FCC RF Test Report

APPLICANT : Cisco Systems, Inc.

EQUIPMENT: LTE Router

BRAND NAME : CISCO

MODEL NAME : MX67C-HW-NA FCC ID : UDX-60076017

STANDARD : FCC 47 CFR Part 2, 22(H), 24(E), 27(L) CLASSIFICATION : PCS Licensed Transmitter (PCB)

The product was received on Mar. 14, 2018 and testing was completed on Jun. 29, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager

SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UDX-60076017 Page Number : 1 of 20
Report Issued Date : Aug. 03, 2018
Report Version : Rev. 02

Testing Laboratory 1190

Report No.: FG831423A

TABLE OF CONTENTS

RE	VISIO	ON HISTORY	3		
SU	мма	RY OF TEST RESULT	4		
1	GENERAL DESCRIPTION				
	1.1	Applicant	5		
	1.2	Product Feature of Equipment Under Test	5		
	1.3	Modification of EUT	5		
	1.4	Testing Location	6		
	1.5	Applicable Standards	6		
2	TES	T CONFIGURATION OF EQUIPMENT UNDER TEST	7		
	2.1	Test Mode	7		
	2.2	Connection Diagram of Test System	8		
	2.3	Support Unit used in test configuration	8		
	2.4	Measurement Results Explanation Example	8		
	2.5	Frequency List of Low/Middle/High Channels	9		
3	CONDUCTED TEST RESULT				
	3.1	Measuring Instruments	10		
	3.2	Conducted Output Power and ERP/EIRP	11		
	3.3	Peak-to-Average Ratio	12		
	3.4	99% Occupied Bandwidth and 26dB Bandwidth Measurement	13		
	3.5	Conducted Band Edge			
	3.6	Conducted Spurious Emission			
	3.7	Frequency Stability			
4	RAD	PIATED TEST ITEMS	17		
	4.1	Measuring Instruments	17		
	4.2	Test Setup	17		
	4.3	Test Result of Radiated Test			
	4.4	Field Strength of Spurious Radiation Measurement			
5	LIST	OF MEASURING EQUIPMENT	19		
6	UNC	ERTAINTY OF EVALUATION	20		
ΑP	PEND	DIX A. TEST RESULTS OF CONDUCTED TEST			
ΑP	PEND	DIX B. TEST RESULTS OF RADIATED TEST			
ΑP	PEND	DIX C. TEST SETUP PHOTOGRAPHS			

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UDX-60076017 Page Number : 2 of 20
Report Issued Date : Aug. 03, 2018
Report Version : Rev. 02

Report No.: FG831423A

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG831423A	Rev. 01	Initial issue of report	Jul. 24, 2018
FG831423A	Rev. 02	Update the address of test site 03CH13-HY	Aug. 03, 2018

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UDX-60076017 Page Number : 3 of 20
Report Issued Date : Aug. 03, 2018
Report Version : Rev. 02

Report Template No.: BU5-FG22/24/27 Version 2.0

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§22.913(a)(2)	Effective Radiated Power	< 7 Watts	PASS	-
3.4	§24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
	§27.50(d)(4)	Equivalent Isotropic Radiated Power	< 1 Watts	PASS	-
3.5	3.5 §24.232(d) Peak-to-Average Ratio		< 13 dB	PASS	-
3.6	\$2.1049 \$22.917(b) \$24.238(b) \$27.53(g)	Occupied Bandwidth	Reporting Only	PASS	-
§2.1051 §22.917(a)		Band Edge Measurement	< 43+10log10(P[Watts])	PASS	-
3.8	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Emission	< 43+10log10(P[Watts])	PASS	-
	§2.1055 §22.355		< 2.5 ppm for Part 22		
3.9	§2.1055 §24.235 §27.54	Frequency Stability for Temperature & Voltage	Within Authorized Band	PASS	-
\$2.1053 \$2.1053 \$22.917(a) Field Strength of Spurious \$24.238(a) Radiation \$27.53(h)		< 43+10log10(P[Watts])	PASS	Under limit 36.12 dB at 3819.000 MHz	

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UDX-60076017 Page Number : 4 of 20
Report Issued Date : Aug. 03, 2018
Report Version : Rev. 02

Report Template No.: BU5-FG22/24/27 Version 2.0

1 General Description

1.1 Applicant

Cisco Systems, Inc.

170 West Tasman Drive, San Jose, CA 95134

1.2 Product Feature of Equipment Under Test

GSM/WCDMA/LTE

	Product sp	ecification subjective to this standard
Antenna Type		WWAN: Dipole Antenna

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UDX-60076017 Page Number : 5 of 20
Report Issued Date : Aug. 03, 2018
Report Version : Rev. 02

Report Template No.: BU5-FG22/24/27 Version 2.0

1.4 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.
	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park,
Test Site Location	Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.
rest site Location	TEL: +886-3-327-3456
	FAX: +886-3-328-4978
Test Site No.	Sporton Site No.
rest site No.	TH03-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.
	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist,
Test Site Location	Taoyuan City, Taiwan (R.O.C.)
lest Site Location	TEL: +886-3-327-0868
	FAX: +886-3-327-0855
Toot Site No.	Sporton Site No.
Test Site No.	03CH13-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 22(H), 24(E), 27(L)
- ANSI / TIA / EIA-603-D-2010
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

- All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UDX-60076017 Page Number : 6 of 20
Report Issued Date : Aug. 03, 2018
Report Version : Rev. 02

Report No.: FG831423A

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

Radiated emissions were investigated as following frequency range:

- 1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
- 2. 30 MHz to 18000 MHz for WCDMA Band IV.
- 3. 30 MHz to 19100 MHz for GSM1900 and WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:


Test Modes							
Band	Radiated TCs	Conducted TCs					
GSM 850	■ GPRS class 8 Link	■ GPRS class 8 Link					
GSIVI 650	■ EDGE class 8 Link	■ EDGE class 8 Link					
CSM 4000	■ GPRS class 8 Link	■ GPRS class 8 Link					
GSM 1900	■ EDGE class 8 Link	■ EDGE class 8 Link					
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link					
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link					
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link					

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UDX-60076017 Page Number : 7 of 20
Report Issued Date : Aug. 03, 2018
Report Version : Rev. 02

Report Template No.: BU5-FG22/24/27 Version 2.0

2.2 Connection Diagram of Test System

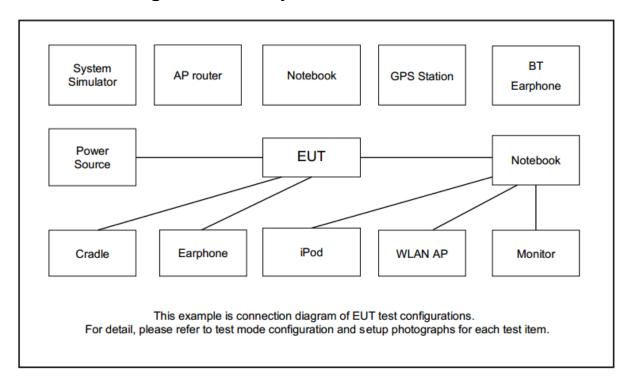

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example:

 $Offset(dB) = RF \ cable \ loss(dB) + attenuator \ factor(dB).$

= 4.2 + 10 = 14.2 (dB)

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UDX-60076017 Page Number : 8 of 20
Report Issued Date : Aug. 03, 2018
Report Version : Rev. 02

Report No.: FG831423A

2.5 Frequency List of Low/Middle/High Channels

Frequency List						
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest		
GSM850	Channel	128	189	251		
GSIVIOSU	Frequency	824.2	836.4	848.8		
WCDMA	Channel	4132	4182	4233		
Band V	Frequency	826.4	836.4	846.6		
GSM1900	Channel	512	661	810		
G2M1900	Frequency	1850.2	1880.0	1909.8		
WCDMA	Channel	9262	9400	9538		
Band II	Frequency	1852.4	1880.0	1907.6		
WCDMA	Channel	1312	1413	1513		
Band IV	Frequency	1712.4	1732.6	1752.6		

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UDX-60076017 Page Number : 9 of 20
Report Issued Date : Aug. 03, 2018
Report Version : Rev. 02

Report Template No.: BU5-FG22/24/27 Version 2.0

3 Conducted Test Result

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power



3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

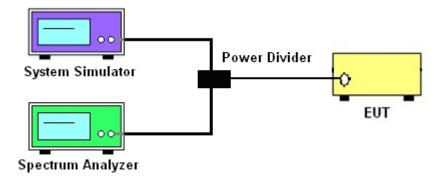

3.1.4 Frequency Stability

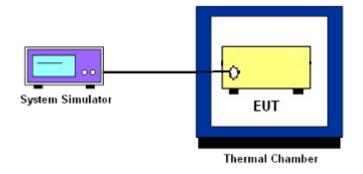

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UDX-60076017 Page Number : 10 of 20
Report Issued Date : Aug. 03, 2018
Report Version : Rev. 02

Report Template No.: BU5-FG22/24/27 Version 2.0

3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for GSM850 and WCDMA Band V.

The EIRP of mobile transmitters must not exceed 2 Watts for GSM1900 and WCDMA Band II.

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV.

According to KDB 412172 D01 Power Approach,

 $EIRP = P_T + G_T - L_C$, ERP = EIRP - 2.15, where

 P_T = transmitter output power in dBm

 G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UDX-60076017 Page Number : 11 of 20
Report Issued Date : Aug. 03, 2018
Report Version : Rev. 02

Report Template No.: BU5-FG22/24/27 Version 2.0

3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.7.1.
- 2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 3. Set EUT to transmit at maximum output power.
- 4. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
- 5. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer. Record the maximum PAPR level associated with a probability of 0.1%.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UDX-60076017 Page Number : 12 of 20
Report Issued Date : Aug. 03, 2018
Report Version : Rev. 02

Report No.: FG831423A

3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

- 1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
- 2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency.
 The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
- 4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- 5. Set the detection mode to peak, and the trace mode to max hold.
- 6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace. (this is the reference value)
- 7. Determine the "-26 dB down amplitude" as equal to (Reference Value X).
- 8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the "–X dB down amplitude" determined in step 6. If a marker is below this "-X dB down amplitude" value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
- 9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

3.5.2 Test Procedures

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
- 2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.The path loss was compensated to the results for each measurement.
- 4. The band edges of low and high channels for the highest RF powers were measured.
- 5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 6. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UDX-60076017 Page Number : 14 of 20
Report Issued Date : Aug. 03, 2018
Report Version : Rev. 02

Report Template No.: BU5-FG22/24/27 Version 2.0

3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Test Procedures

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
- 2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
- 3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 4. The middle channel for the highest RF power within the transmitting frequency was measured.
- 5. The conducted spurious emission for the whole frequency range was taken.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 7. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UDX-60076017 Page Number : 15 of 20
Report Issued Date : Aug. 03, 2018
Report Version : Rev. 02

Report Template No.: BU5-FG22/24/27 Version 2.0

3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency.

3.7.2 Test Procedures for Temperature Variation

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
- 2. The EUT was set up in the thermal chamber and connected with the system simulator.
- 3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
- 4. With power OFF, the temperature was raised in 10°C steps up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
- The EUT was placed in a temperature chamber at 20±5° C and connected with the system simulator.
- 3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
- 4. The variation in frequency was measured for the worst case.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UDX-60076017 Page Number : 16 of 20
Report Issued Date : Aug. 03, 2018
Report Version : Rev. 02

Report No.: FG831423A

4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz



4.2.2 For radiated test above 1GHz

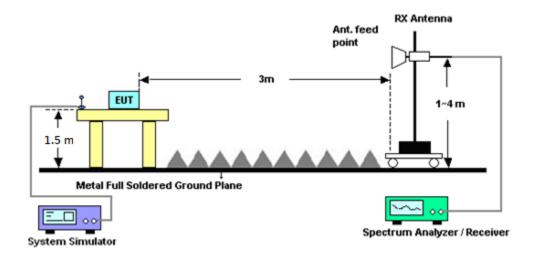

4.3 Test Result of Radiated Test

Please refer to Appendix B.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UDX-60076017 Page Number : 17 of 20
Report Issued Date : Aug. 03, 2018
Report Version : Rev. 02

Report Template No.: BU5-FG22/24/27 Version 2.0

4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

- The testing follows FCC KDB 971168 D01 v02r02 Section 5.8 and ANSI / TIA-603-E Section 2.2.12.
- 2. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
- 3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
- 6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
- 7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 9. Taking the record of output power at antenna port.
- 10. Repeat step 7 to step 8 for another polarization.
- 11. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 12.ERP (dBm) = EIRP 2.15
- 13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 14. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UDX-60076017 Page Number : 18 of 20
Report Issued Date : Aug. 03, 2018
Report Version : Rev. 02

Report No.: FG831423A

5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP30	101067	9kHz~30GHz	Nov. 13, 2017	Jun. 28, 2018~ Jun. 29, 2018	Nov. 12, 2018	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SU-641	92013721	-30℃ ~70℃	Dec. 06, 2017	Jun. 28, 2018~ Jun. 29, 2018	Dec. 05, 2019	Conducted (TH03-HY)
Programmabl e Power Supply	GW Instek	PSS-2005	EL883644	Voltage:0~20V;Cu rrent:0~5A	Dec. 06, 2017	Jun. 28, 2018~ Jun. 29, 2018	Dec. 05, 2019	Conducted (TH03-HY)
Base Station (Measure)	Rohde & Schwarz	CMU200	117995	GSM / GPRS / WCDMA / CDMA	Aug. 09, 2017	Jun. 28, 2018~ Jun. 29, 2018	Aug. 08, 2018	Conducted (TH03-HY)
Amplifier	MITEQ	TTA1840- 35-HG	1871923	18GHz~40GHz,V SWR : 2.5:1 max	Jul. 18, 2017	Jun. 27, 2018~ Jun. 28, 2018	Jul. 17, 2018	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D&N-6-06	35414&AT-N06 02	30MHz~1GHz	Oct. 14, 2017	Jun. 27, 2018~ Jun. 28, 2018	Oct. 13, 2018	Radiation (03CH13-HY)
Amplifier	Sonoma- Instrument	310 N	187282	9KHz~1GHz	Dec. 21, 2016	Jun. 27, 2018~ Jun. 28, 2018	Dec. 20, 2018	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1212	1GHz ~ 18GHz	May 10, 2018	Jun. 27, 2018~ Jun. 28, 2018	May 09, 2019	Radiation (03CH13-HY)
Spectrum Analyzer	Keysight	N9010A	MY55370526	10Hz~44GHz	Mar. 15, 2018	Jun. 27, 2018~ Jun. 28, 2018	Mar. 14, 2019	Radiation (03CH13-HY)
Antenna Mast	EMEC	AM-BS- 4500-B	N/A	1m~4m	N/A	Jun. 27, 2018~ Jun. 28, 2018	N/A	Radiation (03CH13-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Jun. 27, 2018~ Jun. 28, 2018	N/A	Radiation (03CH13-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170251	18GHz- 40GHz	Nov. 10, 2017	Jun. 27, 2018~ Jun. 28, 2018	Nov. 09, 2018	Radiation (03CH13-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 27, 2017	Jun. 27, 2018~ Jun. 28, 2018	Nov. 26, 2018	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0030/126E	30M-18G	Jan. 22, 2018	Jun. 27, 2018~ Jun. 28, 2018	Jan. 21, 2019	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	335041/4	30M-18G	Jan. 22, 2018	Jun. 27, 2018~ Jun. 28, 2018	Jan. 21, 2019	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24961/4	30M~18GHz	Jan. 22, 2018	Jun. 27, 2018~ Jun. 28, 2018	Jan. 21, 2019	Radiation (03CH13-HY)
Software	AUDIX	E3 6.2009-8-24c	RK-001124	N/A	N/A	Jun. 27, 2018~ Jun. 28, 2018	N/A	Radiation (03CH13-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 0SS	SN2	3G High Pass	Sep. 18, 2017	Jun. 27, 2018~ Jun. 28, 2018	Sep. 17, 2018	Radiation (03CH13-HY)
Filter	Wainwright	WLK4-1000-15 30-8000- 40SS	SN12	1GHz Low Pass Filter	Sep. 18, 2017	Jun. 27, 2018~ Jun. 28, 2018	Sep. 17, 2018	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1326	1G~18GHz	Oct. 16, 2017	Jun. 27, 2018~ Jun. 28, 2018	Oct. 15, 2018	Radiation (03CH13-HY)
Signal Generator	Anritsu	MG3694C	163401	0.1Hz~40GHz	Jan. 15, 2018	Jun. 27, 2018~ Jun. 28, 2018	Jan. 14, 2019	Radiation (03CH13-HY)
Preamplifier	Keysight	83017A	MY53270264	1GHz ~ 26.5GHz	Dec. 05, 2017	Jun. 27, 2018~ Jun. 28, 2018	Dec. 04, 2018	Radiation (03CH13-HY)

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UDX-60076017 Page Number : 19 of 20
Report Issued Date : Aug. 03, 2018
Report Version : Rev. 02

Report No.: FG831423A



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of	0.07
Confidence of 95% (U = 2Uc(y))	3.07

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of	3.48
Confidence of 95% (U = 2Uc(y))	3.40

<u>Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)</u>

The second secon	
Measuring Uncertainty for a Level of	3 03
Confidence of 95% (U = 2Uc(y))	3.92

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UDX-60076017 Page Number : 20 of 20
Report Issued Date : Aug. 03, 2018
Report Version : Rev. 02

Report Template No.: BU5-FG22/24/27 Version 2.0

Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

Conducted Power (*Unit: dBm)						
Band	GSM850		GSM1900			
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880	1909.8
GSM	-	-	-	-	-	-
GPRS class 8	32.21	32.36	32.35	30.16	30.17	29.51
GPRS class 10	32.19	32.24	32.31	30.10	29.95	29.43
GPRS class 11	32.12	32.17	32.25	29.96	29.88	29.37
GPRS class 12	32.08	32.12	32.17	29.88	29.77	29.23
EGPRS class 8	26.27	26.33	26.37	25.47	25.21	25.21
EGPRS class 10	26.23	26.24	26.25	25.39	25.14	24.85
EGPRS class 11	26.11	26.16	26.19	25.26	25.03	24.80
EGPRS class 12	26.05	26.07	26.08	25.17	24.85	24.51

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6
RMC 12.2K	23.30	23.31	22.95	22.83	23.74	23.73
HSDPA Subtest-1	22.59	22.50	22.11	22.00	22.81	22.99
HSDPA Subtest-2	22.52	22.41	22.17	22.06	22.98	23.00
HSDPA Subtest-3	21.95	22.09	21.66	21.52	22.43	22.45
HSDPA Subtest-4	22.05	22.07	21.65	21.51	22.35	22.50
HSUPA Subtest-1	22.07	22.01	21.73	22.06	22.40	23.21
HSUPA Subtest-2	21.46	21.35	21.21	20.42	21.74	21.71
HSUPA Subtest-3	21.04	20.96	20.87	21.02	21.36	21.56
HSUPA Subtest-4	22.00	21.70	20.57	21.19	21.73	21.92
HSUPA Subtest-5	22.51	22.54	22.22	22.10	22.96	23.17

Conducted Power (*Unit: dBm)					
Band	WCDMA Band IV				
Channel	1312	1413	1513		
Frequency	1712.4	1732.6	1752.6		
RMC 12.2K	24.22	24.23	23.18		
HSDPA Subtest-1	23.76	23.17	22.33		
HSDPA Subtest-2	23.62	23.24	22.51		
HSDPA Subtest-3	23.20	22.80	21.75		
HSDPA Subtest-4	23.23	22.84	21.86		
HSUPA Subtest-1	22.96	23.09	22.28		
HSUPA Subtest-2	22.17	21.73	21.40		
HSUPA Subtest-3	22.42	22.32	21.45		
HSUPA Subtest-4	22.52	22.09	21.56		
HSUPA Subtest-5	23.76	23.35	22.63		




A2. GSM


Peak-to-Average Ratio

Mode	GSM850		Limit: 13dB
Mod.	GPRS class 8	EDGE class 8	Result
Lowest CH	0.24	3.20	
Middle CH	0.24	3.32	PASS
Highest CH	0.24	3.28	
Mode	GSM1900		Limit: 13dB
Mod.	GPRS class 8	EDGE class 8	Result
Lowest CH	0.24	3.60	
Middle CH	0.24	3.40	PASS
Highest CH	0.28	3.44	

TEL: 886-3-327-3456 Page Number : A2-1 of 15

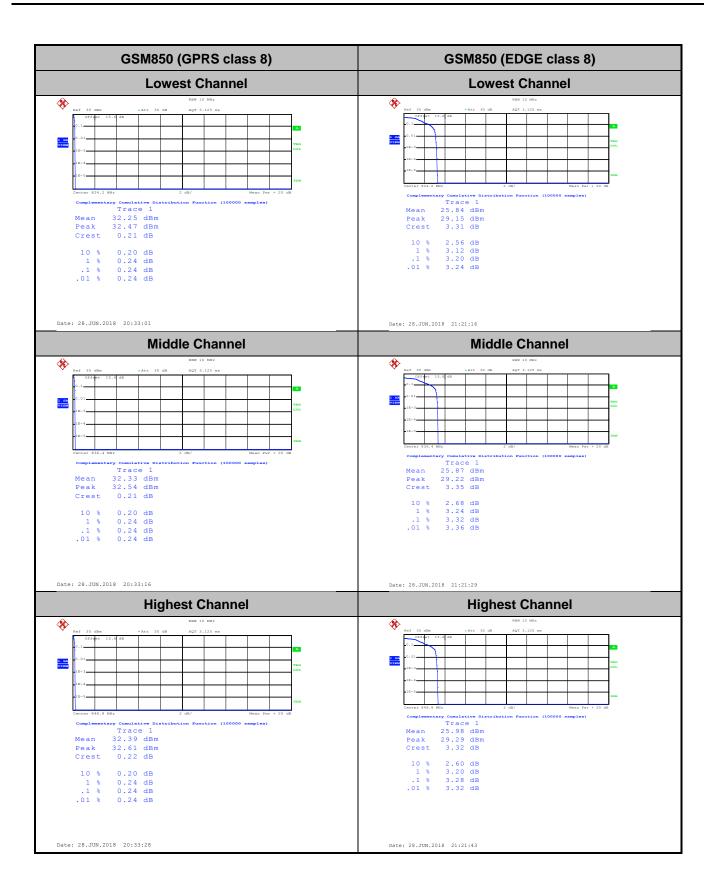

TEL: 886-3-327-3456 Page Number: A2-2 of 15

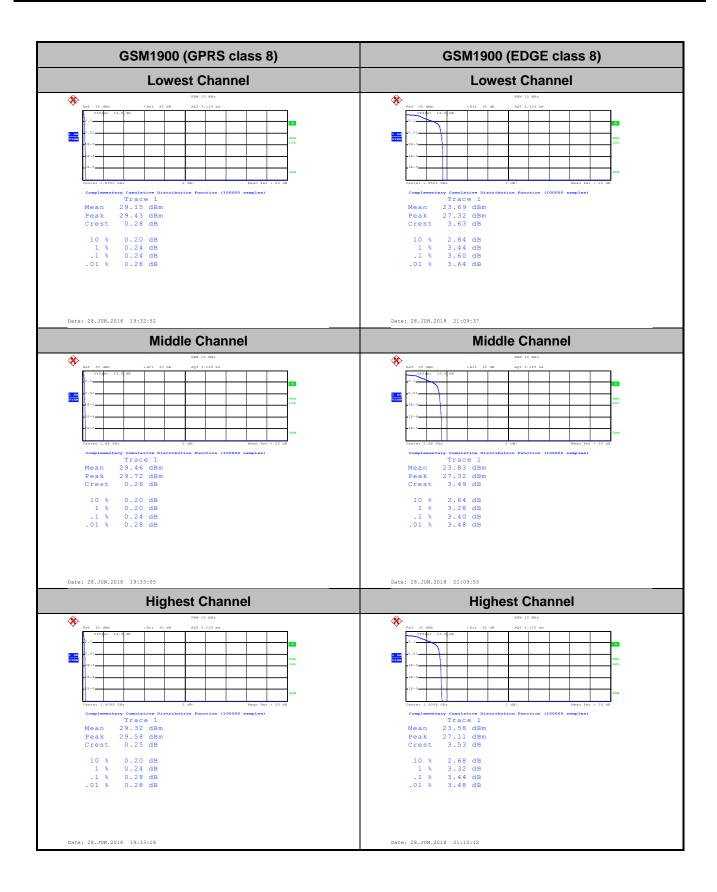


TEL: 886-3-327-3456 Page Number: A2-3 of 15




26dB Bandwidth

Mode	GSM850 : 26dB BW(MHz)			
Mod.	GPRS class 8	EDGE class 8		
Lowest CH	0.317	0.305		
Middle CH	0.310	0.309		
Highest CH	0.317 0.300			
Mode	GSM1900 : 26dB BW(MHz)			
Mod.	GPRS class 8	EDGE class 8		
Lowest CH	0.314	0.296		
Middle CH	0.304 0.305			
Highest CH	0.307	0.297		

TEL: 886-3-327-3456 Page Number : A2-4 of 15

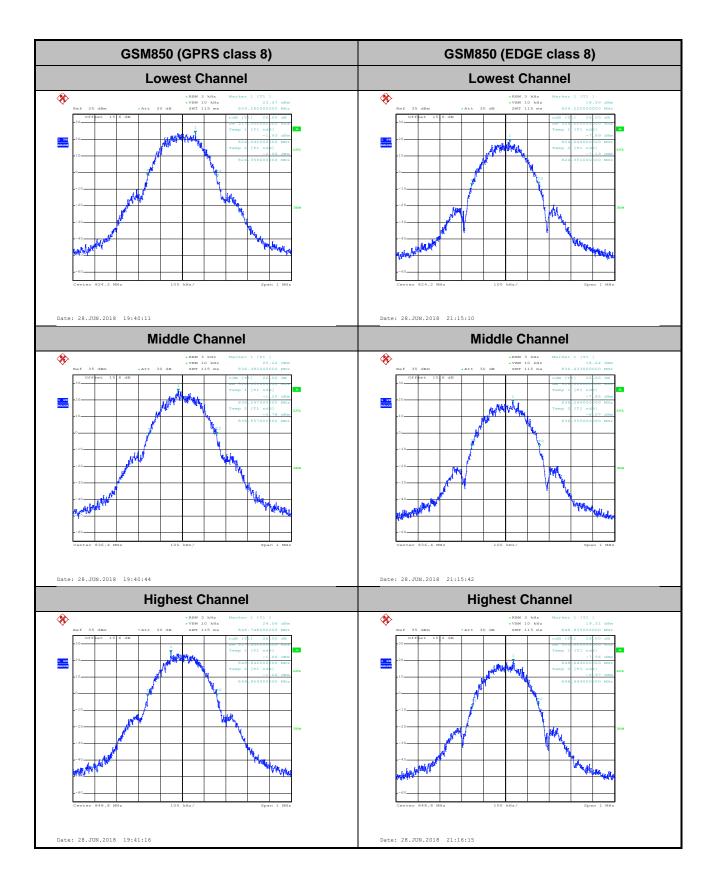

TEL: 886-3-327-3456 Page Number : A2-5 of 15

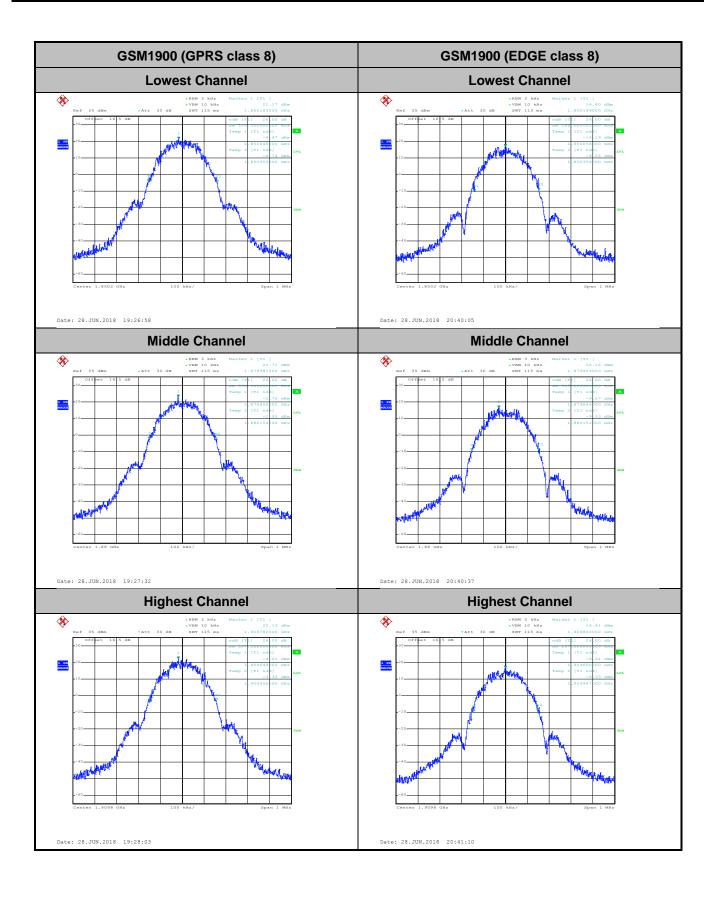


TEL: 886-3-327-3456 Page Number: A2-6 of 15




Occupied Bandwidth

Mode	GSM850 : 99% OBW(MHz)			
Mod.	GPRS class 8	EDGE class 8		
Lowest CH	0.246	0.246		
Middle CH	0.244	0.247		
Highest CH	0.241	0.245		
Mode	GSM1900 : 99% OBW(MHz)			
Mod.	GPRS class 8	EDGE class 8		
Lowest CH	0.241	0.244		
Middle CH	0.244	0.244		
Highest CH	0.246	0.242		

TEL: 886-3-327-3456 Page Number : A2-7 of 15

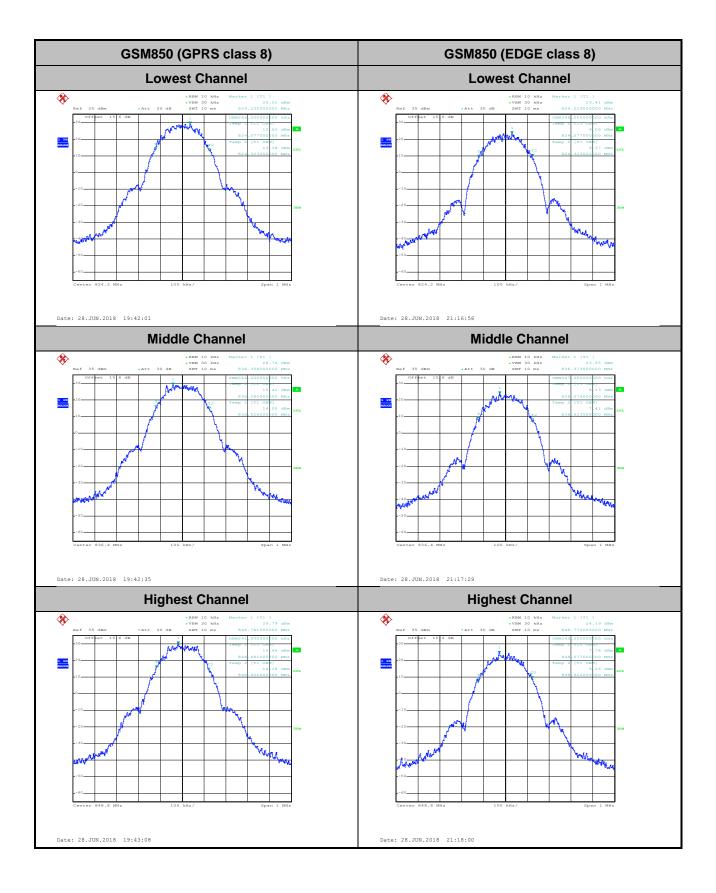


TEL: 886-3-327-3456 Page Number: A2-8 of 15

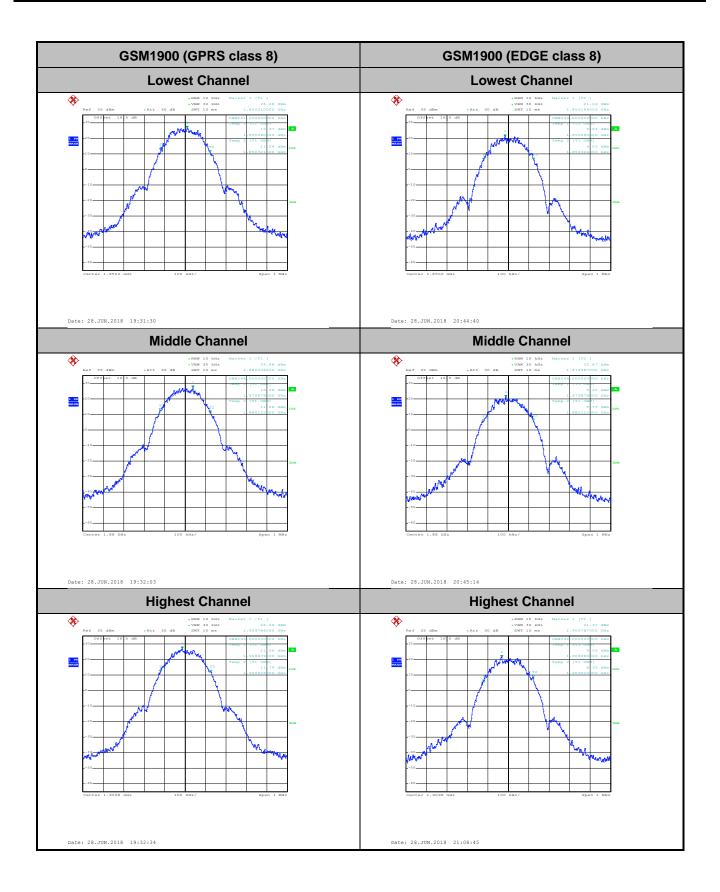


TEL: 886-3-327-3456 Page Number: A2-9 of 15



Conducted Band Edge

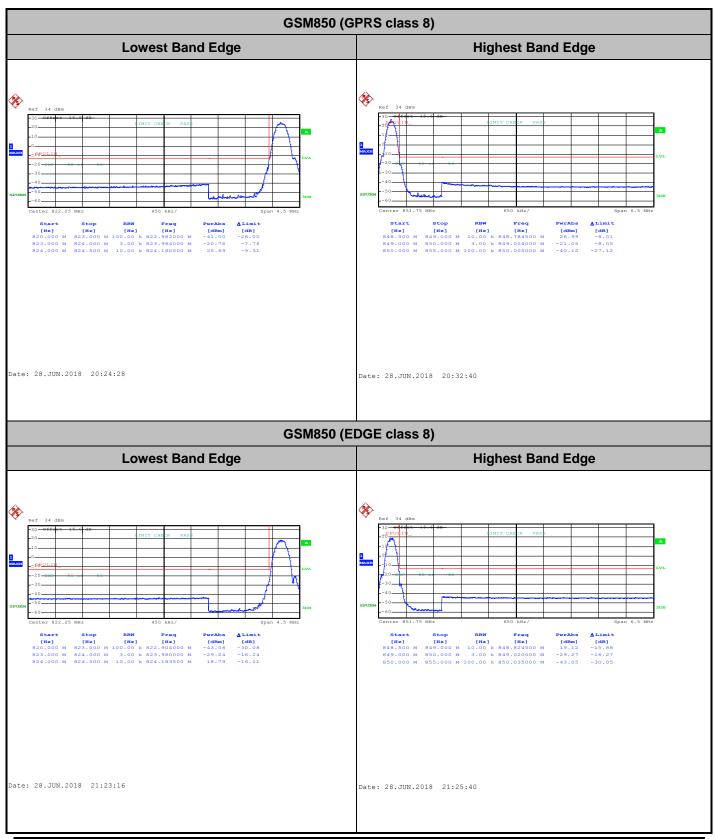


TEL: 886-3-327-3456

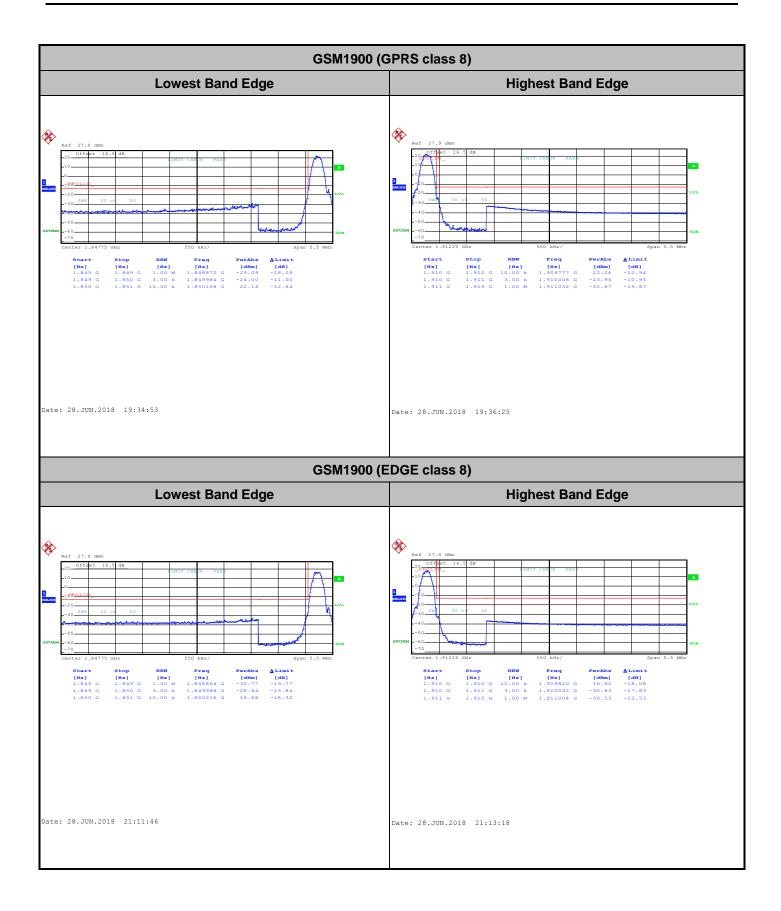


TEL: 886-3-327-3456 Page Number : A2-11 of 15



Conducted Spurious Emission

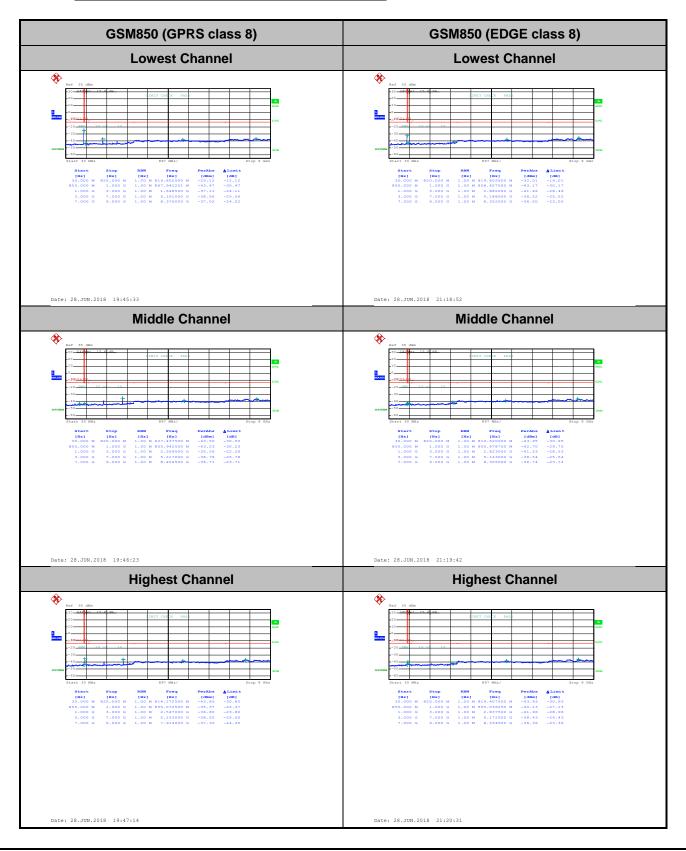

TEL: 886-3-327-3456 Page Number : A2-12 of 15

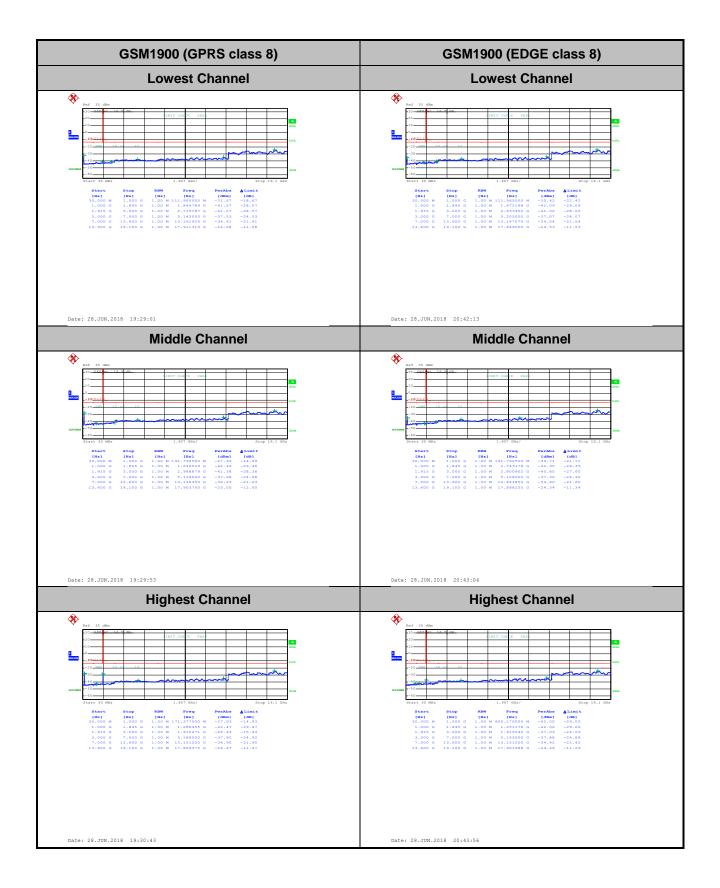

TEL: 886-3-327-3456 Page Number: A2-13 of 15

Frequency Stability

Test Conditions	Middle Channel	GSM850 (GPRS class 8)	GSM850 (EDGE class 8)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation	n (ppm)	Result
50	Normal Voltage	0.0072	0.0036	
40	Normal Voltage	0.0012	0.0036	
30	Normal Voltage	0.0000	0.0108	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0108	0.0072	
0	Normal Voltage	0.0036	0.0012	
-10	Normal Voltage	0.0024	0.0012	PASS
-20	Normal Voltage	0.0024	0.0000	
-30	Normal Voltage	0.0096	0.0024	
20	Maximum Voltage	0.0012	0.0000	
20	Normal Voltage	0.0000	0.0000	
20	Battery End Point	0.0024	0.0000	

Report No. :FG831423A

TEL: 886-3-327-3456 Page Number : A2-14 of 15

*	
SPORTON LAB.	FCC RF T

Test Conditions	Middle Channel	GSM1900 (GSM)	GSM1900 (EDGE class 8)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation	n (ppm)	Result
50	Normal Voltage	0.0080	0.0117	
40	Normal Voltage	0.0048	0.0085	
30	Normal Voltage	0.0000	0.0096	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0059	0.0074	
0	Normal Voltage	0.0011	0.0074	
-10	Normal Voltage	0.0112	0.0011	PASS
-20	Normal Voltage	0.0021	0.0064	
-30	Normal Voltage	0.0043	0.0069	
20	Maximum Voltage	0.0000	0.0021	
20	Normal Voltage	0.0000	0.0000	
20	Battery End Point	0.0011	0.0005	

Report No.:FG831423A

Note:

- 1. Normal Voltage = 12V. ; Battery End Point (BEP) =11.4 V. ; Maximum Voltage =12.6 V
- 2. The frequency fundamental emissions stay within the authorized frequency block.

TEL: 886-3-327-3456 Page Number : A2-15 of 15




A3. WCDMA


Peak-to-Average Ratio

Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV	Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	3.04	2.80	3.16	
Middle CH	3.00	2.92	3.16	PASS
Highest CH	3.04	2.40	3.28	

TEL: 886-3-327-3456 Page Number : A3-1 of 17

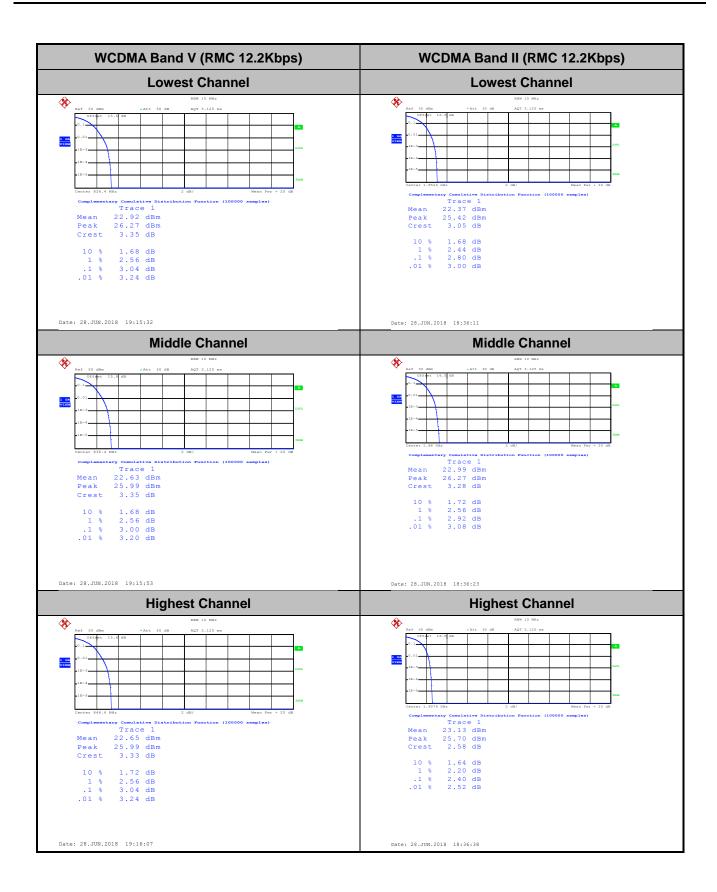

TEL: 886-3-327-3456 Page Number: A3-2 of 17

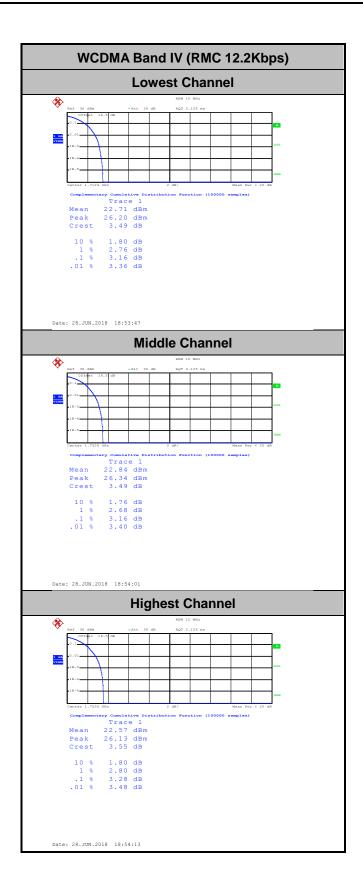


TEL: 886-3-327-3456 Page Number: A3-3 of 17

t Report No. :FG831423A


26dB Bandwidth

Mode	WCDMA Band V 26dB BW(MHz)	WCDMA Band II 26dB BW(MHz)	WCDMA Band IV 26dB BW(MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.71	4.73	4.70
Middle CH	4.71	4.72	4.71
Highest CH	4.71	4.72	4.68

TEL: 886-3-327-3456 Page Number : A3-4 of 17

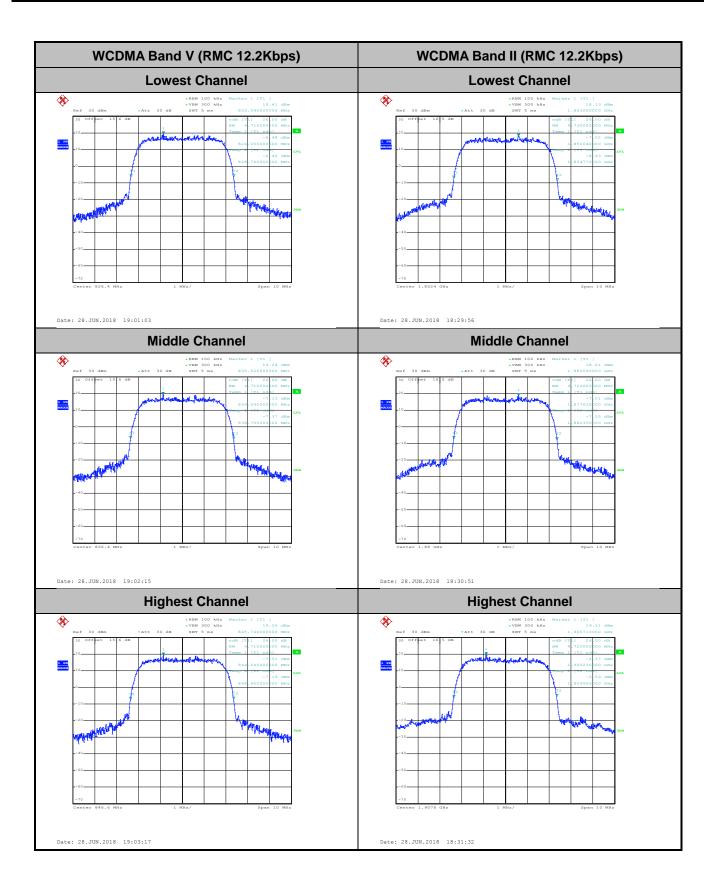

TEL: 886-3-327-3456 Page Number: A3-5 of 17

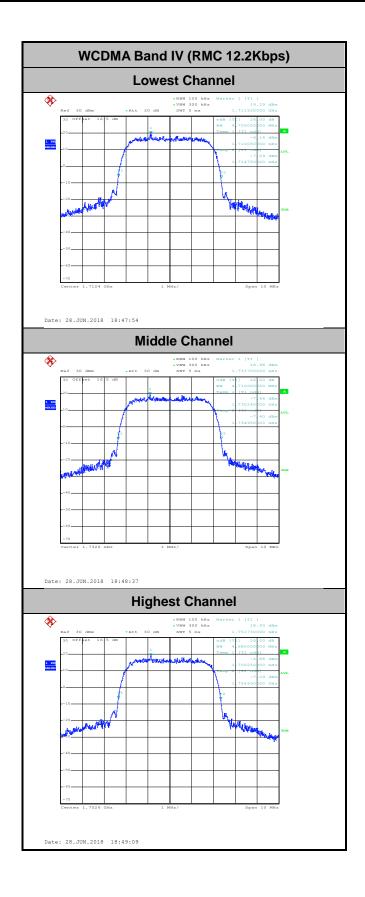


TEL: 886-3-327-3456 Page Number: A3-6 of 17

Occupied Bandwidth


Mode	WCDMA Band V 99% OBW(MHz)	WCDMA Band II 99% OBW(MHz)	WCDMA Band IV 99% OBW(MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.15	4.15	4.13
Middle CH	4.13	4.15	4.12
Highest CH	4.14	4.16	4.13

Report No. :FG831423A

TEL: 886-3-327-3456 Page Number : A3-7 of 17

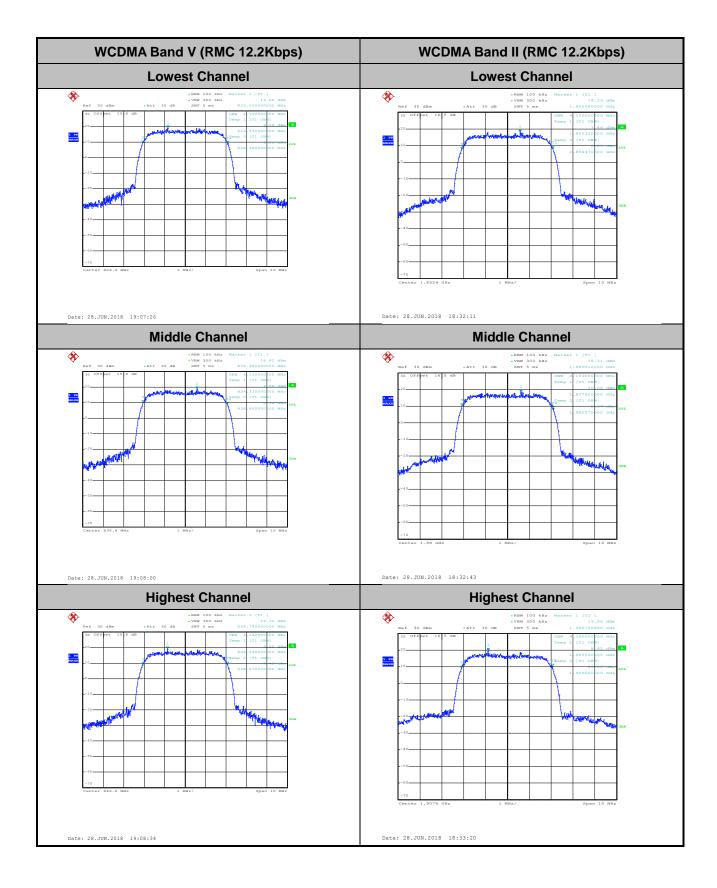


TEL: 886-3-327-3456 Page Number: A3-8 of 17

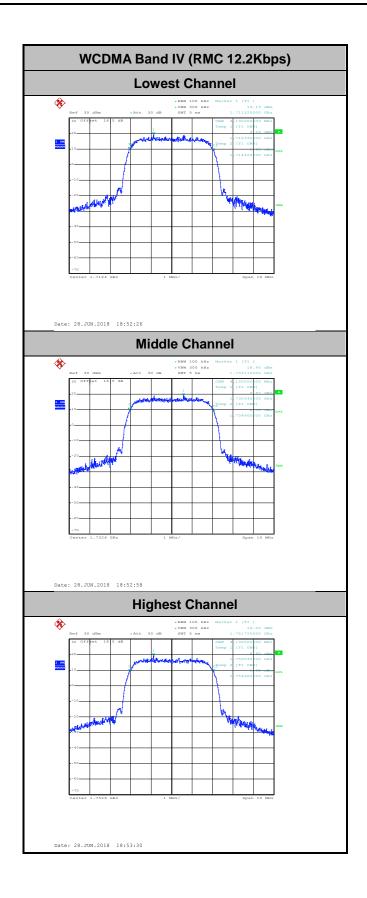


TEL: 886-3-327-3456 Page Number: A3-9 of 17




Conducted Band Edge

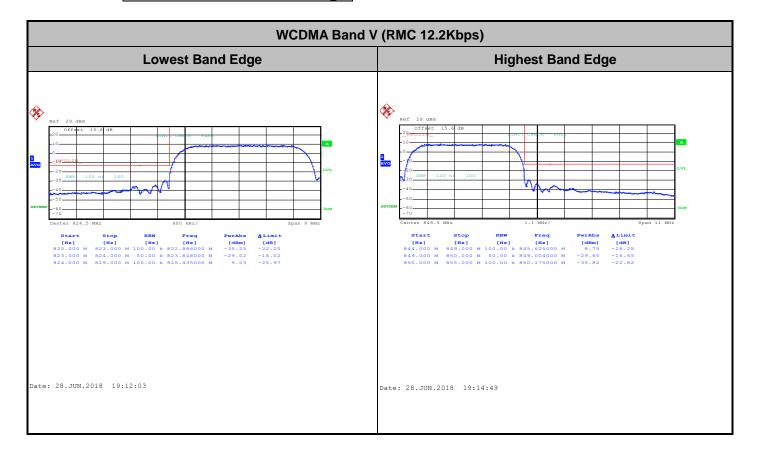

TEL: 886-3-327-3456 Page Number: A3-10 of 17

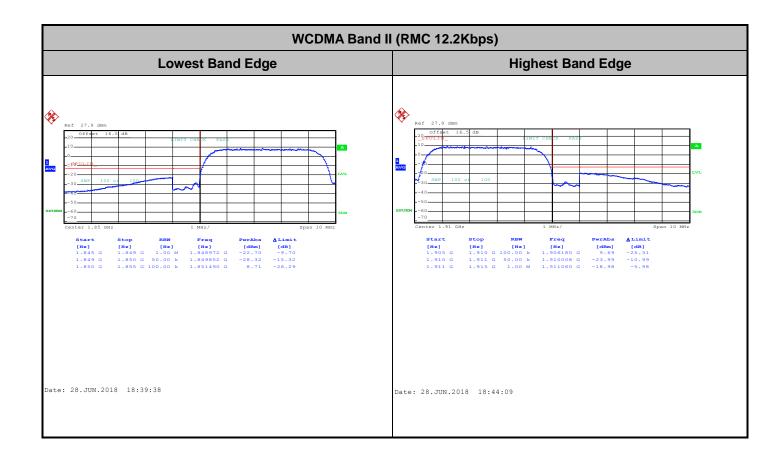


TEL: 886-3-327-3456 Page Number : A3-11 of 17

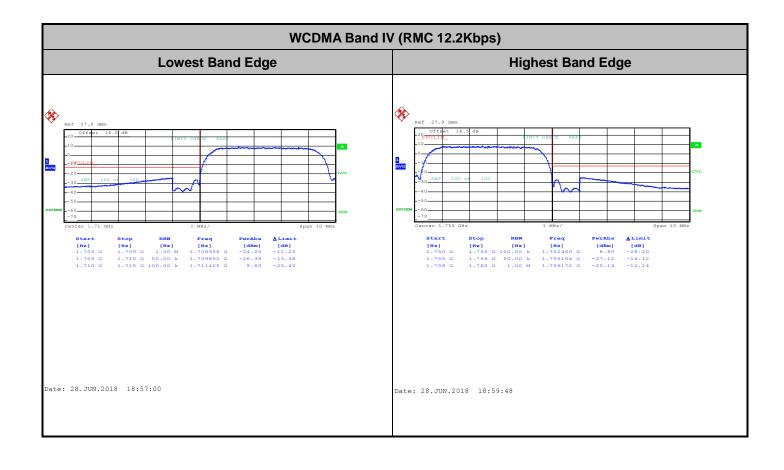


TEL: 886-3-327-3456 Page Number : A3-12 of 17



Conducted Spurious Emission

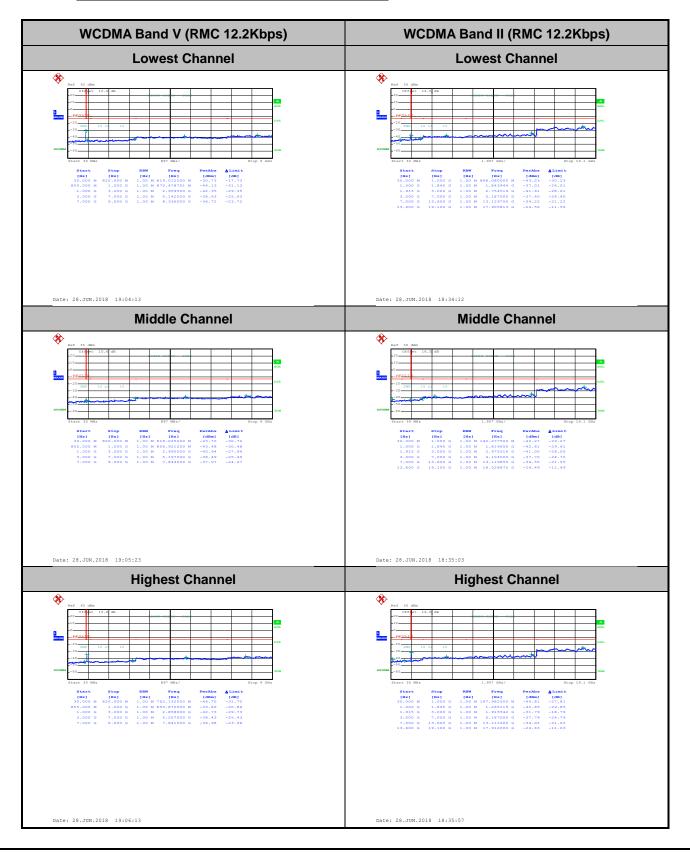

TEL: 886-3-327-3456 Page Number : A3-13 of 17

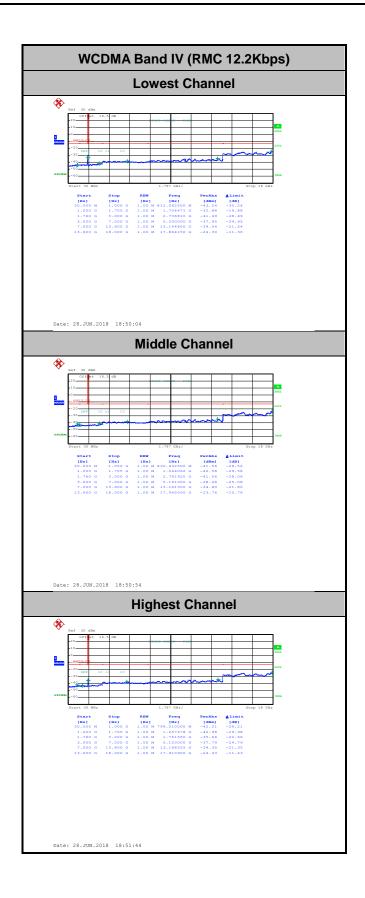

TEL: 886-3-327-3456 Page Number : A3-14 of 17

Frequency Stability

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0036	
40	Normal Voltage	0.0000	
30	Normal Voltage	0.0120	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0048	
0	Normal Voltage	0.0072	D4 00
-10	Normal Voltage	0.0048	PASS
-20	Normal Voltage	0.0024	
-30	Normal Voltage	0.0036	
20	Maximum Voltage	0.0143	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0155	

Report No. :FG831423A

TEL: 886-3-327-3456 Page Number : A3-15 of 17

eport Report No. :FG831423A

Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0106	
40	Normal Voltage	0.0027	
30	Normal Voltage	0.0101	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0021	
0	Normal Voltage	0.0021	
-10	Normal Voltage	0.0021	PASS
-20	Normal Voltage	0.0011	
-30	Normal Voltage	0.0016	
20	Maximum Voltage	0.0000	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0000	

TEL: 886-3-327-3456 Page Number : A3-16 of 17

Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0081	
40	Normal Voltage	0.0058	
30	Normal Voltage	0.0052	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0317	
0	Normal Voltage	0.0329	
-10	Normal Voltage	0.0323	PASS
-20	Normal Voltage	0.0277	
-30	Normal Voltage	0.0225	
20	Maximum Voltage	0.0012	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0006	

Report No.:FG831423A

Note:

- 1. Normal Voltage = 12V. ; Battery End Point (BEP) = 11.4 V. ; Maximum Voltage =12.6 V
- 2. The frequency fundamental emissions stay within the authorized frequency block.

TEL: 886-3-327-3456 Page Number : A3-17 of 17

Appendix B. Test Results of ERP/EIRP and Radiated Test

Report No. : FG831423A

ERP/EIRP

Channel	Mode	Cond	ucted	ERP	
Chamilei	Wode	Power (dBm)	Power (Watts)	ERP(dBm)	ERP(W)
Lowest	GSM850	32.21	1.6634	31.31	1.3521
Middle	GPRS class 8	32.36	1.7219	31.46	1.3996
Highest	(GT - LC = 1.25 dB)	32.35	1.7179	31.45	1.3964
Lowest	GSM850	26.27	0.4236	25.37	0.3443
Middle	EDGE class 8	26.33	0.4295	25.43	0.3491
Highest	(GT - LC = 1.25 dB)	26.37	0.4335	25.47	0.3524
Lowest	WCDMA Band V	23.30	0.2138	22.40	0.1738
Middle	RMC 12.2Kbps	23.31	0.2143	22.41	0.1742
Highest	(GT - LC = 1.25 dB)	22.95	0.1972	22.05	0.1603
Limit	ERP < 7W	Re	sult	PASS	

Channel	Mode	Cond	ucted	EIRP	
Chamilei	Wiode	Power (dBm) Power (Watts		EIRP(dBm)	EIRP(W)
Lowest	GSM1900	30.16	1.0375	32.88	1.9409
Middle	GPRS class 8	30.17	1.0399	32.89	1.9454
Highest	(GT - LC = 2.72 dB)	29.51	0.8933	32.23	1.6711
Lowest	GSM1900	25.47	0.3524	28.19	0.6592
Middle	EDGE class 8	25.21	0.3319	27.93	0.6209
Highest	(GT - LC = 2.72 dB)	25.21	0.3319	27.93	0.6209
Lowest	WCDMA Band II	22.83	0.1919	25.55	0.3589
Middle	RMC 12.2Kbps	23.74	0.2366	26.46	0.4426
Highest	(GT - LC = 2.72 dB)	23.73	0.2360	26.45	0.4416
Limit	EIRP < 2W	Result PASS		SS	

Channel	Mode	Cond	ucted	EIRP		
Chamilei	Wode	Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)	
Lowest	WCDMA Band IV	24.22	0.2642	26.94	0.4943	
Middle	RMC 12.2Kbps	24.23	0.2649	26.95	0.4955	
Highest	(GT - LC = 2.72 dB)	23.18	0.2080	25.90	0.3890	
Limit	EIRP < 1W	Re	sult	PA	SS	

Radiated Spurious Emission

Part22H_GPRS850

	GPRS 850								
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
	1648	-54.21	-13	-41.21	-66.73	-59.60	1.23	8.76	Н
	2472	-59.88	-13	-46.88	-75.21	-66.77	1.44	10.48	Н
	3296	-57.98	-13	-44.98	-75.05	-65.92	1.70	11.79	Н
Lowest									Н
Lowest	1648	-56.89	-13	-43.89	-67.12	-62.28	1.23	8.76	V
	2472	-61.19	-13	-48.19	-75.91	-68.08	1.44	10.48	V
	3296	-60.17	-13	-47.17	-76.79	-68.11	1.70	11.79	V
									V
	1672	-53.48	-13	-40.48	-66.24	-58.95	1.24	8.85	Н
	2512	-60.35	-13	-47.35	-75.5	-67.27	1.44	10.51	Н
	3345	-59.75	-13	-46.75	-76.69	-67.79	1.74	11.94	Н
Middle									Н
ivildale	1672	-58.40	-13	-45.40	-68.74	-63.87	1.24	8.85	V
	2512	-61.30	-13	-48.30	-76	-68.22	1.44	10.51	V
	3345	-60.21	-13	-47.21	-76.69	-68.25	1.74	11.94	V
									V
	1696	-55.72	-13	-42.72	-68.92	-61.27	1.24	8.94	Н
	2544	-59.05	-13	-46.05	-74.08	-65.99	1.44	10.54	Н
	3392	-60.10	-13	-47.10	-76.83	-68.24	1.78	12.08	Н
ا د د داستا									Н
Highest	1696	-58.06	-13	-45.06	-68.6	-63.61	1.24	8.94	V
	2544	-60.88	-13	-47.88	-75.57	-67.82	1.44	10.54	V
	3392	-58.76	-13	-45.76	-75.03	-66.90	1.78	12.08	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978

Part22H_WCDMA850

WCDMA 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
	1648	-58.10	-13	-45.10	-70.62	-63.49	1.23	8.76	Н
	2480	-61.16	-13	-48.16	-76.49	-68.06	1.44	10.48	Н
	3304	-59.55	-13	-46.55	-76.62	-67.50	1.71	11.81	Н
Lowest									Н
Lowest	1648	-61.18	-13	-48.18	-71.41	-66.57	1.23	8.76	V
	2480	-62.05	-13	-49.05	-76.77	-68.95	1.44	10.48	V
	3304	-60.54	-13	-47.54	-77.16	-68.49	1.71	11.81	V
									V
	1672	-59.69	-13	-46.69	-72.45	-65.16	1.24	8.85	Н
	2512	-60.76	-13	-47.76	-75.91	-67.68	1.44	10.51	Н
	3344	-59.87	-13	-46.87	-76.81	-67.91	1.74	11.93	Н
N 4: -1 -11 -									Н
Middle	1672	-62.07	-13	-49.07	-72.41	-67.54	1.24	8.85	V
	2512	-61.77	-13	-48.77	-76.47	-68.69	1.44	10.51	V
	3344	-60.55	-13	-47.55	-77.03	-68.59	1.74	11.93	V
									V
	1688	-60.85	-13	-47.85	-74.05	-66.37	1.24	8.91	Н
	2536	-58.86	-13	-45.86	-73.95	-65.80	1.44	10.53	Н
Highest	3384	-60.13	-13	-47.13	-76.86	-68.26	1.77	12.05	Н
									Н
	1696	-63.43	-13	-50.43	-73.97	-68.98	1.24	8.94	V
	2540	-61.15	-13	-48.15	-75.84	-68.09	1.44	10.53	V
	3386	-56.18	-13	-43.18	-72.45	-64.31	1.78	12.06	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978

Part24H_GPRS1900

GPRS 1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
	3700	-52.76	-13	-39.76	-70.62	-63.07	1.97	12.28	Н
	5548	-54.19	-13	-41.19	-75.48	-64.31	2.14	12.27	Н
	7403	-51.97	-13	-38.97	-76.73	-59.97	2.17	10.17	Н
Lowest									Н
Lowest	3700	-54.83	-13	-41.83	-72.09	-65.14	1.97	12.28	V
	5548	-55.37	-13	-42.37	-76.9	-65.49	2.14	12.27	V
	7403	-52.83	-13	-39.83	-76.65	-60.83	2.17	10.17	V
									V
	3763	-49.31	-13	-36.31	-66.97	-59.55	2.01	12.24	Н
	5639	-51.53	-13	-38.53	-72.7	-61.80	2.12	12.39	Н
	7522	-51.12	-13	-38.12	-76.61	-59.08	2.11	10.08	Н
Middle									Н
ivildale	3763	-54.28	-13	-41.28	-71.44	-64.52	2.01	12.24	V
	5639	-53.57	-13	-40.57	-74.93	-63.84	2.12	12.39	V
	7522	-52.04	-13	-39.04	-76.77	-60.00	2.11	10.08	V
									V
	3819	-49.12	-13	-36.12	-66.74	-59.29	2.04	12.21	Н
	5730	-55.05	-13	-42.05	-76.27	-65.47	2.10	12.52	Н
	7641	-51.23	-13	-38.23	-76.44	-59.62	2.11	10.51	Н
Highest									Н
	3819	-51.83	-13	-38.83	-69.01	-62.00	2.04	12.21	V
	5730	-55.54	-13	-42.54	-76.89	-65.96	2.10	12.52	V
	7641	-51.59	-13	-38.59	-76.38	-59.98	2.11	10.51	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978

Part24H_WCDMA1900

WCDMA 1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
	3707	-59.73	-13	-46.73	-77.53	-70.03	1.98	12.28	Н
	5555	-52.47	-13	-39.47	-73.75	-62.60	2.14	12.28	Н
	7410	-52.08	-13	-39.08	-76.98	-60.07	2.17	10.16	Н
									Н
Lowest	3707	-60.00	-13	-47.00	-77.23	-70.30	1.98	12.28	V
	5555	-55.58	-13	-42.58	-77.1	-65.71	2.14	12.28	V
	7410	-53.03	-13	-40.03	-77.01	-61.02	2.17	10.16	V
									V
	3763	-59.29	-13	-46.29	-76.95	-69.53	2.01	12.24	Н
	5639	-52.20	-13	-39.20	-73.37	-62.47	2.12	12.39	Н
	7522	-51.53	-13	-38.53	-77.02	-59.49	2.11	10.08	Н
N 4: -1 -11 -									Н
Middle	3763	-59.99	-13	-46.99	-77.15	-70.23	2.01	12.24	V
	5639	-53.72	-13	-40.72	-75.08	-63.99	2.12	12.39	V
	7522	-52.17	-13	-39.17	-76.9	-60.13	2.11	10.08	V
									V
	3812	-58.64	-13	-45.64	-76.19	-68.82	2.03	12.21	Н
	5723	-52.62	-13	-39.62	-73.84	-63.03	2.10	12.51	Н
Highest	7630	-51.43	-13	-38.43	-76.66	-59.78	2.11	10.47	Н
									Н
	3812	-59.79	-13	-46.79	-76.9	-69.97	2.03	12.21	V
	5723	-55.04	-13	-42.04	-76.39	-65.45	2.10	12.51	V
	7630	-52.05	-13	-39.05	-76.86	-60.40	2.11	10.47	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978

Part27L_WCDMA1700

WCDMA 1700									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
	3427	-60.16	-13	-47.16	-77	-70.53	1.81	12.18	Н
	5135	-55.47	-13	-42.47	-76.09	-65.29	2.30	12.13	Н
	6850	-53.82	-13	-40.82	-77.25	-62.50	2.37	11.05	Н
Lowest									Н
Lowest	3427	-60.65	-13	-47.65	-77.02	-71.02	1.81	12.18	V
	5135	-54.85	-13	-41.85	-75.41	-64.67	2.30	12.13	V
	6850	-54.88	-13	-41.88	-77.59	-63.56	2.37	11.05	V
									V
	3462	-57.65	-13	-44.65	-74.84	-68.10	1.84	12.29	Н
	5198	-54.76	-13	-41.76	-75.42	-64.62	2.28	12.14	Н
	6927	-53.68	-13	-40.68	-77.5	-62.26	2.40	10.97	Н
N 4: -L-II -									Н
Middle	3462	-59.53	-13	-46.53	-76.26	-69.98	1.84	12.29	V
	5198	-55.13	-13	-42.13	-75.68	-64.99	2.28	12.14	V
	6927	-54.34	-13	-41.34	-77.25	-62.92	2.40	10.97	V
									V
	3504	-58.89	-13	-45.89	-76.42	-69.42	1.87	12.40	Н
	5254	-51.48	-13	-38.48	-72.23	-61.37	2.26	12.15	Н
	7011	-52.80	-13	-39.80	-76.98	-61.27	2.41	10.88	Н
Highest									Н
	3504	-60.16	-13	-47.16	-77.23	-70.69	1.87	12.40	V
	5254	-52.25	-13	-39.25	-73	-62.14	2.26	12.15	V
	7011	-54.17	-13	-41.17	-77.26	-62.64	2.41	10.88	V
			_						V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978