



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Cisco Systems, Inc.
Applicant Address	170 West Tasman Drive, San Jose, CA 95134 USA
FCC ID	UDX-60027010
Manufacturer's company	Cisco Systems, Inc.
Manufacturer Address	170 West Tasman Drive, San Jose, CA 95134 USA

Product Name	Wireless 802.11 abgn AP
Brand Name	Cisco
Model No.	MR26-HW
Test Rule Part(s)	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Received Date	Nov. 14, 2013
Final Test Date	Dec. 24, 2013
Submission Type	Original Equipment

Statement

Test result included is only for the IEEE 802.11n, IEEE 802.11b/g part and IEEE 802.11a (5725 ~ 5850MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in ANSI C63.4-2003, 47 CFR FCC Part 15 Subpart C, KDB 558074 D01 v03r01 and KDB 662911 D01 v02r01.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	6
3.4. Table for Carrier Frequencies	8
3.5. Table for Test Modes.....	9
3.6. Table for Testing Locations.....	14
3.7. Table for Supporting Units	14
3.8. Table for Parameters of Test Software Setting	15
3.9. EUT Operation during Test	16
3.10. Duty Cycle.....	17
3.11. Test Configurations	25
4. TEST RESULT	28
4.1. AC Power Line Conducted Emissions Measurement.....	28
4.2. Maximum Conducted Output Power Measurement.....	32
4.3. Power Spectral Density Measurement	37
4.4. 6dB Spectrum Bandwidth Measurement	54
4.5. Radiated Emissions Measurement	67
4.6. Emissions Measurement	111
4.7. Antenna Requirements	159
5. LIST OF MEASURING EQUIPMENTS	160
6. MEASUREMENT UNCERTAINTY.....	162
APPENDIX A. TEST PHOTOS	A1 ~ A6
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B4
APPENDIX C. CO-LOCATION REPORT.....	C1 ~ C5


History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR3N1492AA	Rev. 01	Initial issue of report	Jan. 10, 2014
FR3N1492AA	Rev. 02	<ol style="list-style-type: none"> 1. Revising the standard version to "ANSI C63.4-2003" from "ANSI C63.10-2009". 2. Revising the standard version to "KDB 662911 D01 v02r01" from "KDB 662911 D01 v02". 	Jan. 20, 2014

1. CERTIFICATE OF COMPLIANCE

Product Name : Wireless 802.11 abgn AP
Brand Name : Cisco
Model No. : MR26-HW
Applicant : Cisco Systems, Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Nov. 14, 2013 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

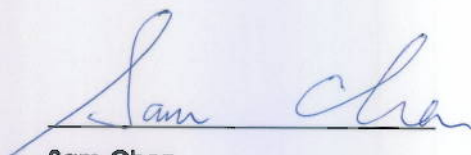

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	9.54 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	2.03 dB
4.3	15.247(e)	Power Spectral Density	Complies	5.81 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	0.23 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.02 dB
4.7	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n

Items	Description
Product Type	Radio 1: WLAN (3TX, 3RX) Radio 2: WLAN (3TX, 3RX) Radio 3: WLAN (1TX, 1RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter or PoE
Modulation	see the below table for IEEE 802.11n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	<u>For 2.4GHz Band:</u> 11 for 20MHz bandwidth ; 7 for 40MHz bandwidth <u>For 5GHz Band:</u> 5 for 20MHz bandwidth ; 2 for 40MHz bandwidth
Channel Band Width (99%)	Radio 1: <u>For 2.4GHz Band:</u> MCS0 (20MHz): 17.36 MHz Radio 2: <u>For 5GHz Band:</u> MCS0 (20MHz): 36.08 MHz ; MCS0 (40MHz): 60.96 MHz Radio 3: <u>For 2.4GHz Band:</u> MCS0 (20MHz): 17.68 MHz ; MCS0 (40MHz): 36.32 MHz <u>For 5GHz Band:</u> MCS0 (20MHz): 30.40 MHz ; MCS0 (40MHz): 67.04 MHz
Maximum Conducted Output Power	Radio 1: <u>For 2.4GHz Band:</u> MCS0 (20MHz): 25.85 dBm Radio 2: <u>For 5GHz Band:</u> MCS0 (20MHz): 27.97 dBm ; MCS0 (40MHz): 26.74 dBm Radio 3: <u>For 2.4GHz Band:</u> MCS0 (20MHz): 20.68 dBm ; MCS0 (40MHz): 16.14 dBm <u>For 5GHz Band:</u> MCS0 (20MHz): 22.66 dBm ; MCS0 (40MHz): 22.65 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

802.11a/b/g

Items	Description
Product Type	Radio 1: 802.11b/g: WLAN (1TX, 3RX) Radio 2: 802.11a: WLAN (1TX, 3RX) Radio 3: 802.11a/b/g: WLAN (1TX, 1RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter or PoE
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11a/g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	11b/g: 11 ; 11a: 5
Channel Band Width (99%)	Radio 1: 11b: 10.48 MHz ; 11g: 17.52 MHz Radio 2: 11a: 36.08 MHz Radio 3: 11b: 10.32 MHz ; 11g: 16.56 MHz ; 11a: 29.36 MHz
Maximum Conducted Output Power	Radio 1: 11b: 24.28 dBm ; 11g: 23.99 dBm Radio 2: 11a: 24.11 dBm Radio 3: 11b: 21.98 dBm ; 11g: 20.83 dBm ; 11a: 22.62 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Note:

The EUT has three radio devices, the information as following table:

Radio Device	Function	Antenna
1	2.4G	4 + 5 + 6
2	5G	1 + 2 + 3
3	2.4G + 5G	7

Antenna and Band width

Antenna	Single (TX)		Three (TX)	
Band width Mode	20 MHz	40 MHz	20 MHz	40 MHz
IEEE 802.11a	V	X	X	X
IEEE 802.11b	V	X	X	X
IEEE 802.11g	V	X	X	X
IEEE 802.11n (Radio 1)	X	X	V	X
IEEE 802.11n (Radio 2)	X	X	V	V
IEEE 802.11n (Radio 3)	V	V	X	X

IEEE 11n Spec.

Radio Device	Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
1	802.11n (HT20)	3	MCS 0-23
2	802.11n (HT20)	3	MCS 0-23
	802.11n (HT40)	3	MCS 0-23
3	802.11n (HT20)	1	MCS 0-7
	802.11n (HT40)	1	MCS 0-7

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).
Radio 1 only supports HT20, Radio 2/3 supports HT20 and HT40.

Note 2: Modulation modes consist of below configuration: HT20/HT40: IEEE 802.11n

3.2. Accessories

N/A

3.3. Table for Filed Antenna

Ant.	Chain	Brand	Model Name	Antenna Type	Connector	Gain (dBi)		
						2.4GHz	5GHz - B1	5GHz- B4
1	1	WNC	81EAAH15.G39	PIFA Antenna	I-PEX	-	3.18	3.78
2	2	WNC	81EAAH15.G39	PIFA Antenna	I-PEX	-	3.18	3.78
3	3	WNC	81EAAH15.G39	PIFA Antenna	I-PEX	-	3.18	3.78
4	4	WNC	81EAAH15.G39	PIFA Antenna	I-PEX	2.9	-	-
5	5	WNC	81EAAH15.G39	PIFA Antenna	I-PEX	2.9	-	-
6	6	WNC	81EAAH15.G39	PIFA Antenna	I-PEX	2.9	-	-
7	7	WNC	81EAAH15.G40	PIFA Antenna	I-PEX	4.84	5.97	5.97

Note: The EUT has seven antennas.

Radio 1:

For 2.4G

For IEEE 802.11b/g mode (1TX/3RX)

Only Chain 4 can be used as transmitting antenna.

Chain 4, Chain 5 and Chain 6 could receive simultaneously.

For IEEE 802.11n mode (3TX/3RX)

Chain 4, Chain 5 and Chain 6 can be used as transmitting/receiving antenna simultaneously.

Radio 2:

For 5G

For IEEE 802.11a mode (1TX/3RX)

Only Chain 1 can be used as transmitting antenna.

Chain 1, Chain 2 and Chain 3 could receive simultaneously.

For IEEE 802.11n mode (3TX/3RX):

Chain 1, Chain 2 and Chain 3 can be used as transmitting/receiving antenna simultaneously.

Radio 3:

For 2.4G


For IEEE 802.11b/g/n mode (1TX/1RX)

Only Chain 7 can be used as transmitting/receiving antenna.

For 5G

For IEEE 802.11a/n mode (1TX/1RX)

Only Chain 7 can be used as transmitting/receiving antenna.

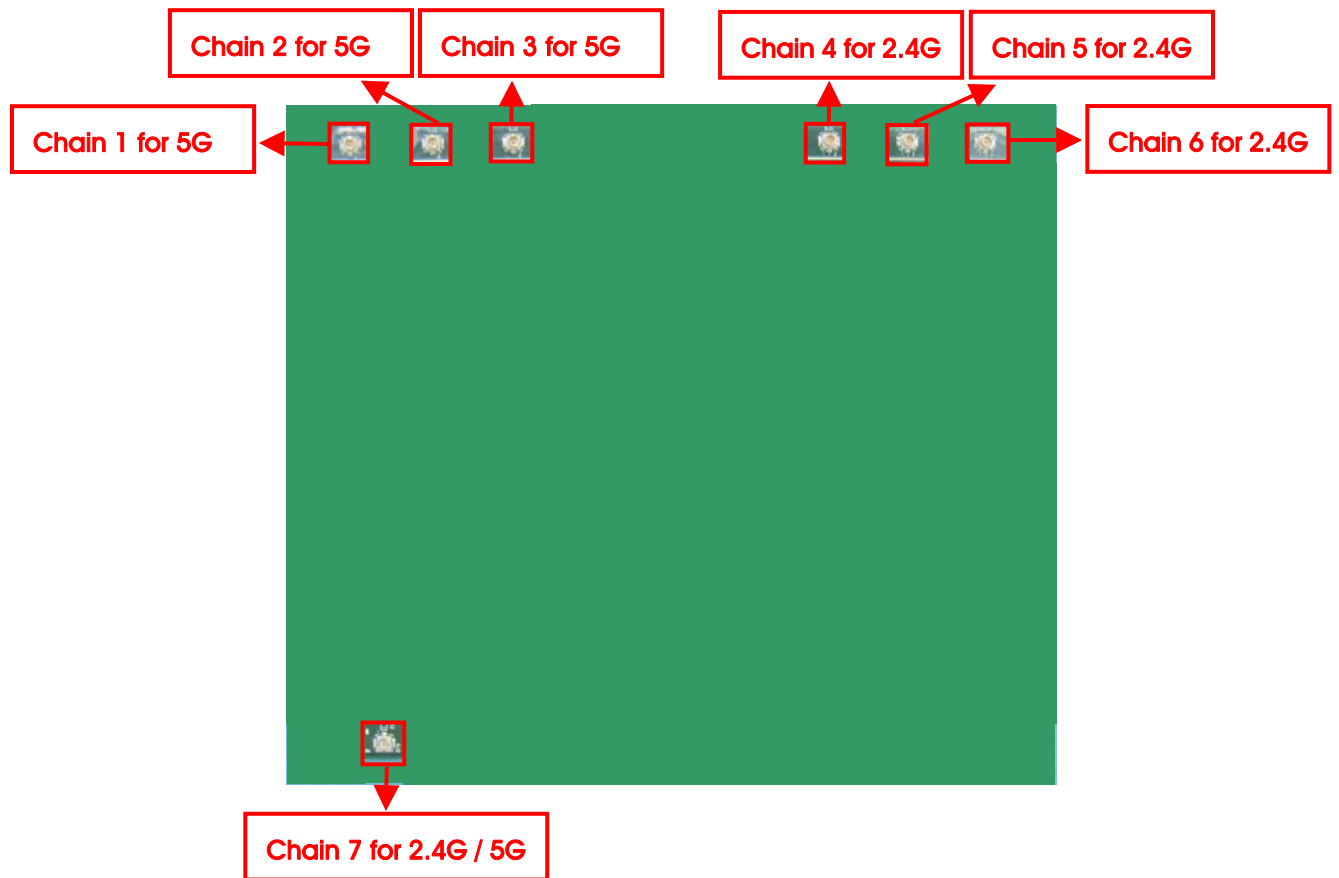

3.4. Table for Carrier Frequencies

For 2.4GHz Band:

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

For 5GHz Band:

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 151, 159.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5725~5850 MHz Band 4	149	5745 MHz	159	5795 MHz
	151	5755 MHz	161	5805 MHz
	153	5765 MHz	165	5825 MHz
	157	5785 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Radio 1:

For 2.4GHz Band

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11n 20MHz	MCS0	1/6/11	4+5+6
	11b/CCK	1 Mbps	1/6/11	4
	11g/BPSK	6 Mbps	1/6/11	4
Power Spectral Density	11n 20MHz	MCS0	1/6/11	4+5+6
	11b/CCK	1 Mbps	1/6/11	4
	11g/BPSK	6 Mbps	1/6/11	4
6dB Spectrum Bandwidth	11n 20MHz	MCS0	1/6/11	4+5+6
	11b/CCK	1 Mbps	1/6/11	4
	11g/BPSK	6 Mbps	1/6/11	4
Radiated Emissions Below 1GHz	Normal Link	-	-	-
Radiated Emissions Above 1GHz	11n 20MHz	MCS0	1/6/11	4+5+6
	11b/CCK	1 Mbps	1/6/11	4
	11g/BPSK	6 Mbps	1/6/11	4
Band Edge Emissions	11n 20MHz	MCS0	1/6/11	4+5+6
	11b/CCK	1 Mbps	1/6/11	4
	11g/BPSK	6 Mbps	1/6/11	4

Radio 2:
For 5GHz Band

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11n 20MHz	MCS0	149/157/165	1+2+3
	11n 40MHz	MCS0	151/159	1+2+3
	11a/BPSK	6 Mbps	149/157/165	1
Power Spectral Density	11n 20MHz	MCS0	149/157/165	1+2+3
	11n 40MHz	MCS0	151/159	1+2+3
	11a/BPSK	6 Mbps	149/157/165	1
6dB Spectrum Bandwidth	11n 20MHz	MCS0	149/157/165	1+2+3
	11n 40MHz	MCS0	151/159	1+2+3
	11a/BPSK	6 Mbps	149/157/165	1
Radiated Emissions Below 1GHz	Normal Link	-	-	-
Radiated Emissions Above 1GHz	11n 20MHz	MCS0	149/157/165	1+2+3
	11n 40MHz	MCS0	151/159	1+2+3
	11a/BPSK	6 Mbps	149/157/165	1
Band Edge Emissions	11n 20MHz	MCS0	149/157/165	1+2+3
	11n 40MHz	MCS0	151/159	1+2+3
	11a/BPSK	6 Mbps	149/157/165	1

Radio 3:
For 2.4GHz Band

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11n 20MHz	MCS0	1/6/11	7
	11n 40MHz	MCS0	3/6/9	7
	11b/CCK	1 Mbps	1/6/11	7
	11g/BPSK	6 Mbps	1/6/11	7
Power Spectral Density	11n 20MHz	MCS0	1/6/11	7
	11n 40MHz	MCS0	3/6/9	7
	11b/CCK	1 Mbps	1/6/11	7
	11g/BPSK	6 Mbps	1/6/11	7
6dB Spectrum Bandwidth	11n 20MHz	MCS0	1/6/11	7
	11n 40MHz	MCS0	3/6/9	7
	11b/CCK	1 Mbps	1/6/11	7
	11g/BPSK	6 Mbps	1/6/11	7
Radiated Emissions Below 1GHz	Normal Link	-	-	-
Radiated Emissions Above 1GHz	11n 20MHz	MCS0	1/6/11	7
	11n 40MHz	MCS0	3/6/9	7
	11b/CCK	1 Mbps	1/6/11	7
	11g/BPSK	6 Mbps	1/6/11	7
Band Edge Emissions	11n 20MHz	MCS0	1/6/11	7
	11n 40MHz	MCS0	3/6/9	7
	11b/CCK	1 Mbps	1/6/11	7
	11g/BPSK	6 Mbps	1/6/11	7

For 5GHz Band

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11n 20MHz	MCS0	149/157/165	7
	11n 40MHz	MCS0	151/159	7
	11a/BPSK	6 Mbps	149/157/165	7
Power Spectral Density	11n 20MHz	MCS0	149/157/165	7
	11n 40MHz	MCS0	151/159	7
	11a/BPSK	6 Mbps	149/157/165	7
6dB Spectrum Bandwidth	11n 20MHz	MCS0	149/157/165	7
	11n 40MHz	MCS0	151/159	7
	11a/BPSK	6 Mbps	149/157/165	7
Radiated Emissions Below 1GHz	Normal Link	-	-	7
Radiated Emissions Above 1GHz	11n 20MHz	MCS0	149/157/165	7
	11n 40MHz	MCS0	151/159	7
	11a/BPSK	6 Mbps	149/157/165	-
Band Edge Emissions	11n 20MHz	MCS0	149/157/165	7
	11n 40MHz	MCS0	151/159	7
	11a/BPSK	6 Mbps	149/157/165	7

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. EUT (Radio 1 + Radio 2 + Radio 3 for 2.4G function) with Adapter

Mode 2. EUT (Radio 1 + Radio 2 + Radio 3 for 5G function) with Adapter

Mode 3. EUT (Radio 1 + Radio 2 + Radio 3 for 2.4G function) with PoE

Mode 4. EUT (Radio 1 + Radio 2 + Radio 3 for 5G function) with PoE

Mode 1 is the worst case, so it was selected to record in this test report.

For Radiated Emission test below 1GHz:

Mode 1. Laying of EUT (Radio 1 + Radio 2 + Radio 3 for 2.4G function) with Adapter

Mode 2. Stand of EUT (Radio 1 + Radio 2 + Radio 3 for 2.4G function) with Adapter

Mode 2 has been evaluated to be the worst case among Mode 1~2, thus measurement for Mode 3 will follow this same test mode.

Mode 3. Stand of EUT (Radio 1 + Radio 2 + Radio 3 for 5G function) with Adapter

Mode 2 has been evaluated to be the worst case among Mode 1~3, thus measurement for Mode 4 will follow this same test mode.

Mode 4. Stand of EUT (Radio 1 + Radio 2 + Radio 3 for 2.4G function) with PoE

Mode 4 generated the worst test result, so it was recorded in this report.

For Radiated Emission test above 1GHz:

Mode 1. Laying of EUT (Radio 1)

Mode 2. Stand of EUT (Radio 1)

Mode 3. Laying of EUT (Radio 2)

Mode 4. Stand of EUT (Radio 2)

Mode 5. Laying of EUT (Radio 3)

Mode 6. Stand of EUT (Radio 3)

Mode 2, Mode 4 and Mode 5 are the worst case, so there were selected to record in this test report.

For Co-location test:

Mode 1. EUT (Radio 1 + Radio 2 + Radio 3 for 2.4G function)

Mode 2. EUT (Radio 1 + Radio 2 + Radio 3 for 5G function)

For MPE and Co-location Test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Maximum Permissible Exposure (Please refer to Appendix B) and Co-location (please refer to Appendix C) tests are added for simultaneously transmit between 2.4GHz (Radio 1)+5GHz (Radio 2)+2.4GHz (Radio 3) and 2.4GHz (Radio 1)+5GHz (Radio 2)+5GHz (Radio 3) function.

3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Supporting Units

For Test Site No: 03CH01-CB (For Below 1G) and CO01-CB

Support Unit	Brand	Model	FCC ID
NB*4	DELL	E6430	DoC
AC Adapter	Powertron Electronics Corp	PA1015-2HE	N/A
PoE	Meraki	POE20U-560	N/A

For Test Site No: 03CH01-CB (For Above 1G) and TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC
AC Adapter	Powertron Electronics Corp	PA1015-2HE	N/A
PoE	Meraki	POE20U-560	N/A

3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Radio 1:

For 2.4GHz Band

Power Parameters of IEEE 802.11n MCS0 20MHz

Test Software Version	Mtool 2.0.0.8		
Frequency	2412 MHz	2437 MHz	2462 MHz
MCS0 20MHz	49	86	56

Power Parameters of IEEE 802.11b/g

Test Software Version	Mtool 2.0.0.8		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	90	100	87
IEEE 802.11g	66	100	68

Radio 2:

For 5GHz Band

Power Parameters of IEEE 802.11n MCS0 20MHz

Test Software Version	Mtool 2.0.0.8		
Frequency	5745 MHz	5785 MHz	5825 MHz
MCS0 20MHz	83	100	90

Power Parameters of IEEE 802.11n MCS0 40MHz

Test Software Version	Mtool 2.0.0.8	
Frequency	5755 MHz	5795 MHz
MCS0 40MHz	80	90

Power Parameters of IEEE 802.11a

Test Software Version	Mtool 2.0.0.8		
Frequency	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11a	84	100	90

Radio 3:

For 2.4GHz Band

Power Parameters of IEEE 802.11n MCS0 20MHz

Test Software Version	Mtool 2.0.0.8		
Frequency	2412 MHz	2437 MHz	2462 MHz
MCS0 20MHz	70	85	73

Power Parameters of IEEE 802.11n MCS0 40MHz

Test Software Version	Mtool 2.0.0.8		
Frequency	2422 MHz	2437 MHz	2452 MHz
MCS0 40MHz	60	66	59

Power Parameters of IEEE 802.11b/g

Test Software Version	Mtool 2.0.0.8		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	79	84	79
IEEE 802.11g	72	86	75

For 5GHz Band

Power Parameters of IEEE 802.11n MCS0 20MHz

Test Software Version	Mtool 2.0.0.8		
Frequency	5745 MHz	5785 MHz	5825 MHz
MCS0 20MHz	74	80	80

Power Parameters of IEEE 802.11n MCS0 40MHz

Test Software Version	Mtool 2.0.0.8	
Frequency	5755 MHz	5795 MHz
MCS0 40MHz	73	80

Power Parameters of IEEE 802.11a

Test Software Version	Mtool 2.0.0.8		
Frequency	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11a	74	80	80

3.9. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

3.10. Duty Cycle

Radio 1:


For 2.4GHz Band

IEEE 802.11n MCS0 20MHz

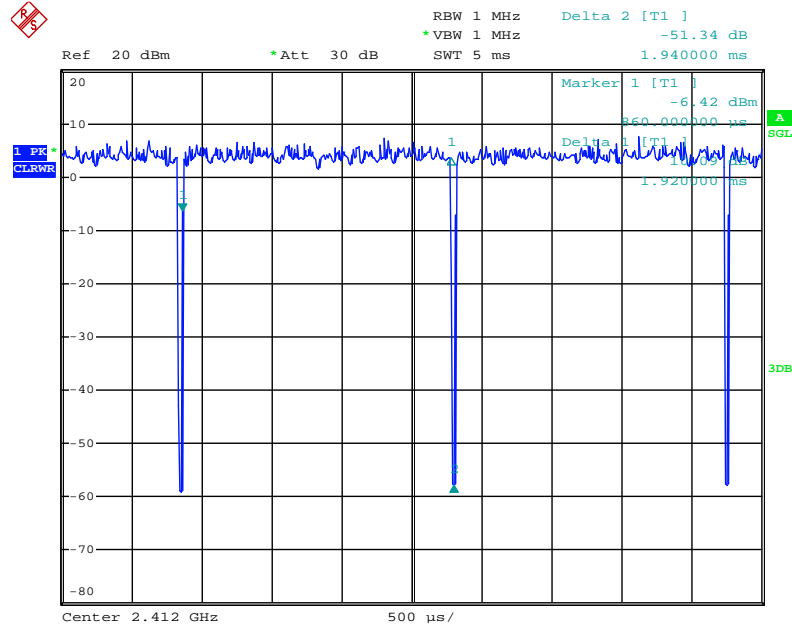


Date: 18.NOV.2013 13:44:02

IEEE 802.11b

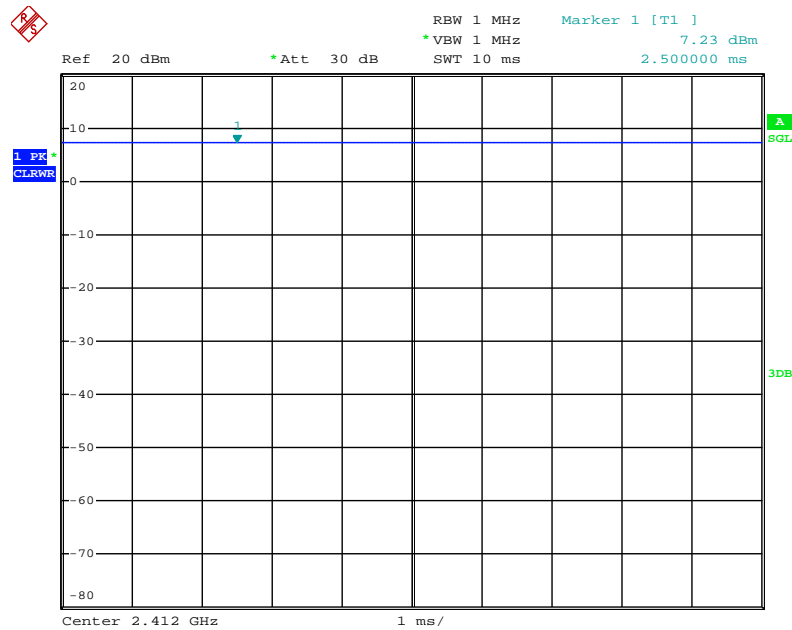

Date: 18.NOV.2013 13:41:43

IEEE 802.11g

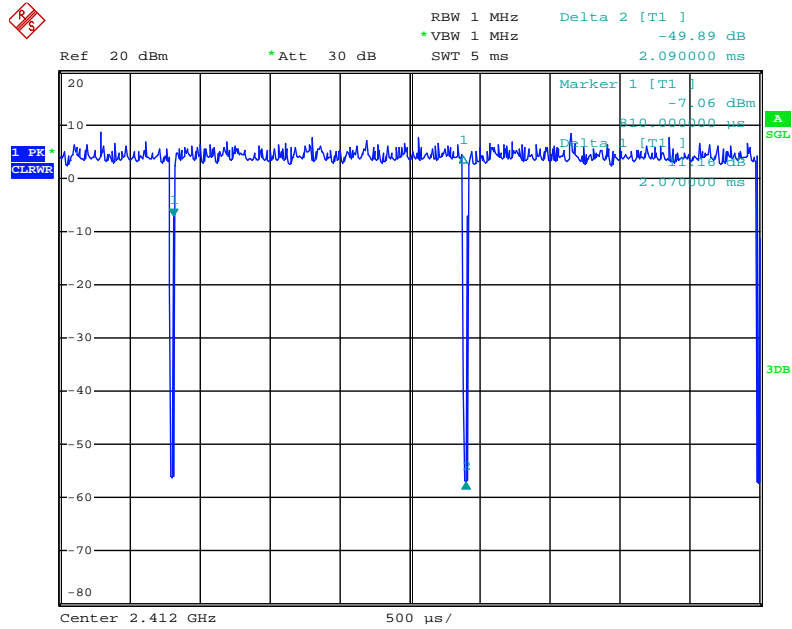


Date: 18.NOV.2013 13:42:43

Radio 2:


For 5GHz Band

IEEE 802.11n MCS0 20MHz

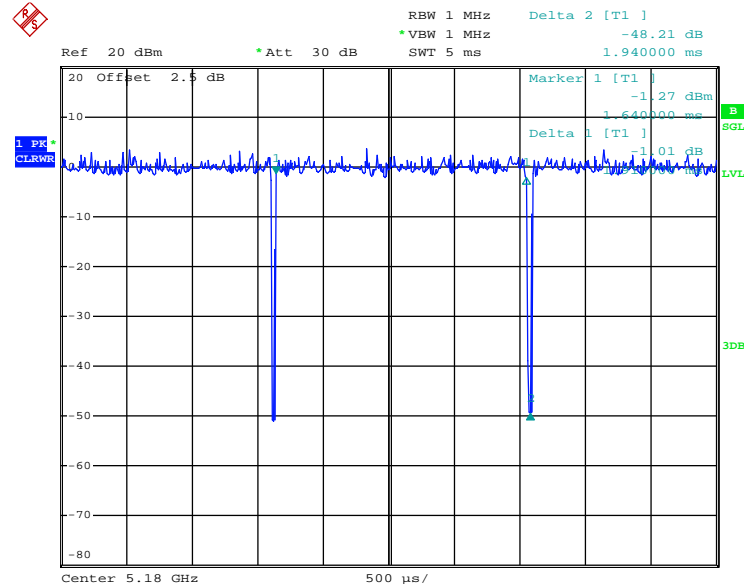


Date: 2.DEC.2013 18:40:42

IEEE 802.11n MCS0 40MHz

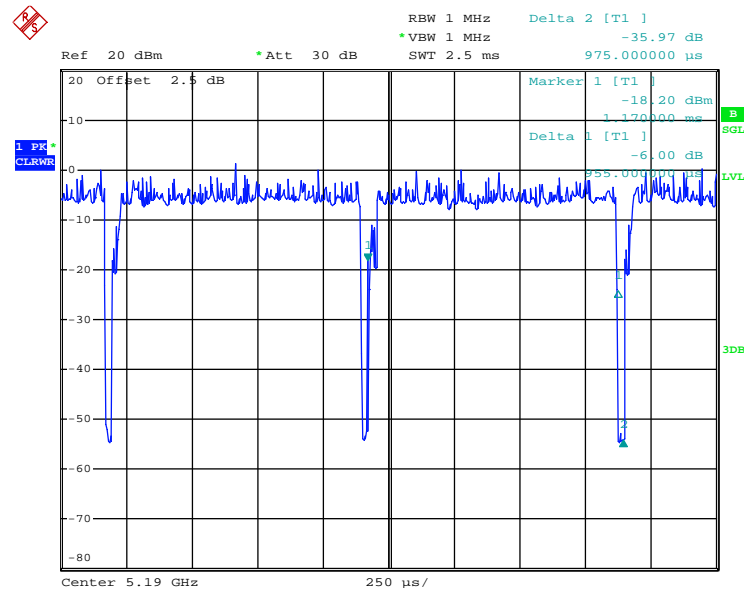

Date: 2.DEC.2013 18:41:53

IEEE 802.11a

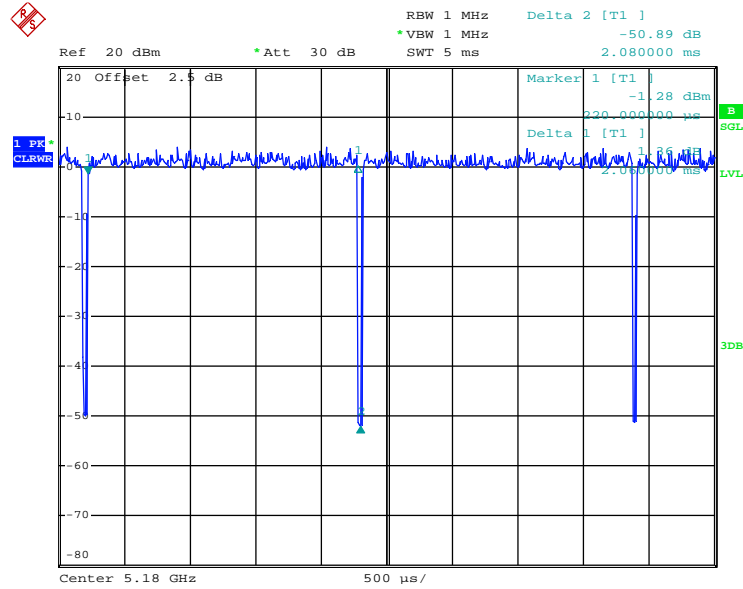


Date: 2.DEC.2013 18:39:19

Radio 3:


For 2.4GHz Band

IEEE 802.11n MCS0 20MHz

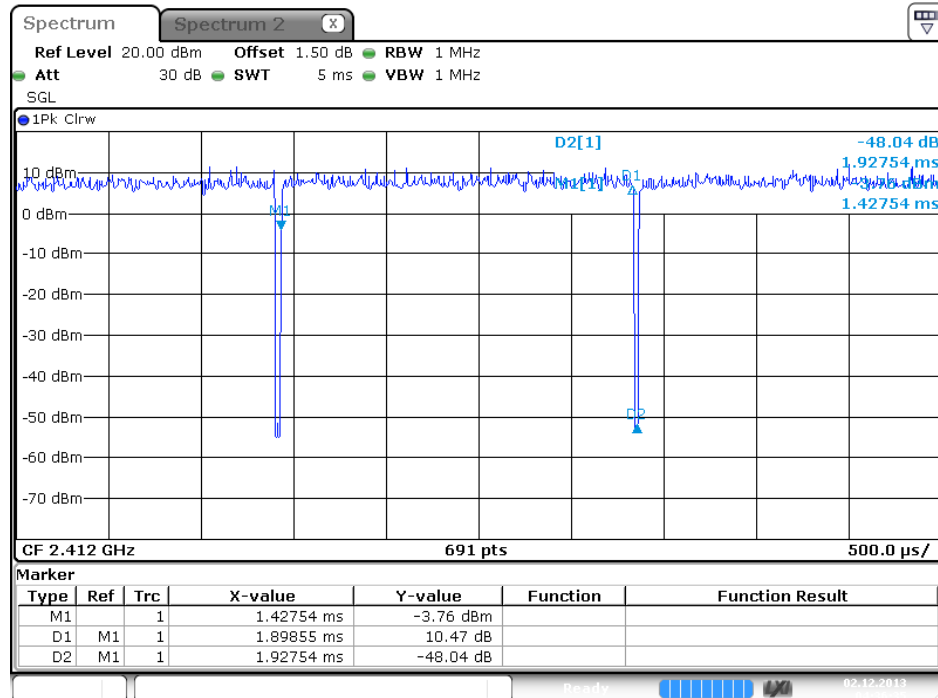


Date: 2 DEC 2013 04:36:36

IEEE 802.11n MCS0 40MHz

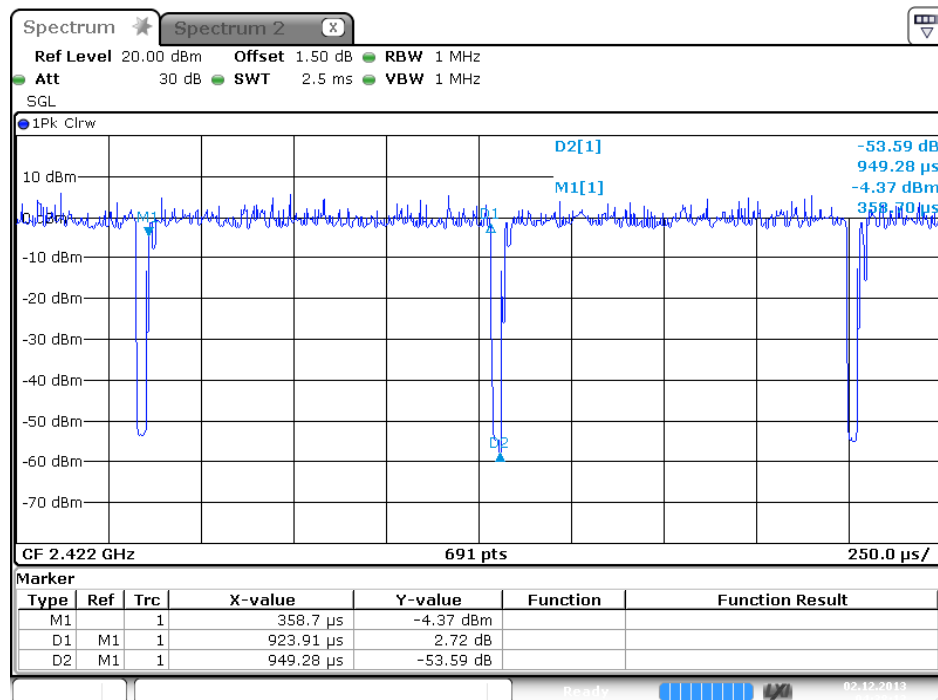


Date: 2 DEC 2013 04:38:13

IEEE 802.11b

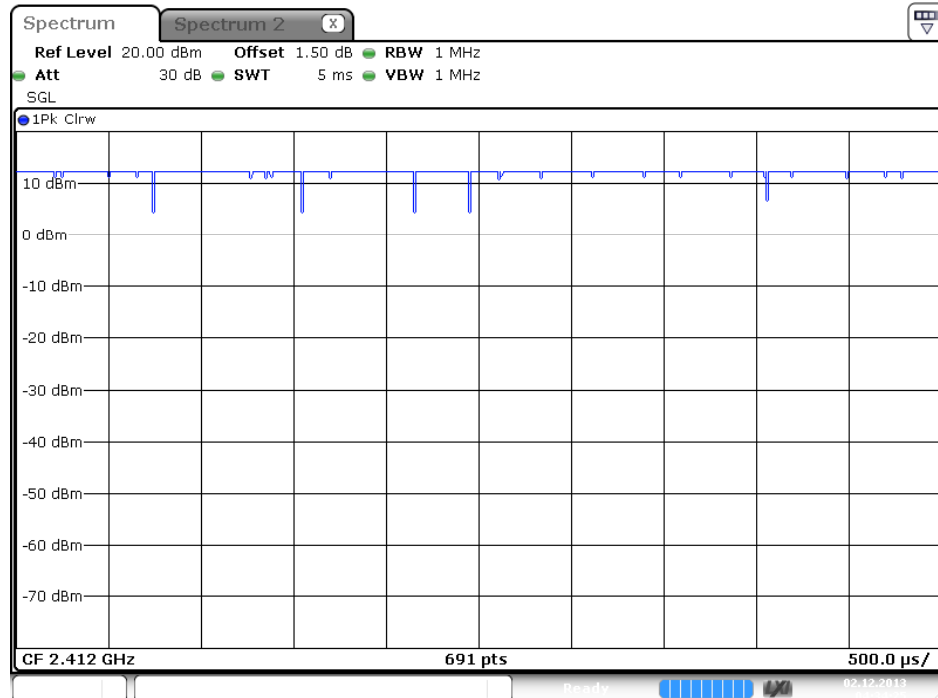

Date: 2 DEC 2013 04:34:25


IEEE 802.11g

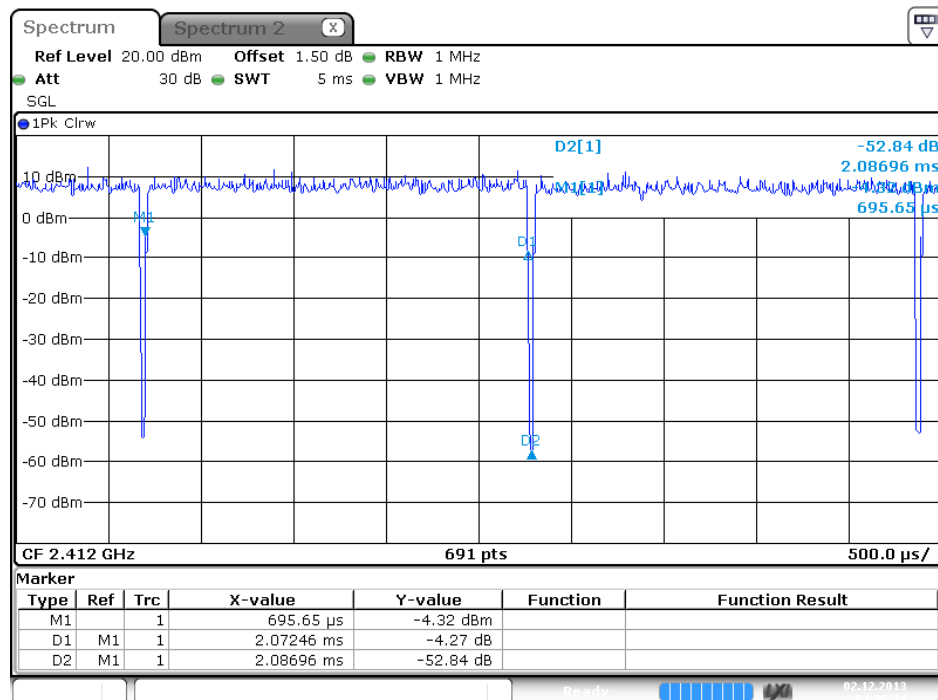

Date: 2 DEC 2013 04:35:24


For 5GHz Band

IEEE 802.11n MCS0 20MHz

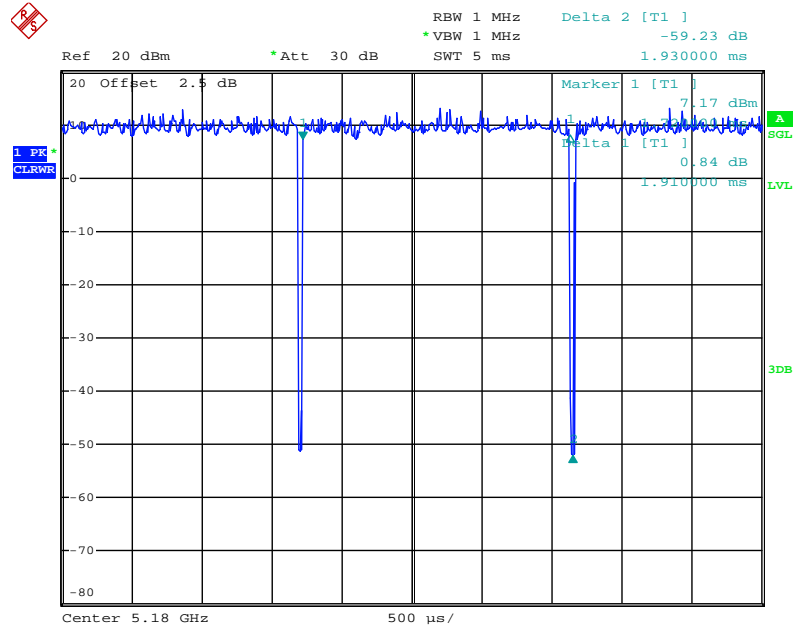


Date: 6.DEC.2013 06:34:14

IEEE 802.11n MCS0 40MHz

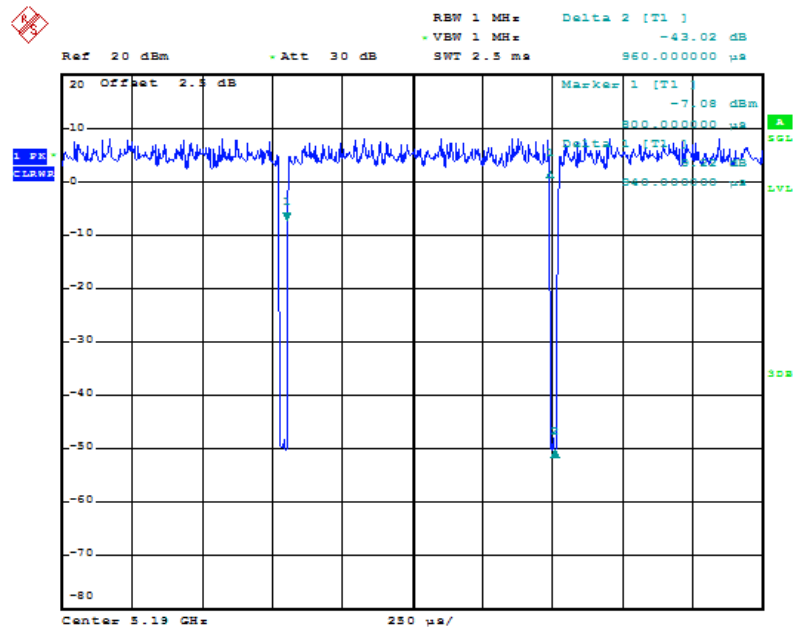

Date: 6.DEC.2013 06:28:11

IEEE 802.11a

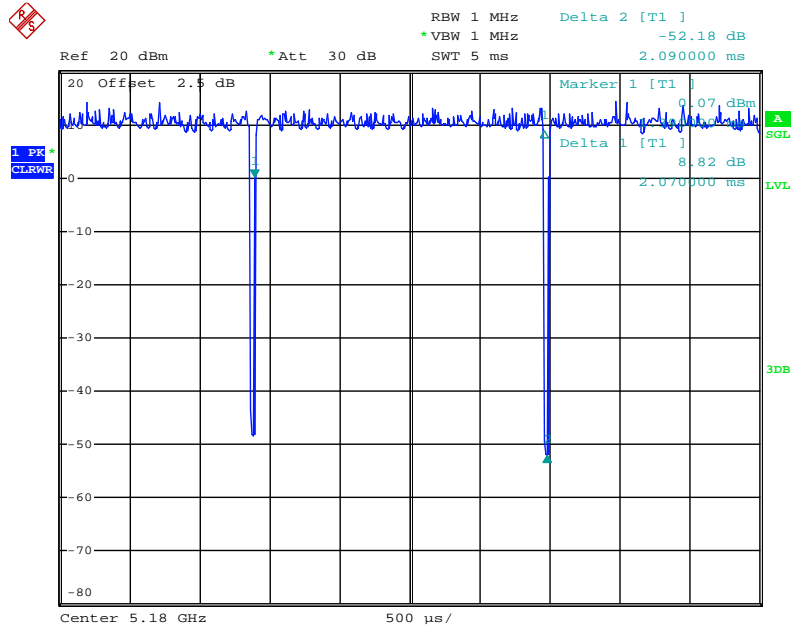


Date: 6.DEC.2013 06:33:04

3.11. Test Configurations

3.11.1. AC Power Line Conduction Emissions Test Configuration


Test Mode: Mode 1

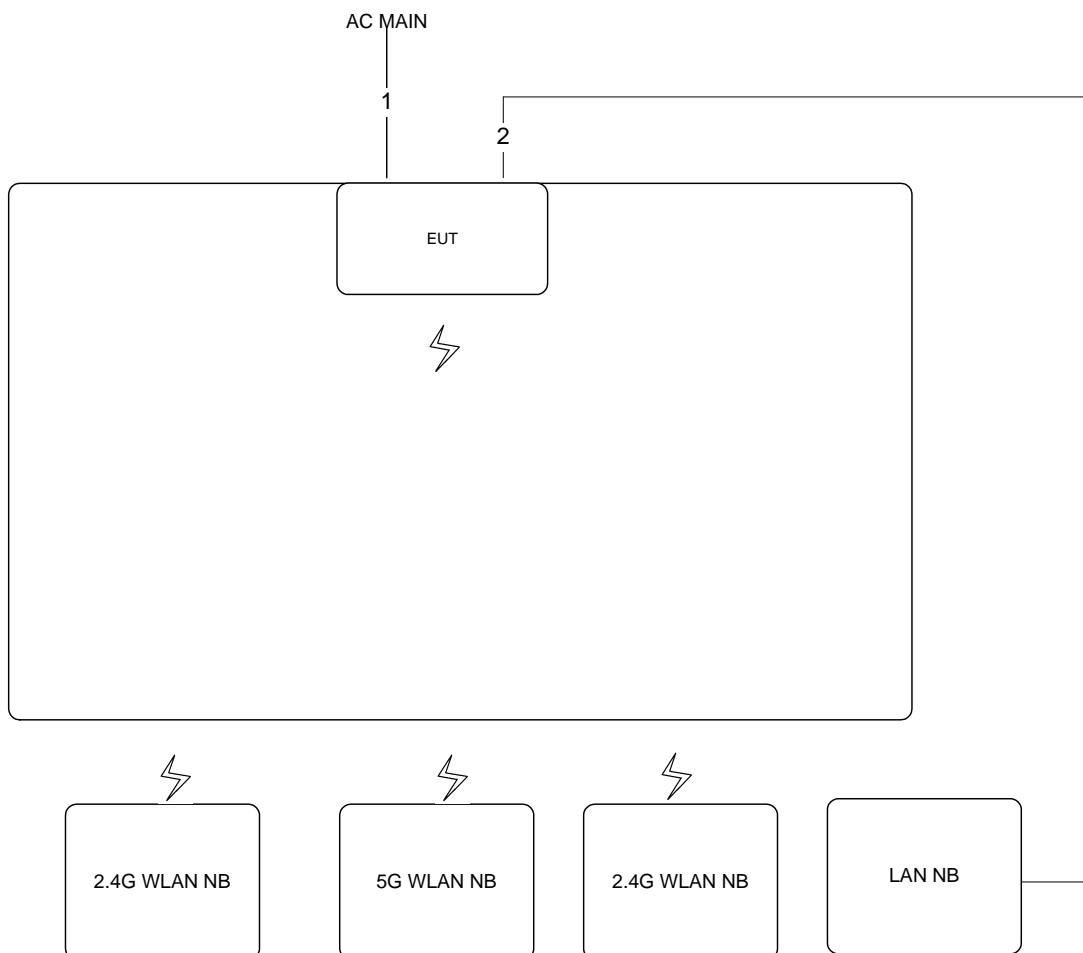

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m


3.11.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz / Test Mode: Mode 4

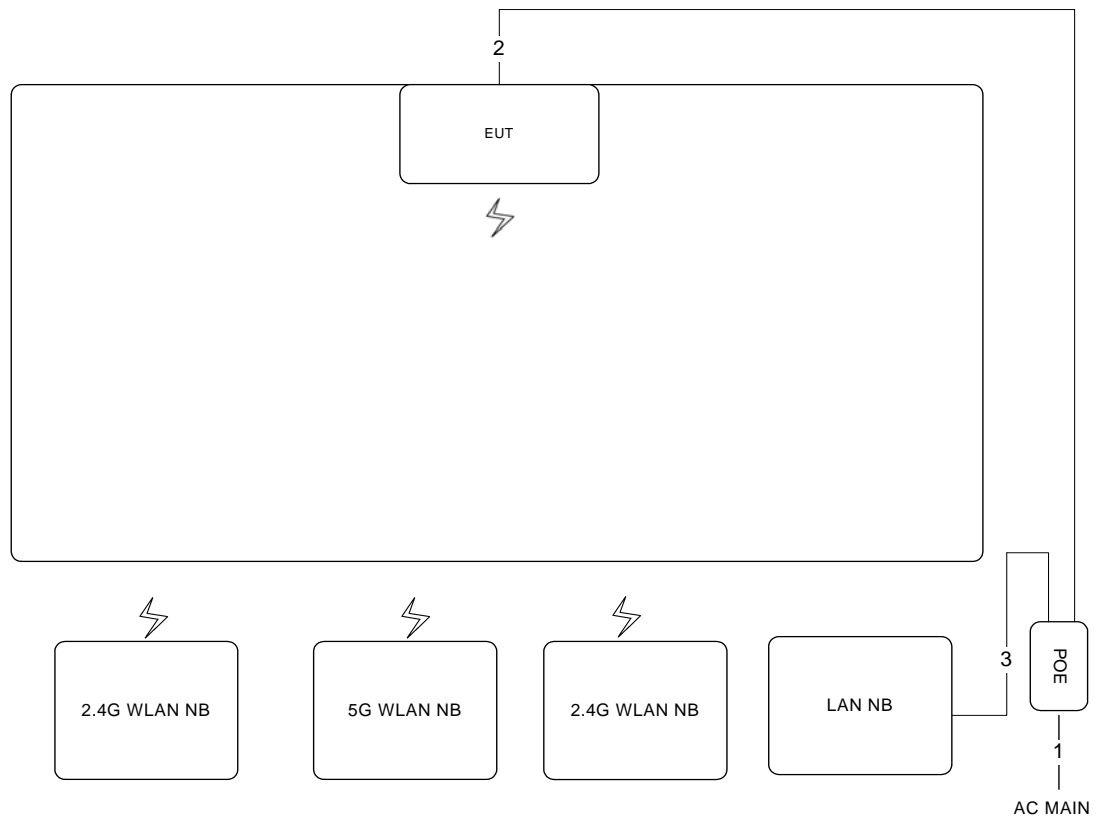

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	1m

Test Configuration: above 1GHz / Test Mode: Mode 2 / Mode 4 / Mode 5

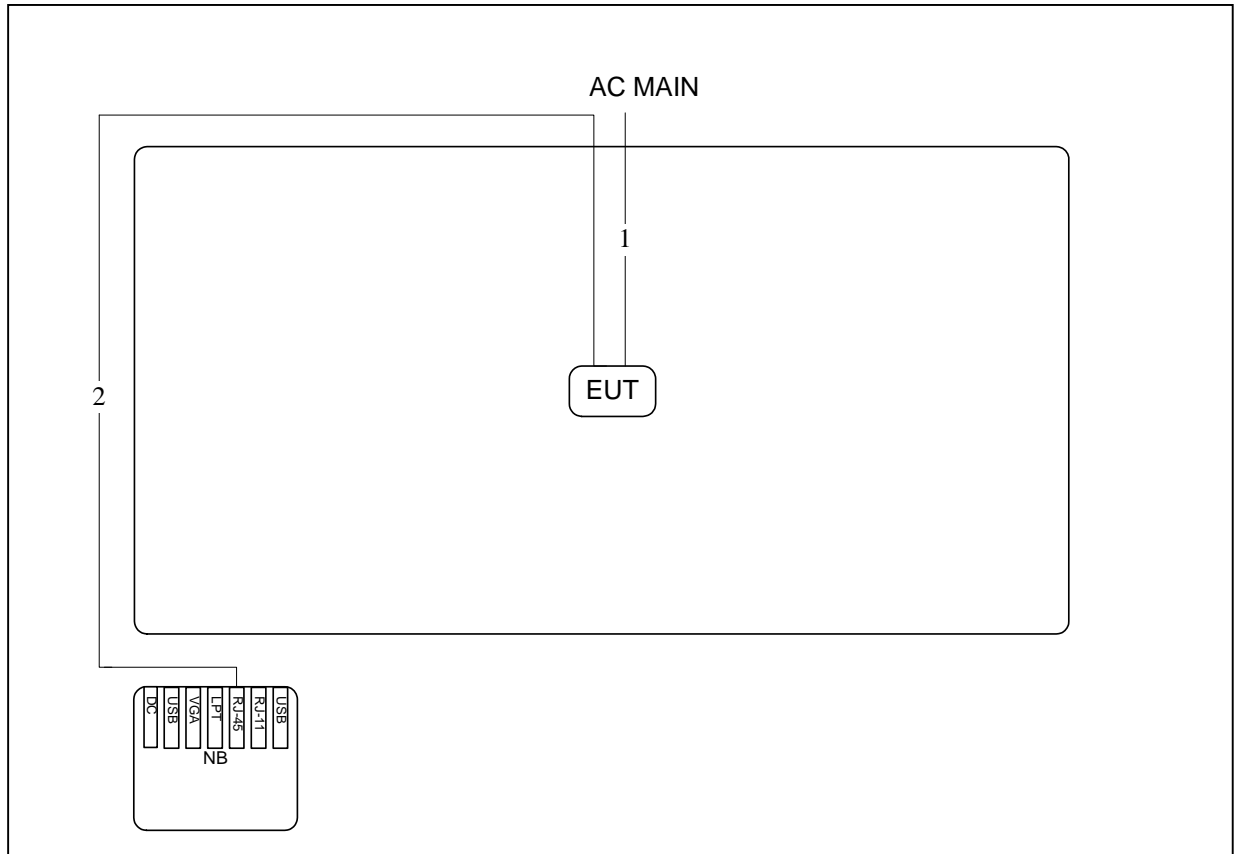

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

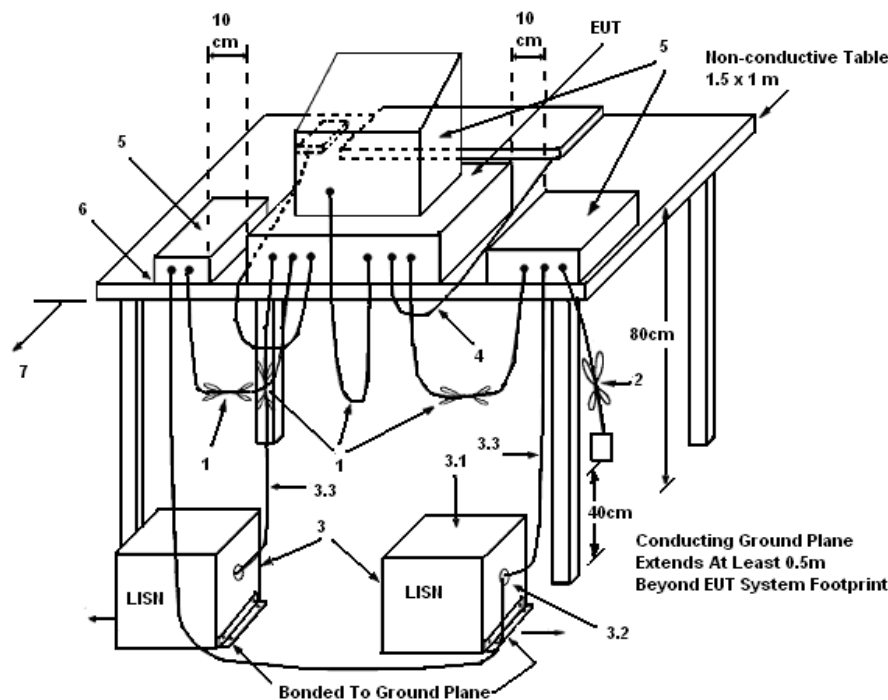

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	25°C	Humidity	54%
Test Engineer	Hank Yang	Phase	Line
Configuration	Normal Link	Test Mode	Mode 1

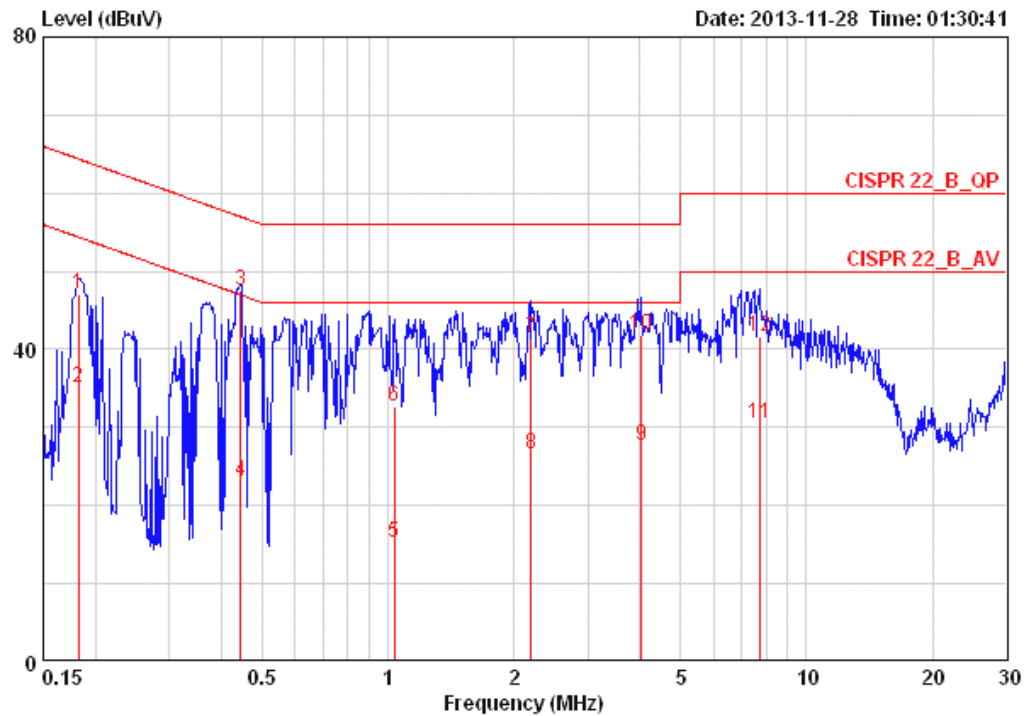

	Freq	Level	Over	Limit	Read	LISN	Cable		
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Pol/Phase	Remark
			dB	dBuV	dBuV	dB	dB		
1	0.18249	47.02	-17.35	64.37	46.68	0.15	0.19	LINE	QP
2	0.18249	35.04	-19.33	54.37	34.70	0.15	0.19	LINE	AVERAGE
3	0.44443	47.44	-9.54	56.98	47.09	0.15	0.20	LINE	QP
4	0.44443	23.07	-23.91	46.98	22.72	0.15	0.20	LINE	AVERAGE
5	1.037	15.29	-30.71	46.00	14.93	0.16	0.20	LINE	AVERAGE
6	1.037	32.66	-23.34	56.00	32.30	0.16	0.20	LINE	QP
7	2.201	41.46	-14.54	56.00	41.03	0.20	0.23	LINE	QP
8	2.201	26.57	-19.43	46.00	26.14	0.20	0.23	LINE	AVERAGE
9	4.027	27.67	-18.33	46.00	27.09	0.28	0.30	LINE	AVERAGE
10	4.027	41.80	-14.20	56.00	41.22	0.28	0.30	LINE	QP
11	7.728	30.45	-19.55	50.00	29.81	0.34	0.30	LINE	AVERAGE
12	7.728	41.69	-18.31	60.00	41.05	0.34	0.30	LINE	QP

Temperature	25°C	Humidity	54%
Test Engineer	Hank Yang	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 1

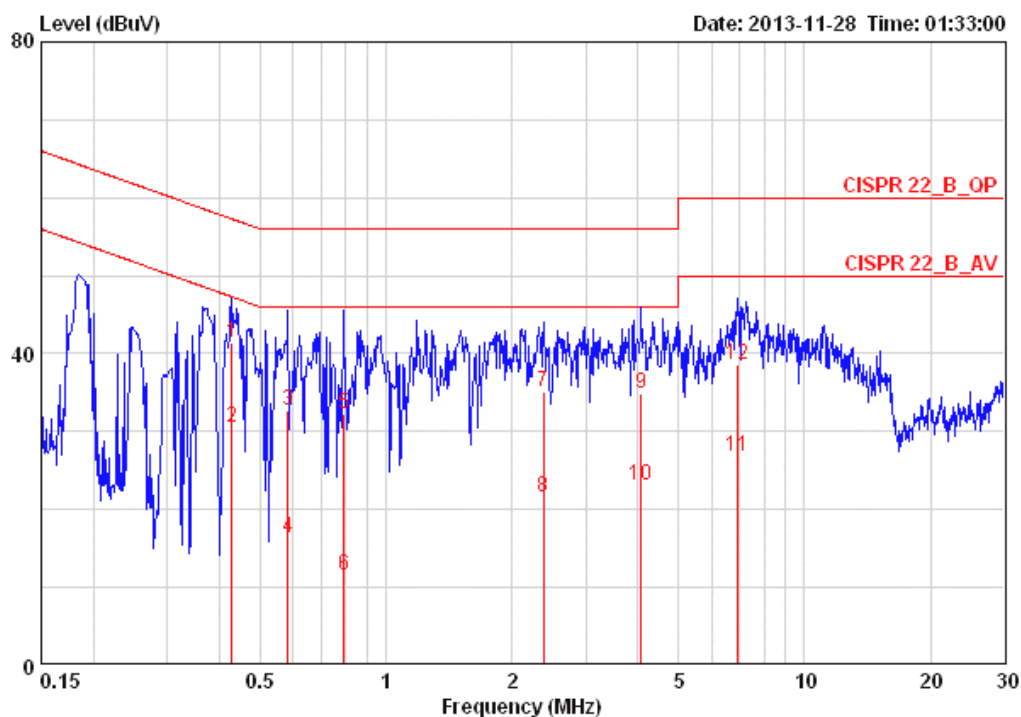

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.42825	41.45	-15.84	57.29	41.18	0.07	0.20	NEUTRAL	QP
2	0.42825	30.51	-16.78	47.29	30.24	0.07	0.20	NEUTRAL	AVERAGE
3	0.58231	32.75	-23.25	56.00	32.48	0.07	0.20	NEUTRAL	QP
4	0.58231	16.40	-29.60	46.00	16.13	0.07	0.20	NEUTRAL	AVERAGE
5	0.79180	32.22	-23.78	56.00	31.94	0.08	0.20	NEUTRAL	QP
6	0.79180	11.56	-34.44	46.00	11.28	0.08	0.20	NEUTRAL	AVERAGE
7	2.384	35.07	-20.93	56.00	34.72	0.11	0.24	NEUTRAL	QP
8	2.384	21.47	-24.53	46.00	21.12	0.11	0.24	NEUTRAL	AVERAGE
9	4.070	34.98	-21.02	56.00	34.55	0.13	0.30	NEUTRAL	QP
10	4.070	23.01	-22.99	46.00	22.58	0.13	0.30	NEUTRAL	AVERAGE
11	6.914	26.83	-23.17	50.00	26.33	0.20	0.30	NEUTRAL	AVERAGE
12	6.914	38.56	-21.44	60.00	38.06	0.20	0.30	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi. Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter output power.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

4.2.3. Test Procedures

1. Test procedures refer KDB 558074 D01 v03r01 section 9.2.2 Measurement using a power meter (PM).
2. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

4.2.4. Test Setup Layout

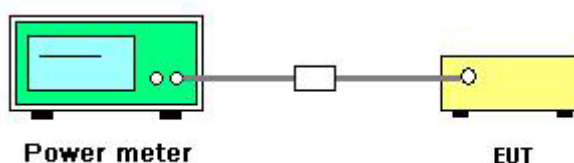

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	24°C	Humidity	60%
Test Engineer	Wen Chao	Configurations	IEEE 802.11b/g/n
Test Date	Dec. 23, 2013		

Radio 1:

For 2.4GHz Band

Configuration IEEE 802.11n MCS0 20MHz / Chain 4 + Chain 5 + Chain 6

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 4	Chain 5	Chain 6	Total		
1	2412 MHz	11.55	12.01	12.91	16.97	30.00	Complies
6	2437 MHz	20.91	21.08	21.23	25.85	30.00	Complies
11	2462 MHz	13.37	14.13	14.71	18.88	30.00	Complies

Configuration IEEE 802.11b / Chain 4

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	21.93	30.00	Complies
6	2437 MHz	24.28	30.00	Complies
11	2462 MHz	21.36	30.00	Complies

Configuration IEEE 802.11g / Chain 4

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	15.85	30.00	Complies
6	2437 MHz	23.99	30.00	Complies
11	2462 MHz	16.48	30.00	Complies

Temperature	24°C	Humidity	60%
Test Engineer	Wen Chao	Configurations	IEEE 802.11a/n
Test Date	Dec. 24, 2013		

Radio 2:

For 5GHz Band

Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
149	5745 MHz	21.5	21.13	20.58	25.86	30.00	Complies
157	5785 MHz	23.9	23.72	21.62	27.97	30.00	Complies
165	5825 MHz	22.49	22.45	20.87	26.77	30.00	Complies

Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
151	5755 MHz	19.74	19.62	19.03	24.25	30.00	Complies
159	5795 MHz	22.75	22.22	20.69	26.74	30.00	Complies

Configuration IEEE 802.11a / Chain 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	21.68	30.00	Complies
157	5785 MHz	24.11	30.00	Complies
165	5825 MHz	22.68	30.00	Complies

Temperature	24°C	Humidity	60%
Test Engineer	Wen Chao	Configurations	IEEE 802.11a/b/g/n
Test Date	Dec. 23, 2013		

Radio 3:

For 2.4GHz Band

Configuration IEEE 802.11n MCS0 20MHz / Chain 7

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	16.66	30.00	Complies
6	2437 MHz	20.68	30.00	Complies
11	2462 MHz	17.54	30.00	Complies

Configuration IEEE 802.11n MCS0 40MHz / Chain 7

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	14.68	30.00	Complies
6	2437 MHz	16.14	30.00	Complies
9	2452 MHz	14.27	30.00	Complies

Configuration IEEE 802.11b / Chain 7

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	20.15	30.00	Complies
6	2437 MHz	21.98	30.00	Complies
11	2462 MHz	19.93	30.00	Complies

Configuration IEEE 802.11g / Chain 7

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	17.1	30.00	Complies
6	2437 MHz	20.83	30.00	Complies
11	2462 MHz	17.84	30.00	Complies

For 5GHz Band

Configuration IEEE 802.11n MCS0 20MHz / Chain 7

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	19.02	30.00	Complies
157	5785 MHz	22.62	30.00	Complies
165	5825 MHz	22.66	30.00	Complies

Configuration IEEE 802.11n MCS0 40MHz / Chain 7

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	18.74	30.00	Complies
159	5795 MHz	22.65	30.00	Complies

Configuration IEEE 802.11a / Chain 7

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	19.01	30.00	Complies
157	5785 MHz	22.62	30.00	Complies
165	5825 MHz	22.61	30.00	Complies

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

4.3.3. Test Procedures

1. Test procedures refer KDB 558074 D01 v03r01 section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be $\leq 8 \text{ dBm}$.

4.3.4. Test Setup Layout

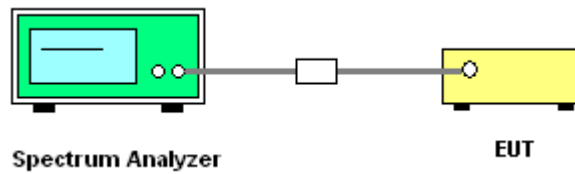

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	24°C	Humidity	60%
Test Engineer	Wen Chao	Configurations	IEEE 802.11b/g/n

Radio 1:

For 2.4GHz Band

Configuration IEEE 802.11n MCS0 20MHz / Chain 4 + Chain 5 + Chain 6

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 4	Chain 5	Chain 6	Total		
1	2412 MHz	-15.26	-13.85	-13.68	-9.44	8.00	Complies
6	2437 MHz	-5.27	-4.62	-5.62	-0.38	8.00	Complies
11	2462 MHz	-12.65	-12.00	-11.53	-7.26	8.00	Complies

Configuration IEEE 802.11b / Chain 4

Channel	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
1	2412 MHz	-0.18	8.00	Complies
6	2437 MHz	0.87	8.00	Complies
11	2462 MHz	-1.18	8.00	Complies

Configuration IEEE 802.11g / Chain 4

Channel	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
1	2412 MHz	-11.22	8.00	Complies
6	2437 MHz	-2.24	8.00	Complies
11	2462 MHz	-9.80	8.00	Complies

Temperature	24°C	Humidity	60%
Test Engineer	Wen Chao	Configurations	IEEE 802.11a/n

Radio 2:

For 5GHz Band

Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
149	5745 MHz	-5.11	-4.23	-6.37	-0.38	8.00	Complies
157	5785 MHz	-2.15	-1.78	-4.18	2.19	8.00	Complies
165	5825 MHz	-4.83	-3.81	-5.46	0.13	8.00	Complies

Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
151	5755 MHz	-8.42	-9.39	-9.13	-4.19	8.00	Complies
159	5795 MHz	-6.28	-6.79	-7.07	-1.93	8.00	Complies

Configuration IEEE 802.11a / Chain 1

Channel	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
149	5745 MHz	-3.94	8.00	Complies
157	5785 MHz	-2.76	8.00	Complies
165	5825 MHz	-3.85	8.00	Complies

Temperature	24°C	Humidity	60%
Test Engineer	Wen Chao	Configurations	IEEE 802.11a/b/g/n

Radio 3:

For 2.4GHz Band

Configuration IEEE 802.11n MCS0 20MHz / Chain 7

Channel	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
1	2412 MHz	-7.18	8.00	Complies
6	2437 MHz	-3.28	8.00	Complies
11	2462 MHz	-6.88	8.00	Complies

Configuration IEEE 802.11n MCS0 40MHz / Chain 7

Channel	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
3	2422 MHz	-14.19	8.00	Complies
6	2437 MHz	-12.63	8.00	Complies
9	2452 MHz	-14.81	8.00	Complies

Configuration IEEE 802.11b / Chain 7

Channel	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
1	2412 MHz	-2.66	8.00	Complies
6	2437 MHz	-1.23	8.00	Complies
11	2462 MHz	-3.61	8.00	Complies

Configuration IEEE 802.11g / Chain 7

Channel	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
1	2412 MHz	-9.34	8.00	Complies
6	2437 MHz	-4.20	8.00	Complies
11	2462 MHz	-8.04	8.00	Complies

For 5GHz Band

Configuration IEEE 802.11n MCS0 20MHz / Chain 7

Channel	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
149	5745 MHz	-6.07	8.00	Complies
157	5785 MHz	-3.91	8.00	Complies
165	5825 MHz	-2.43	8.00	Complies

Configuration IEEE 802.11n MCS0 40MHz / Chain 7

Channel	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
151	5755 MHz	-9.40	8.00	Complies
159	5795 MHz	-7.21	8.00	Complies

Configuration IEEE 802.11a / Chain 7

Channel	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
149	5745 MHz	-4.43	8.00	Complies
157	5785 MHz	-2.74	8.00	Complies
165	5825 MHz	-3.29	8.00	Complies


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

Radio 1:


For 2.4GHz Band

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 2437 MHz / Chain 4

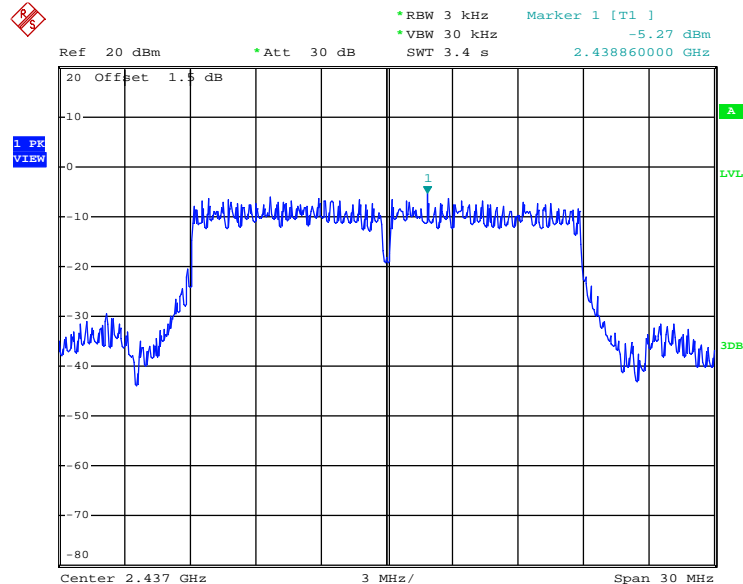


Date: 23.DEC.2013 21:21:59

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 2437 MHz / Chain 5

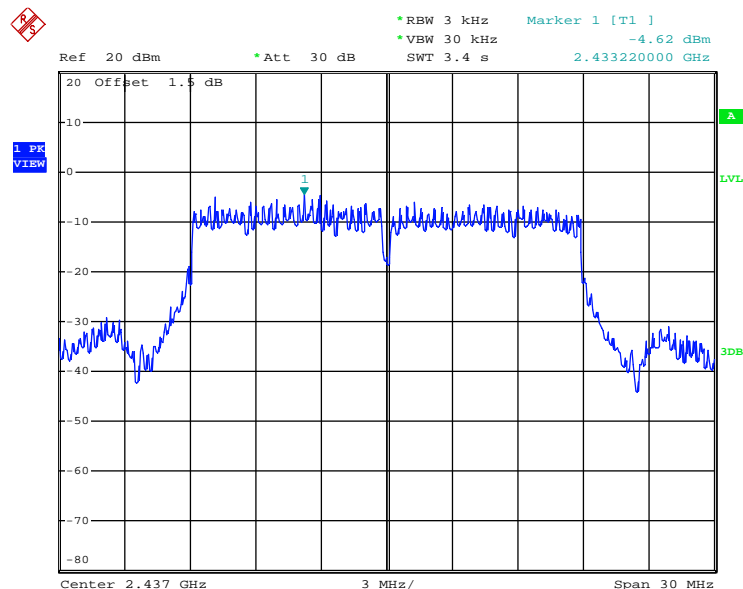


Date: 23.DEC.2013 21:21:18

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 2437 MHz / Chain 6

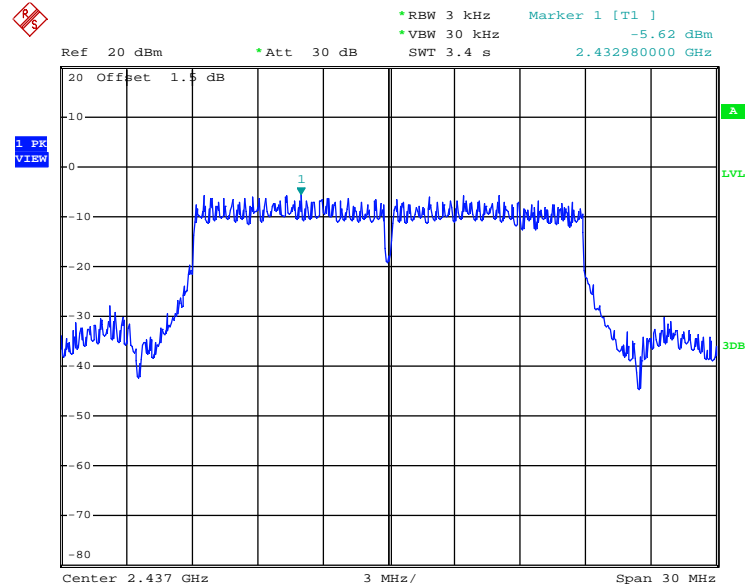


Date: 23.DEC.2013 21:20:35

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 4

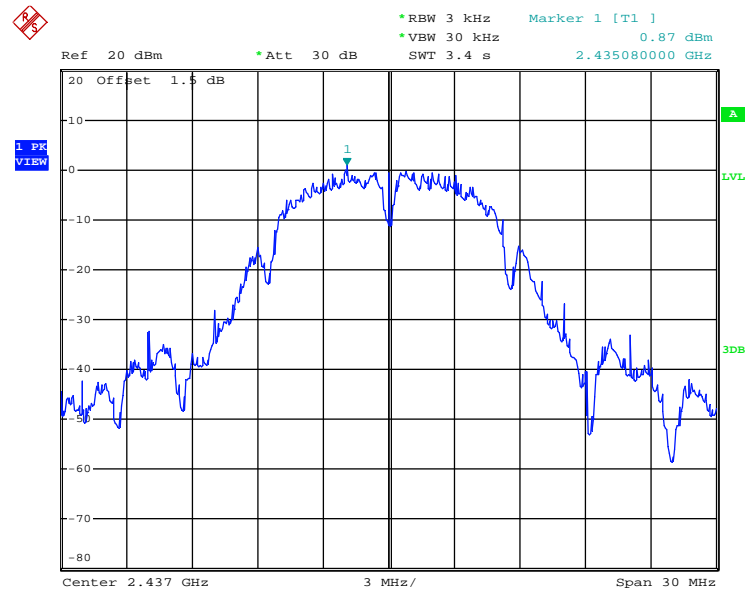

Date: 23.DEC.2013 21:12:45

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 4

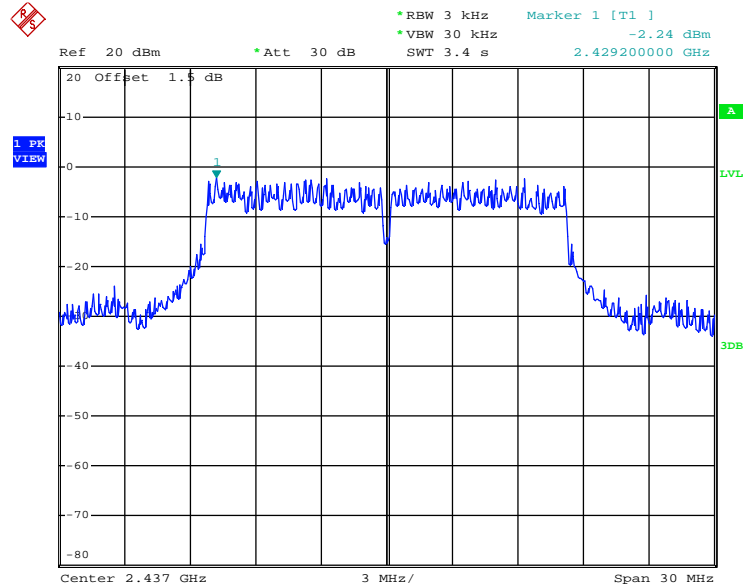


Date: 23.DEC.2013 21:16:02

Radio 2:


For 5GHz Band

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 5785 MHz / Chain 1

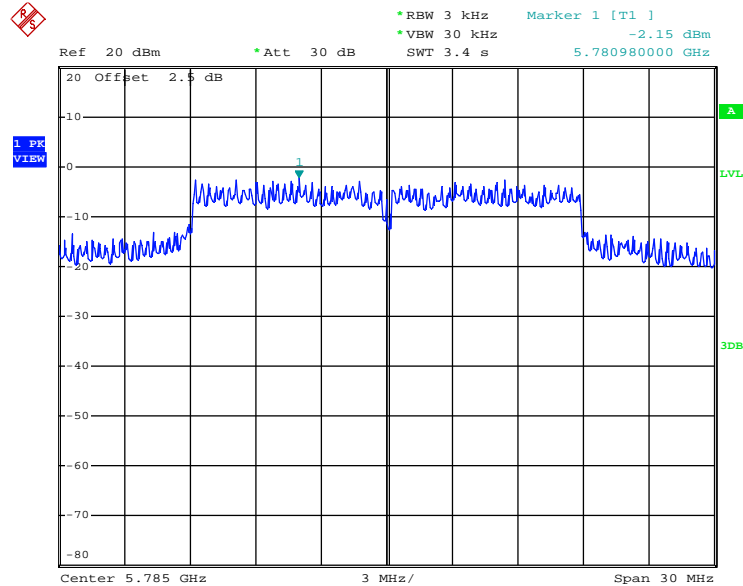


Date: 24.DEC.2013 11:55:07

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 5785 MHz / Chain 2

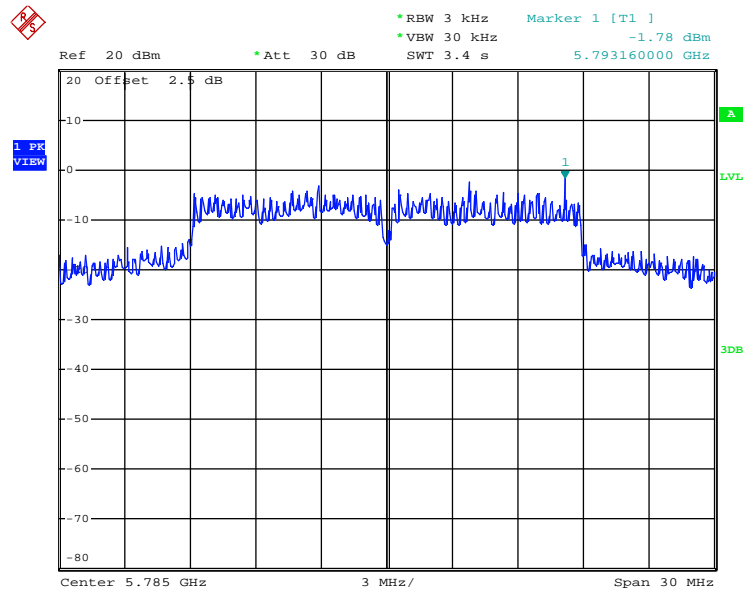


Date: 24.DEC.2013 11:51:25

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 5785 MHz / Chain 3

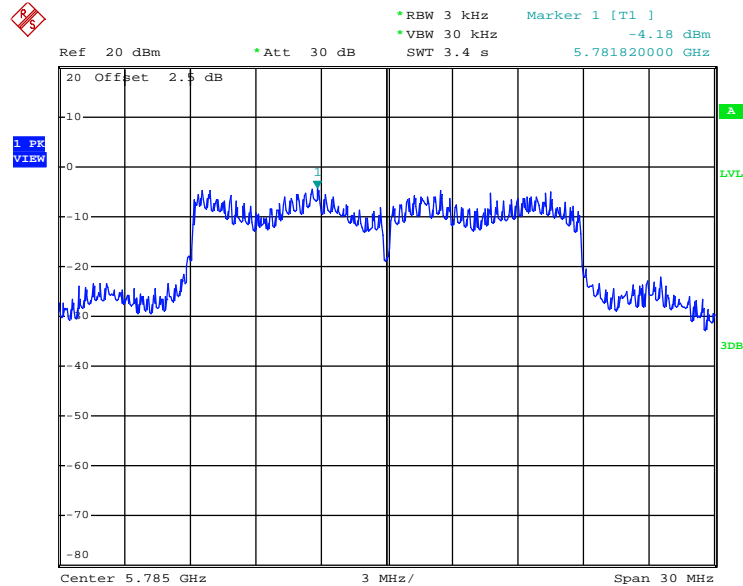


Date: 24.DEC.2013 11:50:43

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / 5795 MHz / Chain 1

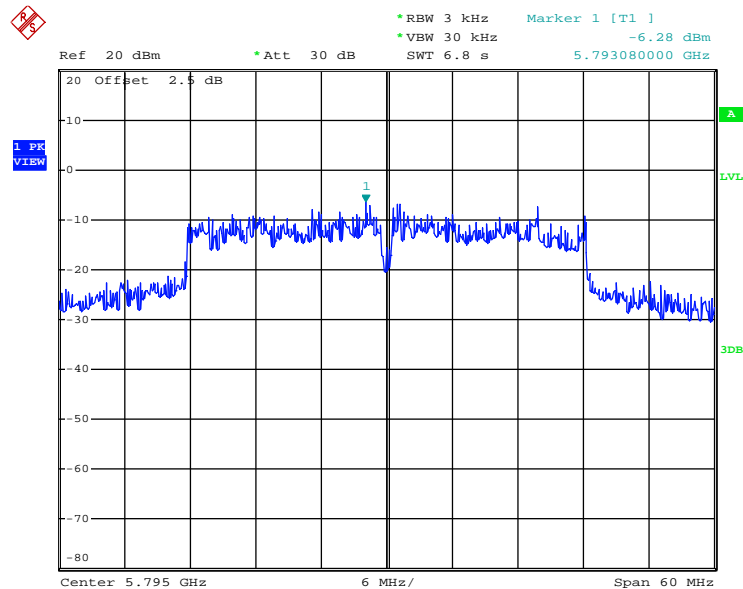


Date: 24.DEC.2013 12:01:38

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / 5795 MHz / Chain 2

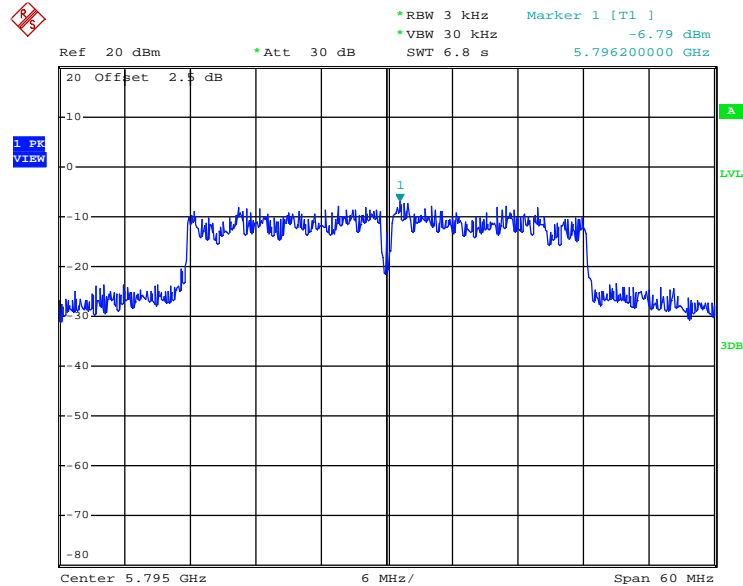


Date: 24.DEC.2013 12:02:23

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / 5795 MHz / Chain 3

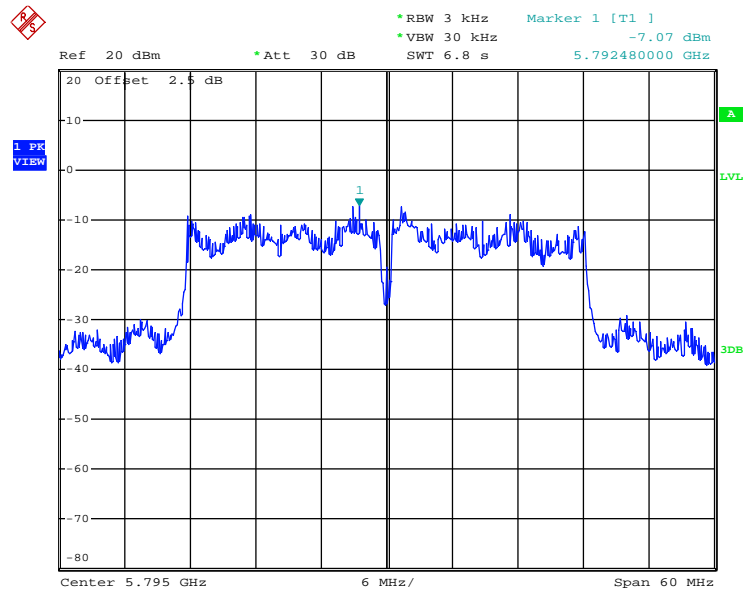

Date: 24.DEC.2013 12:03:01

Power Density Plot on Configuration IEEE 802.11a / 5785 MHz / Chain 1

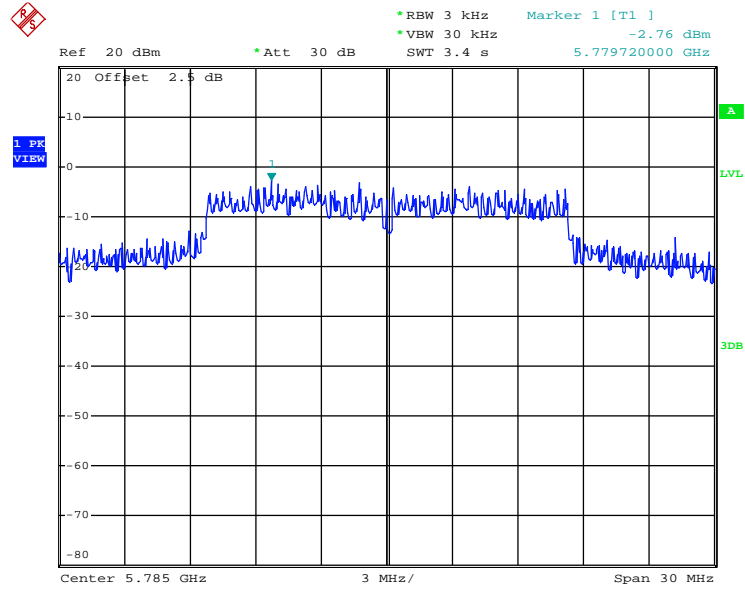


Date: 24.DEC.2013 11:46:46

Radio 3:


For 2.4GHz Band

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 2437 MHz / Chain 7

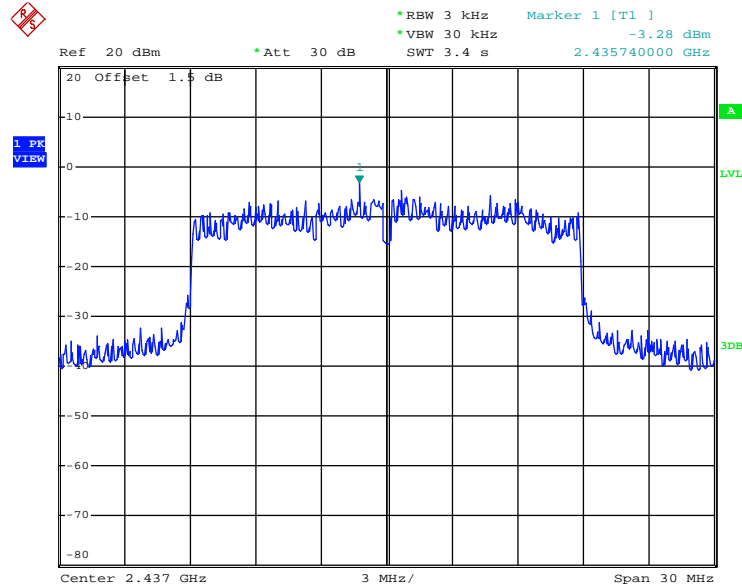


Date: 23.DEC.2013 22:31:01

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / 2437 MHz / Chain 7

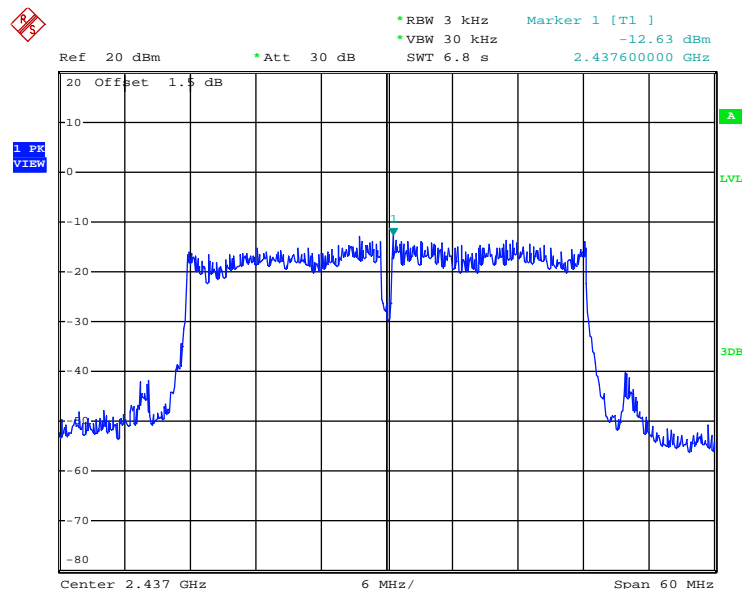


Date: 23.DEC.2013 22:33:26

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 7

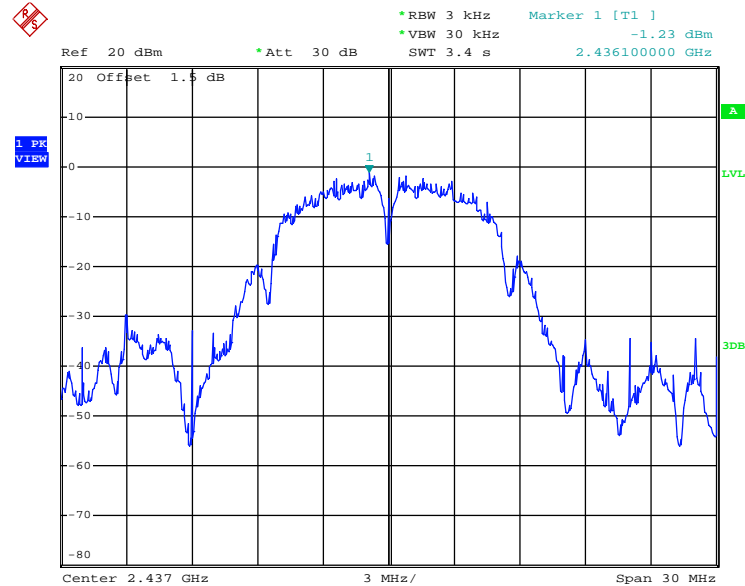

Date: 23.DEC.2013 22:26:51


Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 7

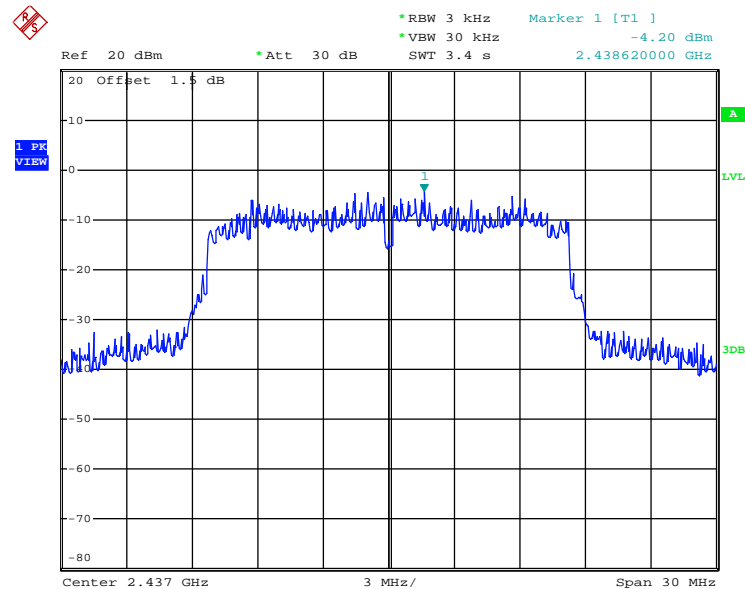

Date: 23.DEC.2013 22:28:57


For 5GHz Band

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 5825 MHz / Chain 7

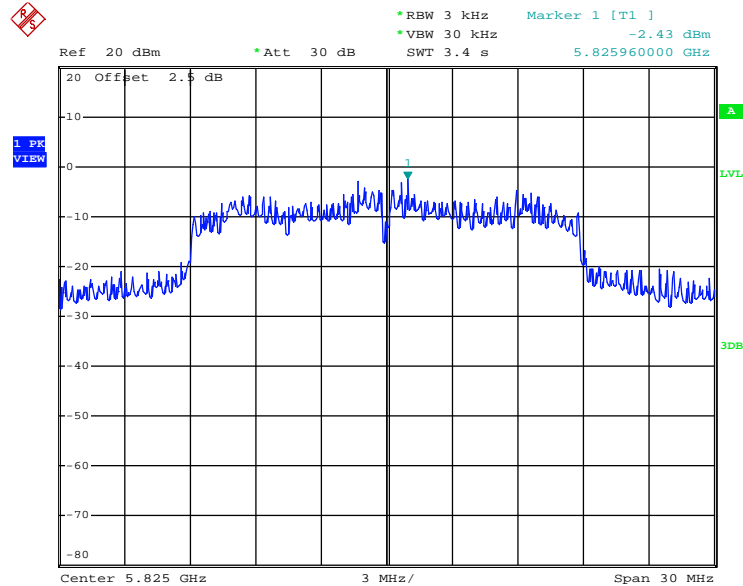


Date: 23.DEC.2013 22:37:51

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / 5795 MHz / Chain 7

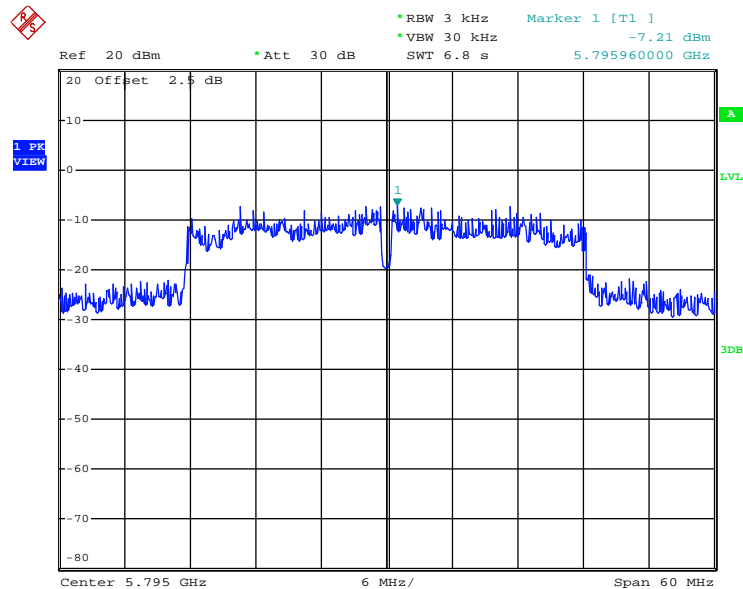

Date: 23.DEC.2013 22:41:14

Power Density Plot on Configuration IEEE 802.11a / 5785 MHz / Chain 7

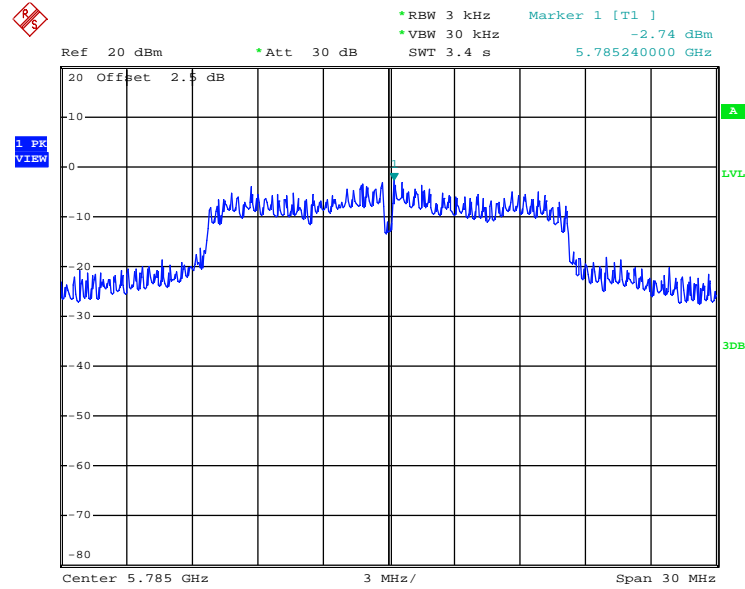

Date: 23.DEC.2013 22:36:27

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

7. The transmitter was radiated to the spectrum analyzer in peak hold mode.
8. Test was performed in accordance with KDB 558074 D01 v03r01 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 8.0 DTS 6-dB signal bandwidth option 1.
9. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
10. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	24°C	Humidity	60%
Test Engineer	Wen Chao	Configurations	IEEE 802.11b/g/n

Radio 1:

For 2.4GHz Band

Configuration IEEE 802.11n MCS0 20MHz / Chain 4 + Chain 5 + Chain 6

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	11.76	17.36	500	Complies
6	2437 MHz	11.68	17.36	500	Complies
11	2462 MHz	11.76	17.28	500	Complies

Configuration IEEE 802.11b / Chain 4

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	8.08	10.24	500	Complies
6	2437 MHz	8.08	10.48	500	Complies
11	2462 MHz	8.08	10.08	500	Complies

Configuration IEEE 802.11g / Chain 4

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.48	16.64	500	Complies
6	2437 MHz	16.32	17.52	500	Complies
11	2462 MHz	16.32	16.64	500	Complies

Temperature	24°C	Humidity	60%
Test Engineer	Wen Chao	Configurations	IEEE 802.11a/n

Radio 2:

For 5GHz Band

Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	13.12	22.24	500	Complies
157	5785 MHz	12.32	36.08	500	Complies
165	5825 MHz	13.68	32.24	500	Complies

Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	30.40	36.16	500	Complies
159	5795 MHz	31.20	60.96	500	Complies

Configuration IEEE 802.11a / Chain 1

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	16.32	24.08	500	Complies
157	5785 MHz	16.48	36.08	500	Complies
165	5825 MHz	16.24	33.04	500	Complies

Temperature	24°C	Humidity	60%
Test Engineer	Wen Chao	Configurations	IEEE 802.11 a/b/g/n

Radio 3:

For 2.4GHz Band

Configuration IEEE 802.11n MCS0 20MHz / Chain 7

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	15.68	17.52	500	Complies
6	2437 MHz	13.60	17.68	500	Complies
11	2462 MHz	14.16	17.52	500	Complies

Configuration IEEE 802.11n MCS0 40MHz / Chain 7

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	34.56	36.32	500	Complies
6	2437 MHz	34.40	36.32	500	Complies
9	2452 MHz	35.68	36.32	500	Complies

Configuration IEEE 802.11b / Chain 7

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	8.00	10.16	500	Complies
6	2437 MHz	8.08	10.32	500	Complies
11	2462 MHz	9.04	10.24	500	Complies

Configuration IEEE 802.11g / Chain 7

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	15.36	16.40	500	Complies
6	2437 MHz	14.40	16.56	500	Complies
11	2462 MHz	14.72	16.40	500	Complies

For 5GHz Band

Configuration IEEE 802.11n MCS0 20MHz / Chain 7

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	15.12	17.84	500	Complies
157	5785 MHz	15.04	29.68	500	Complies
165	5825 MHz	15.04	30.40	500	Complies

Configuration IEEE 802.11n MCS0 40MHz / Chain 7

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	35.84	40.00	500	Complies
159	5795 MHz	36.32	67.04	500	Complies

Configuration IEEE 802.11a / Chain 7

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	14.72	16.64	500	Complies
157	5785 MHz	15.12	29.36	500	Complies
165	5825 MHz	15.44	29.04	500	Complies


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

Radio 1:


For 2.4GHz Band

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / 2437 MHz / Chain 4 + 5 + 6

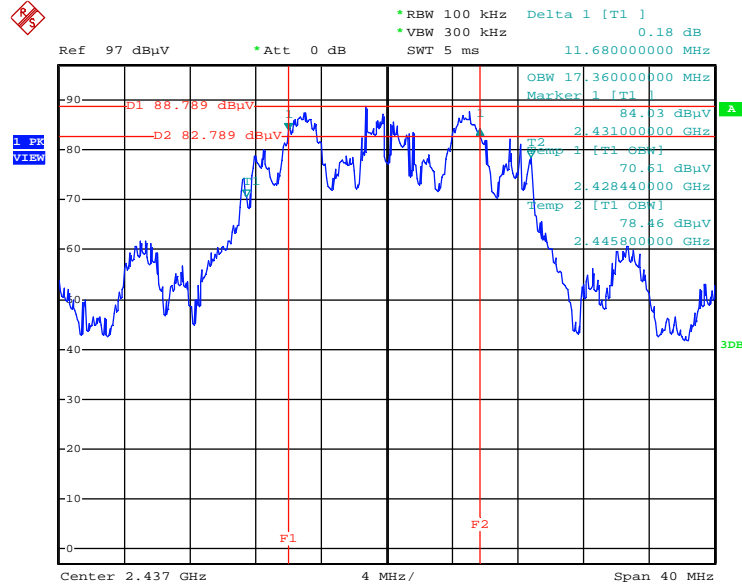


Date: 23.DEC.2013 21:44:18

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 4

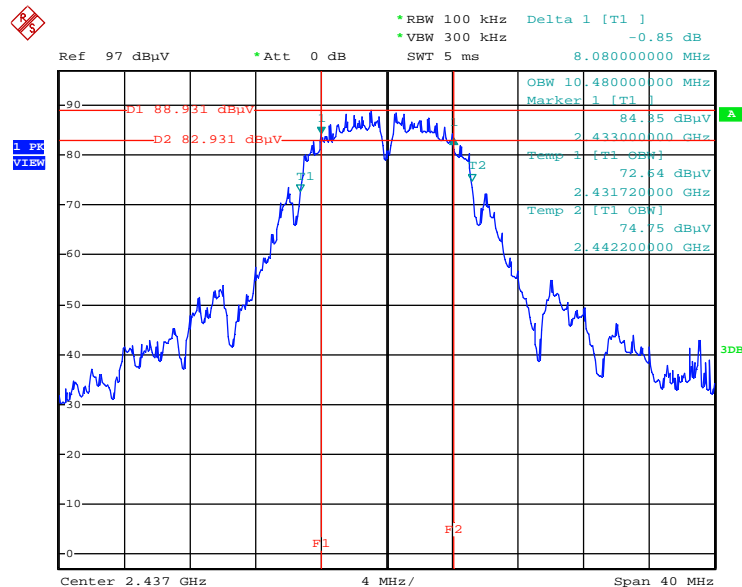

Date: 23.DEC.2013 21:32:49

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 4

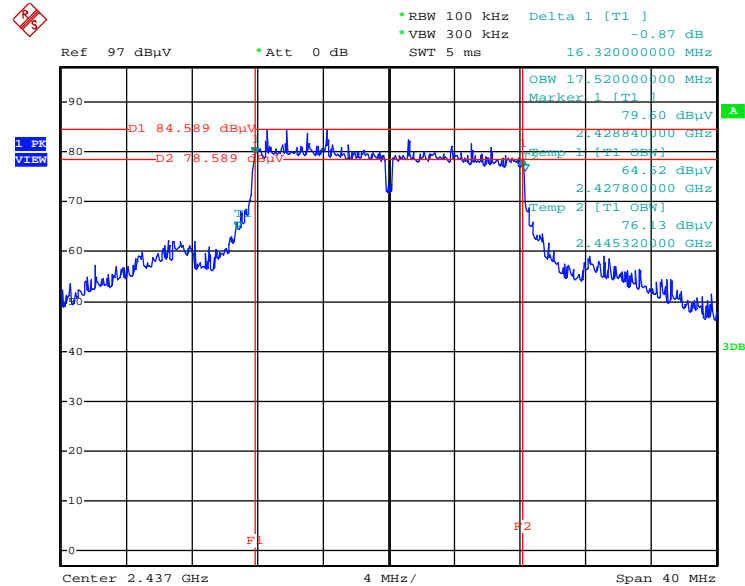


Date: 23.DEC.2013 21:41:44

Radio 2:


For 5GHz Band

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / 5785 MHz / Chain 1 + 2 + 3

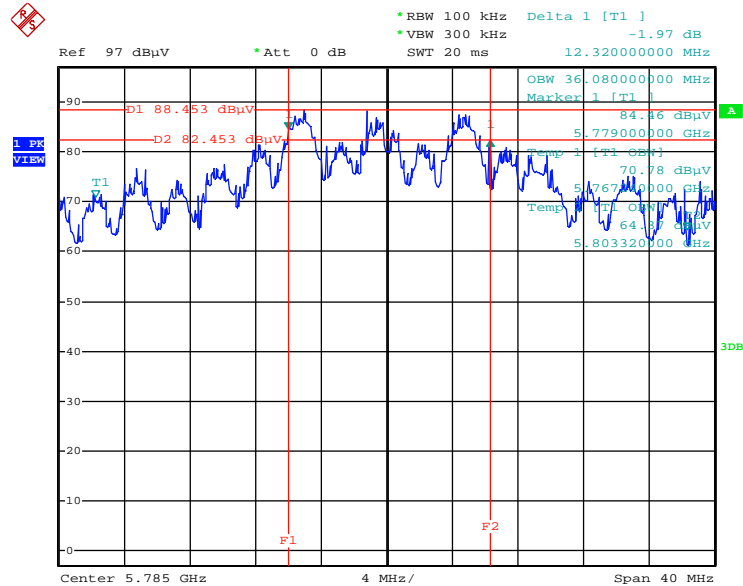


Date: 24.DEC.2013 16:16:13

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / 5755MHz / Chain 1 + 2 + 3

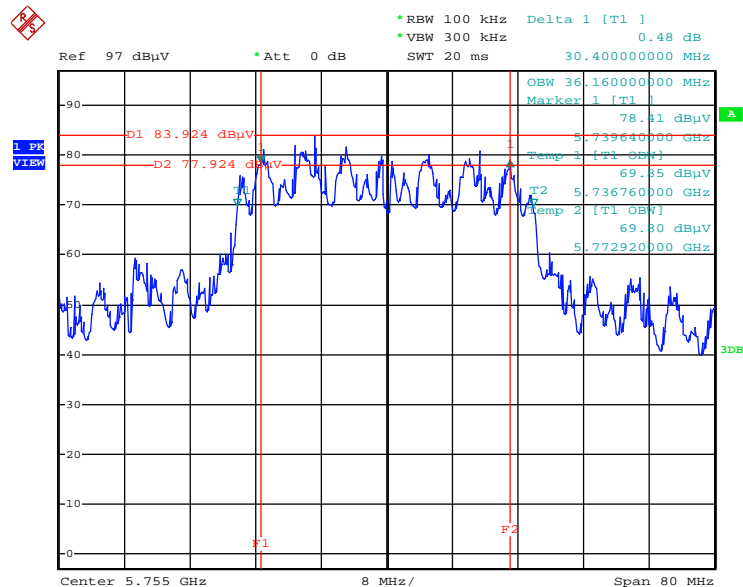

Date: 24.DEC.2013 16:14:17

6 dB Bandwidth Plot on Configuration IEEE 802.11a / 5825 MHz / Chain 1

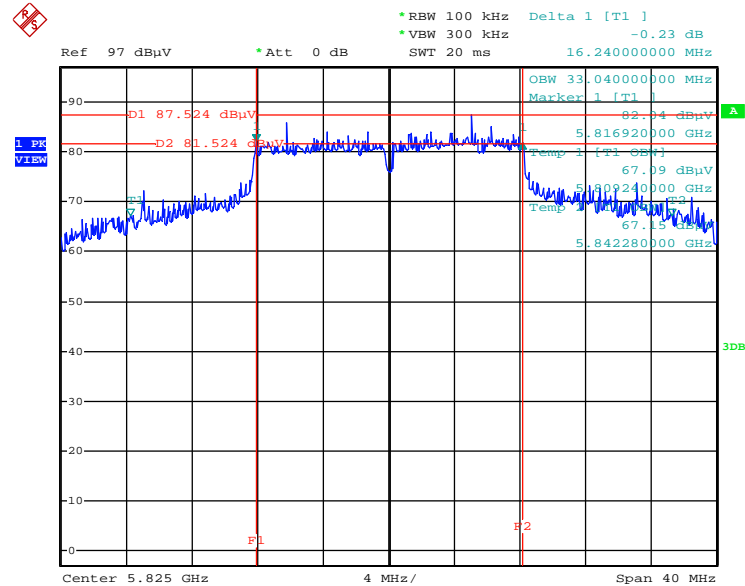


Date: 24.DEC.2013 16:04:11

Radio 3:


For 2.4GHz Band

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / 2437 MHz / Chain 7

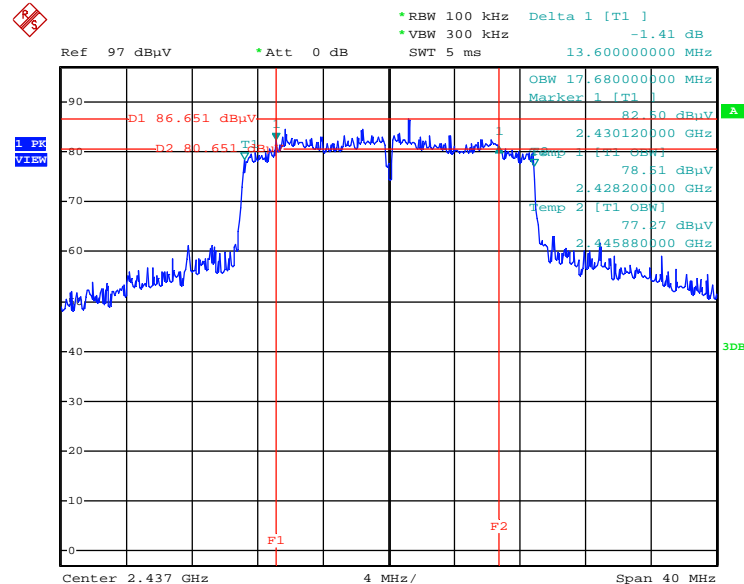


Date: 23.DEC.2013 23:03:19

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / 2437 MHz / Chain 7

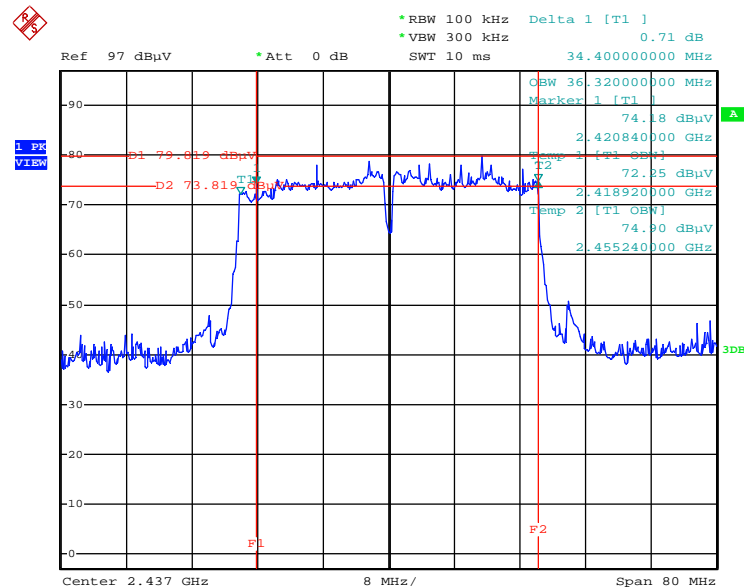


Date: 23.DEC.2013 23:04:52

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 7

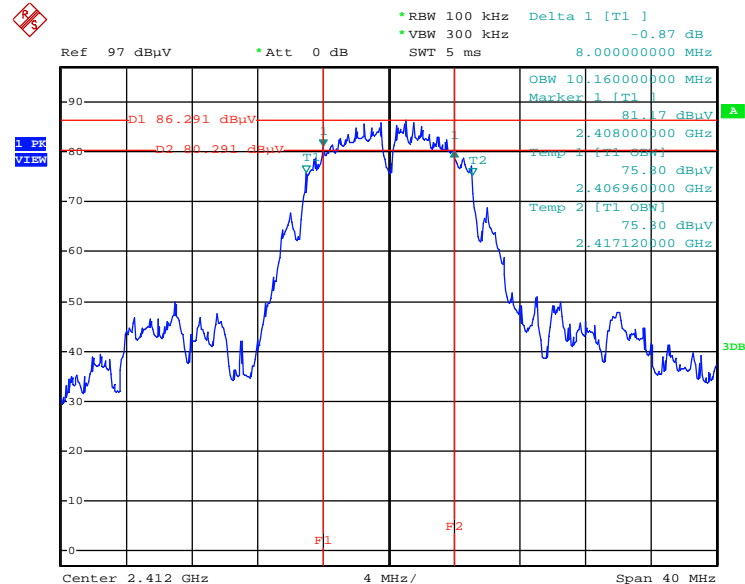

Date: 23.DEC.2013 22:59:54


6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 7

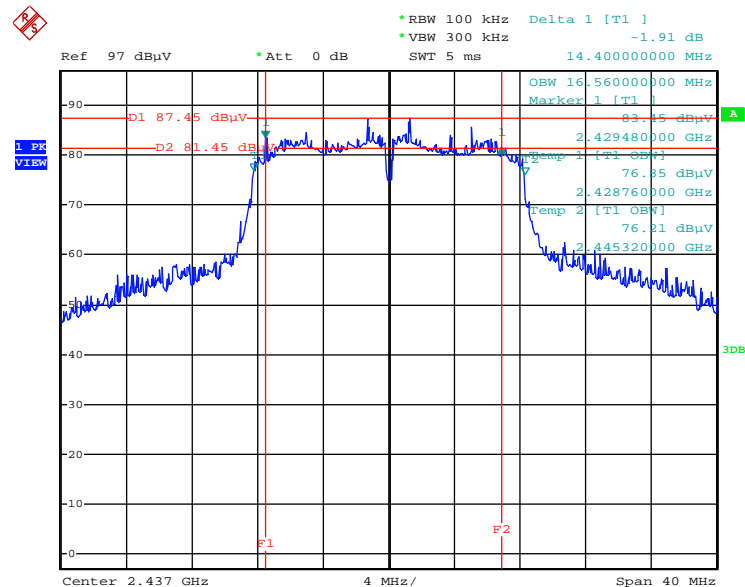

Date: 23.DEC.2013 23:01:47


For 5GHz Band

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / 5785 MHz / Chain 7

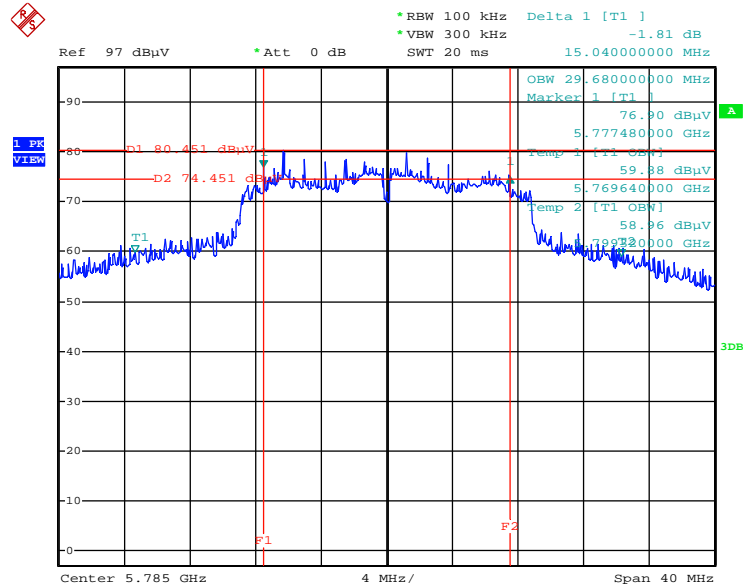

Date: 23.DEC.2013 23:09:01

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / 5755MHz / Chain 7

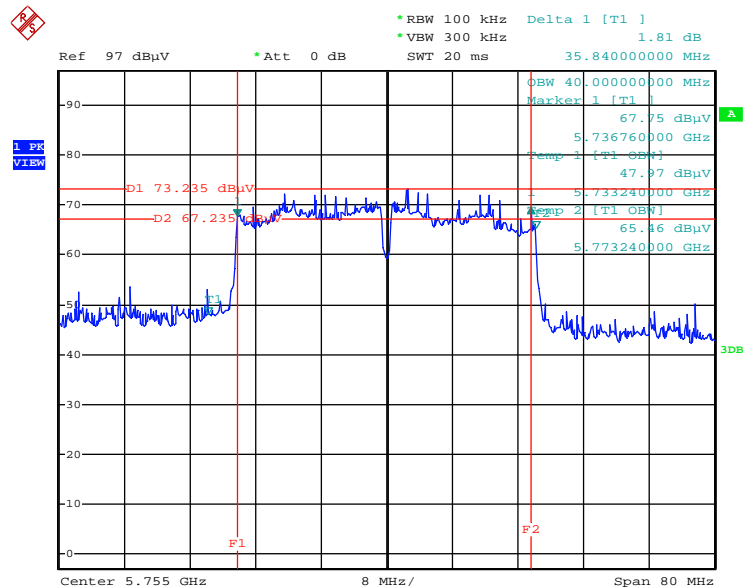

Date: 23.DEC.2013 23:10:17



Ref 97 dBμV *Att 0 dB SWT 20 ms 14.720000000 MHz

OBW 16.640000000 MHz
 Marker 1 [T1] 71.51 dBμV
 5.737560000 GHz
 Temp 1 [T1 OBW] 5.736600000 GHz

D1 77.113 dBμV
 D2 71.113 dBμV

Temp 2 [T1 OBW] 65.91 dBμV
 5.753240000 GHz

Center 5.745 GHz 4 MHz / Span 40 MHz

Issued Date : Jan. 20, 2014

4.5. Radiated Emissions Measurement

4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

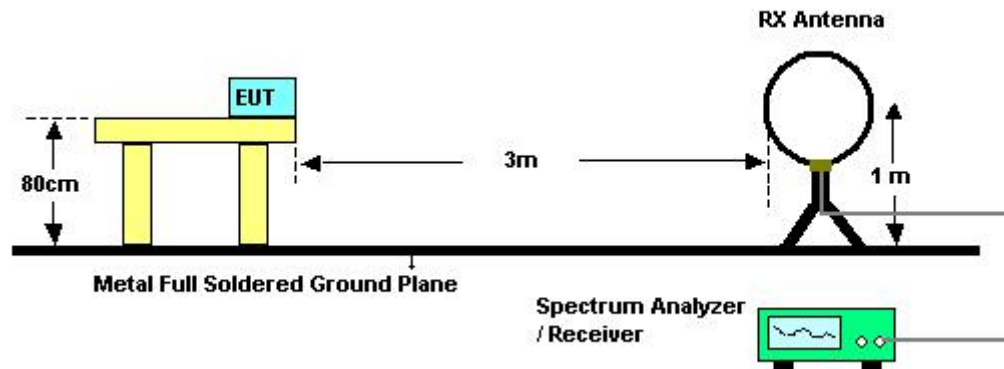

For Radiated Emissions: 30MHz~1GHz

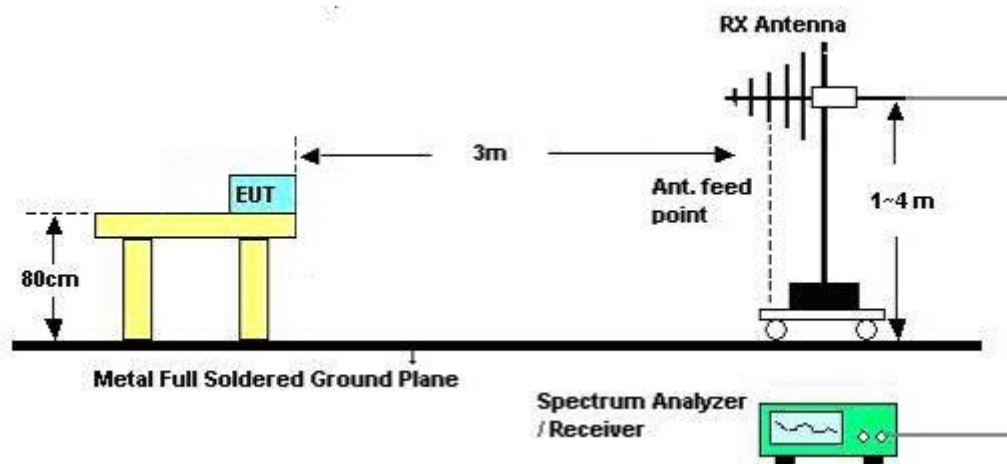

For Radiated Emissions: Above 1GHz

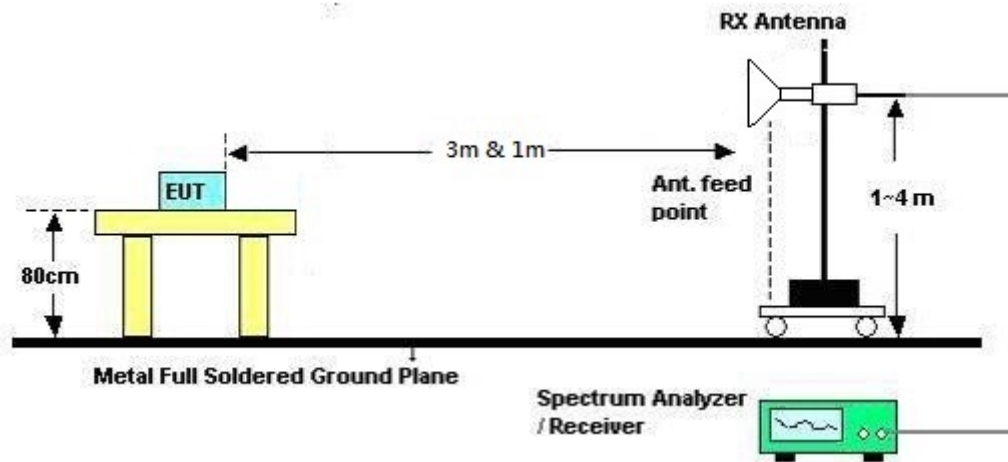

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	Normal Link
Test Date	Dec. 19, 2013		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	Normal Link
Test Mode	Mode 4		

Horizontal

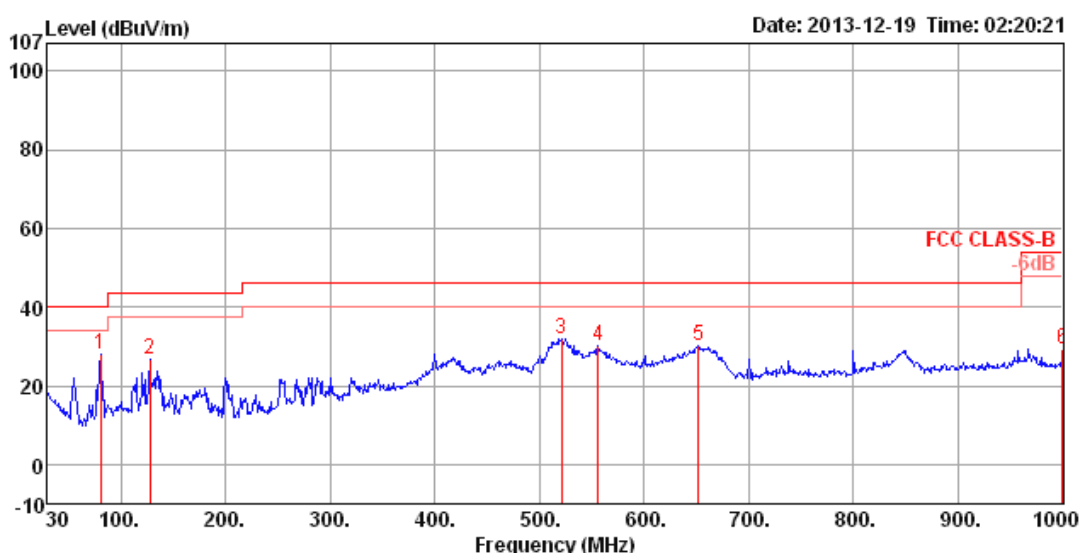

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	80.44	27.99	40.00	-12.01	51.84	1.04	6.83	31.72	150	303	HORIZONTAL	Peak
2	127.97	26.53	43.50	-16.97	45.06	1.35	11.69	31.57	100	156	HORIZONTAL	Peak
3	520.82	31.87	46.00	-14.13	43.04	2.88	17.36	31.41	150	166	HORIZONTAL	Peak
4	555.74	29.99	46.00	-16.01	39.86	2.94	18.46	31.27	100	310	HORIZONTAL	Peak
5	651.77	30.05	46.00	-15.95	39.39	3.26	18.84	31.44	200	300	HORIZONTAL	Peak
6	1000.00	29.25	54.00	-24.75	34.78	4.21	21.44	31.18	125	183	HORIZONTAL	Peak

Vertical

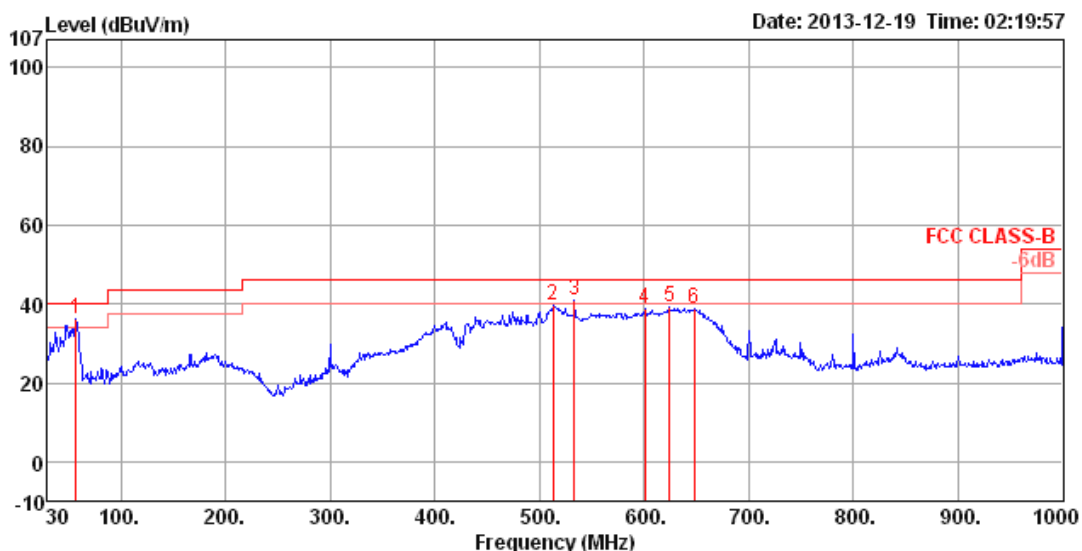

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	57.16	35.98	40.00	-4.02	61.37	0.88	5.51	31.78	100	78	VERTICAL	Peak
2	513.06	39.46	46.00	-6.54	50.74	2.85	17.28	31.41	125	21	VERTICAL	Peak
3	533.43	41.05	46.00	-4.95	51.81	2.90	17.72	31.38	125	179	VERTICAL	Peak
4	600.36	38.97	46.00	-7.03	48.64	3.12	18.45	31.24	100	168	VERTICAL	Peak
5	624.61	39.32	46.00	-6.68	48.93	3.18	18.61	31.40	100	357	VERTICAL	Peak
6	647.89	38.82	46.00	-7.18	48.21	3.24	18.81	31.44	100	344	VERTICAL	Peak

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Radio 1:

For 2.4GHz Band

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 20MHz CH 1 / Chain 4 + Chain 5 + Chain 6
Test Date	Nov. 20, 2013	Test Mode	Mode 2

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4821.65	32.21	54.00	-21.79	28.15	5.87	33.39	35.20	Average	100	100 HORIZONTAL
2	4822.63	45.11	74.00	-28.89	41.05	5.87	33.39	35.20	Peak	100	100 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4822.96	32.12	54.00	-21.88	28.06	5.87	33.39	35.20	Average	100	305 VERTICAL
2	4824.22	44.24	74.00	-29.76	40.18	5.87	33.39	35.20	Peak	100	305 VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 20MHz CH 6 / Chain 4 + Chain 5 + Chain 6
Test Date	Nov. 20, 2013	Test Mode	Mode 2

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4871.62	44.58	74.00	-29.42	40.38	5.92	33.48	35.20	Peak	100	285 HORIZONTAL
2	4871.66	32.30	54.00	-21.70	28.10	5.92	33.48	35.20	Average	100	285 HORIZONTAL
3	7309.92	36.14	54.00	-17.86	27.93	7.13	36.51	35.43	Average	100	354 HORIZONTAL
4	7312.57	48.88	74.00	-25.12	40.67	7.13	36.51	35.43	Peak	100	354 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4872.50	31.84	54.00	-22.16	27.64	5.92	33.48	35.20	Average	100	58 VERTICAL
2	4873.69	44.84	74.00	-29.16	40.64	5.92	33.48	35.20	Peak	100	58 VERTICAL
3	7309.31	48.68	74.00	-25.32	40.47	7.13	36.51	35.43	Peak	100	259 VERTICAL
4	7310.04	36.14	54.00	-17.86	27.93	7.13	36.51	35.43	Average	100	259 VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 20MHz CH 11 / Chain 4 + Chain 5 + Chain 6
Test Date	Nov. 20, 2013	Test Mode	Mode 2

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4922.07	45.13	74.00	-28.87	40.78	5.97	33.58	35.20	Peak	100	132	HORIZONTAL
2	4924.67	32.08	54.00	-21.92	27.73	5.97	33.58	35.20	Average	100	132	HORIZONTAL
3	7384.02	36.26	54.00	-17.74	27.94	7.17	36.61	35.46	Average	100	299	HORIZONTAL
4	7385.42	48.60	74.00	-25.40	40.28	7.17	36.61	35.46	Peak	100	299	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4922.38	44.99	74.00	-29.01	40.64	5.97	33.58	35.20	Peak	100	157	VERTICAL
2	4924.07	32.20	54.00	-21.80	27.85	5.97	33.58	35.20	Average	100	157	VERTICAL
3	7383.95	48.73	74.00	-25.27	40.41	7.17	36.61	35.46	Peak	100	19	VERTICAL
4	7384.20	36.23	54.00	-17.77	27.91	7.17	36.61	35.46	Average	100	19	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11b CH 1 / Chain 4
Test Date	Nov. 20, 2013	Test Mode	Mode 2

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4823.96	45.61	74.00	-28.39	41.55	5.87	33.39	35.20	Peak	100	322	HORIZONTAL
2	4823.97	32.31	54.00	-21.69	28.25	5.87	33.39	35.20	Average	100	322	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4824.13	32.56	54.00	-21.44	28.50	5.87	33.39	35.20	Average	100	209	VERTICAL
2	4824.30	45.46	74.00	-28.54	41.40	5.87	33.39	35.20	Peak	100	209	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11b CH 6 / Chain 4
Test Date	Nov. 20, 2013	Test Mode	Mode 2

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	
1	4873.96	46.18	74.00	-27.82	41.98	5.92	33.48	35.20	Peak	130	39	HORIZONTAL
2	4873.98	35.77	54.00	-18.23	31.57	5.92	33.48	35.20	Average	130	39	HORIZONTAL
3	7310.19	38.49	54.00	-15.51	30.28	7.13	36.51	35.43	Average	155	186	HORIZONTAL
4	7310.46	49.96	74.00	-24.04	41.75	7.13	36.51	35.43	Peak	153	186	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	
1	4871.89	44.46	74.00	-29.54	40.26	5.92	33.48	35.20	Peak	100	255	VERTICAL
2	4873.88	32.91	54.00	-21.09	28.71	5.92	33.48	35.20	Average	100	255	VERTICAL
3	7311.11	49.87	74.00	-24.13	41.66	7.13	36.51	35.43	Peak	100	141	VERTICAL
4	7311.87	38.79	54.00	-15.21	30.58	7.13	36.51	35.43	Average	100	141	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11b CH 11 / Chain 4
Test Date	Nov. 20, 2013	Test Mode	Mode 2

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4923.94	33.27	54.00	-20.73	28.92	5.97	33.58	35.20	Average	100	337	HORIZONTAL
2	4924.46	45.00	74.00	-29.00	40.65	5.97	33.58	35.20	Peak	100	337	HORIZONTAL
3	7383.56	49.69	74.00	-24.31	41.37	7.17	36.61	35.46	Peak	100	181	HORIZONTAL
4	7386.99	36.48	54.00	-17.52	28.16	7.17	36.61	35.46	Average	100	181	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4924.10	32.57	54.00	-21.43	28.22	5.97	33.58	35.20	Average	100	305	VERTICAL
2	4925.78	44.70	74.00	-29.30	40.35	5.97	33.58	35.20	Peak	100	305	VERTICAL
3	7383.75	36.66	54.00	-17.34	28.34	7.17	36.61	35.46	Average	100	90	VERTICAL
4	7387.48	49.13	74.00	-24.87	40.81	7.17	36.61	35.46	Peak	100	90	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11g CH 1 / Chain 4
Test Date	Nov. 20, 2013	Test Mode	Mode 2

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4822.24	44.30	74.00	-29.70	40.24	5.87	33.39	35.20	Peak	100	19	HORIZONTAL
2	4822.59	32.22	54.00	-21.78	28.16	5.87	33.39	35.20	Average	100	19	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4821.68	32.02	54.00	-21.98	27.96	5.87	33.39	35.20	Average	100	126	VERTICAL
2	4824.64	44.94	74.00	-29.06	40.88	5.87	33.39	35.20	Peak	100	126	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11g CH 6 / Chain 4
Test Date	Nov. 20, 2013	Test Mode	Mode 2

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4872.46	31.88	54.00	-22.12	27.68	5.92	33.48	35.20	Average	100	340	HORIZONTAL
2	4875.92	44.38	74.00	-29.62	40.18	5.92	33.48	35.20	Peak	100	340	HORIZONTAL
3	7309.34	36.17	54.00	-17.83	27.96	7.13	36.51	35.43	Average	100	245	HORIZONTAL
4	7309.58	48.28	74.00	-25.72	40.07	7.13	36.51	35.43	Peak	100	245	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4872.45	31.96	54.00	-22.04	27.76	5.92	33.48	35.20	Average	100	356	VERTICAL
2	4872.97	44.61	74.00	-29.39	40.41	5.92	33.48	35.20	Peak	100	356	VERTICAL
3	7311.68	36.51	54.00	-17.49	28.30	7.13	36.51	35.43	Average	100	99	VERTICAL
4	7311.74	48.91	74.00	-25.09	40.70	7.13	36.51	35.43	Peak	100	99	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11g CH 11 / Chain 4
Test Date	Nov. 20, 2013	Test Mode	Mode 2

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4921.99	32.19	54.00	-21.81	27.84	5.97	33.58	35.20	Average	100	332	HORIZONTAL
2	4923.86	44.88	74.00	-29.12	40.53	5.97	33.58	35.20	Peak	100	332	HORIZONTAL
3	7386.80	49.26	74.00	-24.74	40.94	7.17	36.61	35.46	Peak	100	258	HORIZONTAL
4	7388.29	35.97	54.00	-18.03	27.65	7.17	36.61	35.46	Average	100	258	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4923.74	44.99	74.00	-29.01	40.64	5.97	33.58	35.20	Peak	100	189	VERTICAL
2	4924.22	32.19	54.00	-21.81	27.84	5.97	33.58	35.20	Average	100	189	VERTICAL
3	7386.85	48.81	74.00	-25.19	40.49	7.17	36.61	35.46	Peak	100	45	VERTICAL
4	7388.34	36.02	54.00	-17.98	27.70	7.17	36.61	35.46	Average	100	45	VERTICAL

Radio 2:
For 5GHz Band

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 20MHz CH 149 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 22, 2013	Test Mode	Mode 4

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11485.96	51.72	74.00	-22.28	43.11	5.11	38.78	35.28	100	83	HORIZONTAL
2	11490.74	39.55	54.00	-14.45	30.94	5.11	38.78	35.28	100	83	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11495.19	50.08	74.00	-23.92	41.46	5.12	38.78	35.28	100	298	VERTICAL
2	11497.24	37.56	54.00	-16.44	28.94	5.12	38.78	35.28	100	298	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 20MHz CH 157 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 22, 2013	Test Mode	Mode 4

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11564.52	50.42	74.00	-23.58	41.77	5.13	38.82	35.30	100	100	HORIZONTAL
2	11565.83	37.36	54.00	-16.64	28.71	5.13	38.82	35.30	100	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11563.56	49.18	74.00	-24.82	40.53	5.13	38.82	35.30	100	314	VERTICAL
2	11571.06	38.12	54.00	-15.88	29.45	5.14	38.83	35.30	100	314	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 20MHz CH 165 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 22, 2013	Test Mode	Mode 4

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11650.67	40.28	54.00	-13.72	31.56	5.16	38.86	35.30	Average	100	125	HORIZONTAL
2	11650.67	52.02	74.00	-21.98	43.30	5.16	38.86	35.30	Peak	100	125	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11650.48	51.95	74.00	-22.05	43.23	5.16	38.86	35.30	Peak	100	347	VERTICAL
2	11650.80	39.71	54.00	-14.29	30.99	5.16	38.86	35.30	Average	100	347	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 40MHz CH 151 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 22, 2013	Test Mode	Mode 4

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11500.42	51.07	74.00	-22.93	42.44	5.12	38.79	35.28	Peak	100	84	HORIZONTAL
2	11506.12	38.54	54.00	-15.46	29.91	5.12	38.79	35.28	Average	100	84	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11506.57	37.91	54.00	-16.09	29.28	5.12	38.79	35.28	Average	100	352	VERTICAL
2	11511.92	49.86	74.00	-24.14	41.23	5.12	38.79	35.28	Peak	100	352	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 40MHz CH 159 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 22, 2013	Test Mode	Mode 4

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11591.06	38.58	54.00	-15.42	29.91	5.14	38.83	35.30	Average	100	85	HORIZONTAL
2	11591.15	50.69	74.00	-23.31	42.02	5.14	38.83	35.30	Peak	100	85	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11585.99	37.31	54.00	-16.69	28.64	5.14	38.83	35.30	Average	100	200	VERTICAL
2	11590.42	51.13	74.00	-22.87	42.46	5.14	38.83	35.30	Peak	100	200	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11a CH 149 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 22, 2013	Test Mode	Mode 4

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
			dBuV/m	dB	dBuV	dB	dB/m	dB				
1	11487.88	49.84	74.00	-24.16	41.23	5.11	38.78	35.28	Peak	100	304	HORIZONTAL
2	11490.00	37.30	54.00	-16.70	28.69	5.11	38.78	35.28	Average	100	304	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
			dBuV/m	dB	dBuV	dB	dB/m	dB				
1	11487.44	50.86	74.00	-23.14	42.25	5.11	38.78	35.28	Peak	100	118	VERTICAL
2	11492.60	37.47	54.00	-16.53	28.86	5.11	38.78	35.28	Average	100	118	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11a CH 157 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 22, 2013	Test Mode	Mode 4

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11564.13	50.37	74.00	-23.63	41.72	5.13	38.82	35.30	Peak	100	147	HORIZONTAL
2	11570.93	37.23	54.00	-16.77	28.56	5.14	38.83	35.30	Average	100	147	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11566.15	37.44	54.00	-16.56	28.79	5.13	38.82	35.30	Average	100	4	VERTICAL
2	11567.02	49.55	74.00	-24.45	40.90	5.13	38.82	35.30	Peak	100	4	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11a CH 165 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 22, 2013	Test Mode	Mode 4

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11651.57	38.07	54.00	-15.93	29.35	5.16	38.86	35.30	Average	100	354	HORIZONTAL
2	11655.83	49.69	74.00	-24.31	40.97	5.16	38.86	35.30	Peak	100	354	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11648.30	51.29	74.00	-22.71	42.57	5.16	38.86	35.30	Peak	100	180	VERTICAL
2	11651.35	38.25	54.00	-15.75	29.53	5.16	38.86	35.30	Average	100	180	VERTICAL

Radio 3:
For 2.4GHz Band

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 20MHz CH 1 / Chain 7
Test Date	Nov. 23, 2013	Test Mode	Mode 5

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4824.00	29.93	54.00	-24.07	28.59	3.31	33.06	35.03	Average	100	168	HORIZONTAL
2	4824.02	42.65	74.00	-31.35	41.31	3.31	33.06	35.03	Peak	100	168	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4823.99	31.03	54.00	-22.97	29.69	3.31	33.06	35.03	Average	100	94	VERTICAL
2	4824.02	44.61	74.00	-29.39	43.27	3.31	33.06	35.03	Peak	100	94	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 20MHz CH 6 / Chain 7
Test Date	Nov. 23, 2013	Test Mode	Mode 5

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg
1	4873.98	46.56	74.00	-27.44	45.10	3.33	33.16	35.03	Peak	100	293 HORIZONTAL
2	4873.99	33.90	54.00	-20.10	32.44	3.33	33.16	35.03	Average	100	293 HORIZONTAL
3	7310.98	34.14	54.00	-19.86	29.52	4.06	35.96	35.40	Average	100	156 HORIZONTAL
4	7310.99	45.73	74.00	-28.27	41.11	4.06	35.96	35.40	Peak	100	156 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg
1	4873.98	37.35	54.00	-16.65	35.89	3.33	33.16	35.03	Average	100	222 VERTICAL
2	4874.02	50.67	74.00	-23.33	49.21	3.33	33.16	35.03	Peak	100	222 VERTICAL
3	7310.99	37.72	54.00	-16.28	33.10	4.06	35.96	35.40	Average	100	178 VERTICAL
4	7311.00	50.27	74.00	-23.73	45.65	4.06	35.96	35.40	Peak	100	178 VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 20MHz CH 11 / Chain 7
Test Date	Nov. 23, 2013	Test Mode	Mode 5

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4923.98	43.78	74.00	-30.22	42.18	3.35	33.26	35.01	Peak	100	6	HORIZONTAL
2	4923.98	31.57	54.00	-22.43	29.97	3.35	33.26	35.01	Average	100	6	HORIZONTAL
3	7385.98	33.46	54.00	-20.54	28.71	4.06	36.09	35.40	Average	100	200	HORIZONTAL
4	7386.01	45.75	74.00	-28.25	41.00	4.06	36.09	35.40	Peak	100	200	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4924.00	35.30	54.00	-18.70	33.70	3.35	33.26	35.01	Average	100	214	VERTICAL
2	4924.01	50.16	74.00	-23.84	48.56	3.35	33.26	35.01	Peak	100	213	VERTICAL
3	7385.98	46.37	74.00	-27.63	41.62	4.06	36.09	35.40	Peak	100	356	VERTICAL
4	7386.01	33.49	54.00	-20.51	28.74	4.06	36.09	35.40	Average	100	356	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 40MHz CH 3 / Chain 7
Test Date	Nov. 23, 2013	Test Mode	Mode 5

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4844.00	42.51	74.00	-31.49	41.13	3.32	33.09	35.03	Peak	100	36 HORIZONTAL
2	4844.00	29.36	54.00	-24.64	27.98	3.32	33.09	35.03	Average	100	36 HORIZONTAL
3	7266.00	45.12	74.00	-28.88	40.61	4.06	35.85	35.40	Peak	100	99 HORIZONTAL
4	7266.01	32.98	54.00	-21.02	28.47	4.06	35.85	35.40	Average	100	99 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4843.98	42.54	74.00	-31.46	41.16	3.32	33.09	35.03	Peak	100	355 VERTICAL
2	4844.02	29.39	54.00	-24.61	28.01	3.32	33.09	35.03	Average	100	355 VERTICAL
3	7266.01	32.76	54.00	-21.24	28.25	4.06	35.85	35.40	Average	100	288 VERTICAL
4	7266.02	45.50	74.00	-28.50	40.99	4.06	35.85	35.40	Peak	100	288 VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 40MHz CH 6 / Chain 7
Test Date	Nov. 23, 2013	Test Mode	Mode 5

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg
1	4873.98	29.67	54.00	-24.33	28.21	3.33	33.16	35.03	Average	100	200 HORIZONTAL
2	4873.98	42.48	74.00	-31.52	41.02	3.33	33.16	35.03	Peak	100	200 HORIZONTAL
3	7310.98	33.19	54.00	-20.81	28.57	4.06	35.96	35.40	Average	100	81 HORIZONTAL
4	7310.99	45.55	74.00	-28.45	40.93	4.06	35.96	35.40	Peak	100	81 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg
1	4874.00	30.78	54.00	-23.22	29.32	3.33	33.16	35.03	Average	100	214 VERTICAL
2	4874.00	43.71	74.00	-30.29	42.25	3.33	33.16	35.03	Peak	100	214 VERTICAL
3	7310.98	33.36	54.00	-20.64	28.74	4.06	35.96	35.40	Average	100	314 VERTICAL
4	7310.98	46.14	74.00	-27.86	41.52	4.06	35.96	35.40	Peak	100	314 VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 40MHz CH 9 / Chain 7
Test Date	Nov. 23, 2013	Test Mode	Mode 5

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4903.99	30.02	54.00	-23.98	28.51	3.34	33.19	35.02	100	66	HORIZONTAL
2	4904.90	42.69	74.00	-31.31	41.14	3.34	33.23	35.02	100	66	HORIZONTAL
3	7355.12	46.11	74.00	-27.89	41.43	4.06	36.02	35.40	100	276	HORIZONTAL
4	7356.38	33.31	54.00	-20.69	28.63	4.06	36.02	35.40	100	276	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4903.66	30.37	54.00	-23.63	28.86	3.34	33.19	35.02	100	142	VERTICAL
2	4904.05	43.09	74.00	-30.91	41.58	3.34	33.19	35.02	100	142	VERTICAL
3	7356.00	46.19	74.00	-27.81	41.51	4.06	36.02	35.40	100	58	VERTICAL
4	7356.26	33.32	54.00	-20.68	28.64	4.06	36.02	35.40	100	58	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11b CH 1 / Chain 7
Test Date	Nov. 23, 2013	Test Mode	Mode 5

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4823.92	50.72	74.00	-23.28	49.38	3.31	33.06	35.03	Peak	173	294	HORIZONTAL
2	4823.99	47.75	54.00	-6.25	46.41	3.31	33.06	35.03	Average	173	294	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4823.85	51.53	74.00	-22.47	50.19	3.31	33.06	35.03	Peak	102	212	VERTICAL
2	4823.98	47.67	54.00	-6.33	46.33	3.31	33.06	35.03	Average	102	212	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11b CH 6 / Chain 7
Test Date	Nov. 23, 2013	Test Mode	Mode 5

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.99	56.29	74.00	-17.71	54.83	3.33	33.16	35.03	Peak	186	294	HORIZONTAL
2	4874.00	53.77	54.00	-0.23	52.31	3.33	33.16	35.03	Average	186	294	HORIZONTAL
3	7311.70	48.04	54.00	-5.96	43.42	4.06	35.96	35.40	Average	169	312	HORIZONTAL
4	7311.90	53.64	74.00	-20.36	49.02	4.06	35.96	35.40	Peak	169	312	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.98	52.52	54.00	-1.48	51.06	3.33	33.16	35.03	Average	100	226	VERTICAL
2	4874.03	55.20	74.00	-18.80	53.74	3.33	33.16	35.03	Peak	100	226	VERTICAL
3	7311.72	50.24	54.00	-3.76	45.62	4.06	35.96	35.40	Average	186	171	VERTICAL
4	7312.14	55.79	74.00	-18.21	51.17	4.06	35.96	35.40	Peak	186	171	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11b CH 11 / Chain 7
Test Date	Nov. 23, 2013	Test Mode	Mode 5

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	4923.92	54.64	74.00	-19.36	53.04	3.35	33.26	35.01	Peak	168	295	HORIZONTAL
2	4923.97	52.25	54.00	-1.75	50.65	3.35	33.26	35.01	Average	168	295	HORIZONTAL
3	7385.23	39.36	54.00	-14.64	34.61	4.06	36.09	35.40	Average	173	141	HORIZONTAL
4	7386.71	48.60	74.00	-25.40	43.85	4.06	36.09	35.40	Peak	173	141	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	4923.97	54.96	74.00	-19.04	53.36	3.35	33.26	35.01	Peak	100	213	VERTICAL
2	4924.01	52.85	54.00	-1.15	51.25	3.35	33.26	35.01	Average	100	213	VERTICAL
3	7385.26	44.81	54.00	-9.19	40.06	4.06	36.09	35.40	Average	164	170	VERTICAL
4	7386.57	51.85	74.00	-22.15	47.10	4.06	36.09	35.40	Peak	164	170	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11g CH 1 / Chain 7
Test Date	Nov. 23, 2013	Test Mode	Mode 5

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4823.99	30.60	54.00	-23.40	29.26	3.31	33.06	35.03	Average	100	305	HORIZONTAL
2	4823.99	42.88	74.00	-31.12	41.54	3.31	33.06	35.03	Peak	100	305	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4824.01	43.81	74.00	-30.19	42.47	3.31	33.06	35.03	Peak	100	111	VERTICAL
2	4824.02	30.65	54.00	-23.35	29.31	3.31	33.06	35.03	Average	100	111	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11g CH 6 / Chain 7
Test Date	Nov. 23, 2013	Test Mode	Mode 5

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.99	32.64	54.00	-21.36	31.18	3.33	33.16	35.03	Average	100	208	HORIZONTAL
2	4873.99	44.92	74.00	-29.08	43.46	3.33	33.16	35.03	Peak	100	208	HORIZONTAL
3	7311.00	32.92	54.00	-21.08	28.30	4.06	35.96	35.40	Average	100	87	HORIZONTAL
4	7311.02	45.90	74.00	-28.10	41.28	4.06	35.96	35.40	Peak	100	87	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4874.00	49.90	74.00	-24.10	48.44	3.33	33.16	35.03	Peak	100	46	VERTICAL
2	4874.01	37.38	54.00	-16.62	35.92	3.33	33.16	35.03	Average	100	46	VERTICAL
3	7310.98	46.17	74.00	-27.83	41.55	4.06	35.96	35.40	Peak	100	211	VERTICAL
4	7311.01	33.03	54.00	-20.97	28.41	4.06	35.96	35.40	Average	100	211	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11g CH 11 / Chain 7
Test Date	Nov. 23, 2013	Test Mode	Mode 5

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4923.99	43.06	74.00	-30.94	41.46	3.35	33.26	35.01	Peak	100	180	HORIZONTAL
2	4923.99	32.08	54.00	-21.92	30.48	3.35	33.26	35.01	Average	100	180	HORIZONTAL
3	7385.99	32.95	54.00	-21.05	28.20	4.06	36.09	35.40	Average	100	298	HORIZONTAL
4	7385.99	45.62	74.00	-28.38	40.87	4.06	36.09	35.40	Peak	100	298	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4923.98	50.61	74.00	-23.39	49.01	3.35	33.26	35.01	Peak	100	210	VERTICAL
2	4924.00	37.05	54.00	-16.95	35.45	3.35	33.26	35.01	Average	100	210	VERTICAL
3	7386.00	46.66	74.00	-27.34	41.91	4.06	36.09	35.40	Peak	100	222	VERTICAL
4	7386.00	33.33	54.00	-20.67	28.58	4.06	36.09	35.40	Average	100	222	VERTICAL

For 5GHz Band

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 20MHz CH 149 / Chain 7
Test Date	Nov. 23, 2013	Test Mode	Mode 5

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11486.28	54.19	74.00	-19.81	40.53	9.24	39.50	35.08	Peak	100	133	HORIZONTAL
2	11487.52	41.69	54.00	-12.31	28.03	9.24	39.50	35.08	Average	100	133	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11488.56	57.01	74.00	-16.99	43.35	9.24	39.50	35.08	Peak	147	161	VERTICAL
2	11489.96	43.70	54.00	-10.30	30.04	9.24	39.50	35.08	Average	147	161	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 20MHz CH 157 / Chain 7
Test Date	Nov. 23, 2013	Test Mode	Mode 5

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11569.52	54.46	74.00	-19.54	40.82	9.26	39.47	35.09	Peak	100	214	HORIZONTAL
2	11570.04	42.88	54.00	-11.12	29.24	9.26	39.47	35.09	Average	100	214	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11570.00	59.34	74.00	-14.66	45.70	9.26	39.47	35.09	Peak	143	165	VERTICAL
2	11570.08	45.69	54.00	-8.31	32.05	9.26	39.47	35.09	Average	143	165	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 20MHz CH 165 / Chain 7
Test Date	Nov. 23, 2013	Test Mode	Mode 5

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11642.12	42.71	54.00	-11.29	29.06	9.28	39.44	35.07	Average	100	208	HORIZONTAL
2	11643.28	54.84	74.00	-19.16	41.19	9.28	39.44	35.07	Peak	100	208	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11648.92	58.90	74.00	-15.10	45.25	9.28	39.44	35.07	Peak	143	165	VERTICAL
2	11649.88	45.66	54.00	-8.34	32.01	9.28	39.44	35.07	Average	143	165	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 40MHz CH 151 / Chain 7
Test Date	Nov. 23, 2013	Test Mode	Mode 5

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11500.16	41.51	54.00	-12.49	27.86	9.25	39.50	35.10	Average	100	26	HORIZONTAL
2	11503.20	54.69	74.00	-19.31	41.04	9.25	39.50	35.10	Peak	100	26	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11506.60	55.71	74.00	-18.29	42.06	9.25	39.50	35.10	Peak	146	150	VERTICAL
2	11509.88	42.88	54.00	-11.12	29.23	9.25	39.50	35.10	Average	146	150	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 40MHz CH 159 / Chain 7
Test Date	Nov. 23, 2013	Test Mode	Mode 5

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
			dBuV/m	dB	dBuV	dB	dB/m	dB				
1	11595.60	54.87	74.00	-19.13	41.21	9.27	39.47	35.08	Peak	100	256	HORIZONTAL
2	11598.72	42.95	54.00	-11.05	29.29	9.27	39.47	35.08	Average	100	256	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
			dBuV/m	dB	dBuV	dB	dB/m	dB				
1	11589.92	44.58	54.00	-9.42	30.92	9.27	39.47	35.08	Average	146	150	VERTICAL
2	11595.56	58.12	74.00	-15.88	44.46	9.27	39.47	35.08	Peak	146	150	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11a CH 149 / Chain 7
Test Date	Nov. 23, 2013	Test Mode	Mode 5

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11490.72	41.72	54.00	-12.28	28.06	9.24	39.50	35.08	Average	100	299 HORIZONTAL
2	11491.60	54.74	74.00	-19.26	41.08	9.24	39.50	35.08	Peak	100	299 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11489.92	43.68	54.00	-10.32	30.02	9.24	39.50	35.08	Average	150	147 VERTICAL
2	11493.32	57.97	74.00	-16.03	44.31	9.24	39.50	35.08	Peak	150	147 VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11a CH 157 / Chain 7
Test Date	Nov. 23, 2013	Test Mode	Mode 5

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11563.12	55.39	74.00	-18.61	41.74	9.26	39.48	35.09	Peak	100	189	HORIZONTAL
2	11571.60	42.70	54.00	-11.30	29.06	9.26	39.47	35.09	Average	100	189	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11569.96	46.00	54.00	-8.00	32.36	9.26	39.47	35.09	Average	149	152	VERTICAL
2	11571.76	59.02	74.00	-14.98	45.38	9.26	39.47	35.09	Peak	149	152	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11a CH 165 / Chain 7
Test Date	Nov. 23, 2013	Test Mode	Mode 5

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11642.04	54.91	74.00	-19.09	41.26	9.28	39.44	35.07	Peak	100	152	HORIZONTAL
2	11649.96	42.59	54.00	-11.41	28.94	9.28	39.44	35.07	Average	100	152	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11649.84	45.29	54.00	-8.71	31.64	9.28	39.44	35.07	Average	147	161	VERTICAL
2	11652.92	58.23	74.00	-15.77	44.58	9.28	39.44	35.07	Peak	147	161	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Emissions Measurement

4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	100 kHz / 300 kHz for Peak

4.6.3. Test Procedures

For Radiated band edges Measurement:

- The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around band edges.

For Radiated Out of Band Emission Measurement:

- Test was performed in accordance with KDB 558074 D01 v03r01 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure
- The radiated emission test is performed on each TX port of operating mode without summing or adding $10\log(N)$ since the limit is relative emission limit.
Only worst data of each operating mode is presented.

4.6.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Radio 1:

For 2.4GHz Band

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 20MHz CH 1, 6, 11 / Chain 4 + Chain 5 + Chain 6
Test date	Nov. 20, 2013	Test Mode	Mode 2

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	53.94	54.00	-0.06	21.80	4.09	28.05	0.00	Average	146	59	HORIZONTAL
2	2390.00	68.93	74.00	-5.07	36.79	4.09	28.05	0.00	Peak	146	59	HORIZONTAL
3	2410.20	113.23			81.03	4.11	28.09	0.00	Peak	146	59	HORIZONTAL
4	2415.20	103.00			70.80	4.11	28.09	0.00	Average	146	59	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.60	68.87	74.00	-5.13	36.73	4.09	28.05	0.00	Peak	150	45	HORIZONTAL
2	2390.00	53.98	54.00	-0.02	21.84	4.09	28.05	0.00	Average	150	45	HORIZONTAL
3	2430.20	111.37			79.12	4.12	28.13	0.00	Average	150	45	HORIZONTAL
4	2430.20	122.53			90.28	4.12	28.13	0.00	Peak	150	45	HORIZONTAL
5	2485.10	66.48	74.00	-7.52	34.02	4.16	28.30	0.00	Peak	150	45	HORIZONTAL
6	2500.00	52.22	54.00	-1.78	19.75	4.17	28.30	0.00	Average	150	45	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2467.00	115.31			82.95	4.14	28.22	0.00	Peak	147	305	HORIZONTAL
2	2467.20	104.45			72.09	4.14	28.22	0.00	Average	147	305	HORIZONTAL
3	2483.50	53.63	54.00	-0.37	21.21	4.16	28.26	0.00	Average	147	305	HORIZONTAL
4	2486.90	69.37	74.00	-4.63	36.91	4.16	28.30	0.00	Peak	147	305	HORIZONTAL
5	2500.00	53.93	54.00	-0.07	21.46	4.17	28.30	0.00	Average	147	305	HORIZONTAL
6	2500.00	61.26	74.00	-12.74	28.79	4.17	28.30	0.00	Peak	147	305	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11b CH 1, 6, 11 / Chain 4
Test Date	Nov. 20, 2013	Test Mode	Mode 2

Channel 1

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	2389.00	53.61	54.00	-0.39	21.47	4.09	28.05	0.00	Average	143	45 HORIZONTAL
2	2389.60	63.35	74.00	-10.65	31.21	4.09	28.05	0.00	Peak	143	45 HORIZONTAL
3	2411.20	111.91			79.71	4.11	28.09	0.00	Average	143	45 HORIZONTAL
4	2411.20	115.75			83.55	4.11	28.09	0.00	Peak	143	45 HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	2376.00	51.52	54.00	-2.48	19.43	4.08	28.01	0.00	Average	153	72 HORIZONTAL
2	2377.60	63.82	74.00	-10.18	31.73	4.08	28.01	0.00	Peak	153	72 HORIZONTAL
3	2436.20	114.04			81.74	4.12	28.18	0.00	Average	153	72 HORIZONTAL
4	2436.20	117.92			85.62	4.12	28.18	0.00	Peak	153	72 HORIZONTAL
5	2486.30	62.63	74.00	-11.37	30.17	4.16	28.30	0.00	Peak	153	72 HORIZONTAL
6	2495.20	50.74	54.00	-3.26	18.27	4.17	28.30	0.00	Average	153	72 HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	2462.80	110.48			78.12	4.14	28.22	0.00	Average	145	303 HORIZONTAL
2	2463.00	114.47			82.11	4.14	28.22	0.00	Peak	145	303 HORIZONTAL
3	2483.50	53.92	54.00	-0.08	21.50	4.16	28.26	0.00	Average	145	303 HORIZONTAL
4	2483.70	64.18	74.00	-9.82	31.76	4.16	28.26	0.00	Peak	145	303 HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11g CH 1, 6, 11 / Chain 4
Test Date	Nov. 20, 2013	Test Mode	Mode 2

Channel 1

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	2389.40	68.36	74.00	-5.64	36.22	4.09	28.05	0.00	Peak	145	51	HORIZONTAL
2	2389.60	53.73	54.00	-0.27	21.59	4.09	28.05	0.00	Average	145	51	HORIZONTAL
3	2415.20	111.61			79.41	4.11	28.09	0.00	Peak	145	51	HORIZONTAL
4	2415.40	100.55			68.35	4.11	28.09	0.00	Average	145	51	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	2389.60	66.92	74.00	-7.08	34.78	4.09	28.05	0.00	Peak	145	49	HORIZONTAL
2	2390.00	53.23	54.00	-0.77	21.09	4.09	28.05	0.00	Average	145	49	HORIZONTAL
3	2433.00	108.79			76.54	4.12	28.13	0.00	Average	145	49	HORIZONTAL
4	2434.60	119.66			87.36	4.12	28.18	0.00	Peak	145	49	HORIZONTAL
5	2483.50	53.13	54.00	-0.87	20.71	4.16	28.26	0.00	Average	145	49	HORIZONTAL
6	2483.50	66.60	74.00	-7.40	34.18	4.16	28.26	0.00	Peak	145	49	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	2465.00	100.16			67.80	4.14	28.22	0.00	Average	147	310	HORIZONTAL
2	2467.80	110.63			78.27	4.14	28.22	0.00	Peak	147	310	HORIZONTAL
3	2483.50	53.95	54.00	-0.05	21.53	4.16	28.26	0.00	Average	147	310	HORIZONTAL
4	2484.30	68.33	74.00	-5.67	35.91	4.16	28.26	0.00	Peak	147	310	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Radio 3:

For 2.4GHz Band

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 20MHz CH 1, 6, 11 / Chain 7
Test date	Nov. 22, 2013	Test Mode	Mode 5

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2388.08	67.40	74.00	-6.60	37.02	2.21	28.17	0.00	Peak	100	103	VERTICAL
2	2390.00	53.76	54.00	-0.24	23.37	2.22	28.17	0.00	Average	100	103	VERTICAL
3	2411.36	97.51			67.08	2.22	28.21	0.00	Average	100	103	VERTICAL
4	2411.68	107.28			76.85	2.22	28.21	0.00	Peak	100	103	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.04	66.89	74.00	-7.11	36.51	2.21	28.17	0.00	Peak	100	104	VERTICAL
2	2390.00	51.32	54.00	-2.68	20.93	2.22	28.17	0.00	Average	100	104	VERTICAL
3	2436.04	100.06			69.54	2.23	28.29	0.00	Average	100	104	VERTICAL
4	2437.00	111.81			81.29	2.23	28.29	0.00	Peak	100	104	VERTICAL
5	2483.50	53.50	54.00	-0.50	22.87	2.26	28.37	0.00	Average	100	104	VERTICAL
6	2487.99	69.63	74.00	-4.37	38.96	2.26	28.41	0.00	Peak	100	104	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2456.07	96.79			66.22	2.24	28.33	0.00	Average	100	104	VERTICAL
2	2461.20	106.78			76.21	2.24	28.33	0.00	Peak	100	104	VERTICAL
3	2483.50	53.73	54.00	-0.27	23.10	2.26	28.37	0.00	Average	100	104	VERTICAL
4	2483.66	70.16	74.00	-3.84	39.53	2.26	28.37	0.00	Peak	100	104	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 40MHz CH 3, 6, 9 / Chain 7
Test date	Nov. 22, 2013	Test Mode	Mode 5

Channel 3

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2380.06	71.85	74.00	-2.15	41.51	2.21	28.13	0.00	Peak	100	104	VERTICAL
2	2390.00	53.53	54.00	-0.47	23.14	2.22	28.17	0.00	Average	100	104	VERTICAL
3	2423.60	91.19			60.71	2.23	28.25	0.00	Average	100	104	VERTICAL
4	2423.92	102.41			71.93	2.23	28.25	0.00	Peak	100	104	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.68	69.05	74.00	-4.95	38.67	2.21	28.17	0.00	Peak	100	102	VERTICAL
2	2390.00	53.60	54.00	-0.40	23.21	2.22	28.17	0.00	Average	100	102	VERTICAL
3	2424.50	91.29			60.81	2.23	28.25	0.00	Average	100	102	VERTICAL
4	2454.31	103.14			72.57	2.24	28.33	0.00	Peak	100	102	VERTICAL
5	2483.50	53.48	54.00	-0.52	22.85	2.26	28.37	0.00	Average	100	102	VERTICAL
6	2483.82	70.65	74.00	-3.35	40.02	2.26	28.37	0.00	Peak	100	102	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2453.92	90.68			60.11	2.24	28.33	0.00	Average	100	105	VERTICAL
2	2453.92	101.63			71.06	2.24	28.33	0.00	Peak	100	105	VERTICAL
3	2491.83	53.24	54.00	-0.76	22.56	2.27	28.41	0.00	Average	100	105	VERTICAL
4	2492.47	70.25	74.00	-3.75	39.57	2.27	28.41	0.00	Peak	100	105	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11b CH 1, 6, 11 / Chain 7
Test Date	Nov. 23, 2013	Test Mode	Mode 5

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	53.87	54.00	-0.13	23.48	2.22	28.17	0.00	Average	100	103	VERTICAL
2	2390.00	62.44	74.00	-11.56	32.05	2.22	28.17	0.00	Peak	100	103	VERTICAL
3	2411.04	109.94			79.51	2.22	28.21	0.00	Peak	100	103	VERTICAL
4	2411.20	106.11			75.68	2.22	28.21	0.00	Average	100	103	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.68	56.82	74.00	-17.18	26.44	2.21	28.17	0.00	Peak	100	106	VERTICAL
2	2390.00	46.30	54.00	-7.70	15.91	2.22	28.17	0.00	Average	100	106	VERTICAL
3	2436.04	109.26			78.74	2.23	28.29	0.00	Peak	100	106	VERTICAL
4	2436.36	105.49			74.97	2.23	28.29	0.00	Average	100	106	VERTICAL
5	2483.50	46.47	54.00	-7.53	15.84	2.26	28.37	0.00	Average	100	106	VERTICAL
6	2484.78	59.22	74.00	-14.78	28.59	2.26	28.37	0.00	Peak	100	106	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2461.04	108.07			77.50	2.24	28.33	0.00	Peak	100	104	VERTICAL
2	2461.20	104.38			73.81	2.24	28.33	0.00	Average	100	104	VERTICAL
3	2483.98	53.79	54.00	-0.21	23.16	2.26	28.37	0.00	Average	100	104	VERTICAL
4	2486.55	62.58	74.00	-11.42	31.91	2.26	28.41	0.00	Peak	100	104	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11g CH 1, 6, 11 / Chain 7
Test Date	Nov. 22, 2013	Test Mode	Mode 5

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2385.51	67.39	74.00	-6.61	37.01	2.21	28.17	0.00	Peak	100	104	VERTICAL
2	2390.00	53.93	54.00	-0.07	23.54	2.22	28.17	0.00	Average	100	104	VERTICAL
3	2410.88	107.63			77.20	2.22	28.21	0.00	Peak	100	104	VERTICAL
4	2411.20	98.00			67.57	2.22	28.21	0.00	Average	100	104	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	51.54	54.00	-2.46	21.15	2.22	28.17	0.00	Average	100	105	VERTICAL
2	2390.00	63.39	74.00	-10.61	33.00	2.22	28.17	0.00	Peak	100	105	VERTICAL
3	2437.96	101.07			70.55	2.23	28.29	0.00	Average	100	105	VERTICAL
4	2437.96	110.24			79.72	2.23	28.29	0.00	Peak	100	105	VERTICAL
5	2483.50	53.53	54.00	-0.47	22.90	2.26	28.37	0.00	Average	100	105	VERTICAL
6	2489.59	70.47	74.00	-3.53	39.80	2.26	28.41	0.00	Peak	100	105	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2456.07	97.20			66.63	2.24	28.33	0.00	Average	100	104	VERTICAL
2	2456.39	108.43			77.86	2.24	28.33	0.00	Peak	100	104	VERTICAL
3	2483.50	53.87	54.00	-0.13	23.24	2.26	28.37	0.00	Average	100	104	VERTICAL
4	2486.87	71.77	74.00	-2.23	41.10	2.26	28.41	0.00	Peak	100	104	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For Emission not in Restricted Band

Radio 1:


For 2.4GHz Band

Plot on Configuration IEEE 802.11n MCS0 20MHz / Reference Level

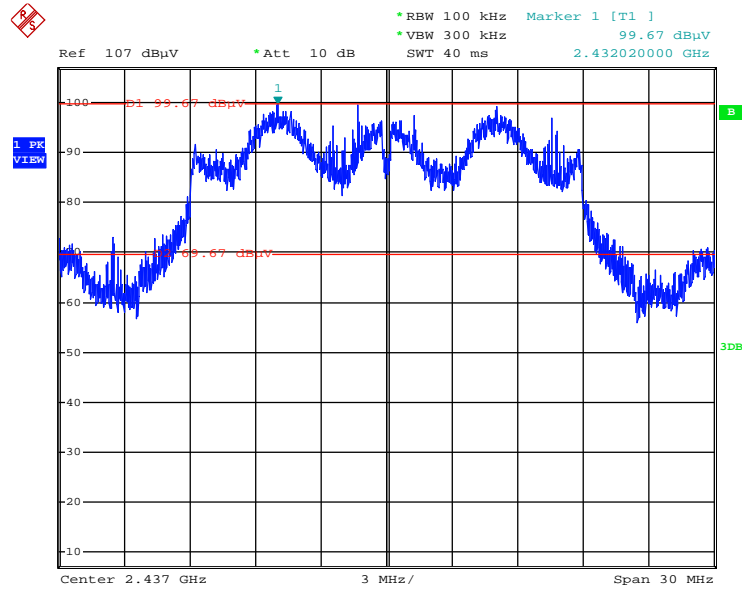


Date: 22.NOV.2013 04:01:29

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 1 / 30MHz~2400MHz (down 30dBc)

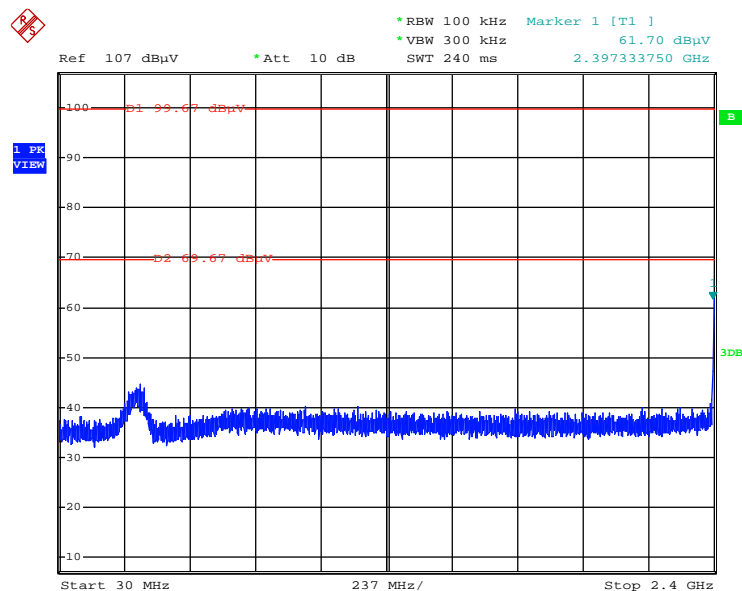


Date: 22.NOV.2013 04:01:57

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 1 / 2500MHz~26500MHz (down 30dBc)

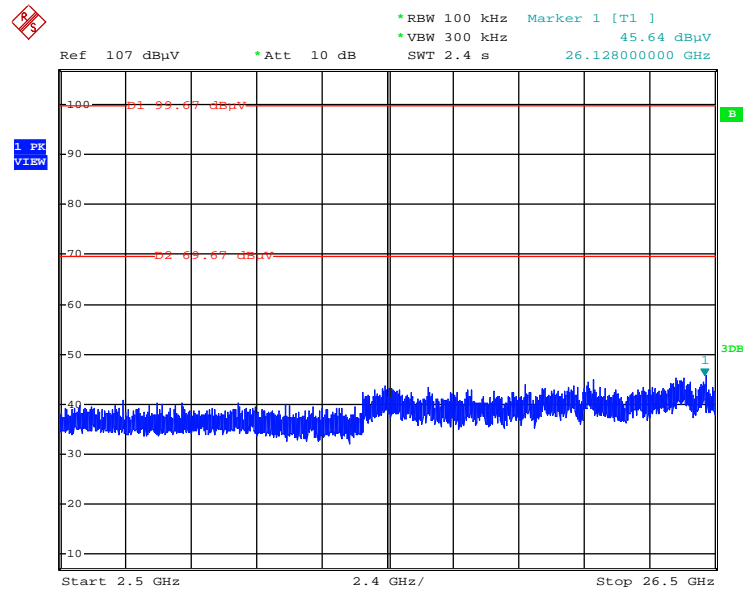


Date: 22.NOV.2013 04:02:17

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 11 / 30MHz~2400MHz (down 30dBc)

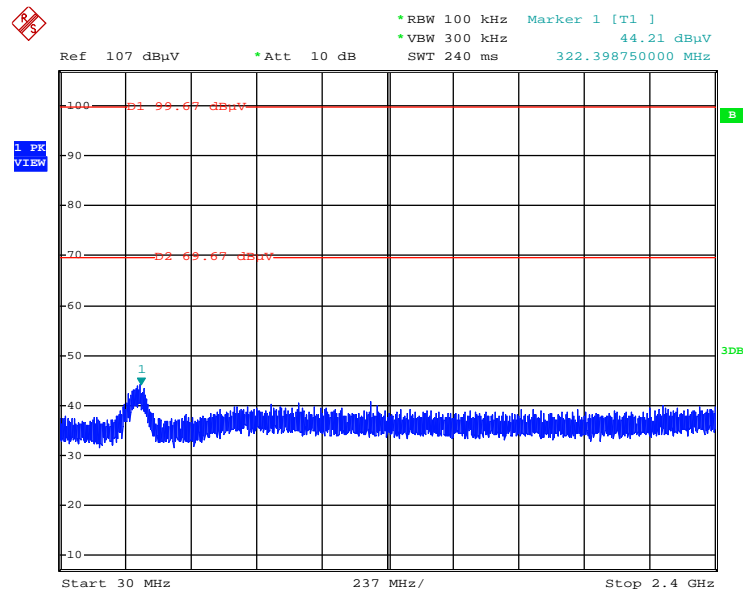


Date: 22.NOV.2013 04:02:58

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 11 / 2500MHz~26500MHz (down 30dBc)

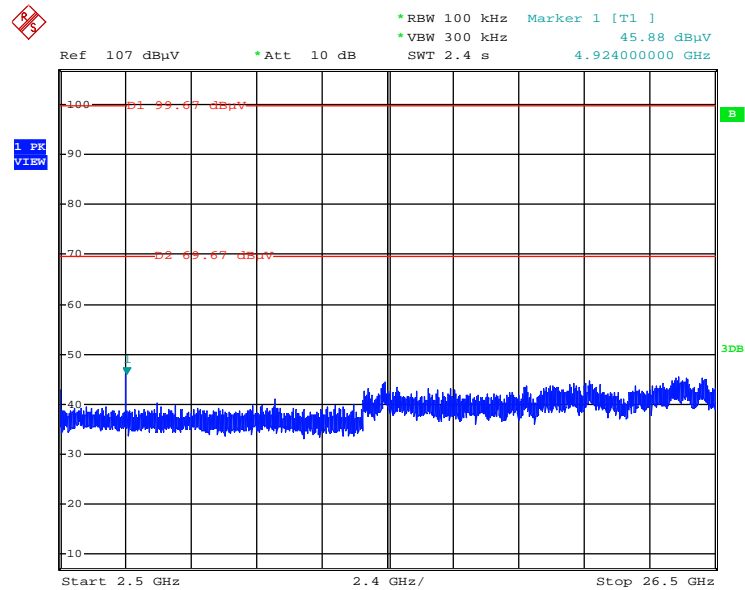


Date: 22.NOV.2013 04:02:38

Plot on Configuration IEEE 802.11b / Reference Level

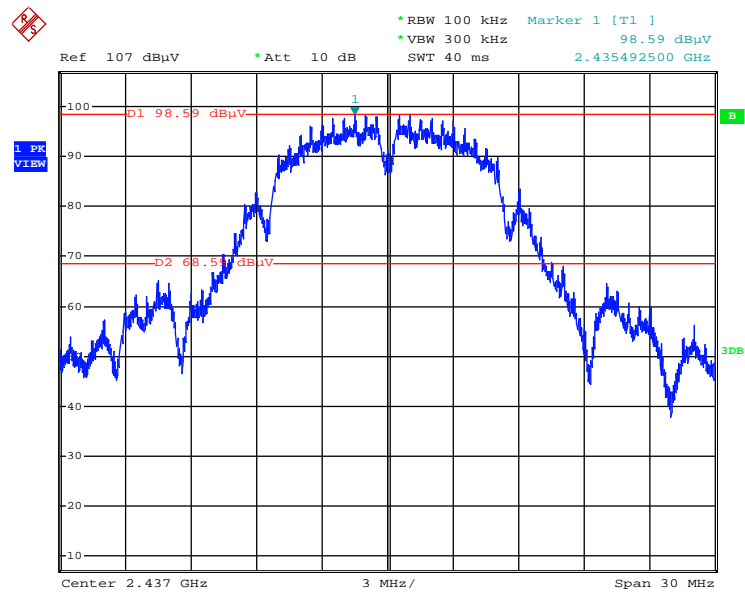


Date: 22.NOV.2013 03:50:33

Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)

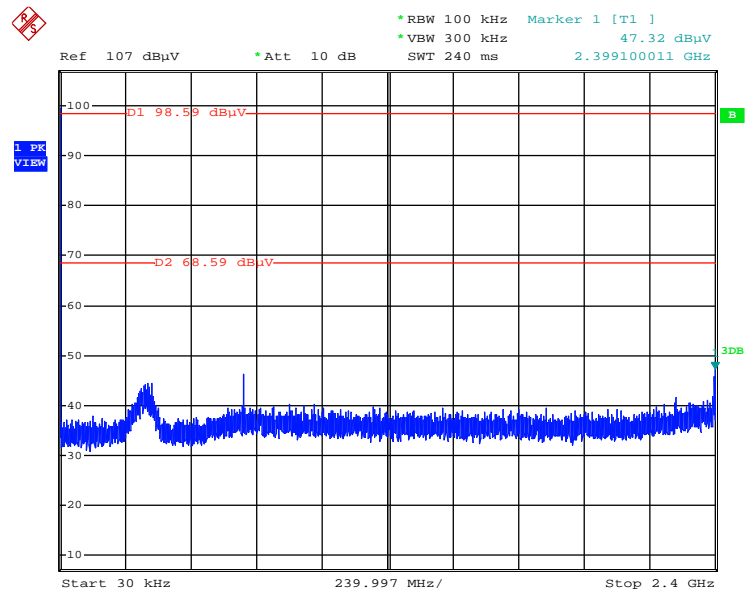


Date: 22.NOV.2013 03:51:13

Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc)

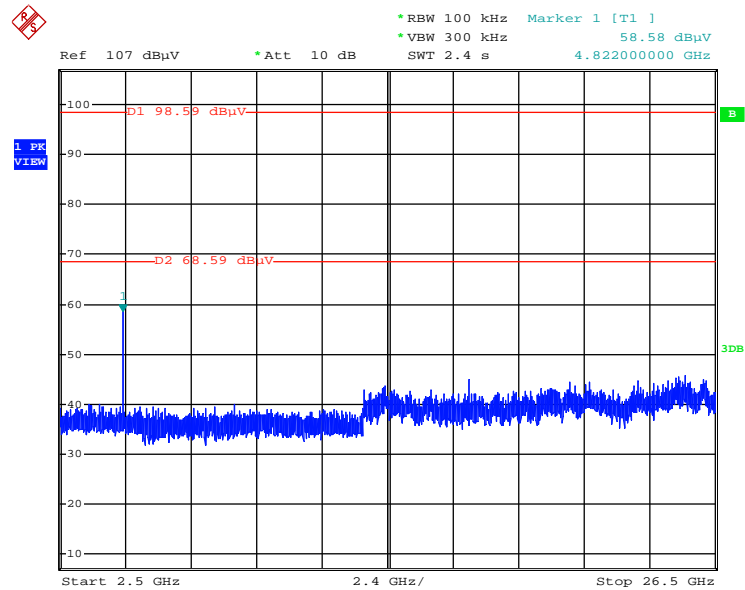


Date: 22.NOV.2013 03:51:38

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)

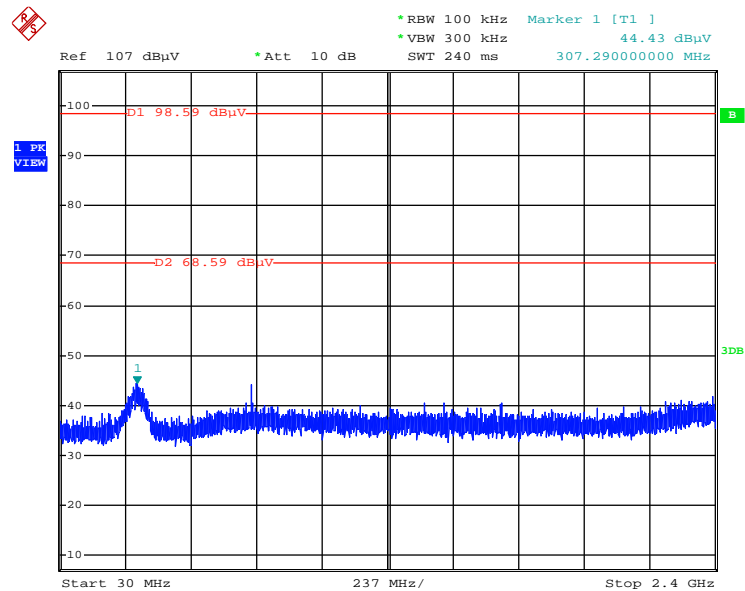


Date: 22.NOV.2013 03:52:23

Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc)

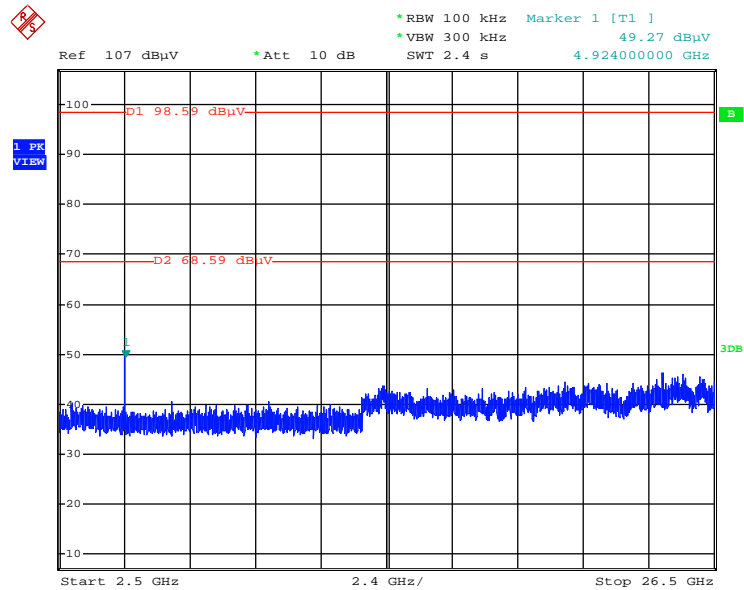


Date: 22.NOV.2013 04:12:49

Plot on Configuration IEEE 802.11g / Reference Level

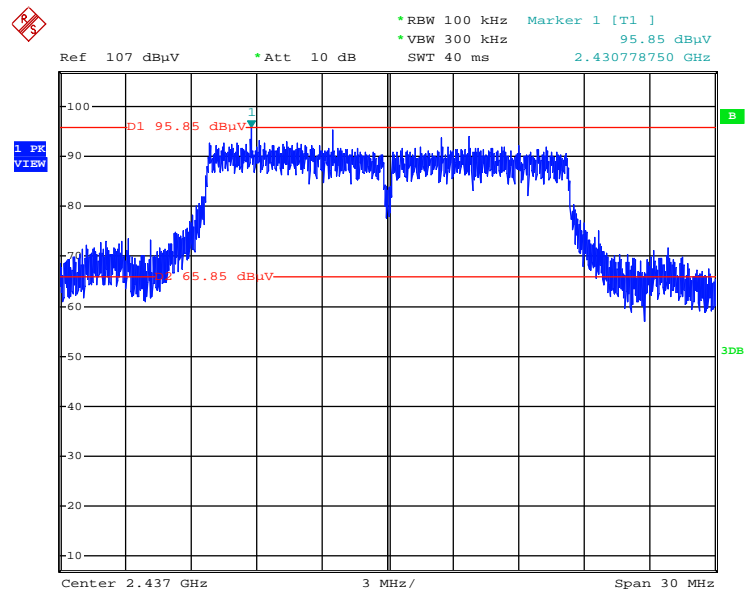


Date: 22.NOV.2013 03:55:55

Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)

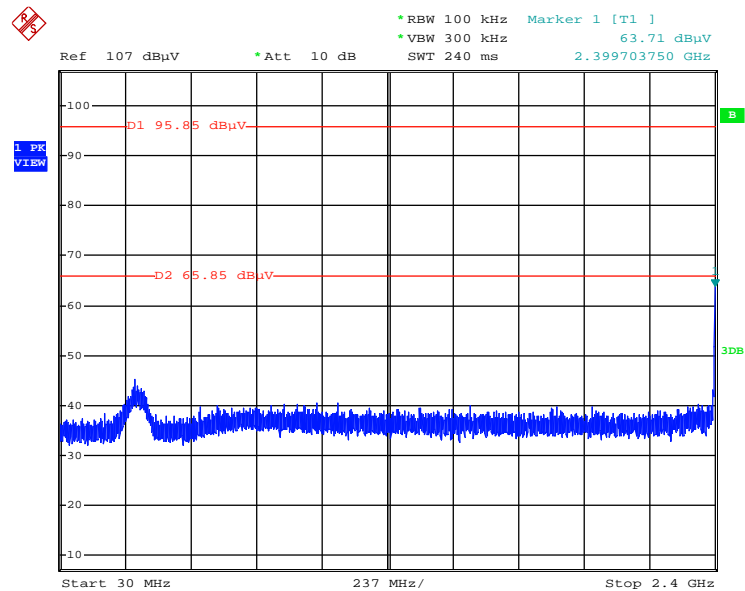


Date: 22.NOV.2013 03:56:31

Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc)

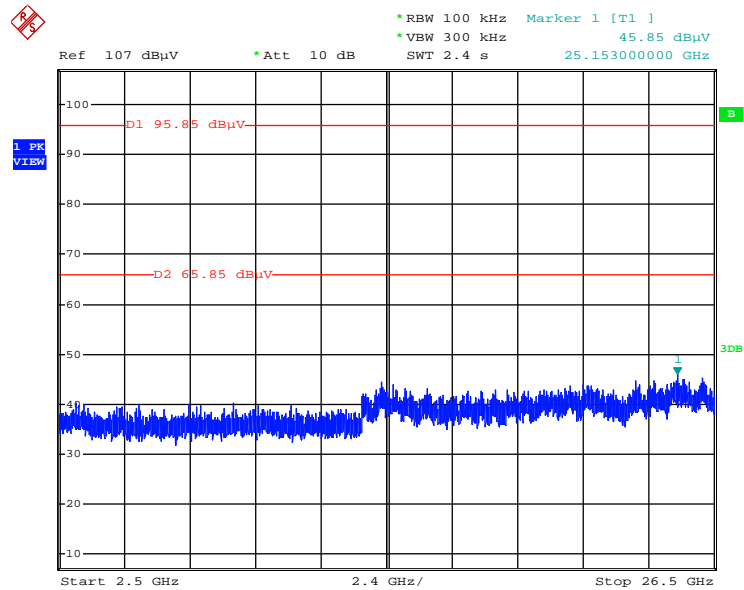


Date: 22.NOV.2013 03:58:01

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

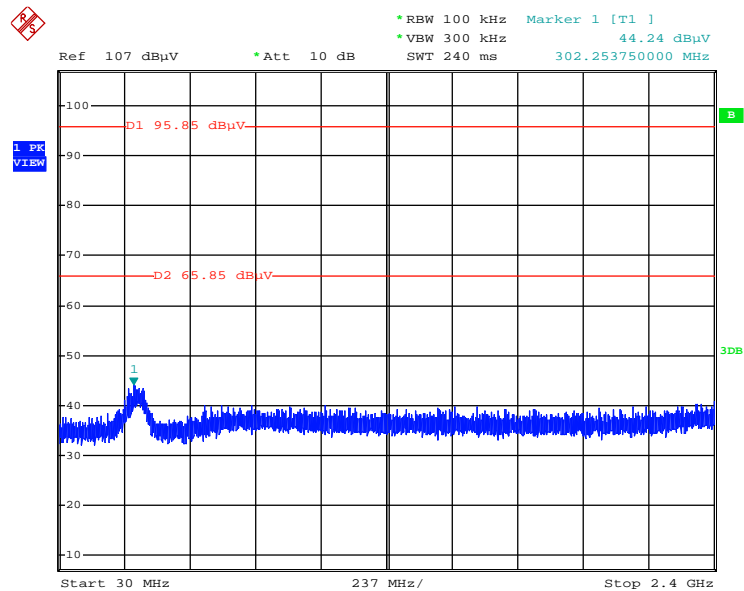

Date: 22.NOV.2013 03:58:33

Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc)

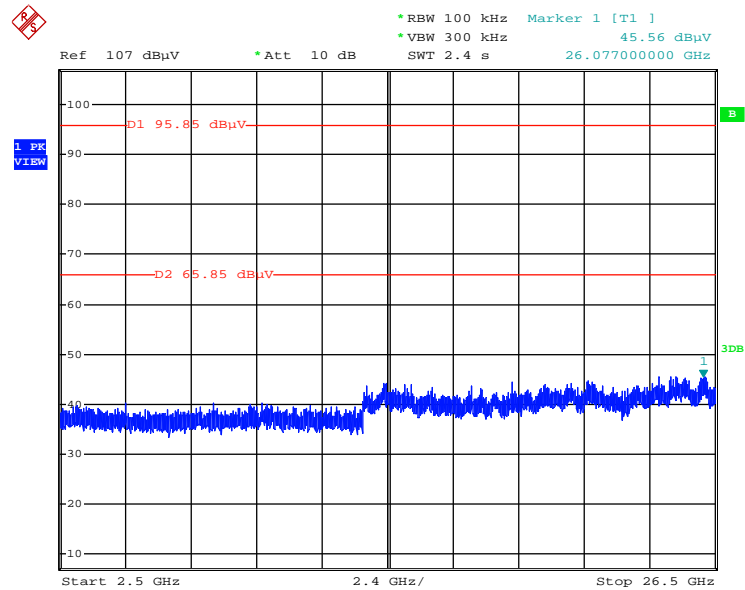


Date: 22.NOV.2013 03:57:35

Radio 2:


For 5GHz Band

Plot on Configuration IEEE 802.11n MCS0 20MHz / Reference Level

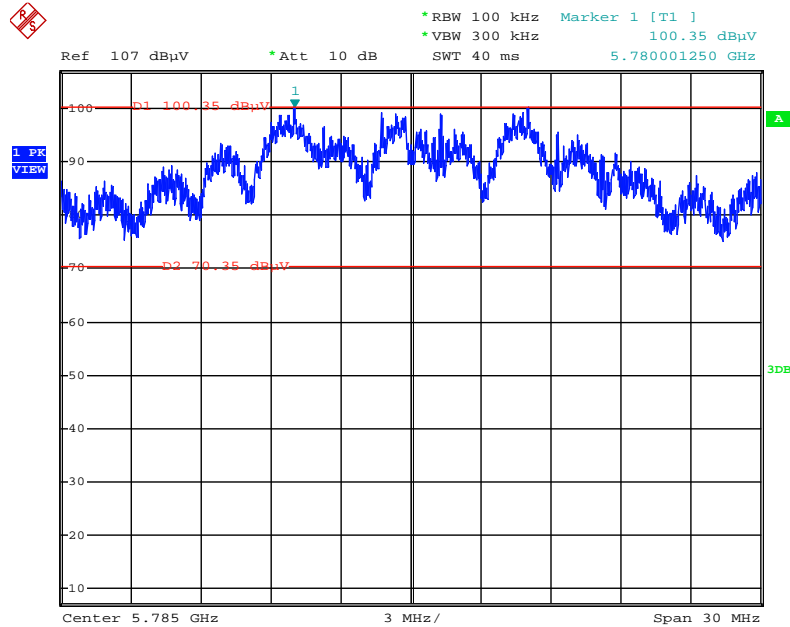


Date: 23.NOV.2013 01:55:19

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 149 / 30MHz~5725MHz (down 30dBc)

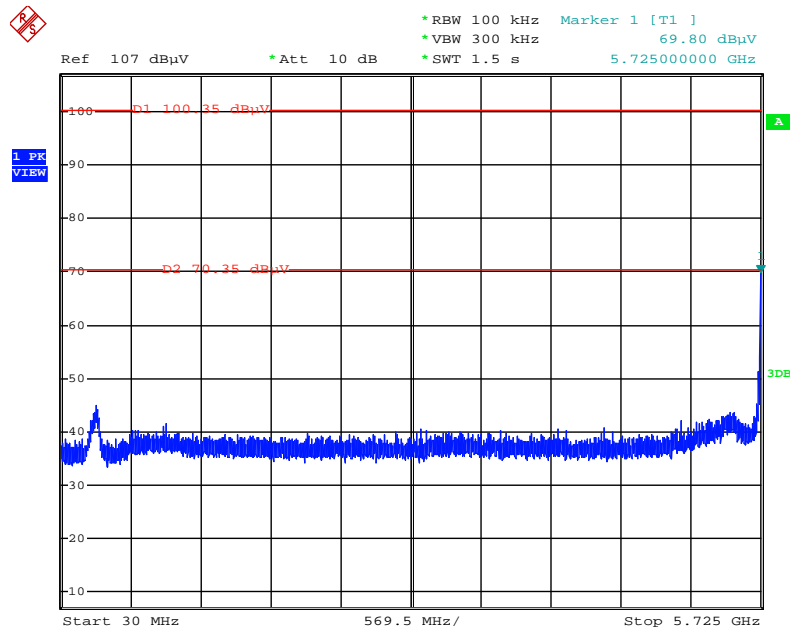


Date: 23.NOV.2013 01:56:49

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 149 / 5850MHz~40000MHz (down 30dBc)

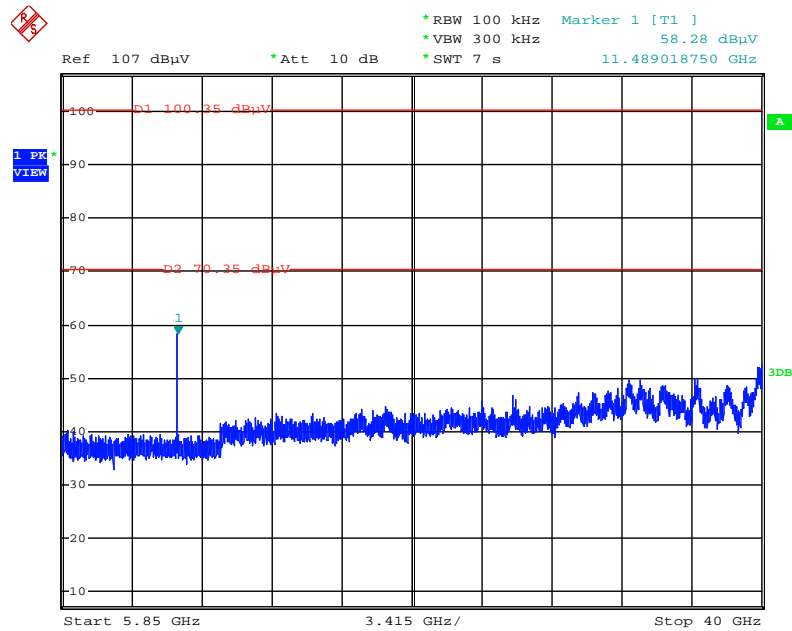


Date: 23.NOV.2013 01:58:39

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 165 / 30MHz~5725MHz (down 30dBc)

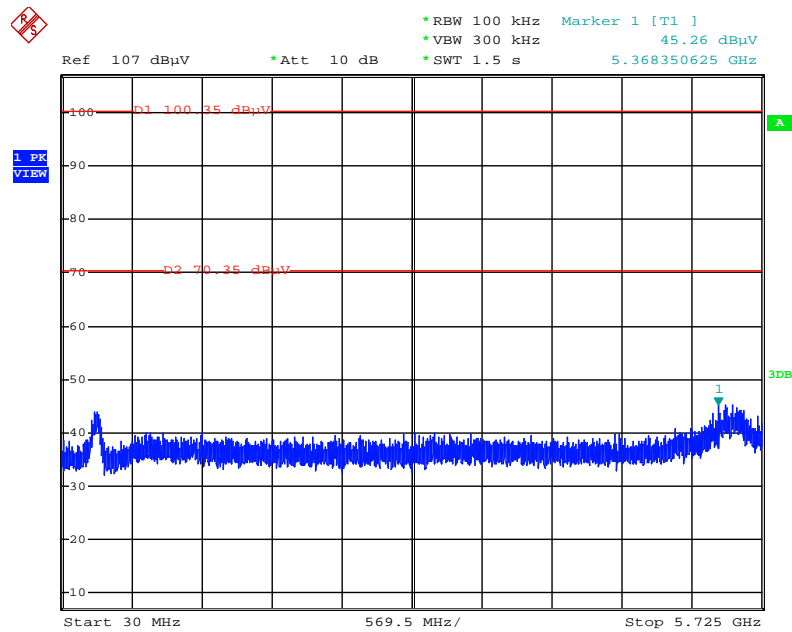


Date: 23.NOV.2013 02:00:31

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 165 / 5850MHz~40000MHz (down 30dBc)

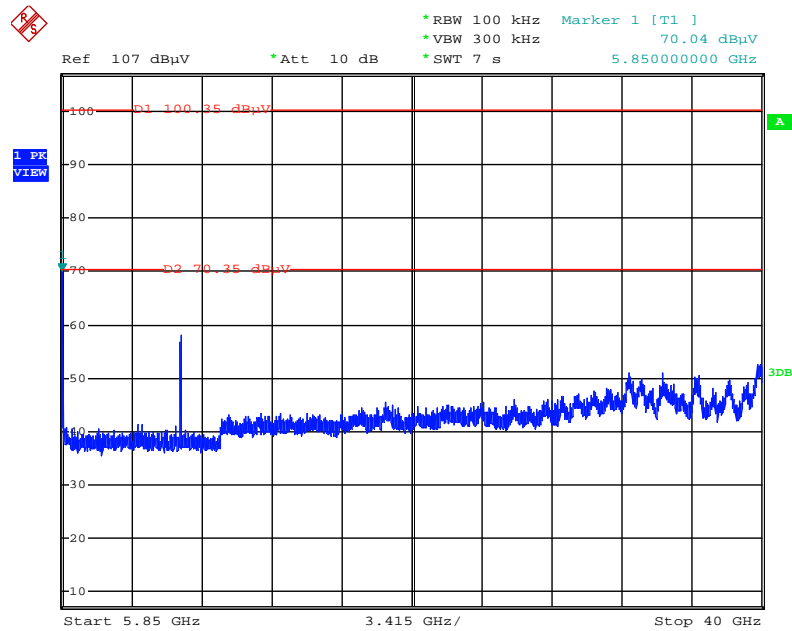


Date: 23.NOV.2013 02:00:04

Plot on Configuration IEEE 802.11n MCS0 40MHz / Reference Level

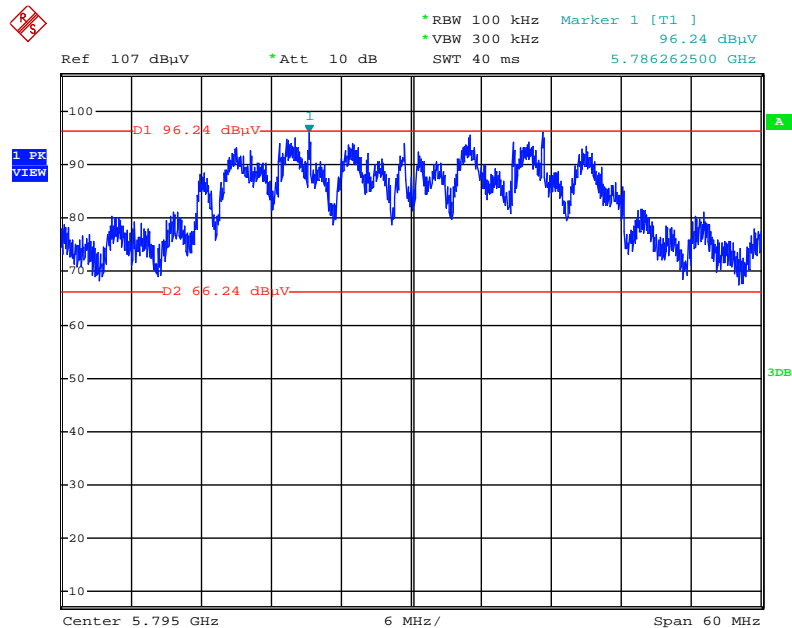


Date: 23.NOV.2013 02:04:52

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 151 / 30MHz~5725MHz (down 30dBc)

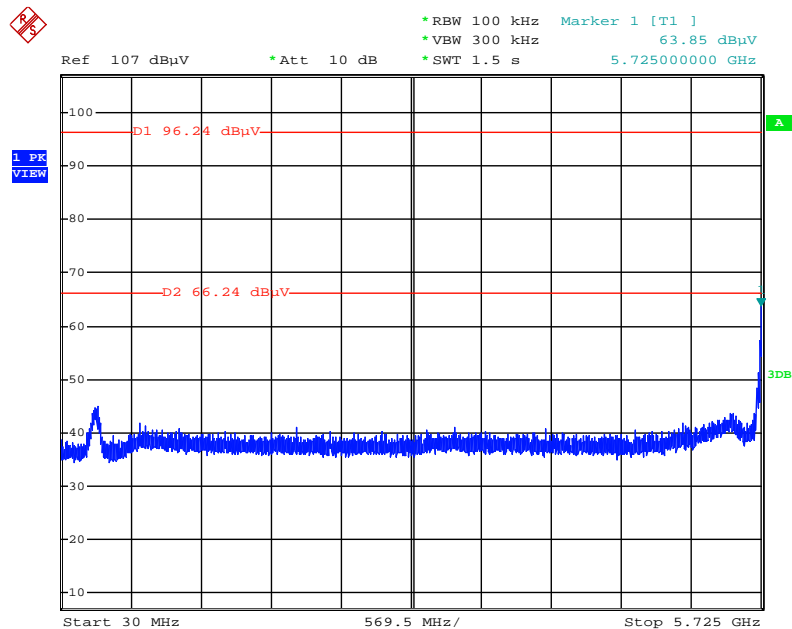


Date: 23.NOV.2013 02:08:56

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 151 / 5850MHz~40000MHz (down 30dBc)

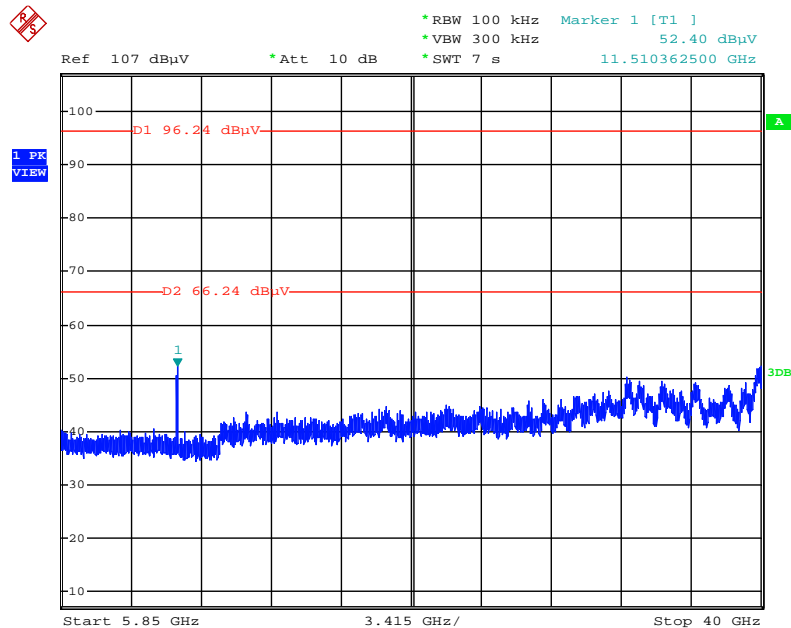


Date: 23.NOV.2013 02:09:34

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 159 / 30MHz~5725MHz (down 30dBc)

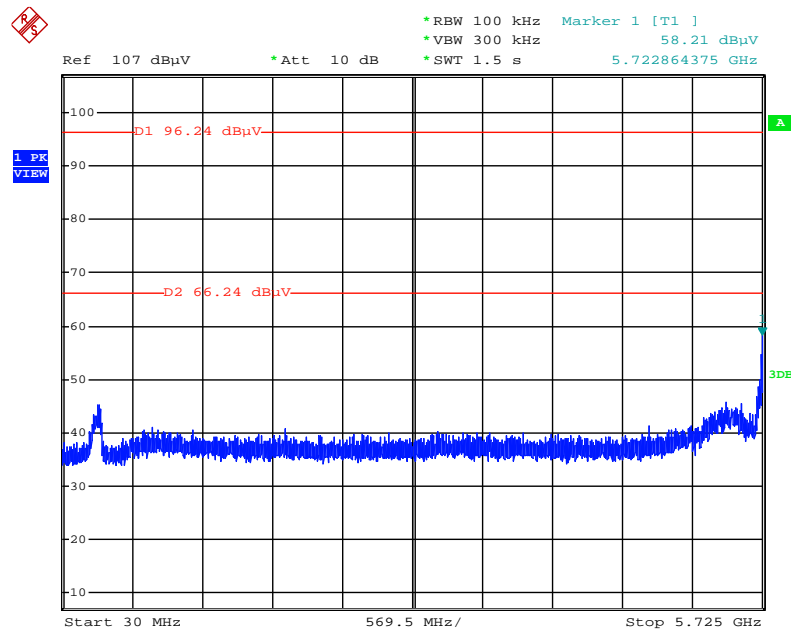


Date: 23.NOV.2013 02:07:29

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 159 / 5850MHz~40000MHz (down 30dBc)

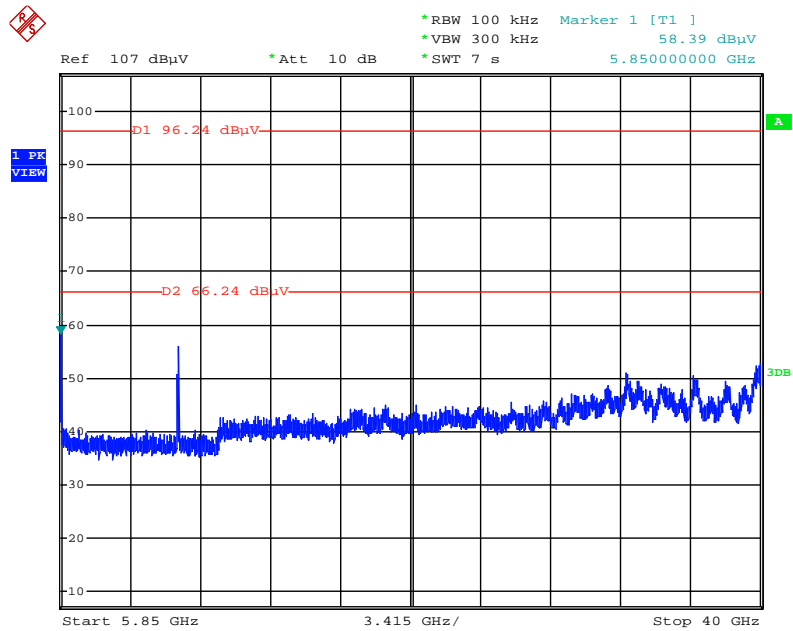


Date: 23.NOV.2013 02:05:36

Plot on Configuration IEEE 802.11a / Reference Level

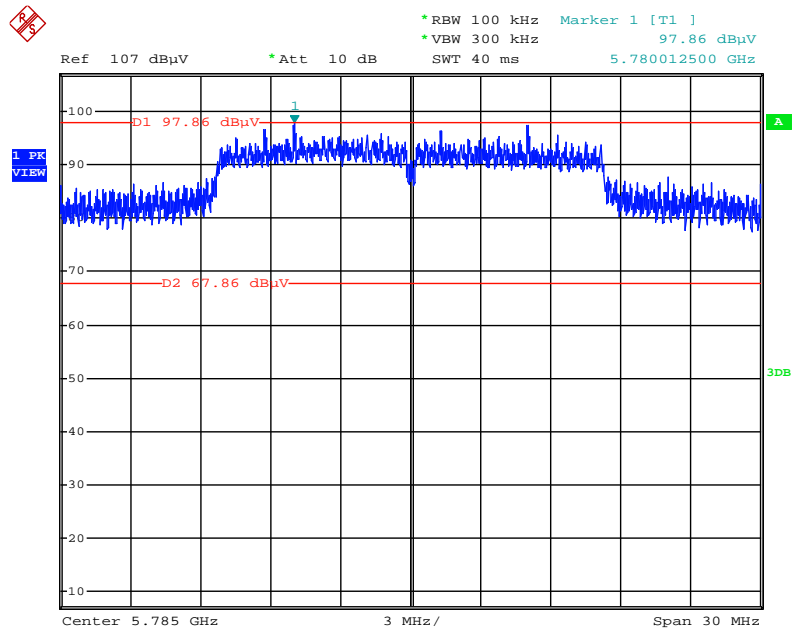


Date: 23.NOV.2013 01:46:00

Plot on Configuration IEEE 802.11a / CH 149 / 30MHz~5725MHz (down 30dBc)

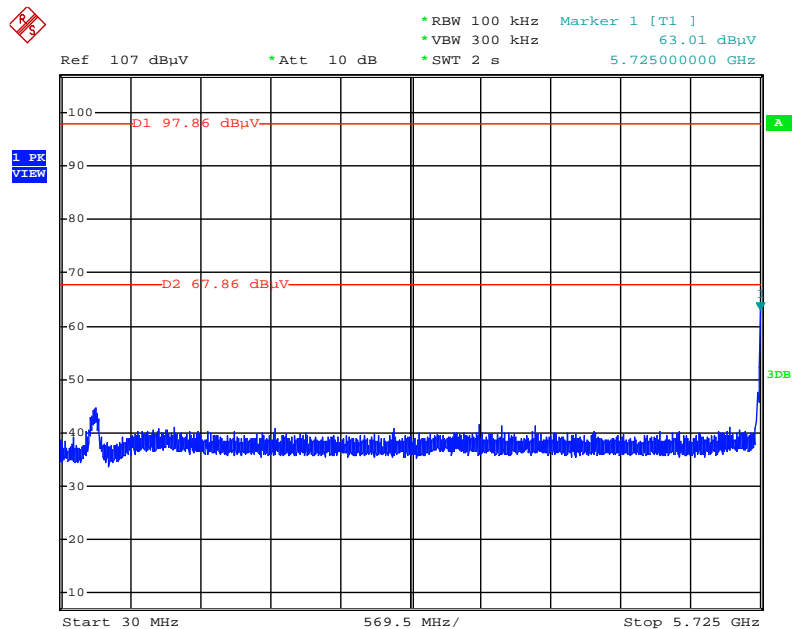


Date: 23.NOV.2013 01:48:47

Plot on Configuration IEEE 802.11a / CH 149 / 5850MHz~40000MHz (down 30dBc)

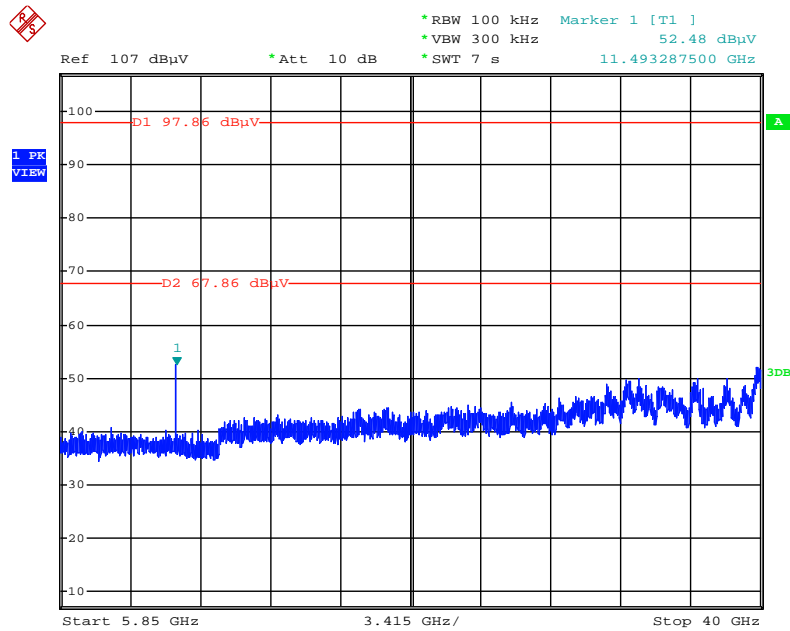


Date: 23.NOV.2013 01:50:25

Plot on Configuration IEEE 802.11a / CH 165 / 30MHz~5725MHz (down 30dBc)

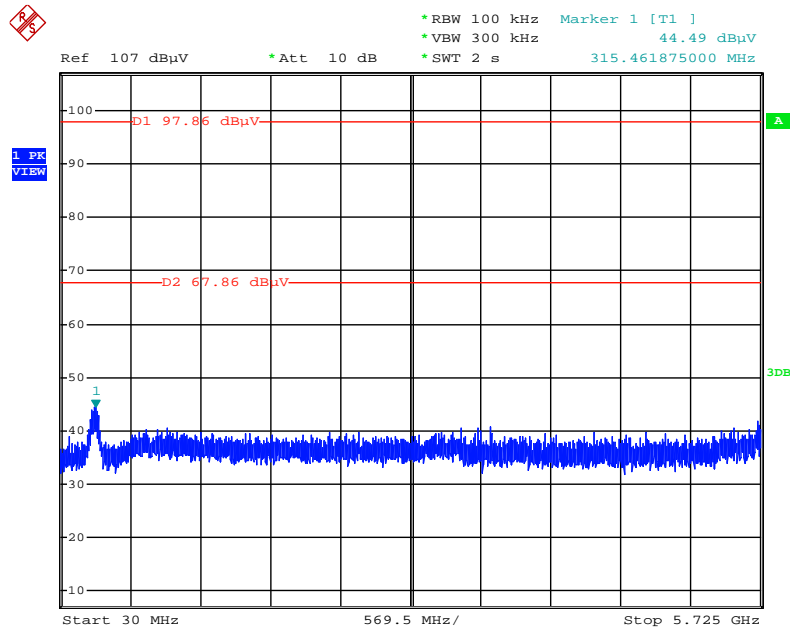

Date: 23.NOV.2013 01:53:51

Plot on Configuration IEEE 802.11a / CH 165 / 5850MHz~40000MHz (down 30dBc)

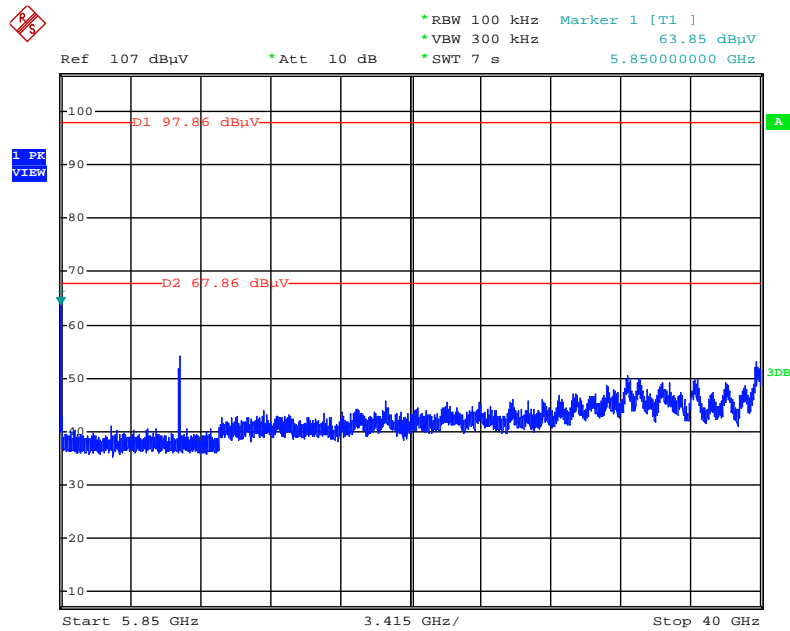


Date: 23.NOV.2013 01:52:30

Radio 3:


For 2.4GHz Band

Plot on Configuration IEEE 802.11n MCS0 20MHz / Reference Level

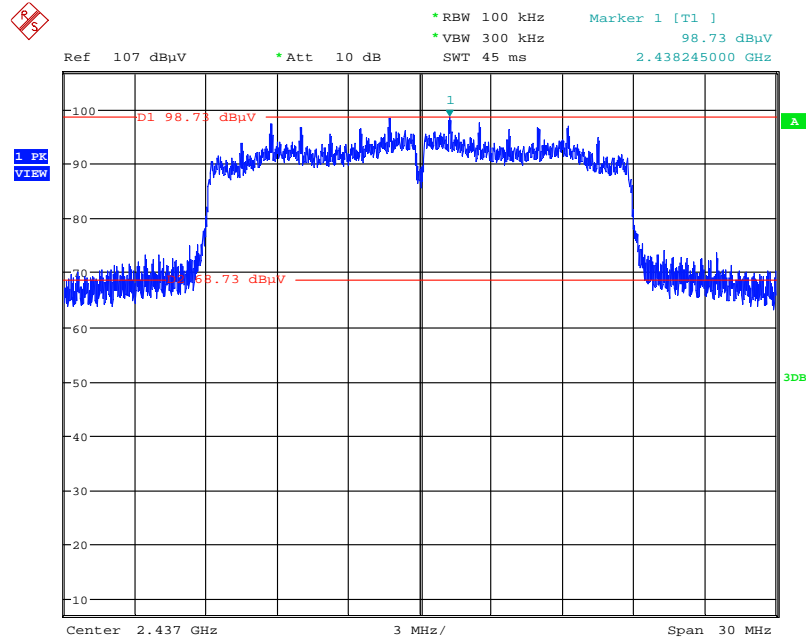


Date: 23.NOV.2013 00:54:52

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 1 / 30MHz~2400MHz (down 30dBc)

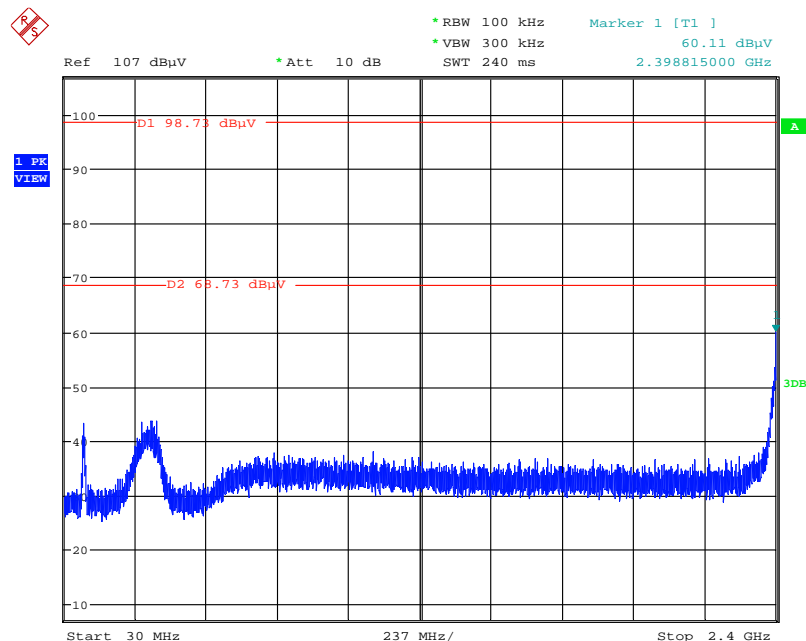


Date: 23.NOV.2013 00:55:15

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 1 / 2500MHz~26500MHz (down 30dBc)

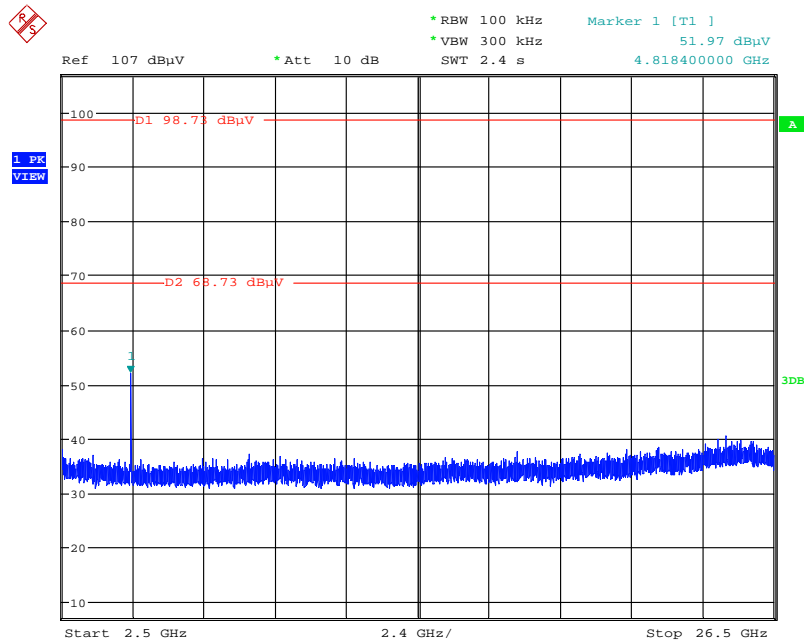


Date: 23.NOV.2013 00:55:48

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 11 / 30MHz~2400MHz (down 30dBc)

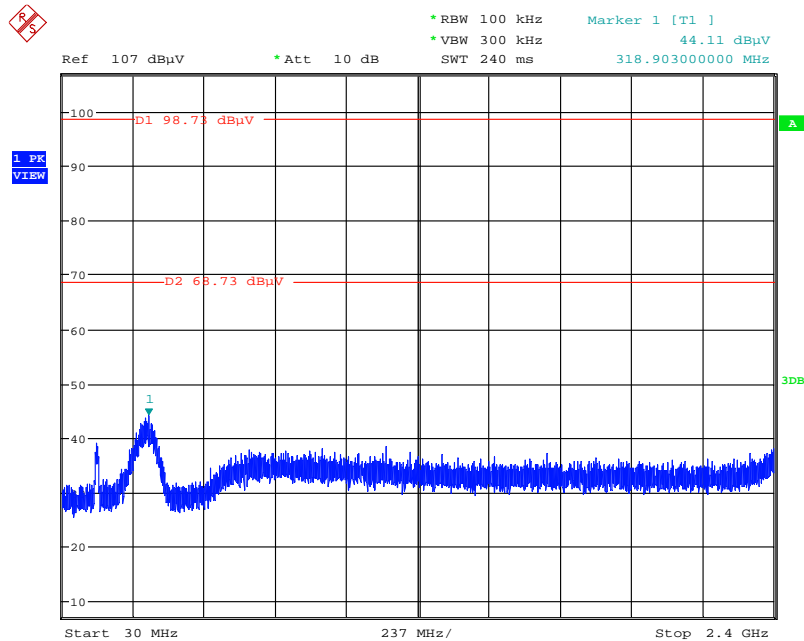


Date: 23.NOV.2013 00:56:28

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 11 / 2500MHz~26500MHz (down 30dBc)

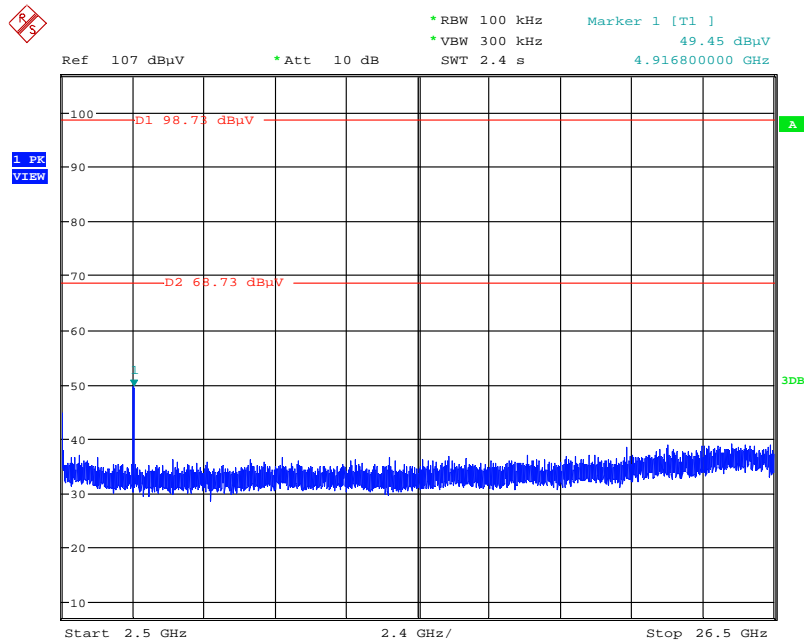


Date: 23.NOV.2013 00:56:11

Plot on Configuration IEEE 802.11n MCS0 40MHz / Reference Level

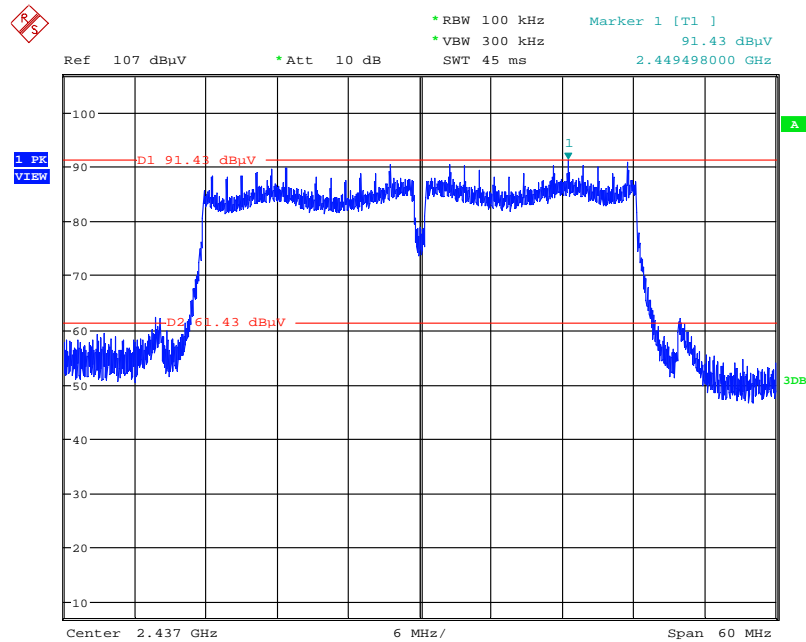


Date: 23.NOV.2013 00:57:35

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 3 / 30MHz~2400MHz (down 30dBc)

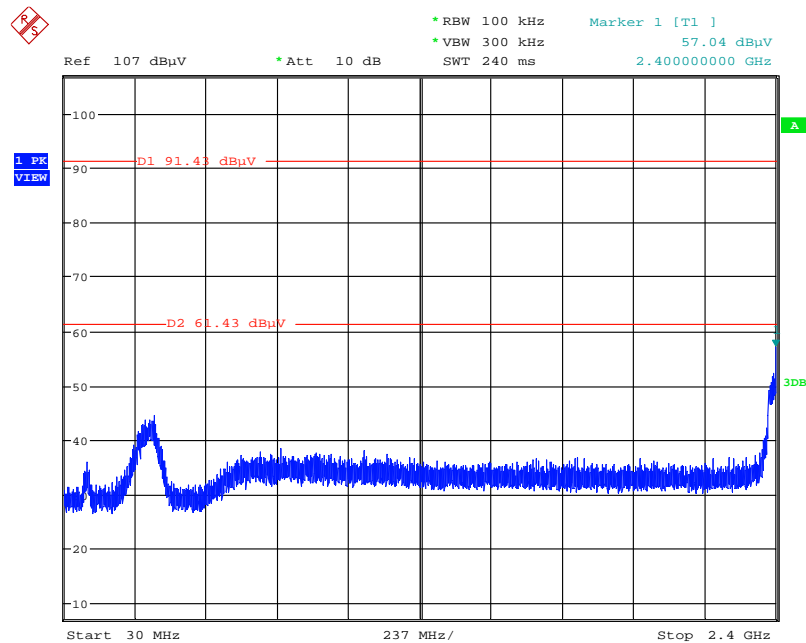


Date: 23.NOV.2013 00:58:02

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 3 / 2500MHz~26500MHz (down 30dBc)

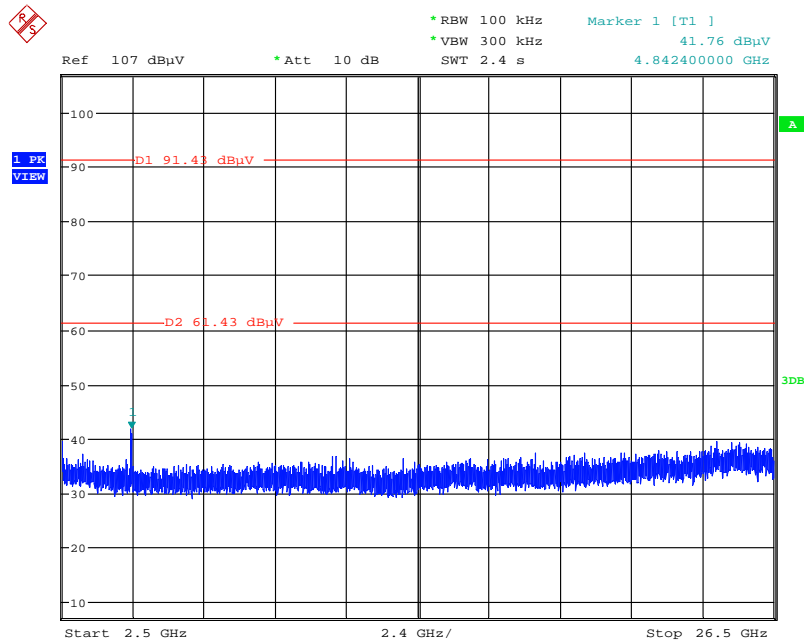


Date: 23.NOV.2013 00:58:20

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 9 / 30MHz~2400MHz (down 30dBc)

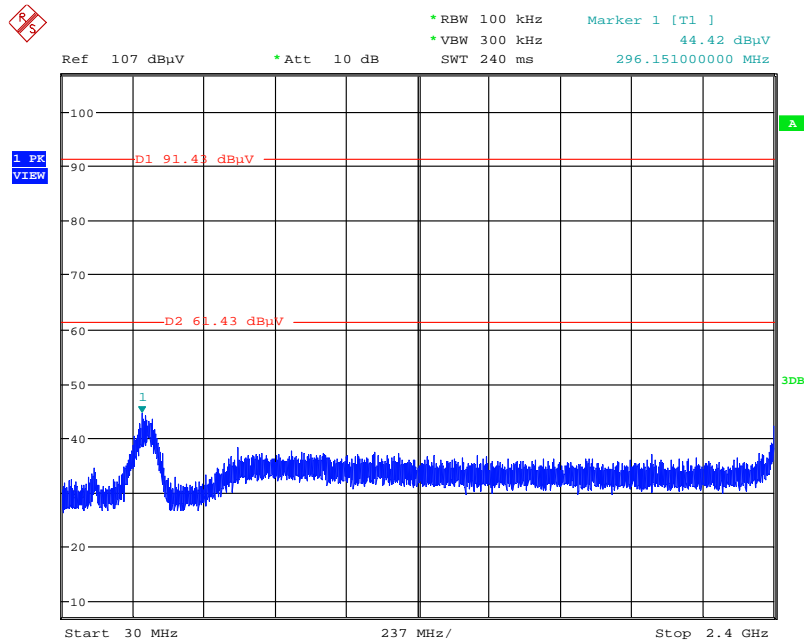


Date: 23.NOV.2013 00:59:01

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 9 / 2500MHz~26500MHz (down 30dBc)

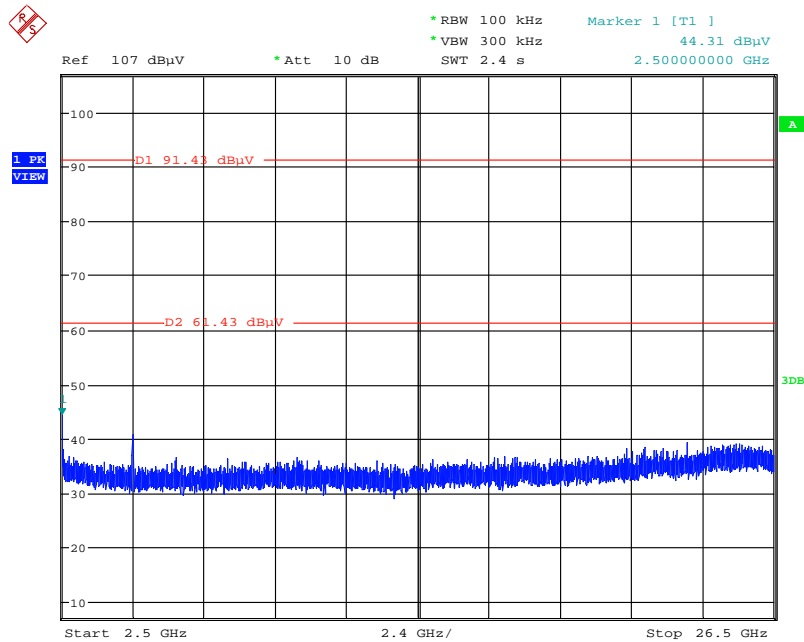


Date: 23.NOV.2013 00:58:43

Plot on Configuration IEEE 802.11b / Reference Level

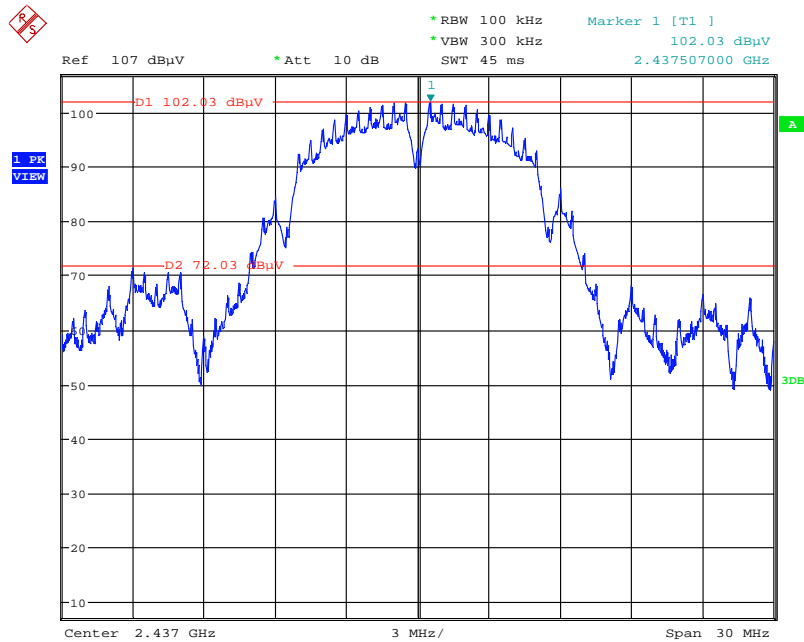


Date: 23.NOV.2013 00:48:11

Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)

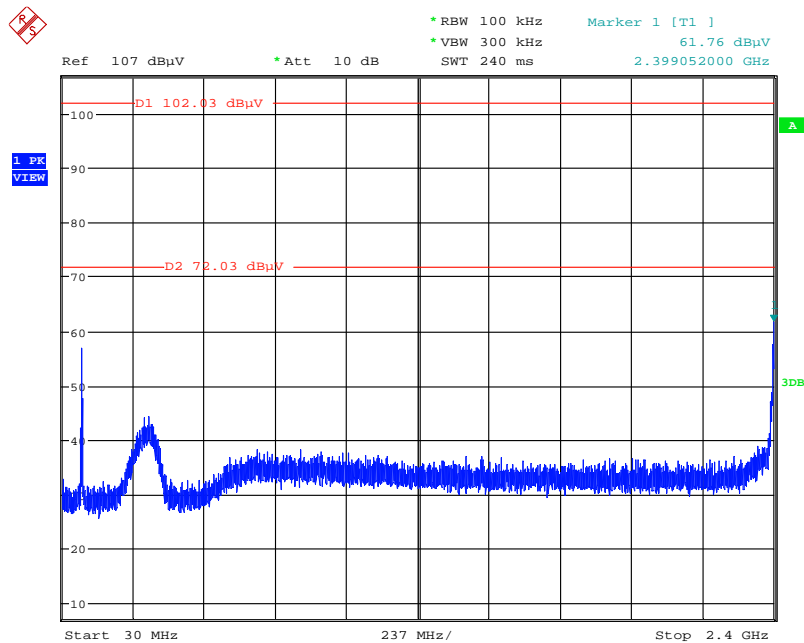


Date: 23.NOV.2013 00:49:16

Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc)

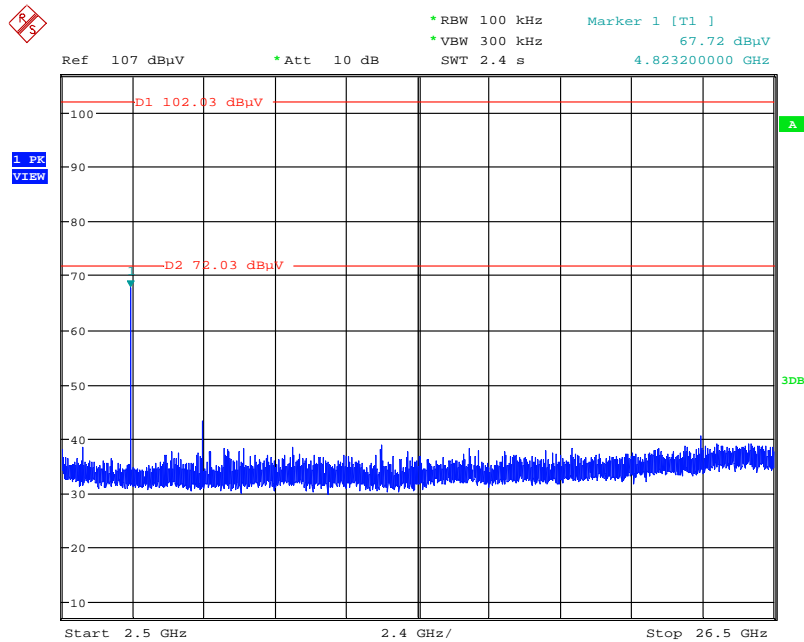


Date: 23.NOV.2013 00:49:42

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)

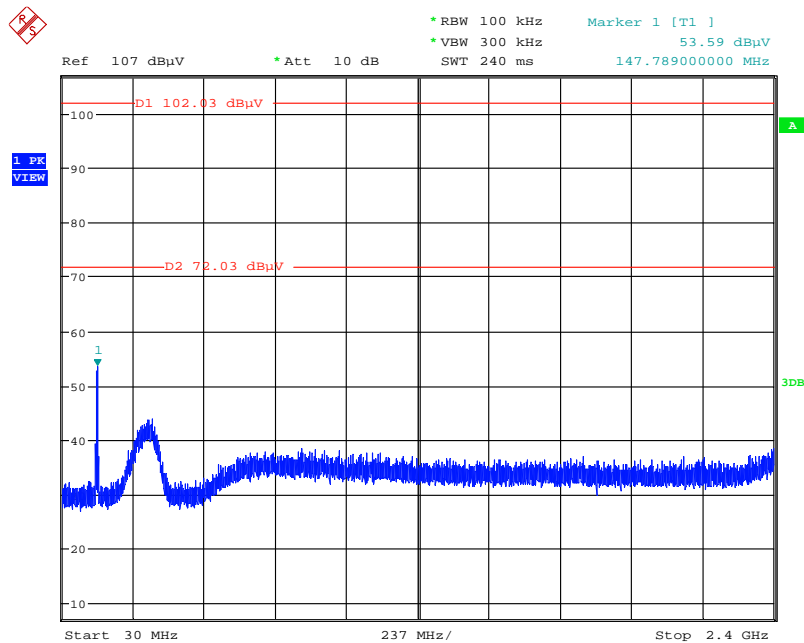


Date: 23.NOV.2013 00:50:43

Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc)

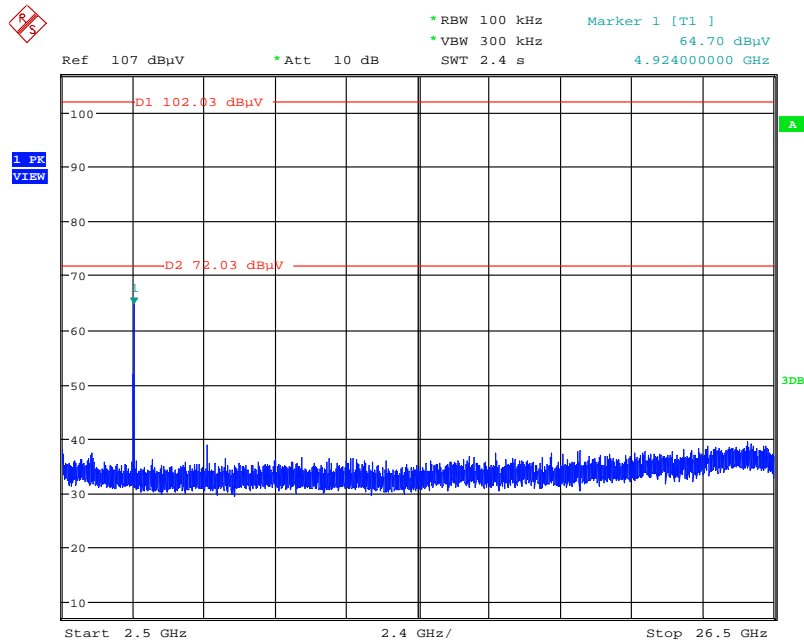


Date: 23.NOV.2013 00:50:16

Plot on Configuration IEEE 802.11g / Reference Level

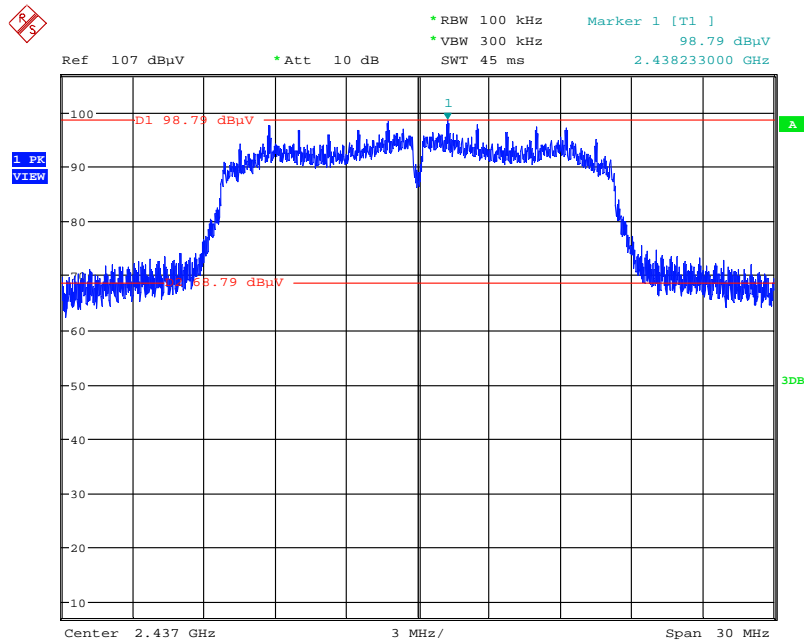


Date: 23.NOV.2013 00:52:00

Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)

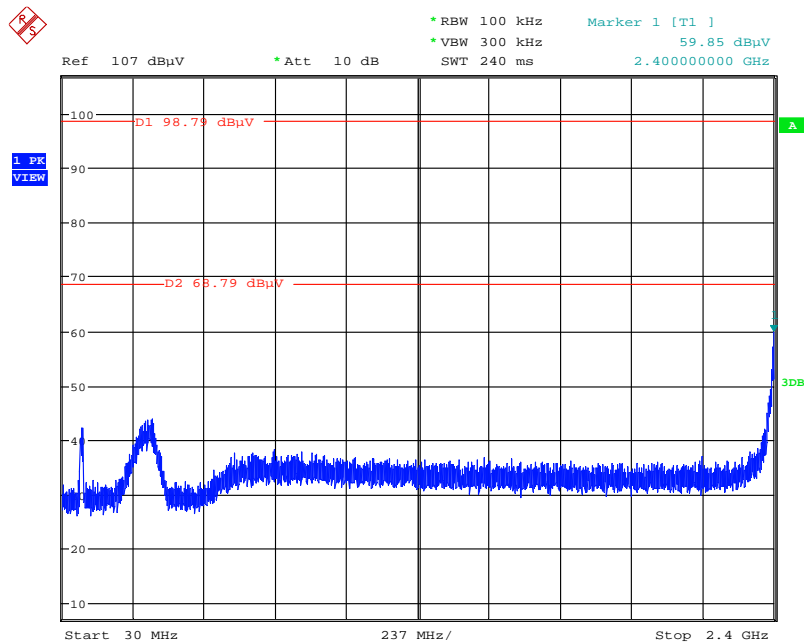


Date: 23.NOV.2013 00:52:41

Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc)

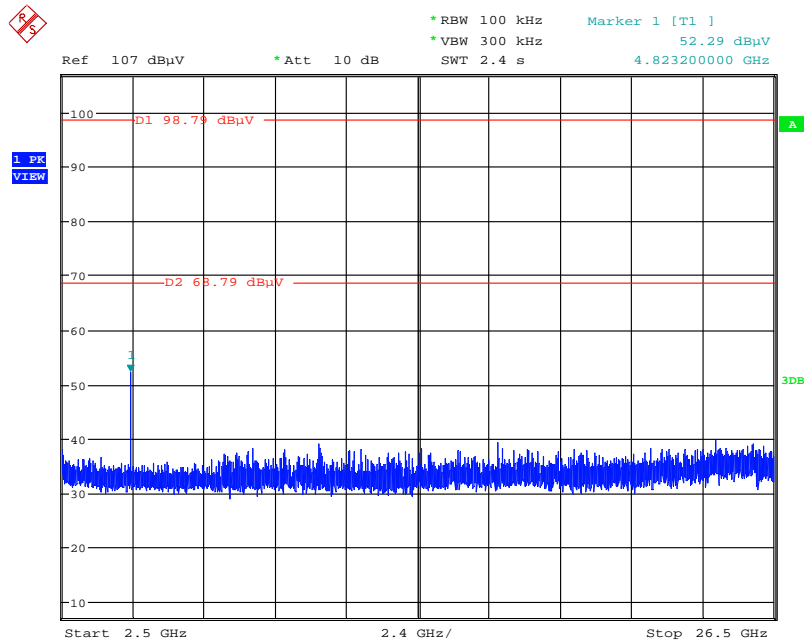


Date: 23.NOV.2013 00:52:56

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

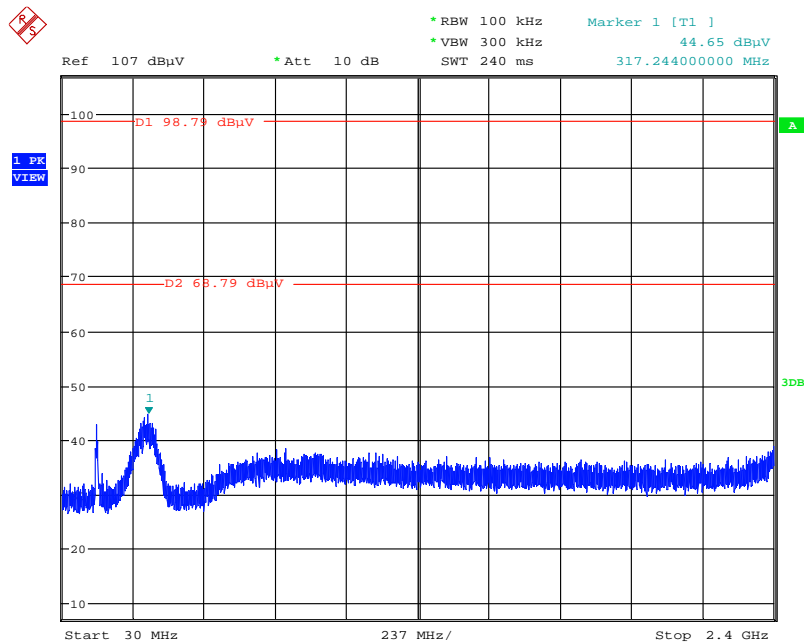

Date: 23.NOV.2013 00:53:48


Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc)

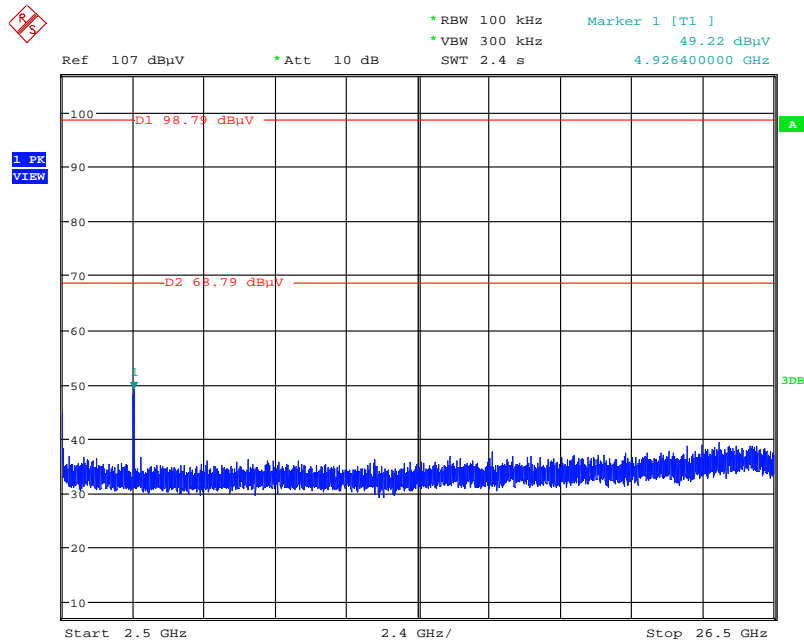

Date: 23.NOV.2013 00:53:26


For 5GHz Band

Plot on Configuration IEEE 802.11n MCS0 20MHz / Reference Level

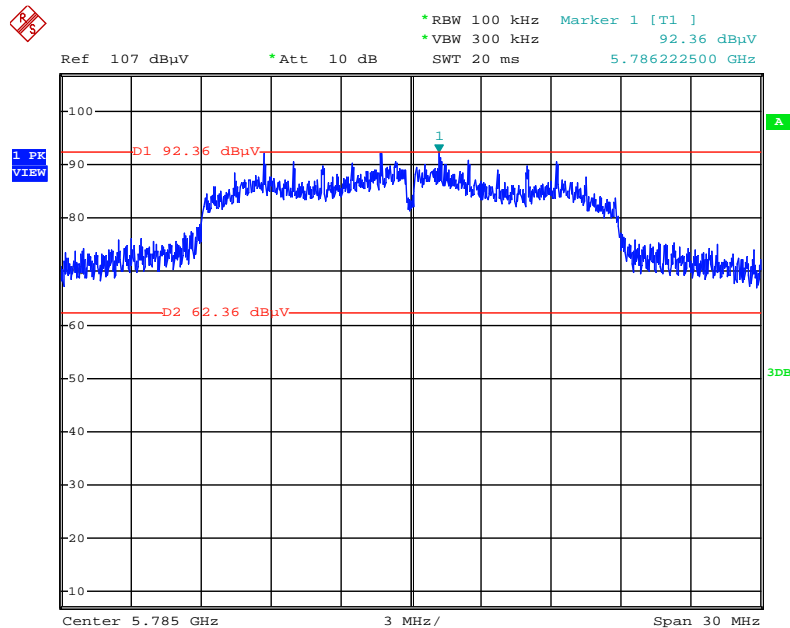


Date: 23.NOV.2013 11:05:22

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 149 / 30MHz~5725MHz (down 30dBc)

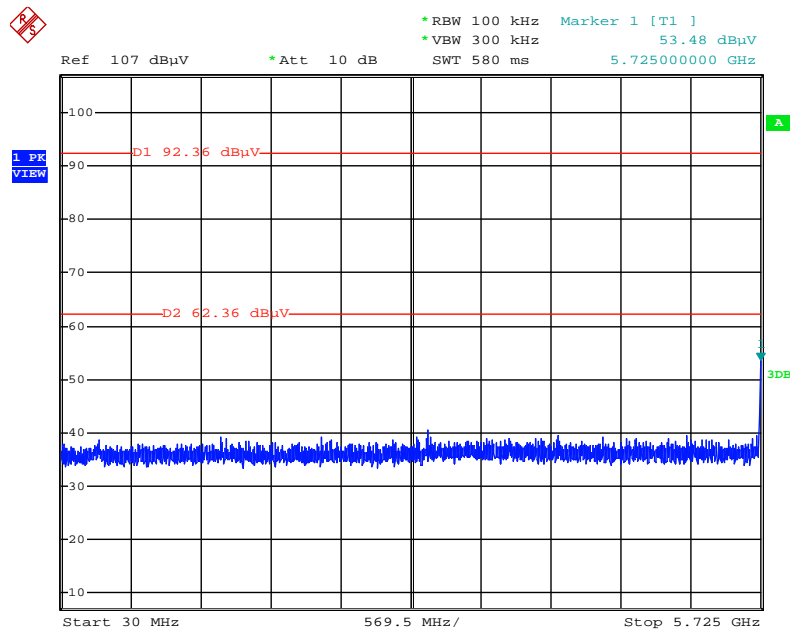


Date: 23.NOV.2013 11:07:13

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 149 / 5850MHz~40000MHz (down 30dBc)

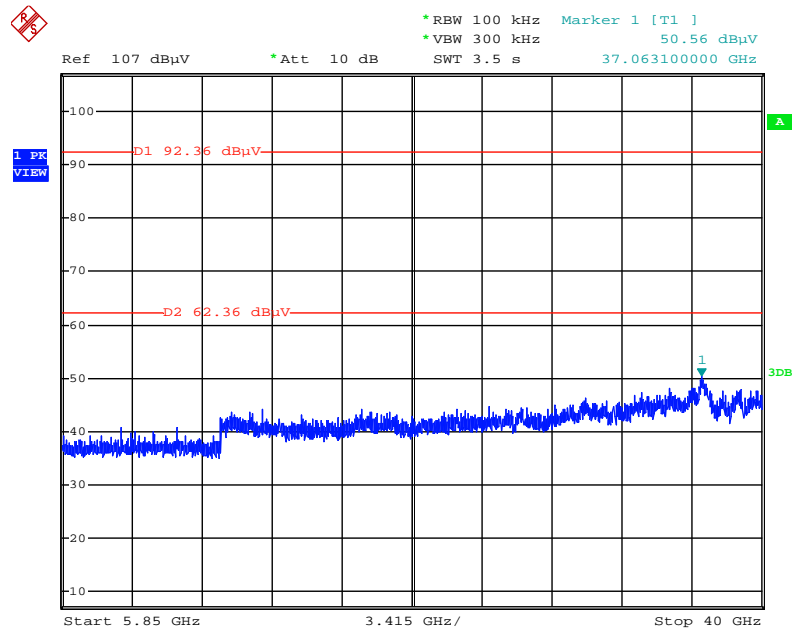


Date: 23.NOV.2013 11:07:44

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 165 / 30MHz~5725MHz (down 30dBc)

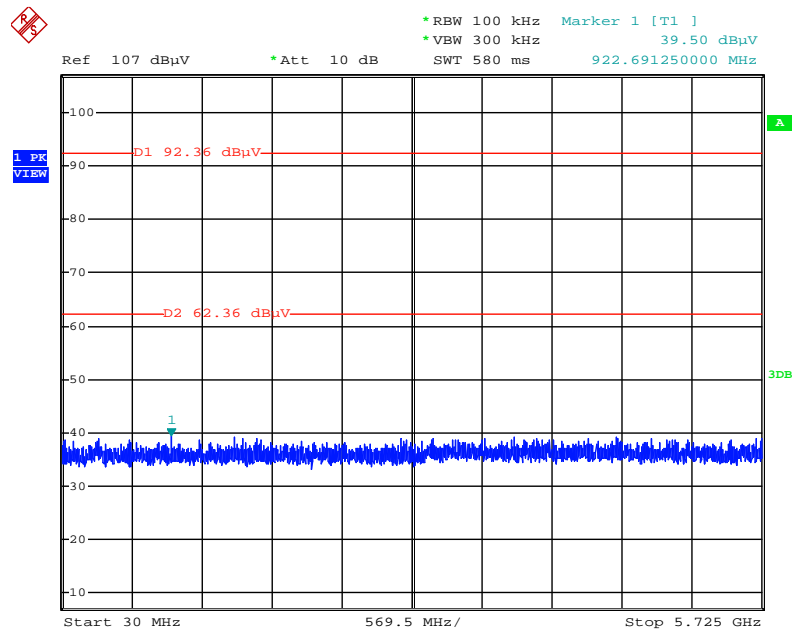


Date: 23.NOV.2013 11:09:13

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 165 / 5850MHz~40000MHz (down 30dBc)

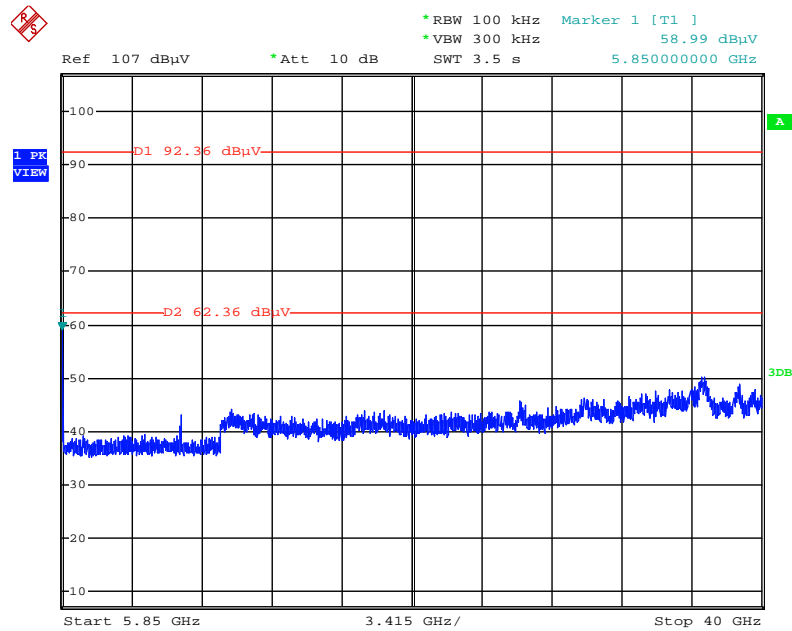


Date: 23.NOV.2013 11:08:34

Plot on Configuration IEEE 802.11n MCS0 40MHz / Reference Level

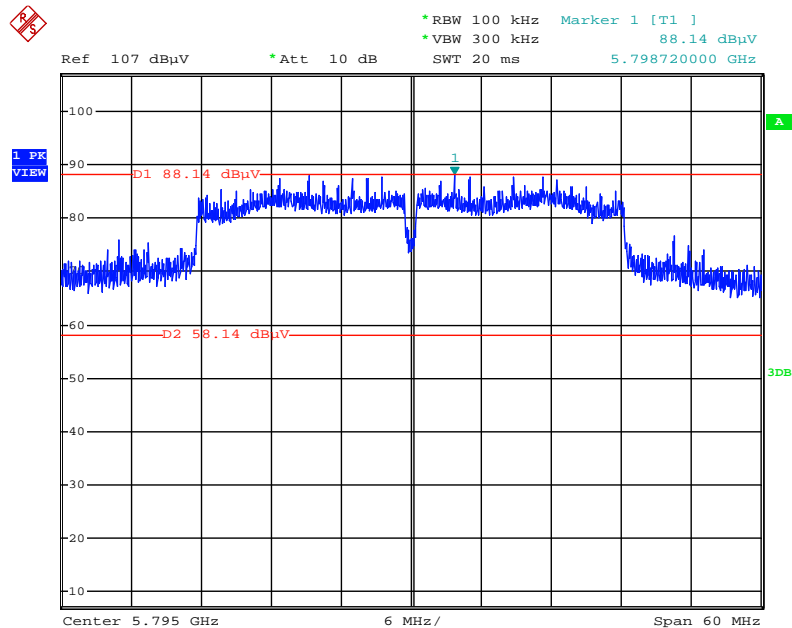


Date: 23.NOV.2013 11:18:19

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 151 / 30MHz~5725MHz (down 30dBc)

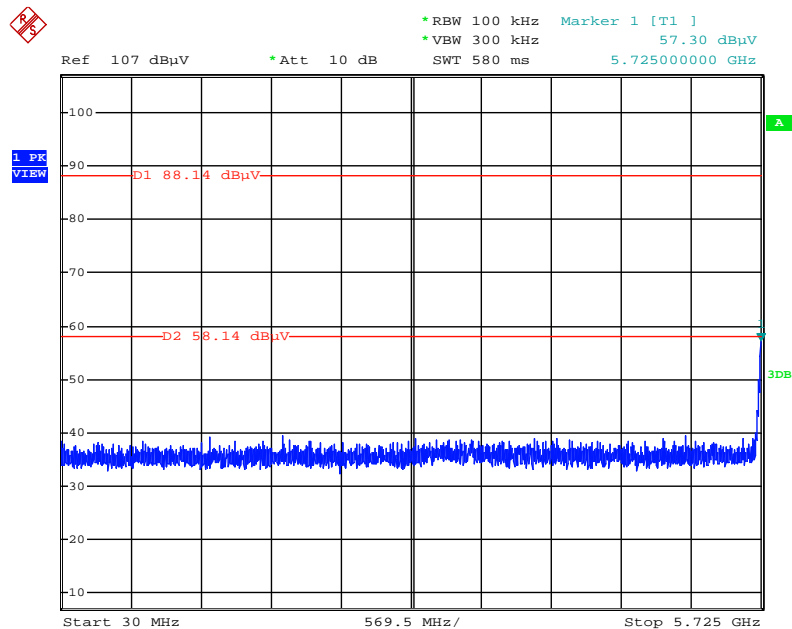


Date: 23.NOV.2013 11:20:59

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 151 / 5850MHz~40000MHz (down 30dBc)

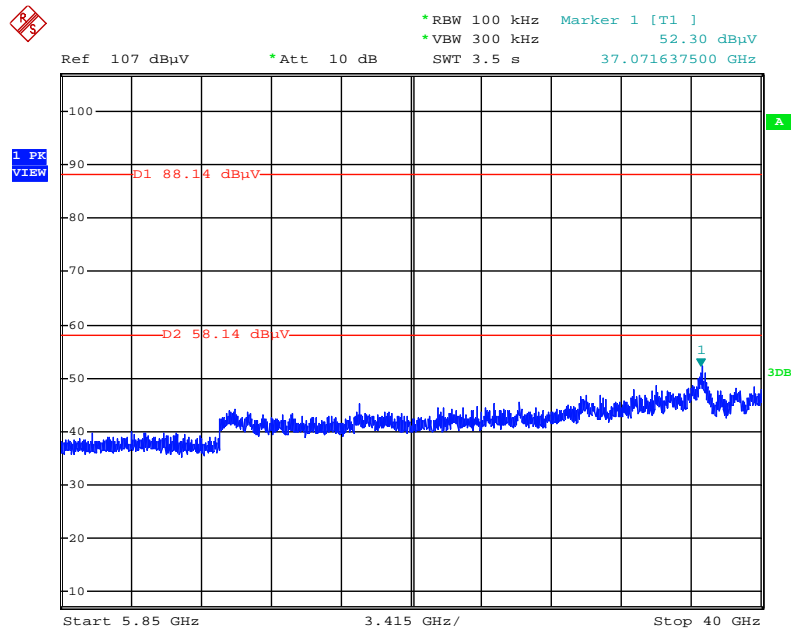


Date: 23.NOV.2013 11:21:43

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 159 / 30MHz~5725MHz (down 30dBc)

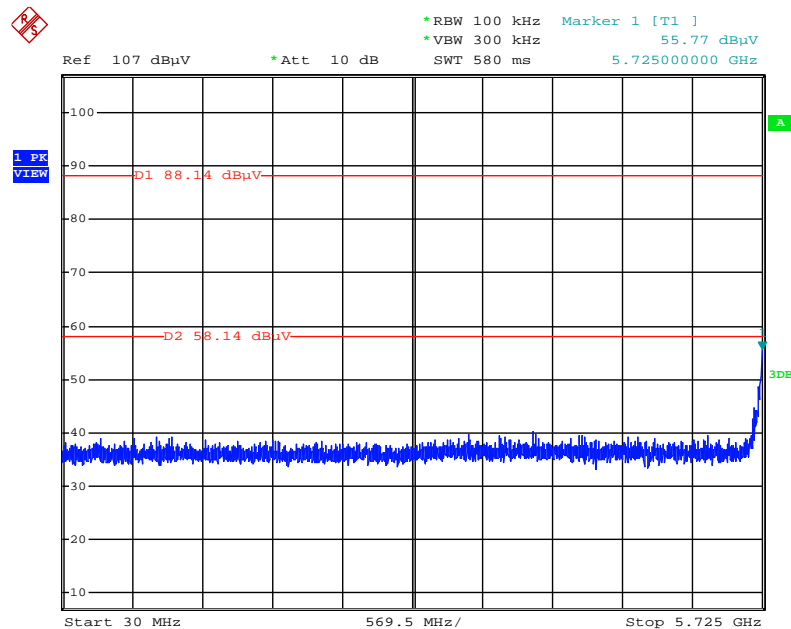


Date: 23.NOV.2013 11:18:57

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 159 / 5850MHz~40000MHz (down 30dBc)

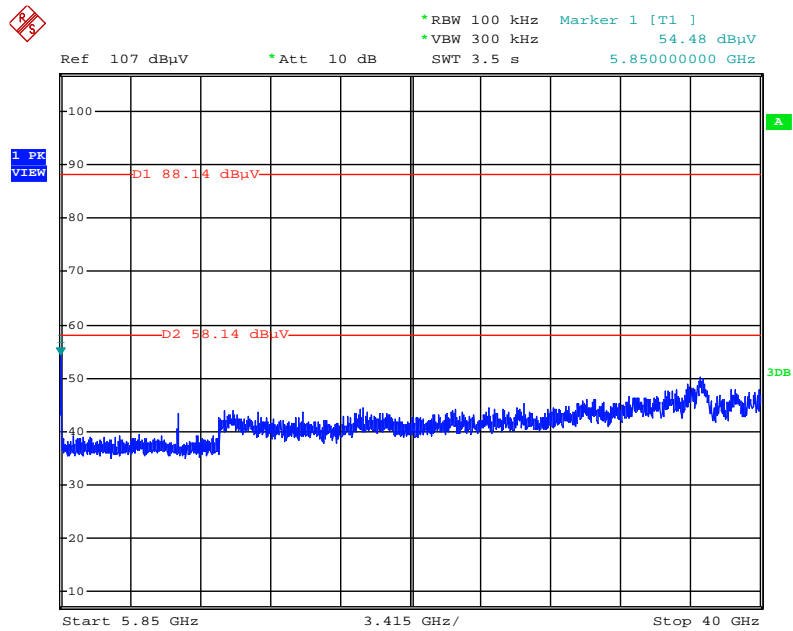


Date: 23.NOV.2013 11:19:20

Plot on Configuration IEEE 802.11a / Reference Level

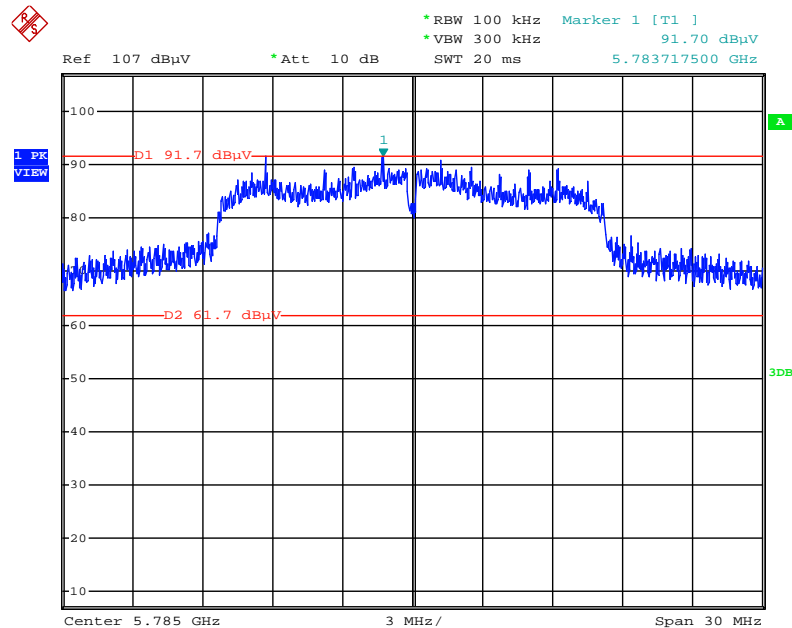


Date: 23.NOV.2013 10:58:25

Plot on Configuration IEEE 802.11a / CH 149 / 30MHz~5725MHz (down 30dBc)

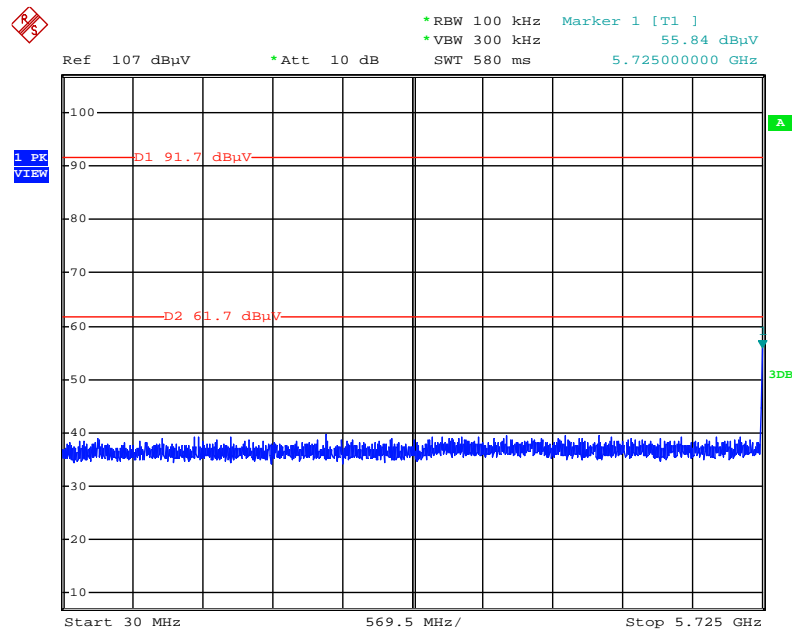


Date: 23.NOV.2013 11:01:48

Plot on Configuration IEEE 802.11a / CH 149 / 5850MHz~40000MHz (down 30dBc)

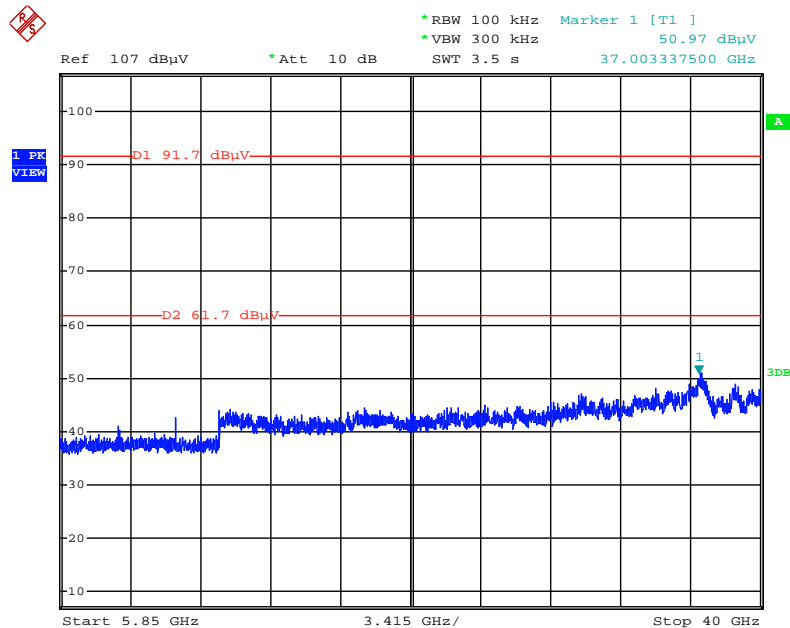


Date: 23.NOV.2013 11:02:35

Plot on Configuration IEEE 802.11a / CH 165 / 30MHz~5725MHz (down 30dBc)

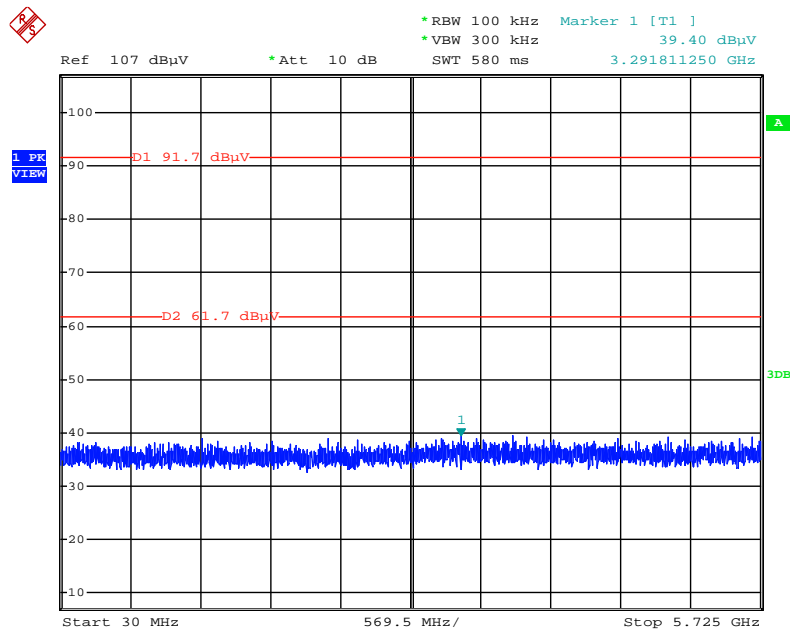

Date: 23.NOV.2013 11:03:59

Plot on Configuration IEEE 802.11a / CH 165 / 5850MHz~40000MHz (down 30dBc)

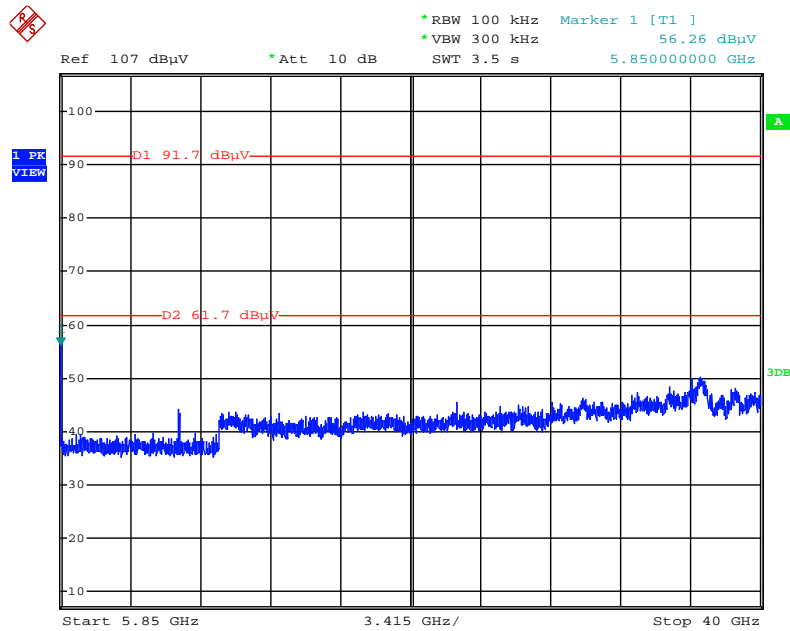

Date: 23.NOV.2013 11:03:33

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9 kHz ~ 2.75 GHz	Apr. 12, 2013	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150 kHz ~ 100 MHz	Nov. 23, 2013	Conduction (CO01-CB)
Artificial Mains Network	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Nov. 23, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150 kHz ~ 30 MHz	Dec. 04, 2012	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	-	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Apr. 16, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 01, 2013	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	9170-507	15GHz ~ 40GHz	Jan. 14, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 12, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02121	1GHz~26.5GHz	Aug. 30, 2013	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Oct. 23, 2013	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100304	9kHz ~ 40GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100019	9kHz ~ 40GHz	Dec. 02, 2013	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Dec. 12, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz - 26.5 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz - 26.5 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Nov. 29, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	2 Way	0120A02056002D	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	3 Way	MDC2366	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	4 Way	0120A04056002D	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	0.026	dB	normal(k=2)	0.013
Cable loss	0.002	dB	normal(k=2)	0.001
AMN/LISN specification	1.200	dB	normal(k=2)	0.600
Mismatch Receiver VSWR 1 = AMN/LISN VSWR 2 =	-0.080	dB	U-shaped	0.060
Combined standard uncertainty $U_c(y)$				1.2
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				2.4

Uncertainty of Radiated Emission Measurement (30MHz ~ 1,000MHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	± 0.173	dB	K=1	0.086
Cable loss	± 0.174	dB	K=2	0.087
Antenna gain	± 0.169	dB	K=2	0.084
Site imperfection	± 0.433	dB	Triangular	0.214
Pre-amplifier gain	± 0.366	dB	K=2	0.183
Transmitter antenna	± 1.200	dB	Rectangular	0.600
Signal generator	± 0.461	dB	Rectangular	0.231
Mismatch	± 0.080	dB	U-shape	0.040
Spectrum analyzer	± 0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.778
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.555

Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	± 0.191	dB	K=1	0.095
Cable loss	± 0.169	dB	K=2	0.084
Antenna gain	± 0.191	dB	K=2	0.096
Site imperfection	± 0.582	dB	Triangular	0.291
Pre-amplifier gain	± 0.304	dB	K=2	0.152
Transmitter antenna	± 1.200	dB	Rectangular	0.600
Signal generator	± 0.461	dB	Rectangular	0.231
Mismatch	± 0.080	dB	U-shape	0.040
Spectrum analyzer	± 0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.839
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.678

Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	± 0.186	dB	K=1	0.093
Cable loss	± 0.167	dB	K=2	0.083
Antenna gain	± 0.190	dB	K=2	0.095
Site imperfection	± 0.488	dB	Triangular	0.244
Pre-amplifier gain	± 0.269	dB	K=2	0.134
Transmitter antenna	± 1.200	dB	Rectangular	0.600
Signal generator	± 0.461	dB	Rectangular	0.231
Mismatch	± 0.080	dB	U-shape	0.040
Spectrum analyzer	± 0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.771
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.541

Uncertainty of Conducted Emission Measurement

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Cable loss	± 0.038	dB	K=2	0.019
Attenuator	± 0.047	dB	K=2	0.024
Power Meter specification	± 0.300	dB	Triangular	0.150
Power Sensor specification	± 0.300	dB	Rectangular	0.150
Signal generator	± 0.461	dB	Rectangular	0.231
Mismatch	± 0.080	dB	U-shape	0.040
Spectrum analyzer	± 0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				0.863
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				1.726