

## FCC PART 15.247



## TEST REPORT

For

### Gajah International (HK) Co., Ltd.

18/F Bel Trade Commercial Building, 1-3, Burrows Street, Wan Chai, Hong Kong

**FCC ID: UFKMD7018A00**

<b>Report Type:</b> Original Report	<b>Product Type:</b> 7" MID
<b>Test Engineer:</b> Rocky Kang 	
<b>Report Number:</b> RSZ130829001-00B	
<b>Report Date:</b> 2013-09-06	
<b>Reviewed By:</b>	Alvin Huang  RF Leader
<b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

**Note:** This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
OBJECTIVE .....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY .....	4
TEST FACILITY .....	5
<b>SYSTEM TEST CONFIGURATION .....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION .....	6
EUT EXERCISE SOFTWARE .....	6
EQUIPMENT MODIFICATIONS .....	6
SUPPORT EQUIPMENT LIST AND DETAILS .....	7
EXTERNAL I/O CABLING LIST AND DETAILS.....	7
BLOCK DIAGRAM OF TEST SETUP .....	7
<b>SUMMARY OF TEST RESULTS .....</b>	<b>8</b>
<b>FCC §15.247 (i) &amp; §2.1093 – RF EXPOSURE .....</b>	<b>9</b>
APPLICABLE STANDARD .....	9
RESULT .....	9
<b>FCC §15.203 - ANTENNA REQUIREMENT.....</b>	<b>10</b>
APPLICABLE STANDARD .....	10
ANTENNA CONNECTOR CONSTRUCTION .....	10
<b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS .....</b>	<b>11</b>
APPLICABLE STANDARD .....	11
MEASUREMENT UNCERTAINTY .....	11
EUT SETUP .....	11
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE .....	12
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST RESULTS SUMMARY .....	12
TEST DATA .....	13
<b>FCC §15.209, §15.205 &amp; §15.247(d) - SPURIOUS EMISSIONS.....</b>	<b>15</b>
APPLICABLE STANDARD .....	15
MEASUREMENT UNCERTAINTY .....	15
EUT SETUP .....	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	16
TEST PROCEDURE .....	16
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	16
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST RESULTS SUMMARY .....	17
TEST DATA .....	17
<b>FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....</b>	<b>32</b>
APPLICABLE STANDARD .....	32
TEST PROCEDURE .....	32
TEST EQUIPMENT LIST AND DETAILS.....	32
TEST DATA .....	32
<b>FCC §15.247(b) (3) - MAXIMUM PEAK OUTPUT POWER .....</b>	<b>40</b>

APPLICABLE STANDARD .....	40
TEST PROCEDURE .....	40
TEST EQUIPMENT LIST AND DETAILS.....	40
TEST DATA .....	40
<b>FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....</b>	<b>54</b>
APPLICABLE STANDARD .....	54
TEST PROCEDURE .....	54
TEST EQUIPMENT LIST AND DETAILS.....	54
TEST DATA .....	55
<b>FCC §15.247(e) - POWER SPECTRAL DENSITY .....</b>	<b>60</b>
APPLICABLE STANDARD .....	60
TEST PROCEDURE .....	60
TEST EQUIPMENT LIST AND DETAILS.....	60
TEST DATA .....	60
<b>PRODUCT SIMILARITY DECLARATION LETTER.....</b>	<b>68</b>

## GENERAL INFORMATION

---

### Product Description for Equipment under Test (EUT)

The *Gajah International (HK) Co., Ltd*'s product, model number: *PTAB780 (FCC ID: UFKMD7018A00)* or the "EUT" in this report was a 7" *MID*, which was measured approximately: 211.9 mm (L) x 157.7 mm (W) x 17.9 mm (H), rated input voltage: DC 3.7V battery or DC 5V from adapter.

#### Adapter Information:

Model: YN12W-0500200UU

Input: 100-240V~50/60Hz, 0.3A

Output: DC 5V, 2A

*Note: The serial models PTAB780 and MD7018A are electrically identical, they have the same PCB layout and schematics, the differences between them is just the model number, model PTAB780 was selected for fully testing, the details was explained in the attached product similarity declaration letter that provided and guaranteed by applicant.*

*\* All measurement and test data in this report was gathered from production sample serial number: 1308141 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2013-08-29.*

### Objective

This report is prepared on behalf of *Gajah International (HK) Co., Ltd* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

FCC Part 15B JBP submission with FCC ID: UFKMD7018A00.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with radiated emission is 5.91 dB for 30MHz-1GHz.and 4.92 dB for above 1GHz, 1.95dB for conducted measurement.

## Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3<sup>rd</sup> Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

For 802.11b, 802.11g and 802.11n-HT20 mode, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, 802.11n-HT20 mode, EUT was tested with Channel 1, 6 and 11.

For 802.11n-HT40 mode, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2422	6	2447
2	2427	7	2452
3	2432	/	/
4	2437	/	/
5	2442	/	/

EUT was tested with Channel 1, 4 and 7.

### EUT Exercise Software

WIFI test with adb command.

802.11b: Data rate: 1 Mbps, the power level is 30

802.11g: Data rate: 6 Mbps, the power level is 40

802.11n-HT20: Data rate: MCS0, the power level is 40

802.11n-HT40: Data rate: MCS0, the power level is 40

### Equipment Modifications

No modification was made to the EUT tested.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cabling List and Details

Cable Description	Length (m)	From	To
Unshielded Detachable USB Cable	1.0	EUT	Adapter

Block Diagram of Test Setup

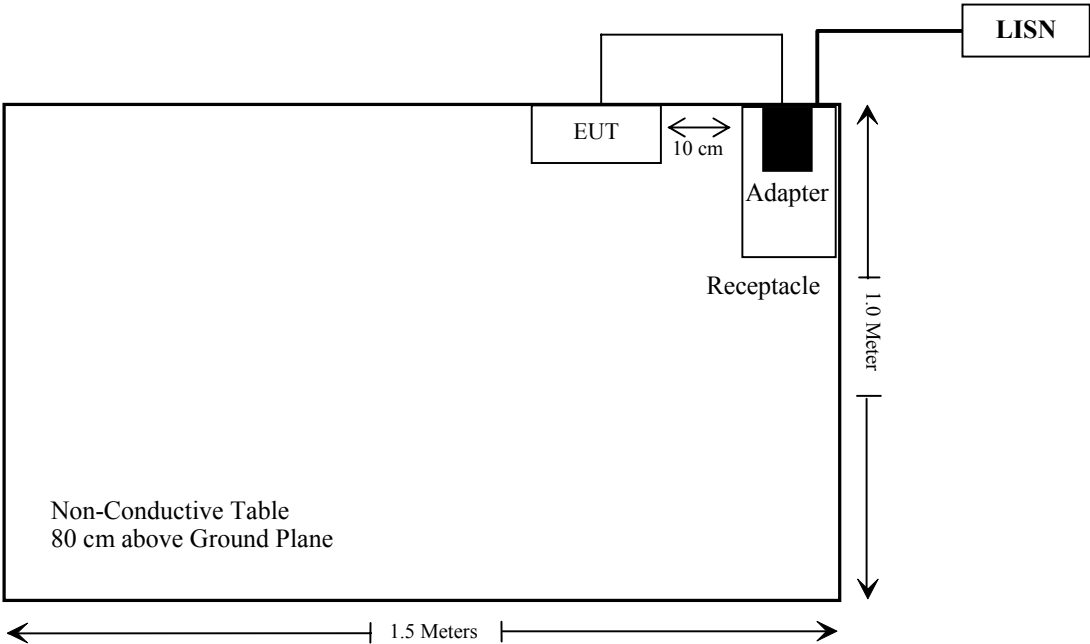

**SUMMARY OF TEST RESULTS**

FCC Rules	Description of Test	Result
§15.247 (i), §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Peak Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance



---

## **FCC §15.247 (i) & §2.1093 – RF EXPOSURE**

---

### **Applicable Standard**

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance v05

### **Result**

According to FCC KDB 447498 D01 General RF Exposure Guidance v05 generic portable criteria

The Max output power: 8.87 dBm=7.71 mW

According to the Appendix A of KDB 447498, the exclusion thresholds for 2450 MHz is 10 mW

### **Conclusion:**

The time-averaged output power is 7.71 mW < the exclusion thresholds 10 mW, so stand-alone SAR evaluation is not required.

### **Result: Compliance**

---

## **FCC §15.203 - ANTENNA REQUIREMENT**

---

### **Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

### **Antenna Connector Construction**

The EUT has a PIFA antenna arrangement for Wi-Fi which was permanently attached and the antenna gain is -3dBi, fulfill the requirement of this section. Please refer to the external photos.

**Result:** Compliance.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC§15.207


### Measurement Uncertainty

Input quantities to be considered for conducted disturbance measurements may be receiver reading, attenuation of the connection between AMN/ISN and receiver, AMN/ISN voltage division factor, AMN/ISN VDF frequency interpolation and receiver related input quantities, etc.

Based on CISPR 16-4-2:2011, the expanded combined standard uncertainty of conducted disturbance test at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown as below. And the uncertainty will not be taken into consideration for the test data recorded in the report

Port	Measurement uncertainty
AC Mains	3.26 dB (k=2, 95% level of confidence)
CAT 3	3.70 dB (k=2, 95% level of confidence)
CAT 5	3.86 dB (k=2, 95% level of confidence)
CAT 6	4.64 dB (k=2, 95% level of confidence)

### EUT Setup

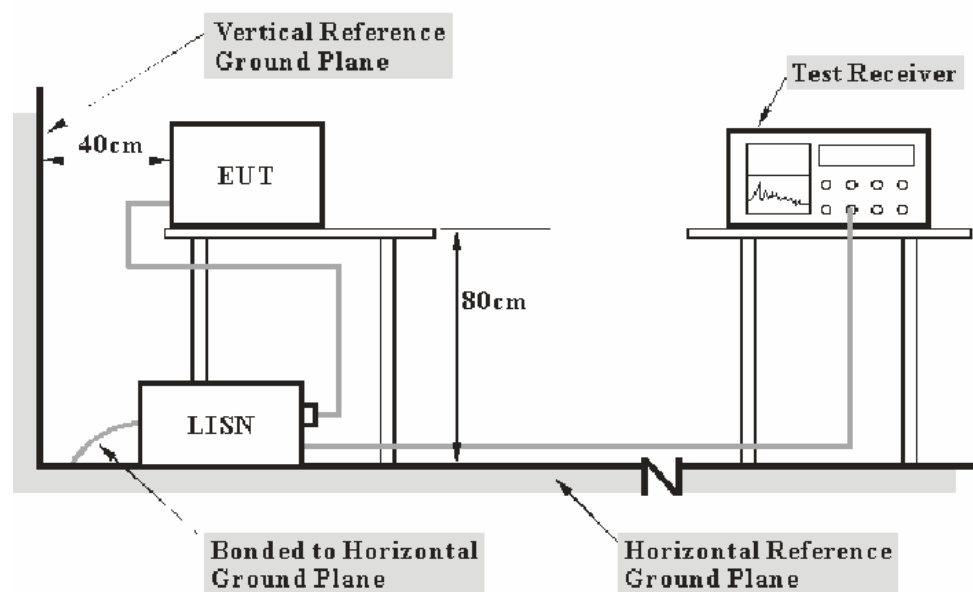

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The receptacle was connected to a 120 VAC/60 Hz power source.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

During the conducted emission test, the receptacle was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2013-06-17	2014-06-17
Rohde & Schwarz	L.I.S.N.	ENV216	3560.6650.12-101613-Yb	2013-05-07	2014-05-07
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2013-08-09	2014-08-09
Rohde & Schwarz	CE Test software	EMC 32	8.95	-	-

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

### Test Results Summary

According to the recorded data in following table, with the worst margin reading of:

**12.6 dB at 27.334000/27.518000 MHz in the Line conducted mode**

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

in BACL,  $U_{(Lm)}$  is less than  $U_{cispr}$ , if  $L_m$  is less than  $L_{lim}$ , it implies that the EUT complies with the limit.

**Test Data****Environmental Conditions**


<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	101.0 kPa

The testing was performed by Rocky Kang on 2013-09-03.

Test mode: Transmitting & Charging

**AC 120V/60Hz, Line:**


EMI Auto Test L

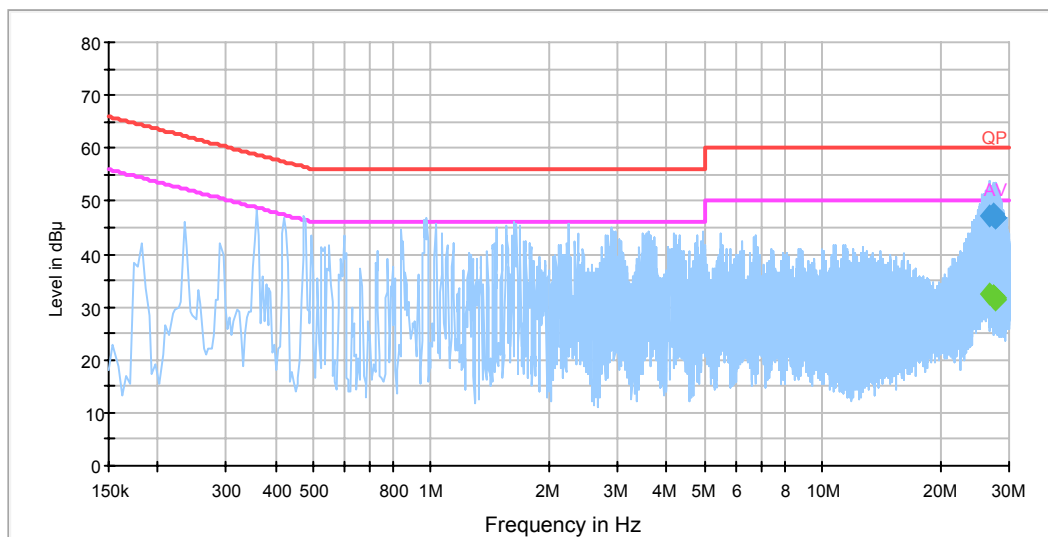

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
26.882000	47.3	20.3	60.0	12.7	QP
26.882000	32.3	20.3	50.0	17.7	Ave.
27.334000	47.4	20.3	60.0	12.6	QP
27.334000	32.2	20.3	50.0	17.8	Ave.
27.374000	47.3	20.3	60.0	12.7	QP
27.374000	32.2	20.3	50.0	17.8	Ave.
27.518000	47.4	20.3	60.0	12.6	QP
27.518000	31.9	20.3	50.0	18.1	Ave.
27.702000	47.0	20.3	60.0	13.0	QP
27.702000	31.6	20.3	50.0	18.4	Ave.
27.814000	47.0	20.3	60.0	13.0	QP
27.814000	31.5	20.3	50.0	18.5	Ave.

**AC 120V/60Hz, Neutral:**

## EMI Auto Test N

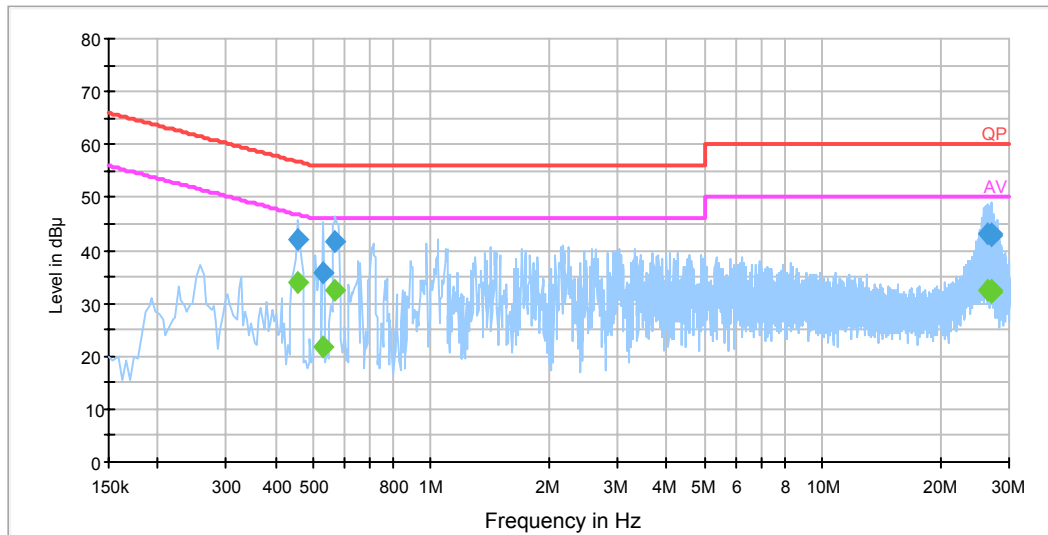

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.458000	42.0	19.5	56.7	14.7	QP
0.458000	33.9	19.5	46.7	12.8	Ave.
0.530000	35.7	19.5	56.0	20.3	QP
0.530000	21.6	19.5	46.0	24.4	Ave.
0.570000	41.7	19.5	56.0	14.3	QP
0.570000	32.5	19.5	46.0	13.5	Ave.
26.514000	43.3	20.4	60.0	16.7	QP
26.514000	32.5	20.4	50.0	17.5	Ave.
26.914000	42.7	20.4	60.0	17.3	QP
26.914000	32.3	20.4	50.0	17.7	Ave.
26.994000	43.0	20.4	60.0	17.0	QP
26.994000	31.9	20.4	50.0	18.1	Ave.

**Note:**

- 1) Correction Factor = LISN/ISN VDF (Voltage Division Factor) + Cable Loss + Pulse Limiter Attenuation  
The corrected factor has been input into the transducer of the test software.
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

## FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

### Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expanded combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Shenzhen) will not be taken into consideration for the test data recorded in the report

### EUT Setup

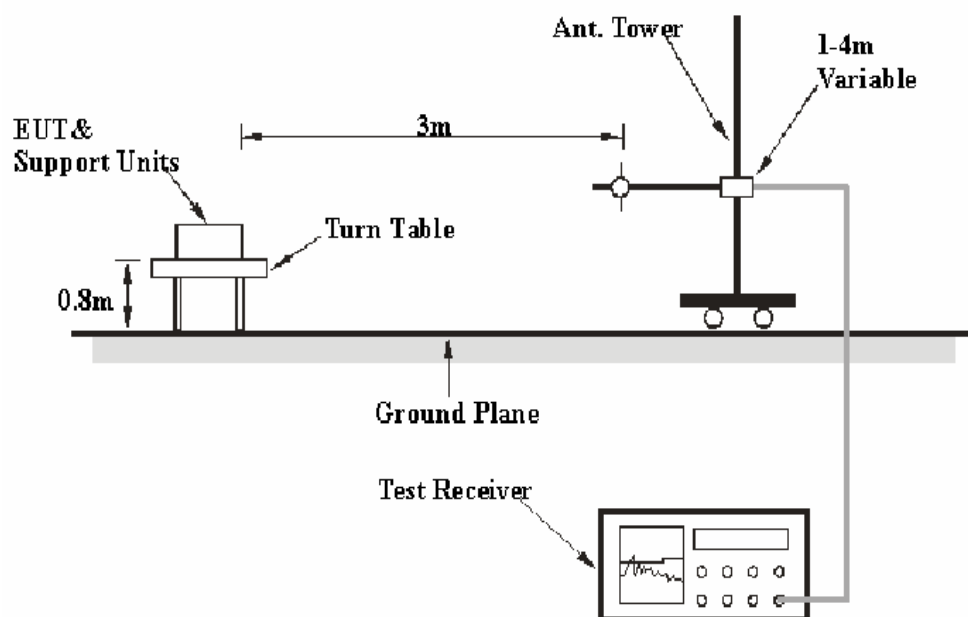

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209, and FCC 15.247 limits.

The receptacle was connected to an AC 120V/60 Hz power source

## EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	100 kHz	300 kHz	120kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$



**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	8447E	1937A01046	2013-08-09	2014-08-09
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2013-05-09	2014-05-09
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2014-11-27
SUPER ULTRA	Amplifier	ZVA-213+	N/A	2012-11-24	2013-11-23
Sunol Sciences	Horn Antenna	DRH-118	A052304	2011-12-01	2014-11-30
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23
the electro-Mechanics Co.	Horn Antenna	3116	9510-2270	2010-10-14	2013-10-13

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

**Test Results Summary**

According to the data in the following table, with the worst margin reading of:

**4.78 dB at 4924.0 MHz** in the **Horizontal** polarization

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

in BACL,  $U_{(Lm)}$  is less than  $U_{cispr}$ , if  $L_m$  is less than  $L_{lim}$ , it implies that the EUT complies with the limit.

**Test Data****Environmental Conditions**

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Rocky Kang on 2013-09-03.*

*Test Mode: Transmitting*

**30 MHz-25 GHz:****802.11b Mode:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBuV/m)	FCC Part 15.247/205/209	
	Reading (dBuV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBuV/m)	Margin (dB)
Low Channel (2412 MHz)									
2412.0	98.99	PK	114	1.2	H	6.13	105.12	/	/
2412.0	94.61	Ave.	114	1.2	H	6.13	100.74	/	/
2412.0	80.62	PK	107	1.5	V	6.13	86.75	/	/
2412.0	85.37	Ave.	107	1.5	V	6.13	91.50	/	/
4824.0	52.17	PK	167	1.4	H	12.40	64.57	74	9.43
4824.0	30.27	Ave.	167	1.4	H	12.40	42.67	54	11.33
9648.0	23.21	Ave.	233	1.3	H	19.29	42.50	54	11.50
448.5	43.28	QP	120	1.3	V	-11.4	31.88	46	14.12
7236.0	23.26	Ave.	16	1.5	V	16.62	39.88	54	14.12
2375.7	28.57	Ave.	121	1.3	V	6.13	34.70	54	19.30
9648.0	35.17	PK	233	1.3	H	19.29	54.46	74	19.54
2384.5	27.57	Ave.	116	1.5	H	6.13	33.70	54	20.30
7236.0	36.17	PK	16	1.5	V	16.62	52.79	74	21.21
2493.0	25.17	Ave.	49	1.4	H	7.21	32.38	54	21.62
2375.7	43.20	PK	121	1.3	V	6.13	49.33	74	24.67
2493.0	40.27	PK	49	1.4	H	7.21	47.48	74	26.52
2384.5	41.03	PK	116	1.5	H	6.13	47.16	74	26.84
Middle Channel (2437 MHz)									
2437.0	95.68	PK	111	1.3	H	7.21	102.89	/	/
2437.0	90.27	Ave.	111	1.3	H	7.21	97.48	/	/
2437.0	89.24	PK	50	1.2	V	7.21	96.45	/	/
2437.0	84.97	Ave.	50	1.2	V	7.21	92.18	/	/
4874.0	32.34	Ave.	335	1.4	H	12.46	44.80	54	9.20
9748.0	23.34	Ave.	17	1.4	H	19.40	42.74	54	11.26
4874.0	49.77	PK	335	1.4	H	12.46	62.23	74	11.77
448.5	44.90	QP	12	1.4	V	-11.4	33.50	46	12.50
7311.0	24.50	Ave.	339	1.3	V	16.49	40.99	54	13.01
2492.0	28.83	Ave.	139	1.5	H	7.21	36.04	54	17.96
7311.0	37.27	PK	339	1.3	V	16.49	53.76	74	20.24
9748.0	34.24	PK	17	1.4	H	19.40	53.64	74	20.36
2388.4	27.16	Ave.	348	1.4	H	6.13	33.29	54	20.71
2492.0	45.23	PK	139	1.5	H	7.21	52.44	74	21.56
2368.2	25.34	Ave.	225	1.2	V	5.48	30.82	54	23.18
2368.2	41.28	PK	225	1.2	V	5.48	46.76	74	27.24
2388.4	40.27	PK	348	1.4	H	6.13	46.40	74	27.60

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBuV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2462 MHz)									
2462.0	96.23	PK	38	1.6	H	7.21	103.44	/	/
2462.0	91.94	Ave.	38	1.6	H	7.21	99.15	/	/
2462.0	89.48	PK	337	1.5	V	7.21	96.69	/	/
2462.0	85.19	Ave.	337	1.5	V	7.21	92.40	/	/
4924.0	31.27	Ave.	65	1.4	H	12.50	43.77	54	10.23
4924.0	51.24	PK	65	1.4	H	12.50	63.74	74	10.26
9848.0	23.05	Ave.	164	1.2	H	19.39	42.44	54	11.56
7386.0	25.65	Ave.	88	1.3	V	15.91	41.56	54	12.44
448.5	42.50	QP	71	1.5	V	-11.4	31.10	46	14.90
9848.0	35.12	PK	164	1.2	H	19.39	54.51	74	19.49
7386.0	38.46	PK	88	1.3	V	15.91	54.37	74	19.63
2498.7	24.15	Ave.	145	1.2	H	7.21	31.36	54	22.64
2372.8	24.28	Ave.	45	1.5	V	6.13	30.41	54	23.59
2384.2	24.24	Ave.	235	1.4	H	6.13	30.37	54	23.63
2384.2	41.54	PK	235	1.4	H	6.13	47.67	74	26.33
2372.8	40.57	PK	45	1.5	V	6.13	46.70	74	27.30
2498.7	39.23	PK	145	1.2	H	7.21	46.44	74	27.56

**802.11g Mode:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBuV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
2412.0	102.13	PK	88	1.5	H	6.13	108.26	/	/
2412.0	86.08	Ave.	88	1.5	H	6.13	92.21	/	/
2412.0	91.84	PK	326	1.3	V	6.13	97.97	/	/
2412.0	75.01	Ave.	326	1.3	V	6.13	81.14	/	/
4824.0	36.19	Ave.	5	1.5	V	12.40	48.59	54	5.41
4824.0	55.17	PK	5	1.5	V	12.40	67.57	74	6.43
9648.0	23.35	Ave.	195	1.4	H	19.29	42.64	54	11.36
7236.0	25.40	Ave.	31	1.4	V	16.62	42.02	54	11.98
448.5	43.13	QP	90	1.2	V	-11.4	31.73	46	14.27
9648.0	36.28	PK	195	1.4	H	19.29	55.57	74	18.43
2492.8	27.16	Ave.	183	1.5	H	7.21	34.37	54	19.63
7236.0	35.92	PK	31	1.4	V	16.62	52.54	74	21.46
2492.8	45.17	PK	183	1.5	H	7.21	52.38	74	21.62
2386.3	25.34	Ave.	62	1.4	H	6.13	31.47	54	22.53
2356.4	24.17	Ave.	116	1.3	V	5.48	29.65	54	24.35
2386.3	40.16	PK	62	1.4	H	6.13	46.29	74	27.71
2356.4	38.45	PK	116	1.3	V	5.48	43.93	74	30.07
Middle Channel (2437 MHz)									
2437.0	101.56	PK	73	1.4	H	7.21	108.77	/	/
2437.0	85.37	Ave.	73	1.4	H	7.21	92.58	/	/
2437.0	92.23	PK	97	1.4	V	7.21	99.44	/	/
2437.0	75.24	Ave.	97	1.4	V	7.21	82.45	/	/
4874.0	54.28	PK	326	1.5	H	12.46	66.74	74	7.26
4874.0	33.48	Ave.	326	1.5	H	12.46	45.94	54	8.06
9748.0	22.42	Ave.	63	1.4	H	19.40	41.82	54	12.18
448.5	44.71	QP	201	1.3	V	-11.4	33.31	46	12.69
7311.0	23.67	Ave.	246	1.3	V	16.49	40.16	54	13.84
9748.0	37.75	PK	63	1.4	H	19.40	57.15	74	16.85
7311.0	39.75	PK	246	1.3	V	16.49	56.24	74	17.76
2494.2	26.37	Ave.	322	1.3	H	7.21	33.58	54	20.42
2389.1	24.67	Ave.	113	1.2	H	6.13	30.80	54	23.20
2494.2	43.25	PK	322	1.3	H	7.21	50.46	74	23.54
2372.6	23.42	Ave.	87	1.4	V	6.13	29.55	54	24.45
2389.1	39.54	PK	113	1.2	H	6.13	45.67	74	28.33
2372.6	38.67	PK	87	1.4	V	6.13	44.80	74	29.20

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBuV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2462 MHz)									
2462.0	100.24	PK	14	1.4	H	7.21	107.45	/	/
2462.0	84.35	Ave.	14	1.4	H	7.21	91.56	/	/
2462.0	92.21	PK	221	1.3	V	7.21	99.42	/	/
2462.0	76.48	Ave.	221	1.3	V	7.21	83.69	/	/
4924.0	56.72	PK	118	1.5	H	12.50	69.22	74	4.78
4924.0	34.34	Ave.	118	1.5	H	12.50	46.84	54	7.16
9848.0	21.30	Ave.	32	1.3	H	19.39	40.69	54	13.31
448.5	43.48	QP	128	1.3	V	-11.4	32.08	46	13.92
7386.0	23.61	Ave.	264	1.5	V	15.91	39.52	54	14.48
7386.0	39.35	PK	264	1.5	V	15.91	55.26	74	18.74
9848.0	35.44	PK	32	1.3	H	19.39	54.83	74	19.17
2486.7	25.18	Ave.	128	1.3	H	7.21	32.39	54	21.61
2371.3	25.48	Ave.	273	1.3	V	6.13	31.61	54	22.39
2486.7	43.66	PK	128	1.3	H	7.21	50.87	74	23.13
2384.2	24.36	Ave.	188	1.4	H	6.13	30.49	54	23.51
2371.3	42.35	PK	273	1.3	V	6.13	48.48	74	25.52
2384.2	40.18	PK	188	1.4	H	6.13	46.31	74	27.69

**802.11n-HT20 Mode:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBuV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
2412.0	96.75	PK	358	1.4	H	6.13	102.88	/	/
2412.0	78.24	Ave.	358	1.4	H	6.13	84.37	/	/
2412.0	90.35	PK	221	1.4	V	6.13	96.48	/	/
2412.0	70.65	Ave.	221	1.4	V	6.13	76.78	/	/
9648.0	23.51	Ave.	245	1.4	H	19.29	42.80	54	11.20
7236.0	24.11	Ave.	136	1.5	V	16.62	40.73	54	13.27
448.5	43.97	QP	238	1.3	V	-11.4	32.37	46	13.63
4824.0	26.57	Ave.	244	1.3	H	12.40	38.97	54	15.03
9648.0	37.34	PK	245	1.4	H	19.29	56.63	74	17.37
7236.0	39.65	PK	136	1.5	V	16.62	56.27	74	17.73
4824.0	43.65	PK	244	1.3	H	12.40	56.05	74	17.95
2387.6	23.57	Ave.	2	1.2	H	6.13	29.70	54	24.30
2484.3	22.27	Ave.	323	1.2	H	7.21	29.48	54	24.52
2375.0	22.35	Ave.	12	1.3	V	6.13	28.48	54	25.52
2484.3	39.35	PK	323	1.2	H	7.21	46.56	74	27.44
2375.0	40.32	PK	12	1.3	V	6.13	46.45	74	27.55
2387.6	40.32	PK	2	1.2	H	6.13	46.45	74	27.55
Middle Channel (2437 MHz)									
2437.0	95.06	PK	129	1.6	H	7.21	102.27	/	/
2437.0	76.27	Ave.	129	1.6	H	7.21	83.48	/	/
2437.0	90.21	PK	326	1.2	V	7.21	97.42	/	/
2437.0	71.92	Ave.	326	1.2	V	7.21	79.13	/	/
9748.0	23.60	Ave.	326	1.2	H	19.40	43.00	54	11.00
4874.0	30.27	Ave.	246	1.3	H	12.46	42.73	54	11.27
4874.0	48.27	PK	246	1.3	H	12.46	60.73	74	13.27
7311.0	24.20	Ave.	321	1.3	V	16.49	40.69	54	13.31
448.5	43.98	QP	230	1.3	V	-11.4	32.58	46	13.42
7311.0	39.55	PK	321	1.3	V	16.49	56.04	74	17.96
9748.0	35.38	PK	326	1.2	H	19.40	54.78	74	19.22
2485.2	24.58	Ave.	94	1.5	H	7.21	31.79	54	22.21
2387.0	24.42	Ave.	41	1.3	H	6.13	30.55	54	23.45
2376.7	24.33	Ave.	326	1.2	V	6.13	30.46	54	23.54
2387.0	43.02	PK	41	1.3	H	6.13	49.15	74	24.85
2485.2	40.01	PK	94	1.5	H	7.21	47.22	74	26.78
2376.7	41.04	PK	326	1.2	V	6.13	47.17	74	26.83

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBuV/m)	FCC Part 15.247/205/209	
	Reading (dBuV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBuV/m)	Margin (dB)
High Channel (2462 MHz)									
2462.0	97.24	PK	157	1.4	H	7.21	104.45	/	/
2462.0	78.32	Ave.	157	1.4	H	7.21	85.53	/	/
2462.0	92.60	PK	100	1.3	V	7.21	99.81	/	/
2462.0	74.61	Ave.	100	1.3	V	7.21	81.82	/	/
4924.0	30.62	Ave.	317	1.2	H	12.50	43.12	54	10.88
9848.0	23.23	Ave.	274	1.2	H	19.39	42.62	54	11.38
448.5	43.94	QP	127	1.3	V	-11.4	32.54	46	13.46
7386.0	24.52	Ave.	263	1.3	V	15.91	40.43	54	13.57
4924.0	46.10	PK	317	1.2	H	12.50	58.60	74	15.40
9848.0	36.20	PK	274	1.2	H	19.39	55.59	74	18.41
7386.0	38.57	PK	263	1.3	V	15.91	54.48	74	19.52
2378.6	24.52	Ave.	321	1.5	V	6.13	30.65	54	23.35
2387.8	24.30	Ave.	23	1.4	H	6.13	30.43	54	23.57
2486.7	23.20	Ave.	83	1.4	H	7.21	30.41	54	23.59
2387.8	42.02	PK	23	1.4	H	6.13	48.15	74	25.85
2378.6	41.58	PK	321	1.5	V	6.13	47.71	74	26.29
2486.7	39.04	PK	83	1.4	H	7.21	46.25	74	27.75

**802.11n-HT40 Mode:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBuV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2422 MHz)									
2422.0	98.68	PK	183	1.6	H	6.13	104.81	/	/
2422.0	79.85	Ave.	183	1.6	H	6.13	85.98	/	/
2422.0	90.11	PK	104	1.5	V	6.13	96.24	/	/
2422.0	70.63	Ave.	104	1.5	V	6.13	76.76	/	/
4844.0	52.21	PK	152	1.2	H	12.40	64.61	74	9.39
9688.0	25.11	Ave.	172	1.4	H	19.29	44.40	54	9.60
4844.0	31.34	Ave.	152	1.2	H	12.40	43.74	54	10.26
448.5	44.84	QP	37	1.3	V	-11.4	33.44	46	12.56
7266.0	24.33	Ave.	40	1.2	V	16.62	40.95	54	13.05
9688.0	40.20	PK	172	1.4	H	19.29	59.49	74	14.51
2388.0	51.75	PK	142	1.4	H	6.13	57.88	74	16.12
2388.0	30.32	Ave.	142	1.4	H	6.13	36.45	54	17.55
7266.0	39.64	PK	40	1.2	V	16.62	56.26	74	17.74
2379.0	48.35	PK	202	1.2	V	6.13	54.48	74	19.52
2379.0	26.85	Ave.	202	1.2	V	6.13	32.98	54	21.02
2489.7	25.71	Ave.	263	1.3	H	7.21	32.92	54	21.08
2489.7	43.62	PK	263	1.3	H	7.21	50.83	74	23.17
Middle Channel (2437 MHz)									
2437.0	96.54	PK	23	1.5	H	7.21	103.75	/	/
2437.0	77.58	Ave.	23	1.5	H	7.21	84.79	/	/
2437.0	89.54	PK	251	1.4	V	7.21	96.75	/	/
2437.0	70.12	Ave.	251	1.4	V	7.21	77.33	/	/
4874.0	51.26	PK	357	1.5	H	12.46	63.72	74	10.28
448.5	46.46	QP	203	1.3	V	-11.4	35.06	46	10.94
4874.0	30.36	Ave.	357	1.5	H	12.46	42.82	54	11.18
9748.0	22.10	Ave.	109	1.2	H	19.40	41.50	54	12.50
7311.0	24.36	Ave.	193	1.4	V	16.49	40.85	54	13.15
2493.2	49.35	PK	313	1.4	H	7.21	56.56	74	17.44
2493.2	28.93	Ave.	313	1.4	H	7.21	36.14	54	17.86
9748.0	35.46	PK	109	1.2	H	19.40	54.86	74	19.14
2385.0	27.92	Ave.	119	1.4	H	6.13	34.05	54	19.95
7311.0	36.54	PK	193	1.4	V	16.49	53.03	74	20.97
2385.0	46.32	PK	119	1.4	H	6.13	52.45	74	21.55
2376.4	24.35	Ave.	215	1.5	V	6.13	30.48	54	23.52
2376.4	43.26	PK	215	1.5	V	6.13	49.39	74	24.61



Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBuV/m)	FCC Part 15.247/205/209	
	Reading (dBuV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBuV/m)	Margin (dB)
High Channel (2452 MHz)									
2452.0	95.03	PK	92	1.5	H	7.21	102.24	/	/
2452.0	76.63	Ave.	92	1.5	H	7.21	83.84	/	/
2452.0	88.41	PK	35	1.3	V	7.21	95.62	/	/
2452.0	68.25	Ave.	35	1.3	V	7.21	75.46	/	/
4904.0	53.20	PK	236	1.3	H	12.46	65.66	74	8.34
4904.0	31.24	Ave.	236	1.3	H	12.46	43.70	54	10.30
448.5	44.07	QP	120	1.3	V	-11.4	32.67	46	13.33
9808.0	21.26	Ave.	227	1.4	H	19.29	40.55	54	13.45
7356.0	22.36	Ave.	121	1.3	V	15.91	38.27	54	15.73
2485.3	50.32	PK	196	1.4	H	7.21	57.53	74	16.47
2485.3	29.87	Ave.	196	1.4	H	7.21	37.08	54	16.92
9808.0	37.65	PK	227	1.4	H	19.29	56.94	74	17.06
7356.0	38.46	PK	121	1.3	V	15.91	54.37	74	19.63
2388.0	27.32	Ave.	181	1.5	H	6.13	33.45	54	20.55
2375.8	26.54	Ave.	334	1.3	V	6.13	32.67	54	21.33
2388.0	44.85	PK	181	1.5	H	6.13	50.98	74	23.02
2375.8	43.62	PK	334	1.3	V	6.13	49.75	74	24.25

Note:


Corrected Amplitude = Corrected Factor + Reading

Corrected Factor=Antenna factor (RX) +cable loss – amplifier factor


Margin = Limit- Corrected Amplitude

# Conducted Spurious Emissions at Antenna Port:


## 802.11b Low Channel

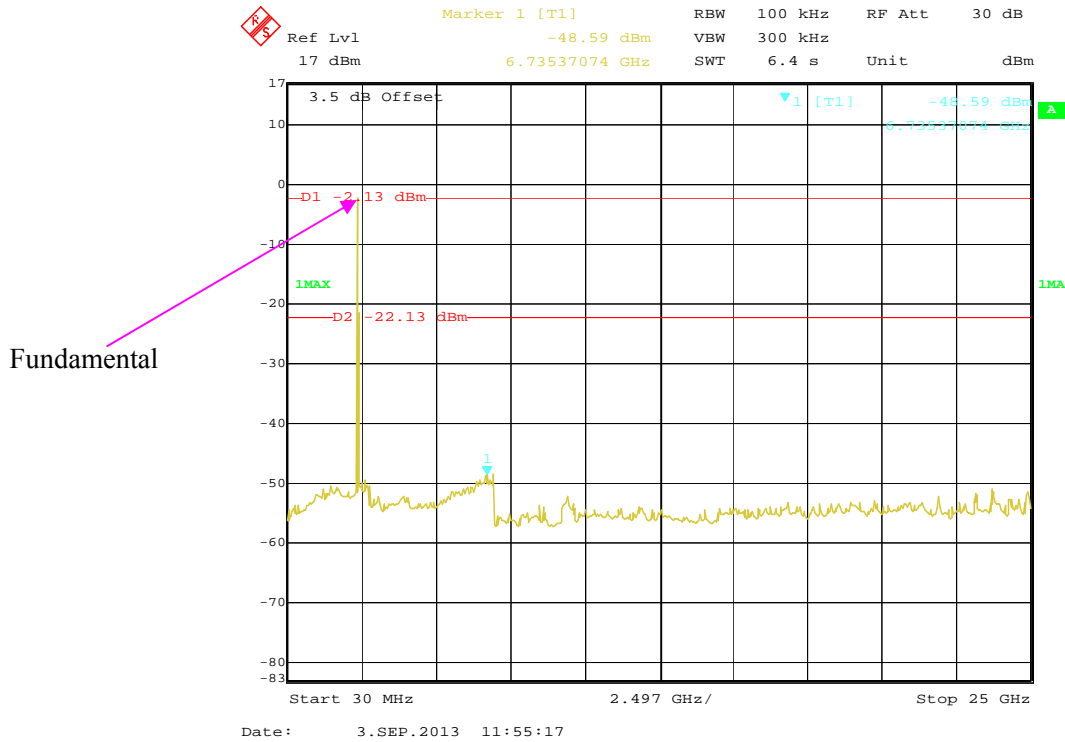


## 802.11b Middle Channel

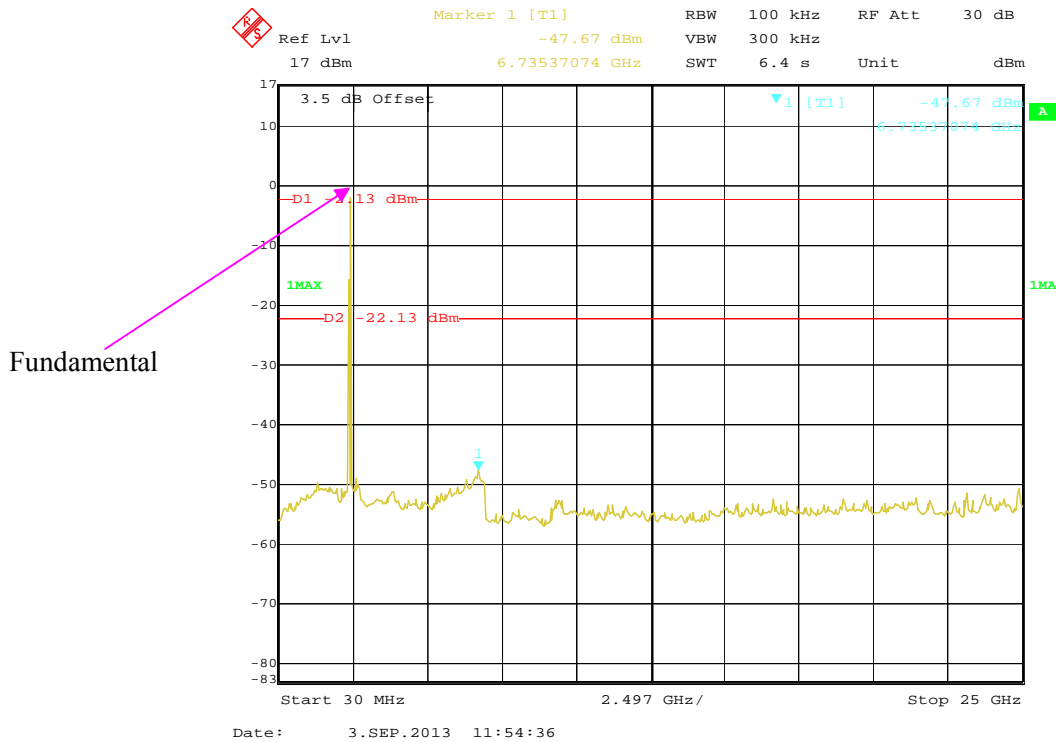


### 802.11b High Channel

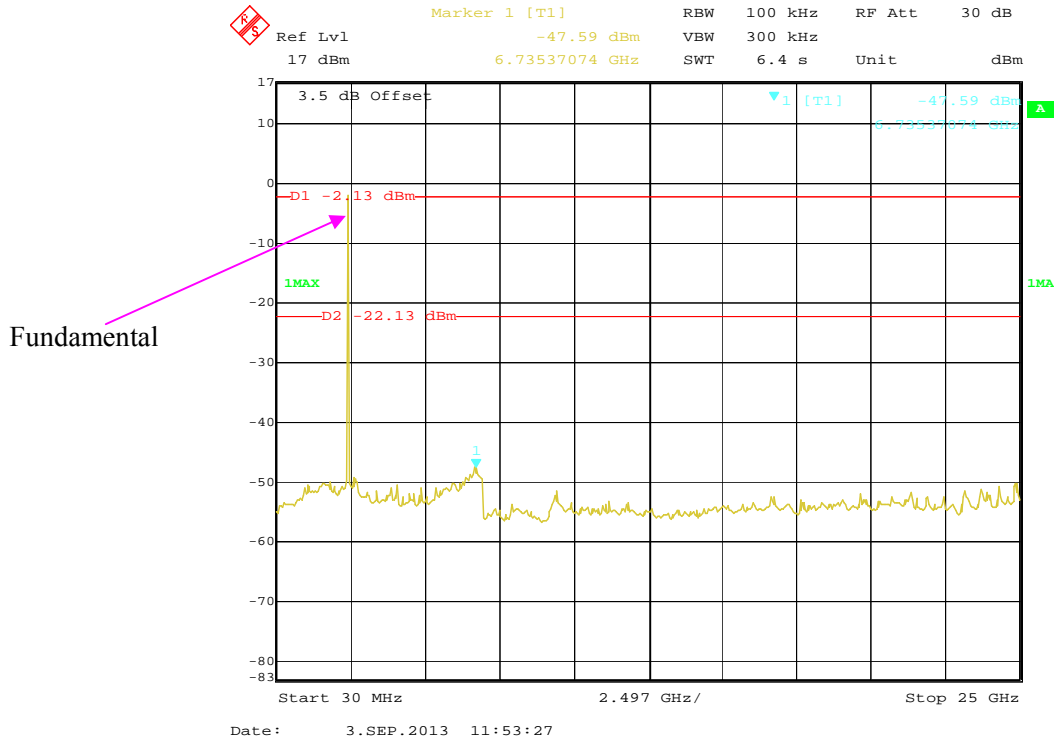


### 802.11g Low Channel

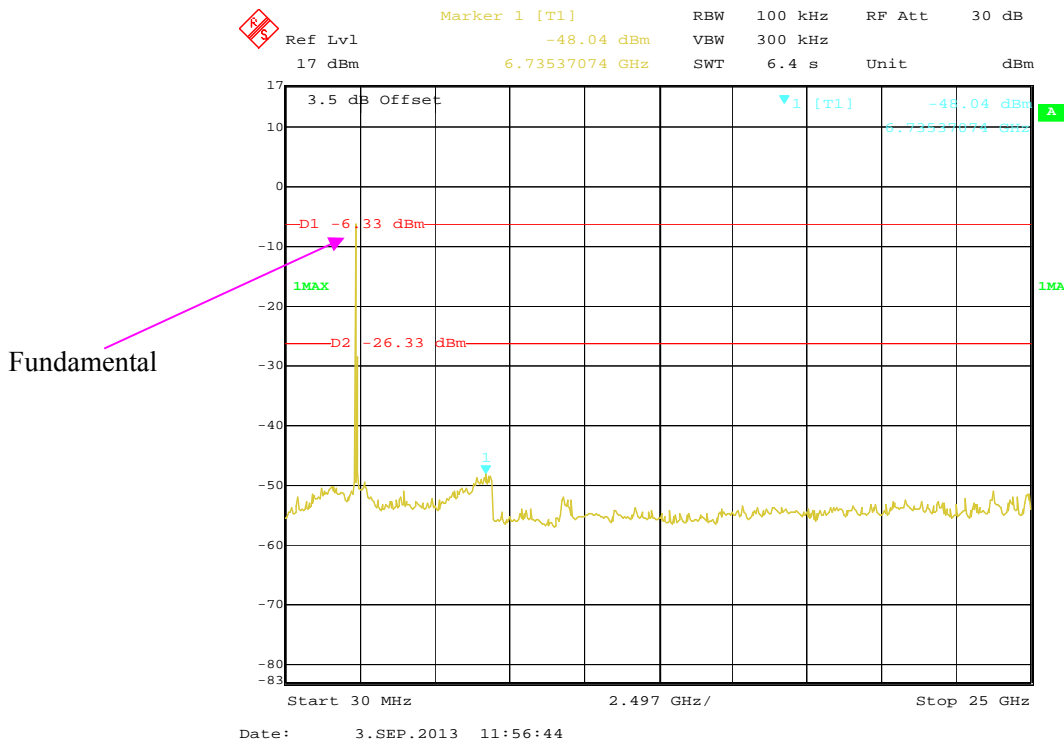


### 802.11g Middle Channel

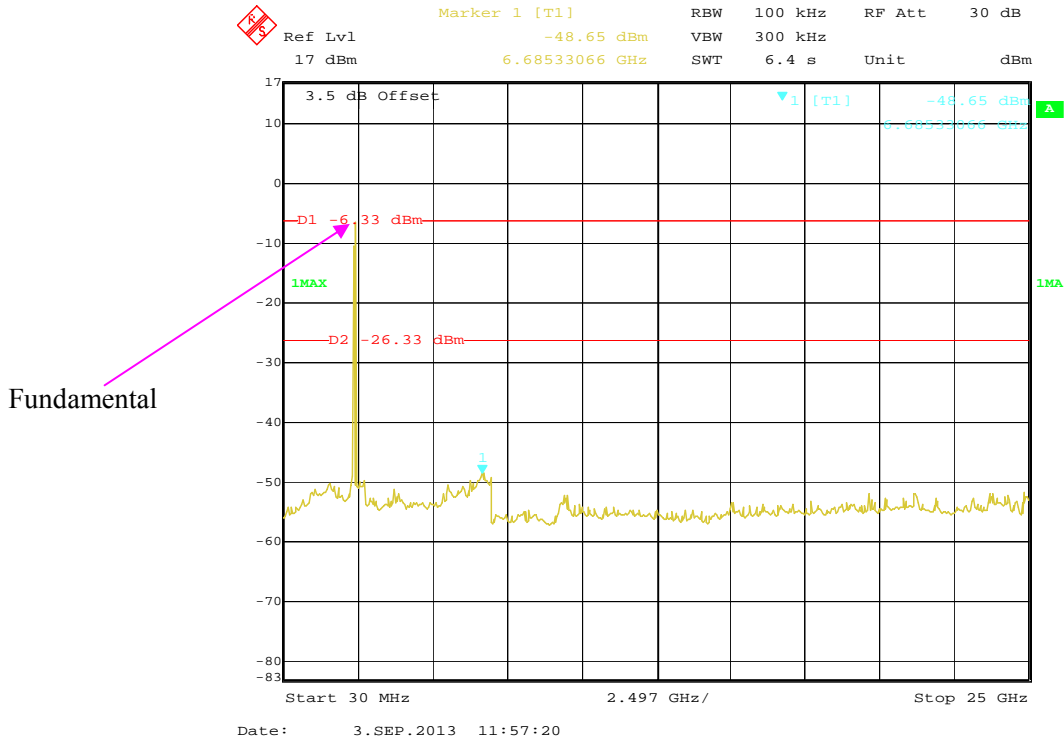


### 802.11g High Channel

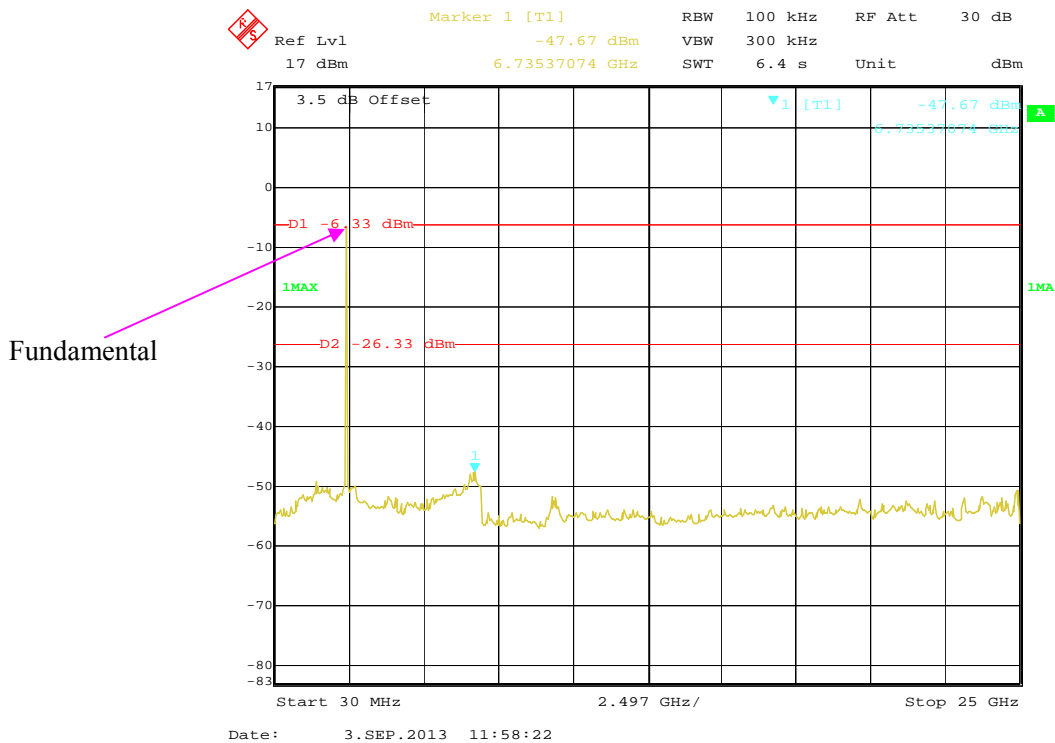


### 802.11n-HT20 Low Channel

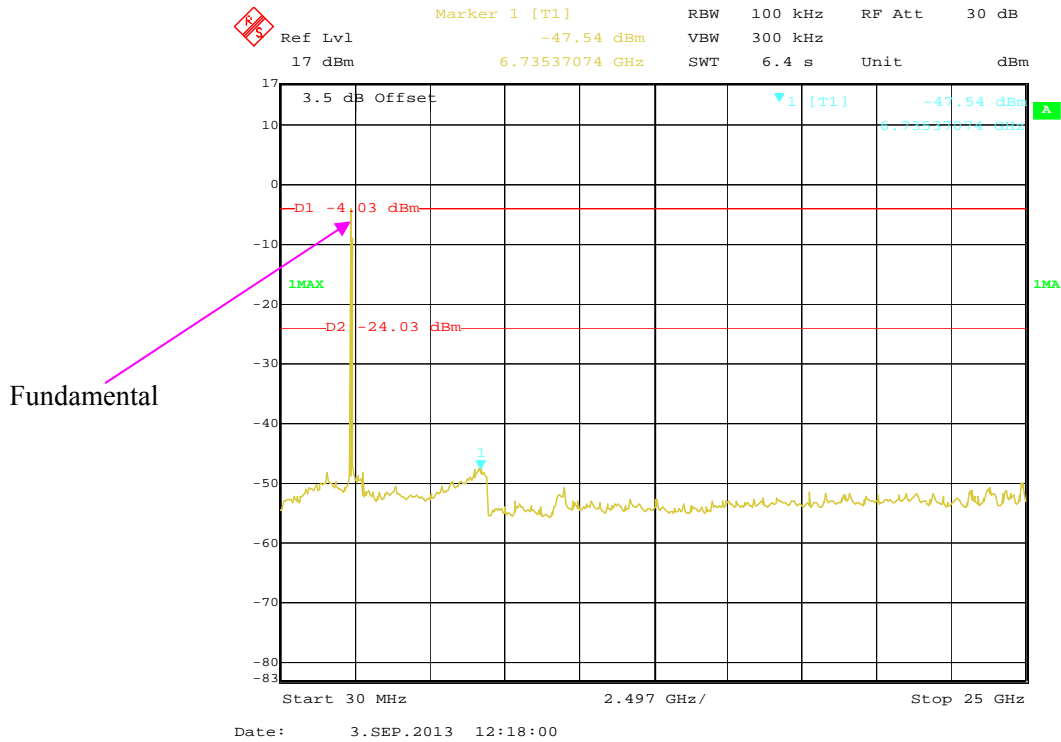


### 802.11n-HT20 Middle Channel

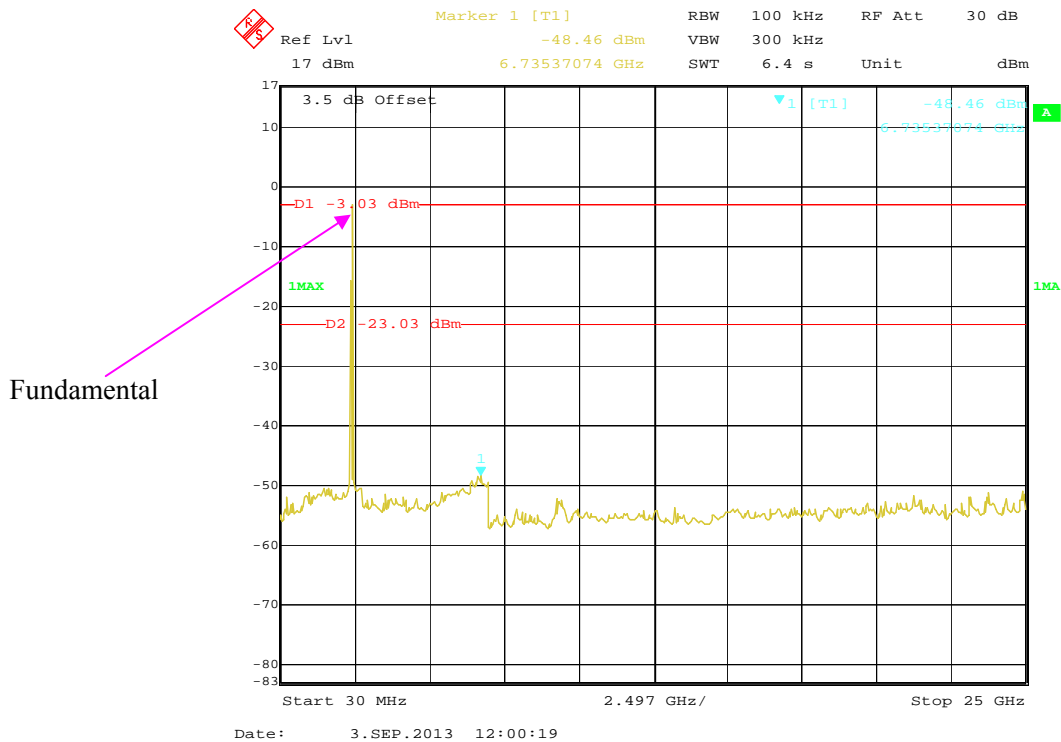


### 802.11n-HT20 High Channel

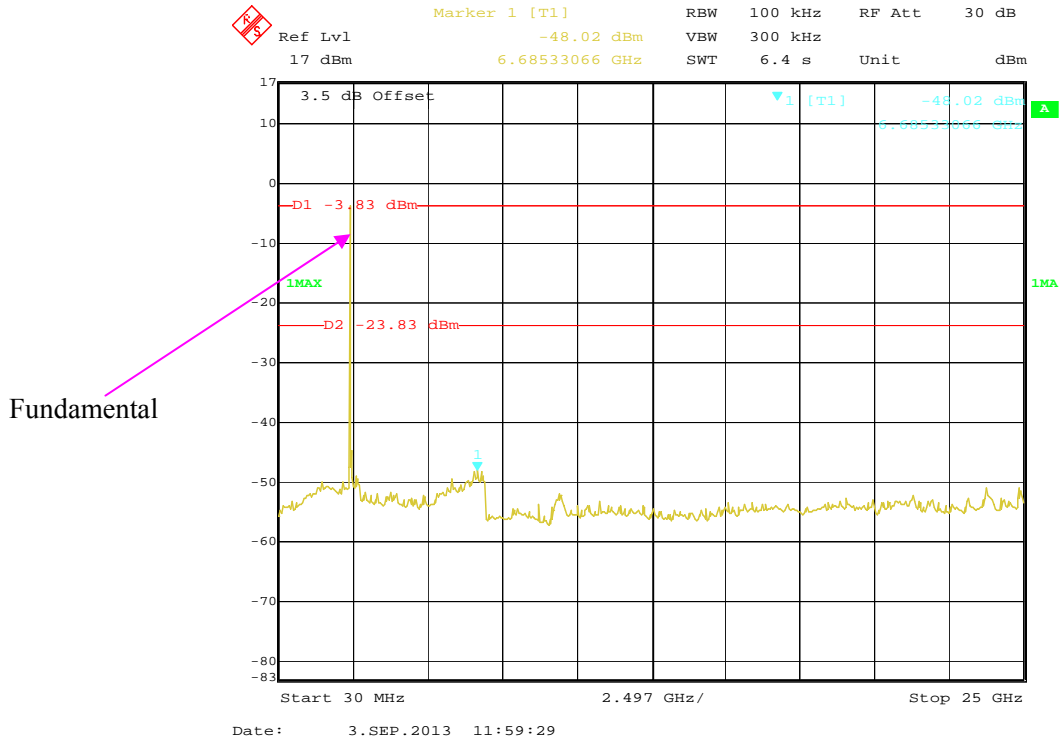


### 802.11n-HT40 Low Channel

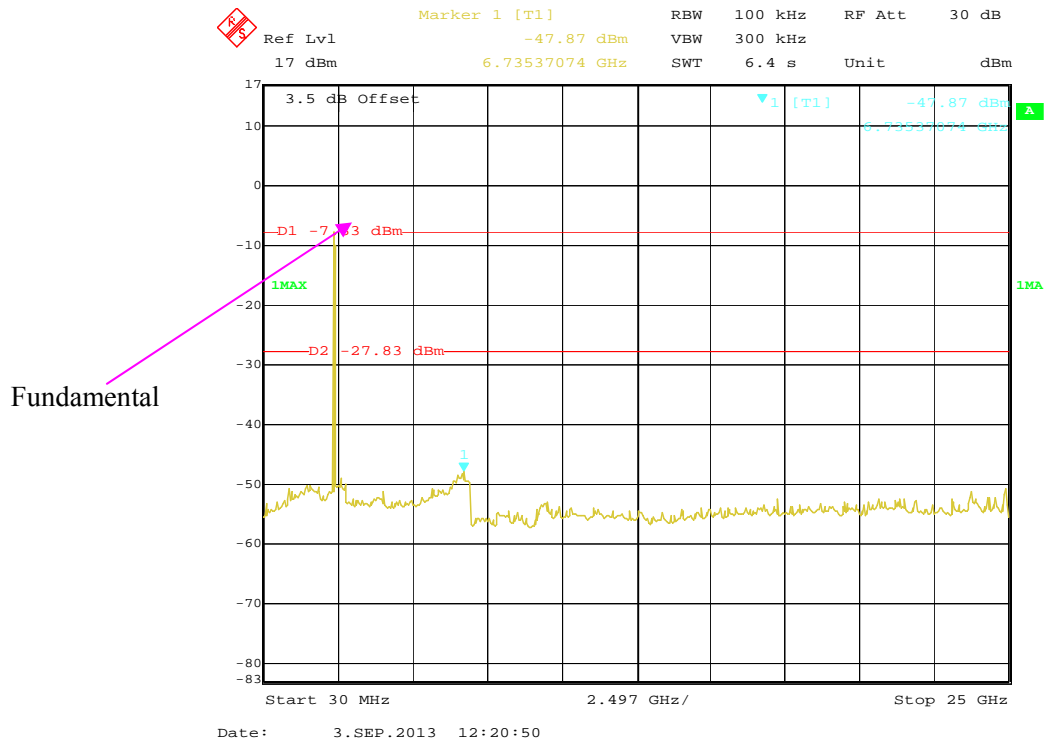

### 802.11n-HT40 Middle Channel

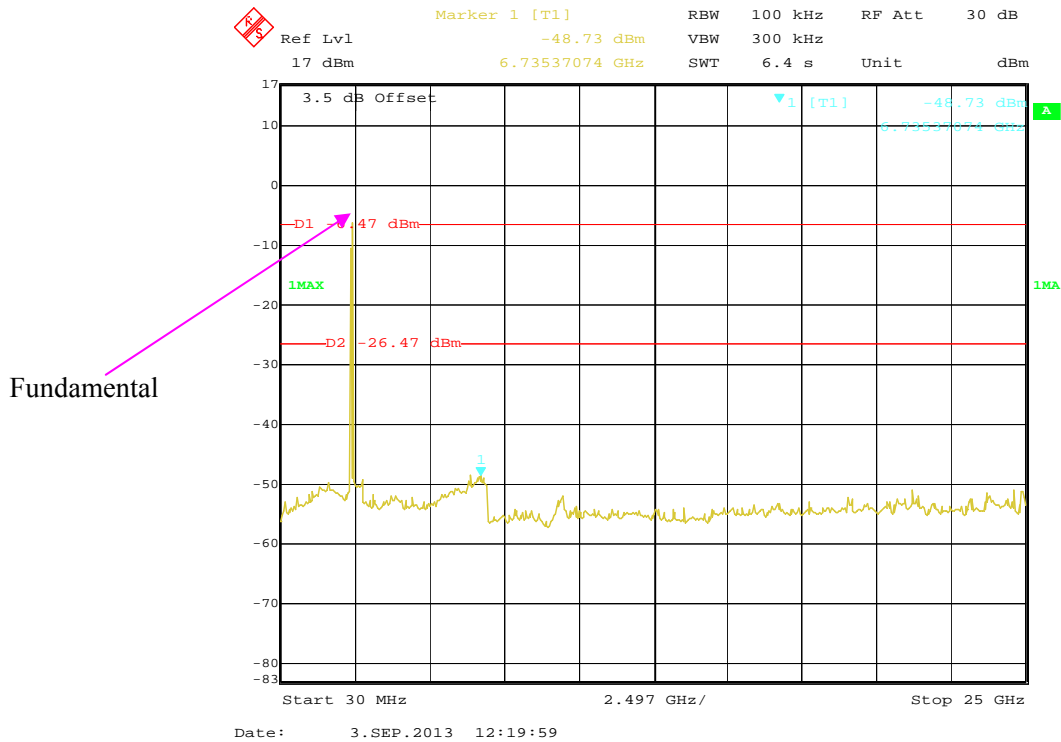

### 802.11n-HT40 High Channel

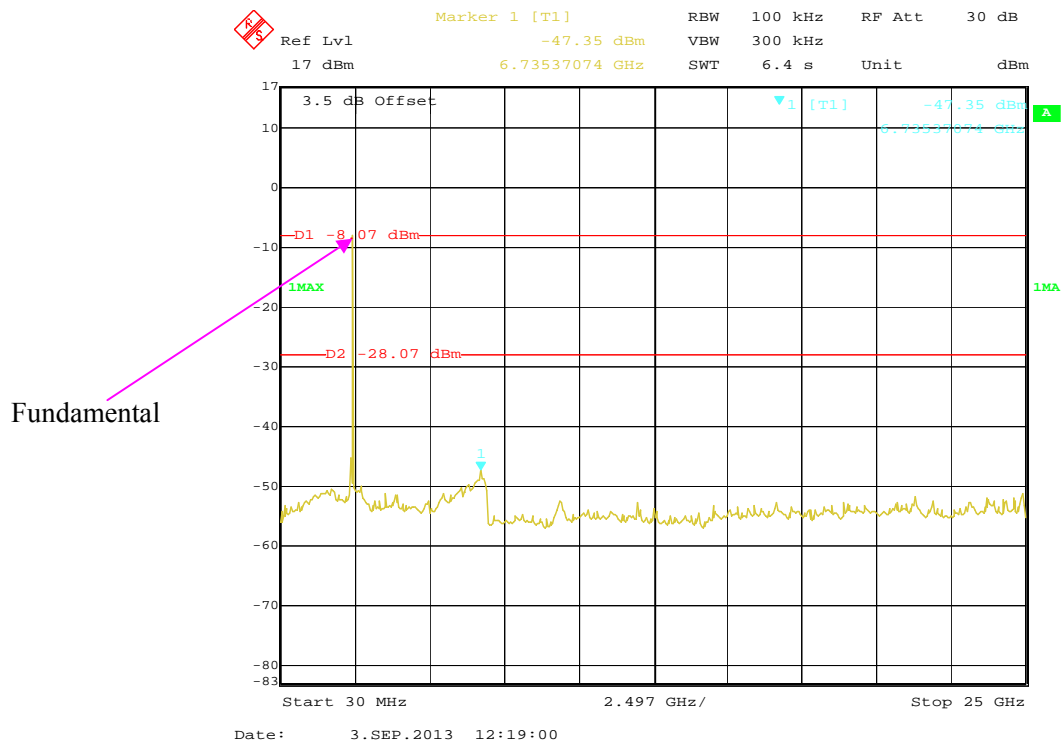

## FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH


### Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB emission bandwidth shall be at least 500 kHz.

### Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r01

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

**\* Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

*The testing was performed by Rocky Kang on 2013-09-03.*

*Test Mode: Transmitting*


**Test Result:** Pass.

Please refer to the following tables and plots.




Channel	Frequency (MHz)	Data Rate (Mbps)	6 dB Emissions Bandwidth (MHz)	Limit (MHz)
802.11b mode				
Low	2412	1	10.16	>0.5
Middle	2437	1	10.16	>0.5
High	2462	1	10.16	>0.5
802.11g mode				
Low	2412	6	16.47	>0.5
Middle	2437	6	16.47	>0.5
High	2462	6	16.47	>0.5
802.11n-HT20 mode				
Low	2412	MCS0	17.68	>0.5
Middle	2437	MCS0	17.68	>0.5
High	2462	MCS0	17.68	>0.5
802.11n-HT40 mode				
Low	2422	MCS0	35.83	>0.5
Middle	2437	MCS0	35.83	>0.5
High	2452	MCS0	35.83	>0.5


### 802.11b Low Channel

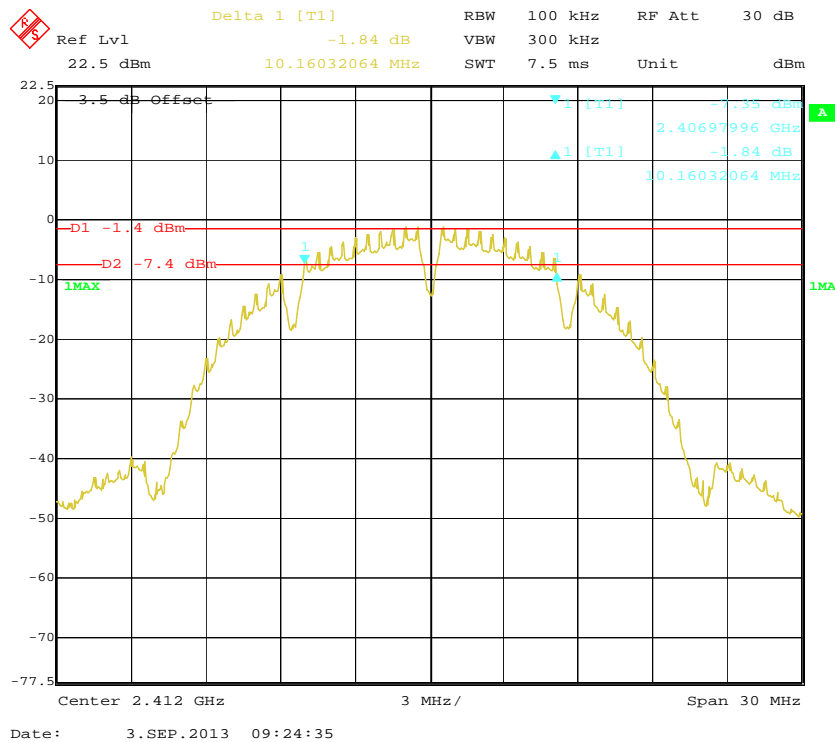

### 802.11b Middle Channel

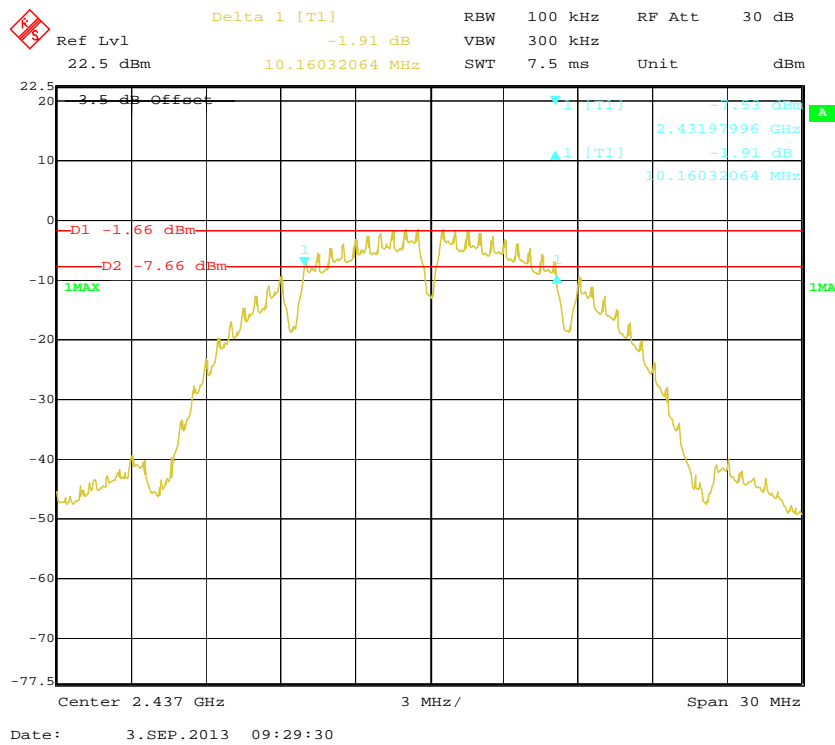

### 802.11b High Channel

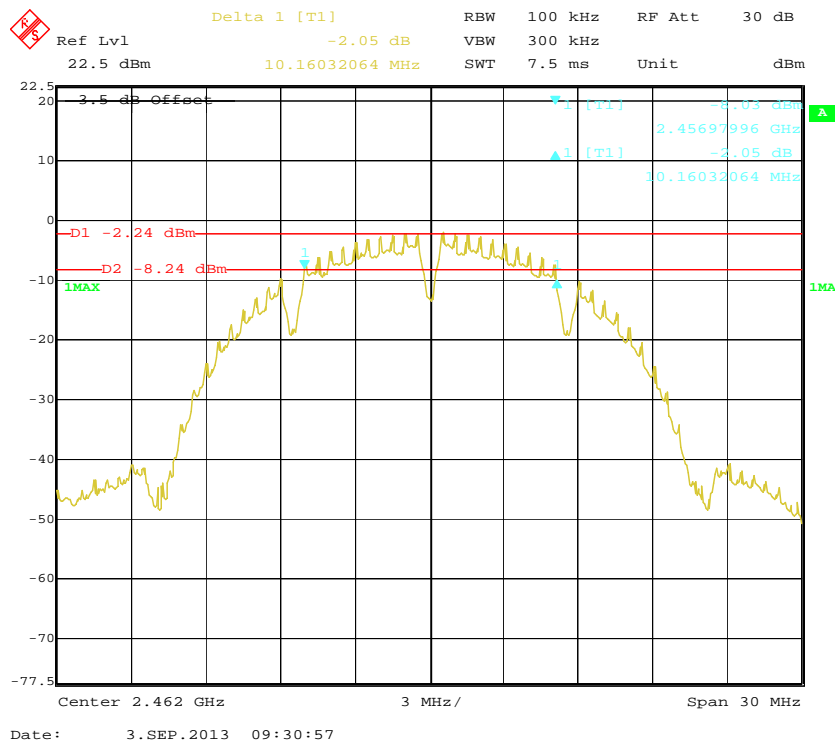

Delta 1 [T1]

RBW 100 kHz RF Att 30 dB

Ref Lvl 22.5 dBm 1.43 dB VBW 300 kHz

SWT 7.5 ms Unit dBm

3.5 dB Offset

-13.06 dBm

2.40379359 GHz

1.43 dB

16.47294589 MHz

D1 -3.53 dBm

D2 -9.53 dBm

1MAX

Center 2.412 GHz

3 MHz/

Span 30 MHz

Date: 3.SEP.2013 09:48:02

Delta 1 [T1] 1.36 dB RBW 100 kHz RF Att 30 dB

Ref Lvl 22.5 dBm 16.47294589 MHz VBW 300 kHz SWT 7.5 ms Unit dBm

3.5 dB Offset

22.5

20

10

0

-10

-20

-30

-40

-50

-60

-70

-77.5

Center 2.437 GHz 3 MHz/ Span 30 MHz

D1 -3.46 dBm

D2 -9.46 dBm

1MAX

1 [T1] -13.00 dBm


2.42879359 GHz

1.36 dB


16.47294589 MHz

1


### 802.11g High Channel

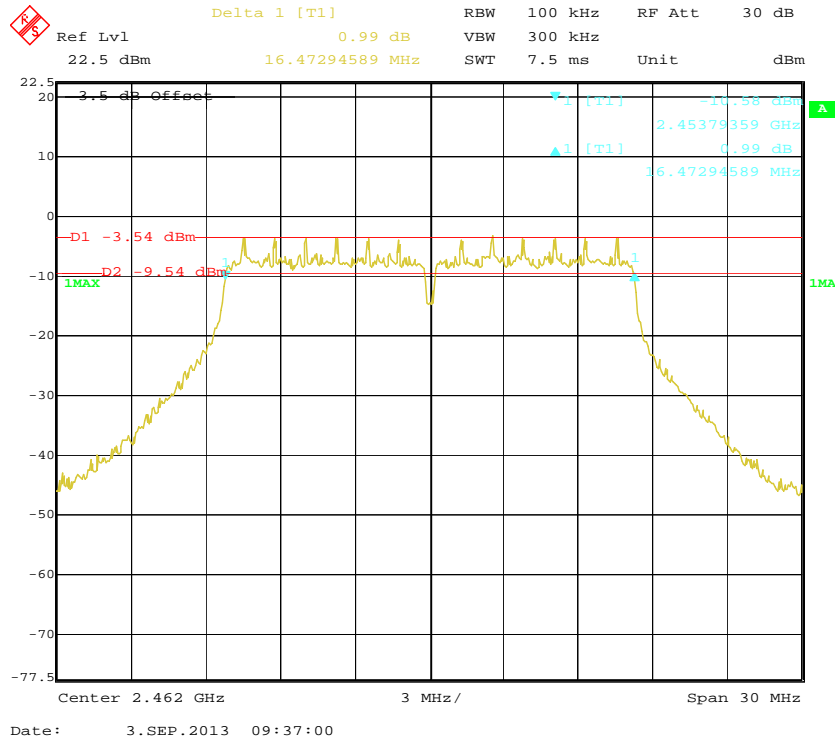


### 802.11n-HT20 Low Channel

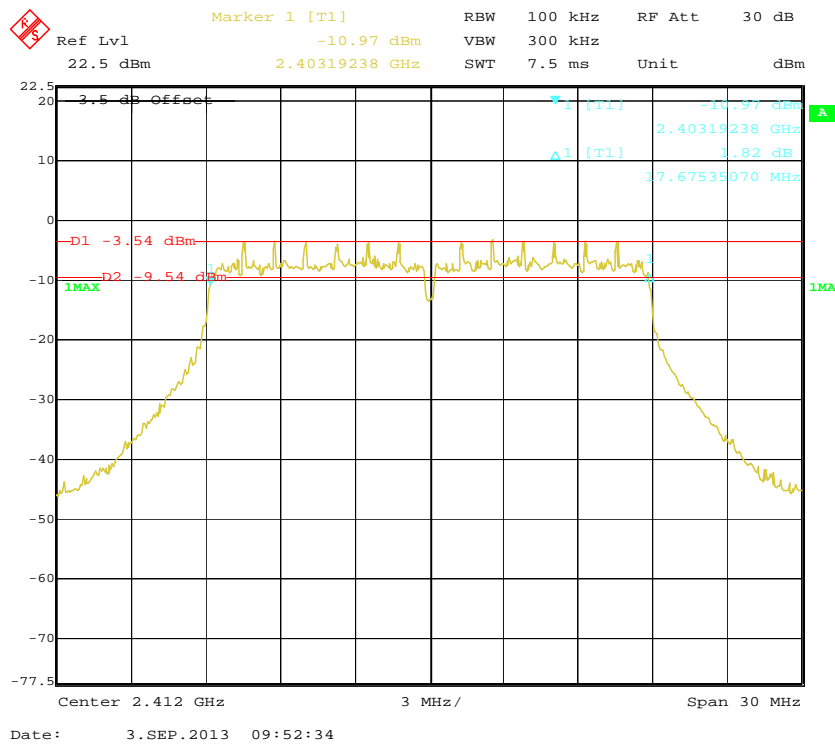


### 802.11n-HT20 Middle Channel

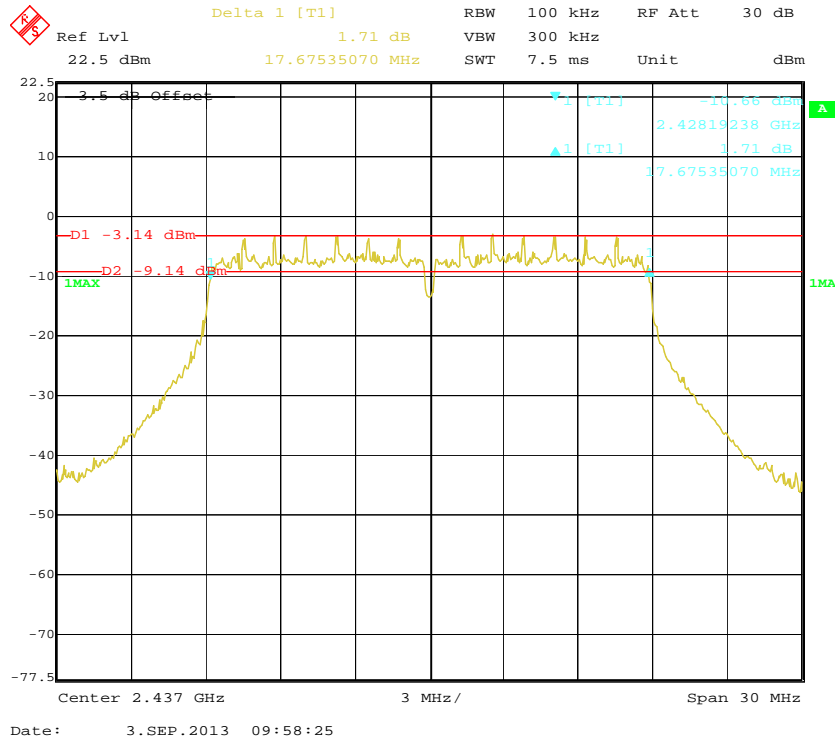


### 802.11n-HT20 High Channel

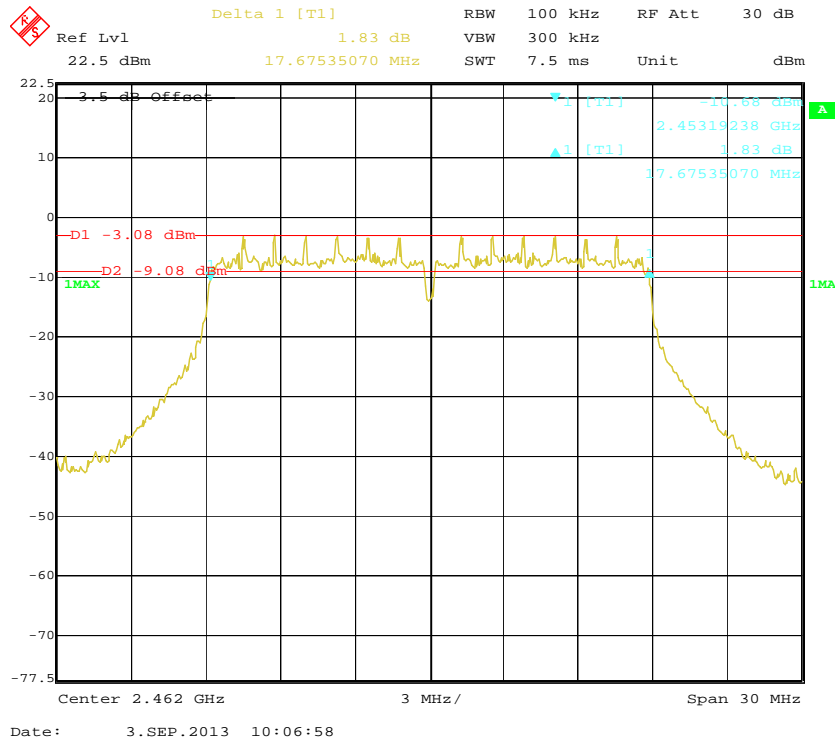


### 802.11n-HT40 Low Channel

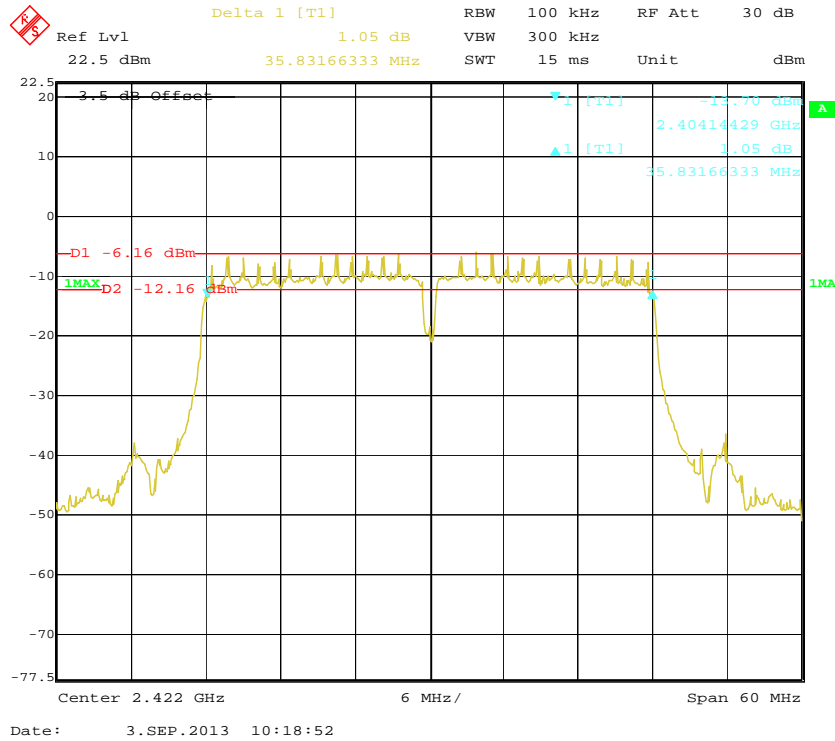

### 802.11n-HT40 Middle Channel

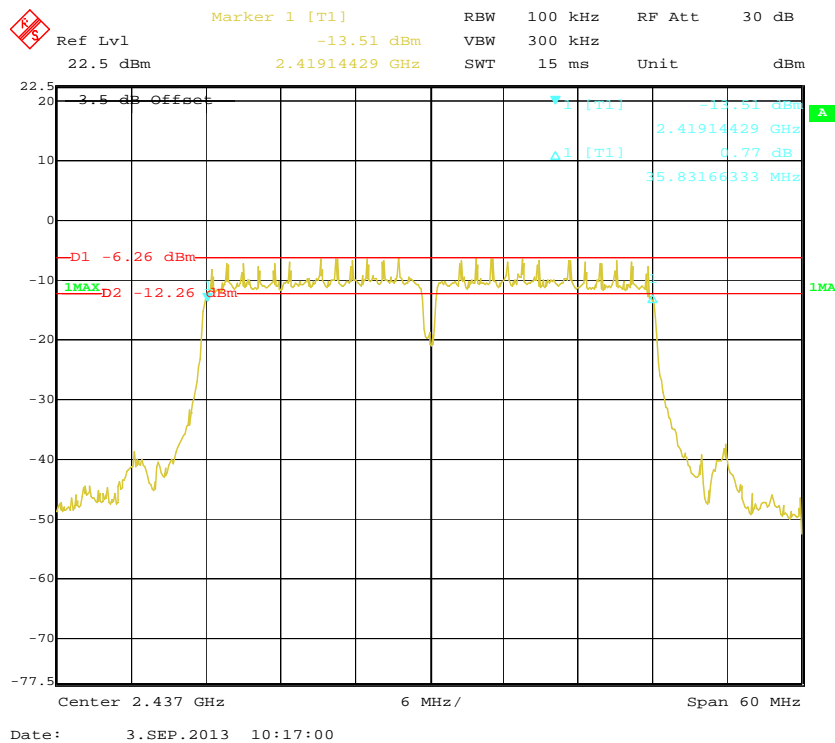

# 802.11n-HT40 High Channel

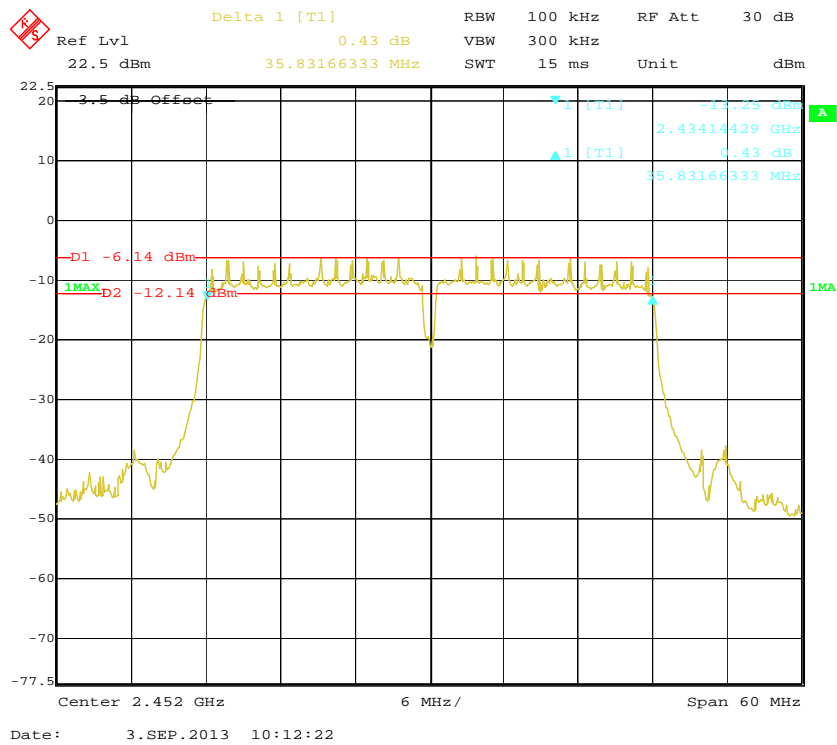

## FCC §15.247(b) (3) - MAXIMUM PEAK OUTPUT POWER


### Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r01

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to spectrum analyzer.
3. Add a correction factor to the display.



### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa


*The testing was performed by Rocky Kang on 2013-09-03.*




Test mode: Transmitting

Channel	Frequency (MHz)	Data Rate (Mbps)	Peak Output Power (dBm)	Average Output Power (dBm)	Limit (dBm)	Result
<b>802.11b mode</b>						
Low	2412	1	11.13	7.94	30	Pass
Middle	2437	1	10.83	7.71	30	Pass
High	2462	1	10.22	7.13	30	Pass
<b>802.11g mode</b>						
Low	2412	6	15.94	8.52	30	Pass
Middle	2437	6	15.85	8.60	30	Pass
High	2462	6	15.75	8.65	30	Pass
<b>802.11n-HT20 mode</b>						
Low	2412	MCS0	16.10	8.65	30	Pass
Middle	2437	MCS0	16.07	8.87	30	Pass
High	2462	MCS0	16.00	8.58	30	Pass
<b>802.11n-HT40 mode</b>						
Low	2422	MCS0	15.78	8.50	30	Pass
Middle	2437	MCS0	15.78	8.56	30	Pass
High	2452	MCS0	15.77	8.41	30	Pass


## 802.11b RF Peak Output Power, Low Channel

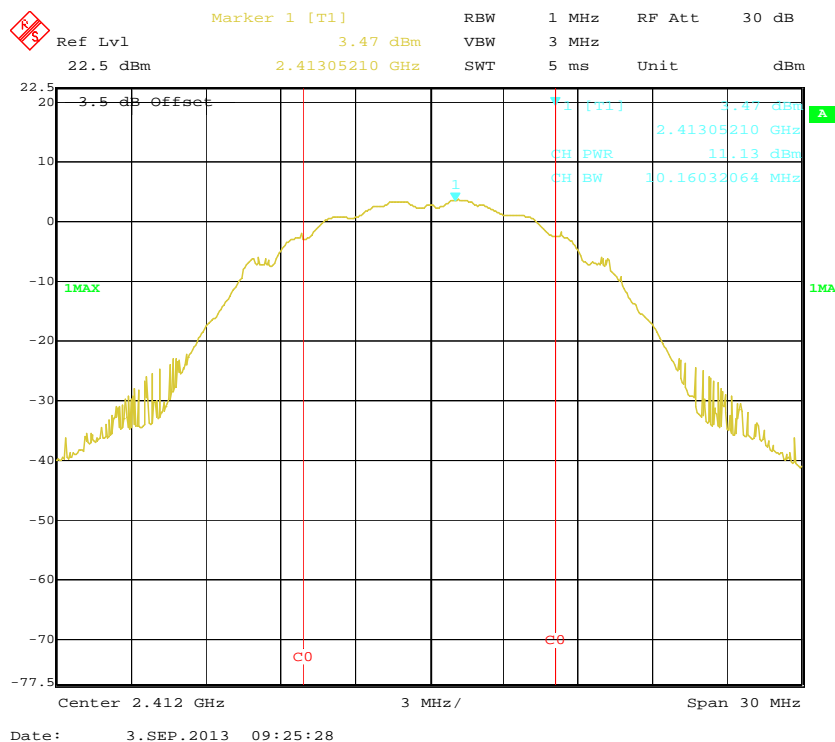


## 802.11b RF Average Output Power, Low Channel

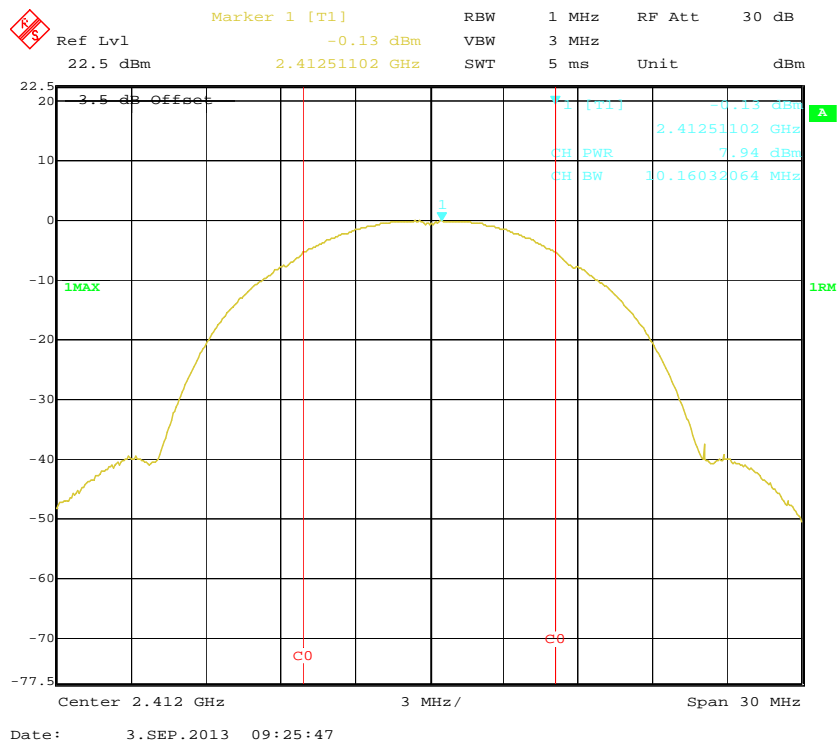


## 802.11b RF Peak Output Power, Middle Channel

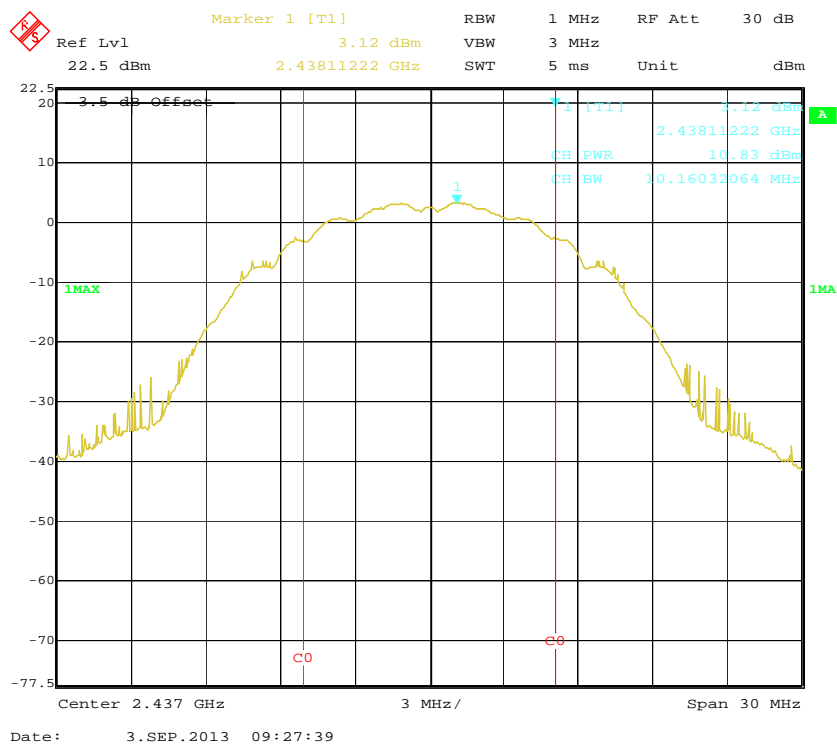


## 802.11b RF Average Output Power, Middle Channel

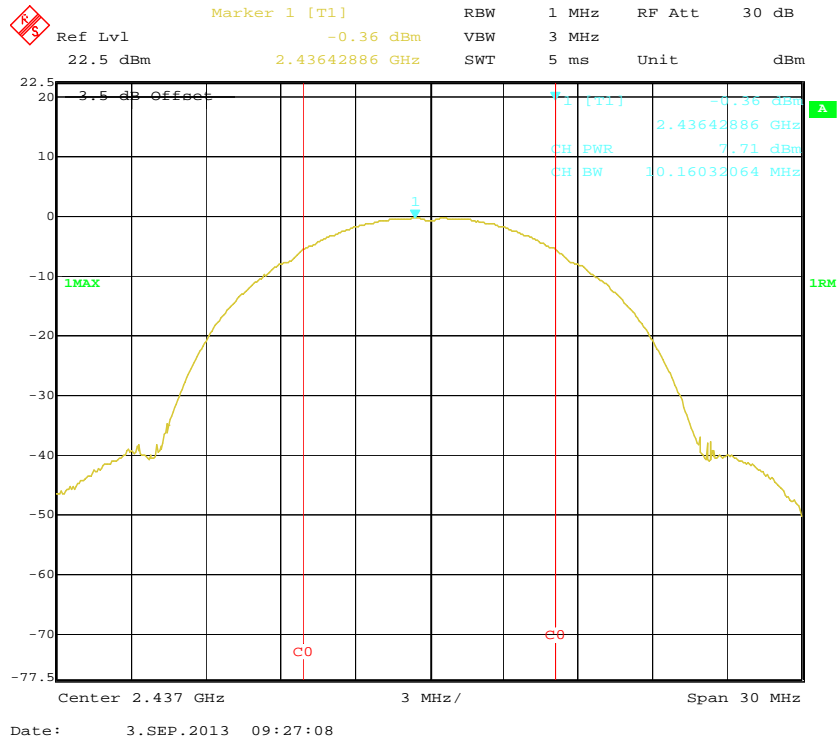


## 802.11b RF Peak Output Power, High Channel

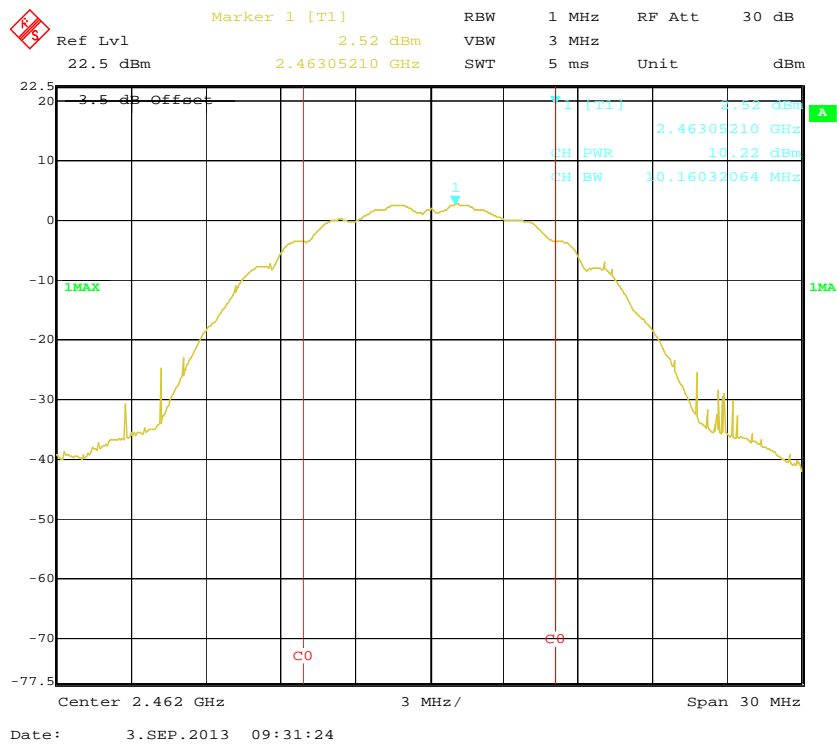


## 802.11b RF Average Output Power, High Channel

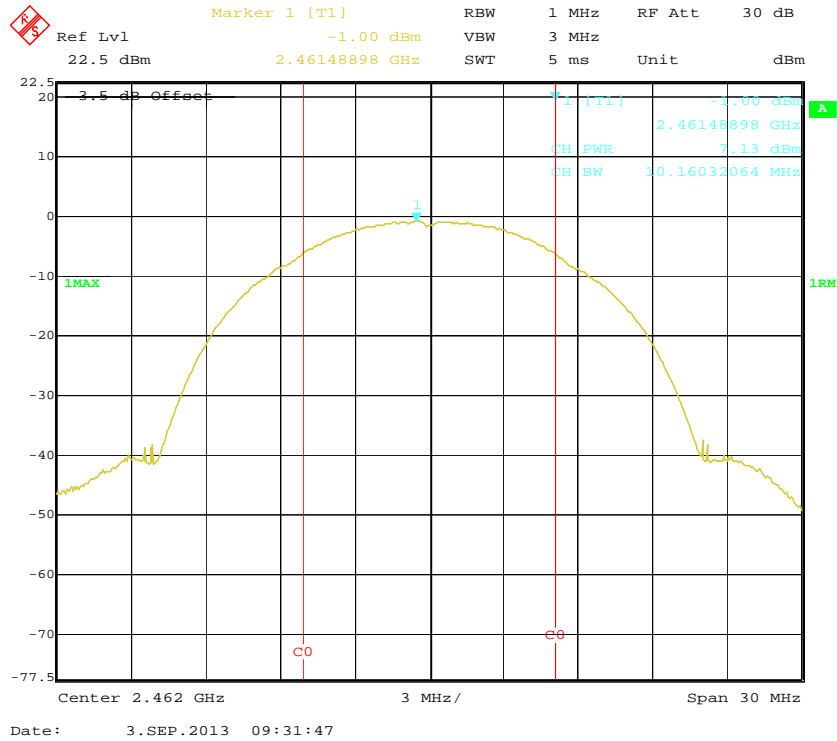


## 802.11g RF Peak Output Power, Low Channel

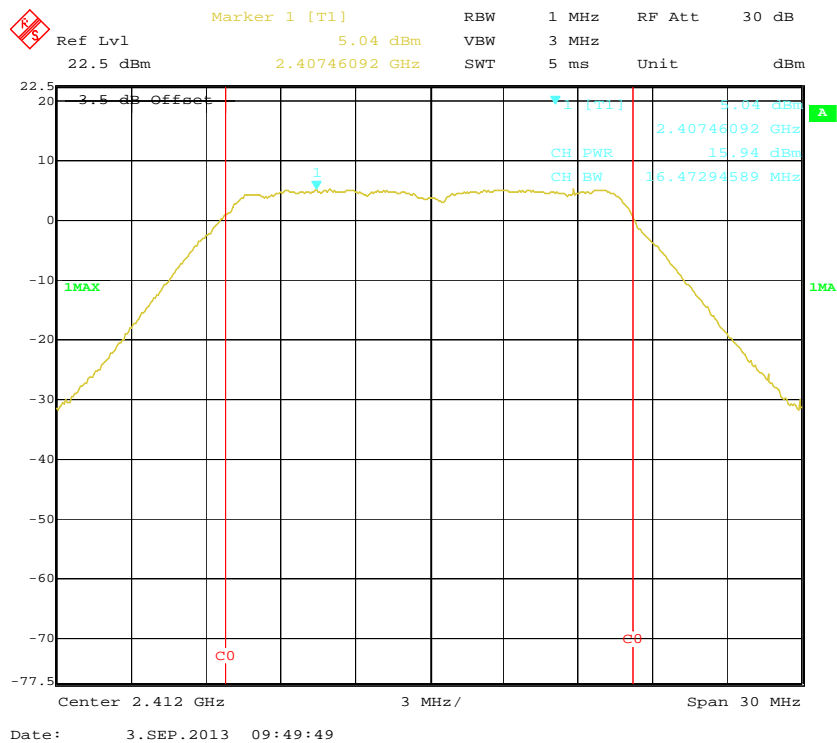


### 802.11g RF Average Output Power, Low Channel

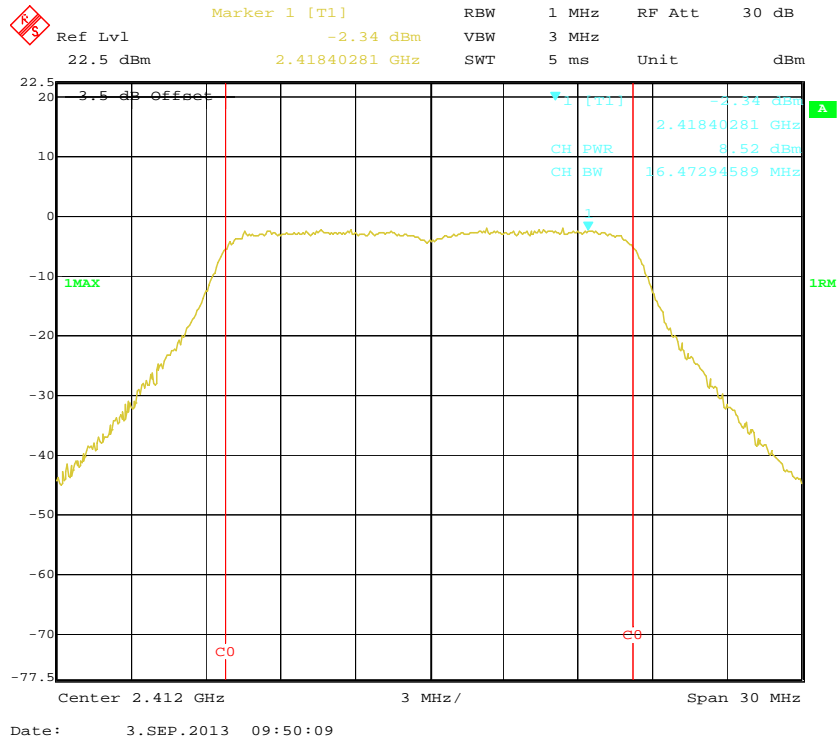


### 802.11g RF Peak Output Power, Middle Channel

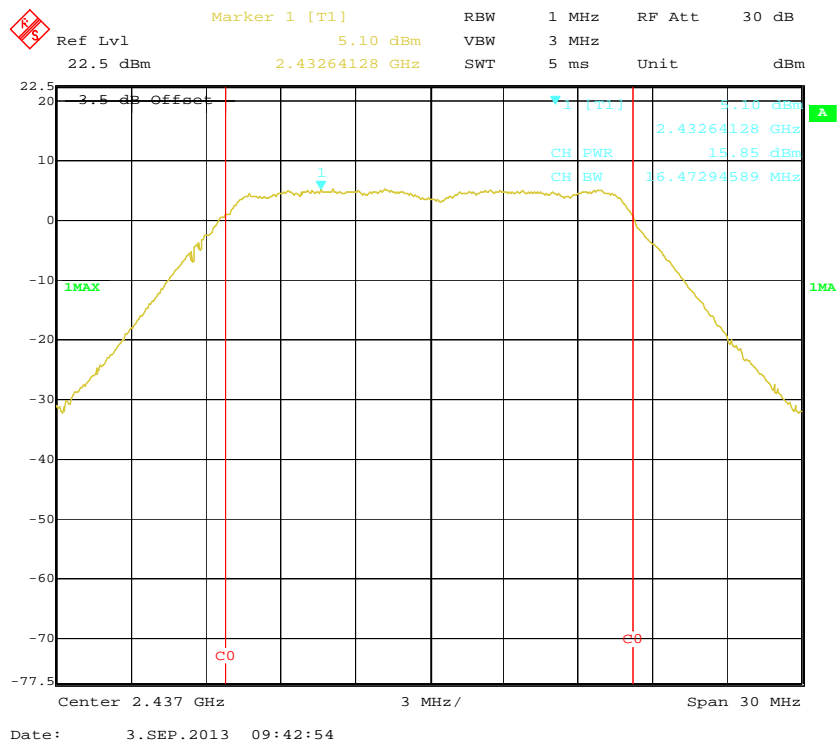


### 802.11g RF Average Output Power, Middle Channel

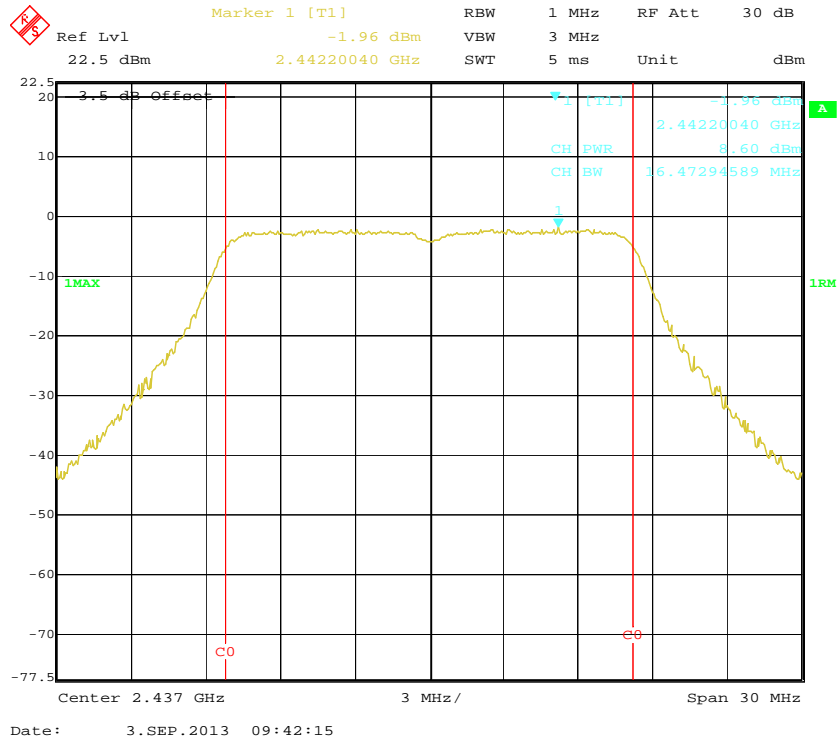


### 802.11g RF Peak Output Power, High Channel

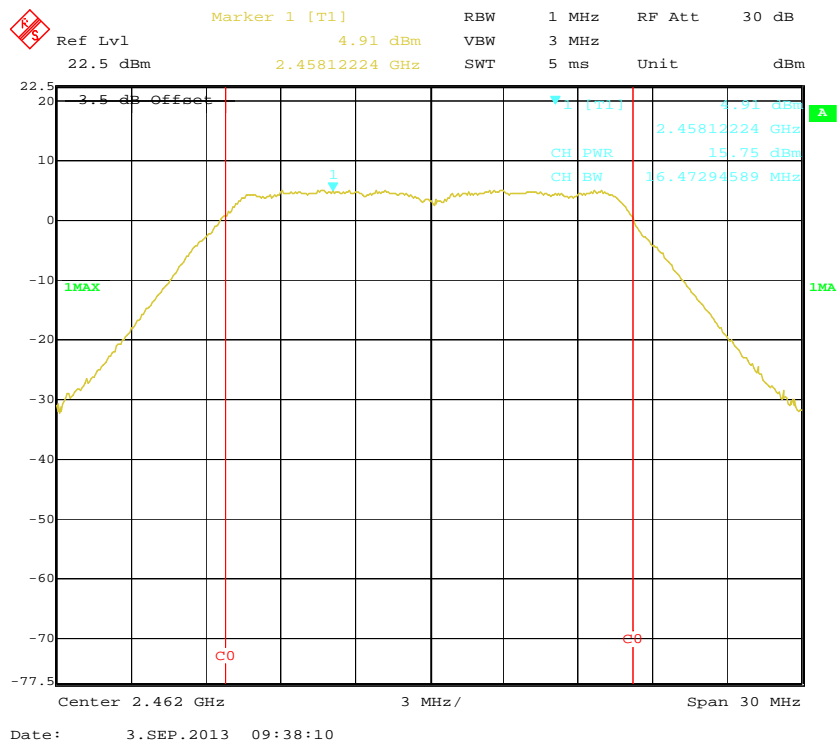


## 802.11g RF Average Output Power, High Channel

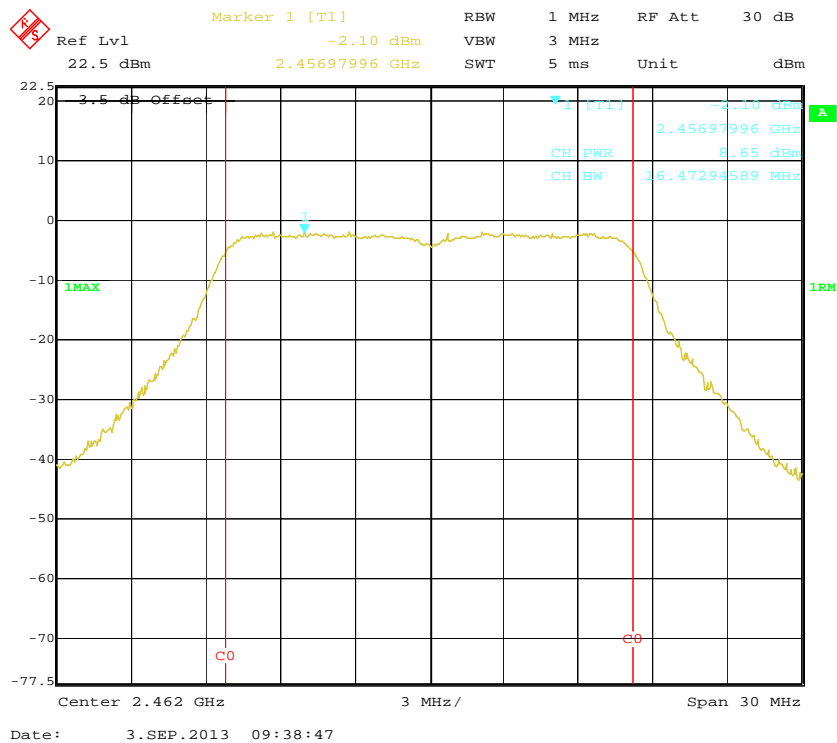


## 802.11n-HT20 RF Peak Output Power, Low Channel

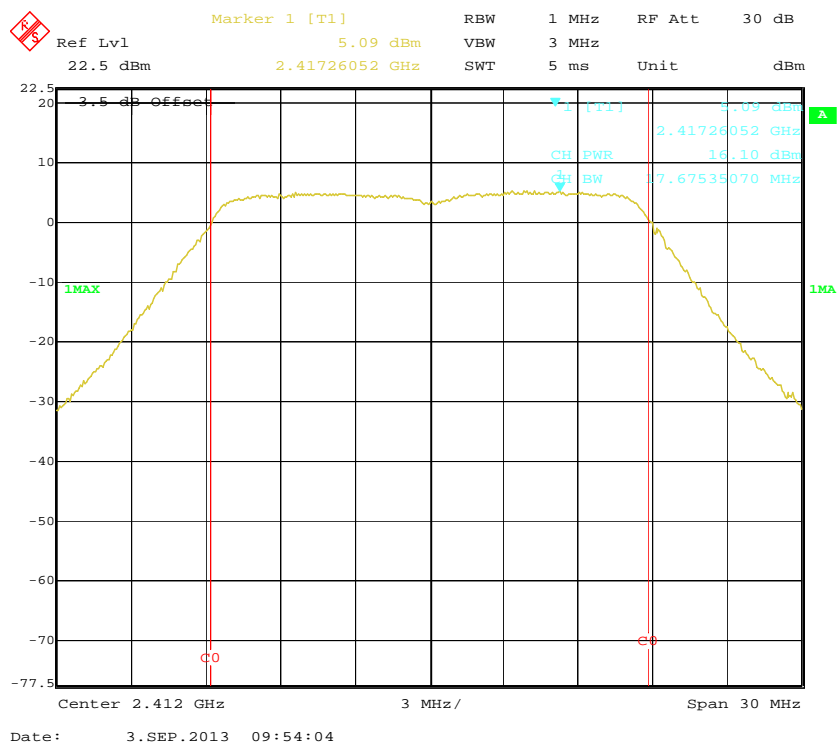

### 802.11n-HT20 RF Average Output Power, Low Channel

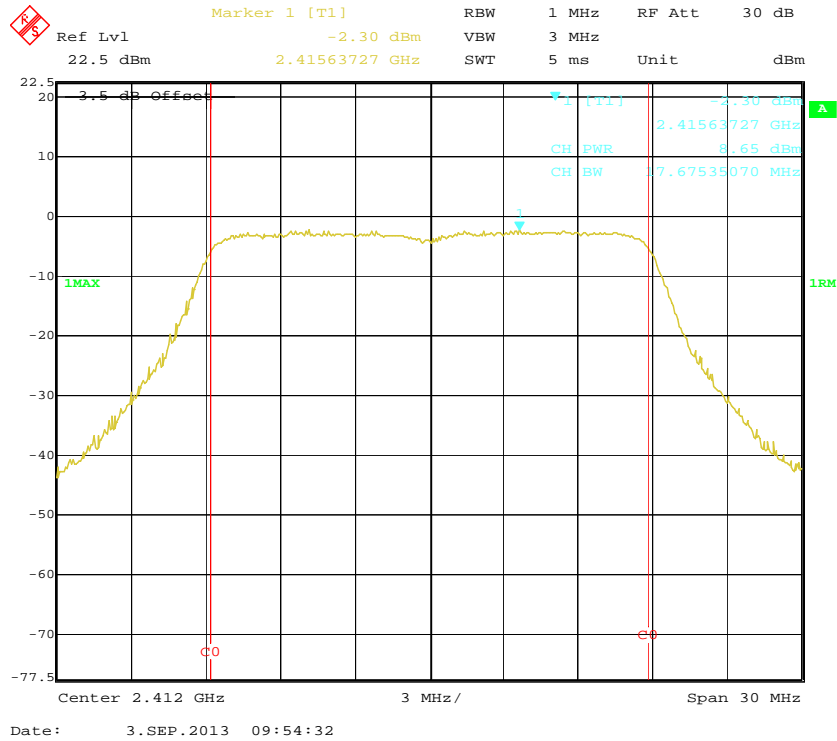


### 802.11n-HT20 RF Peak Output Power, Middle Channel

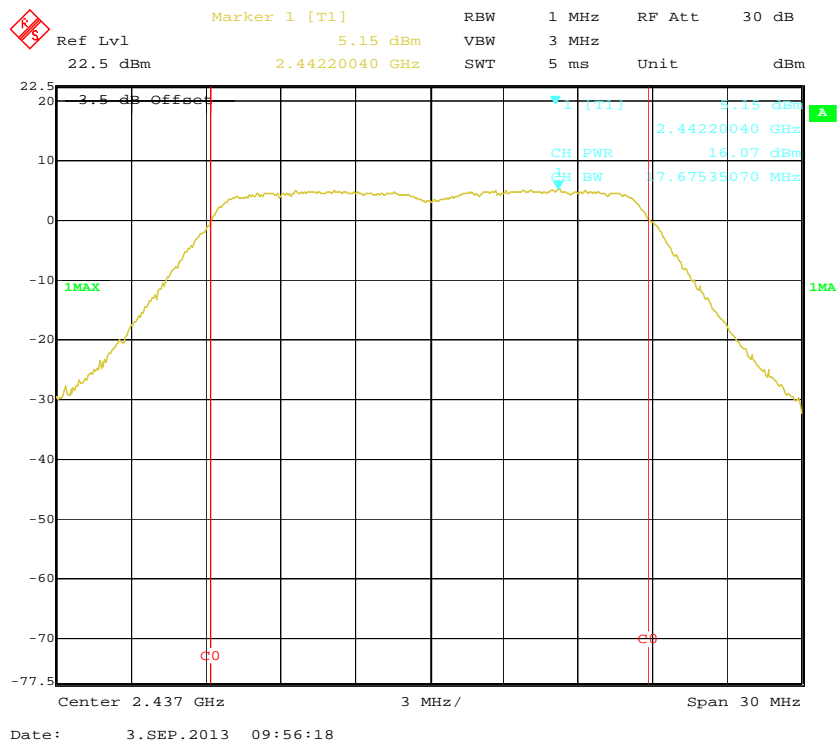




### 802.11n-HT20 RF Average Output Power, Middle Channel

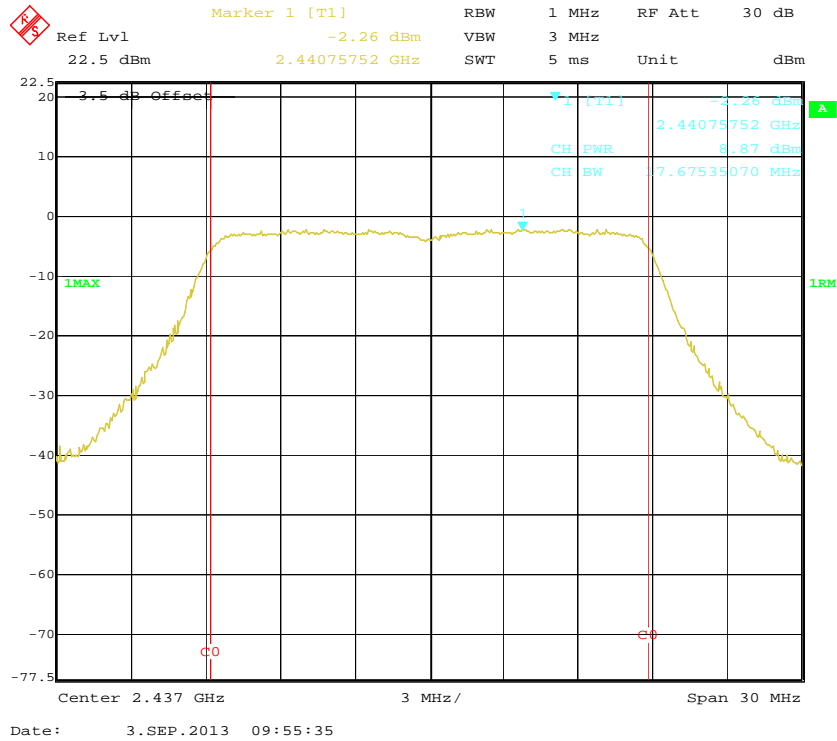

### 802.11n-HT20 RF Peak Output Power, High Channel

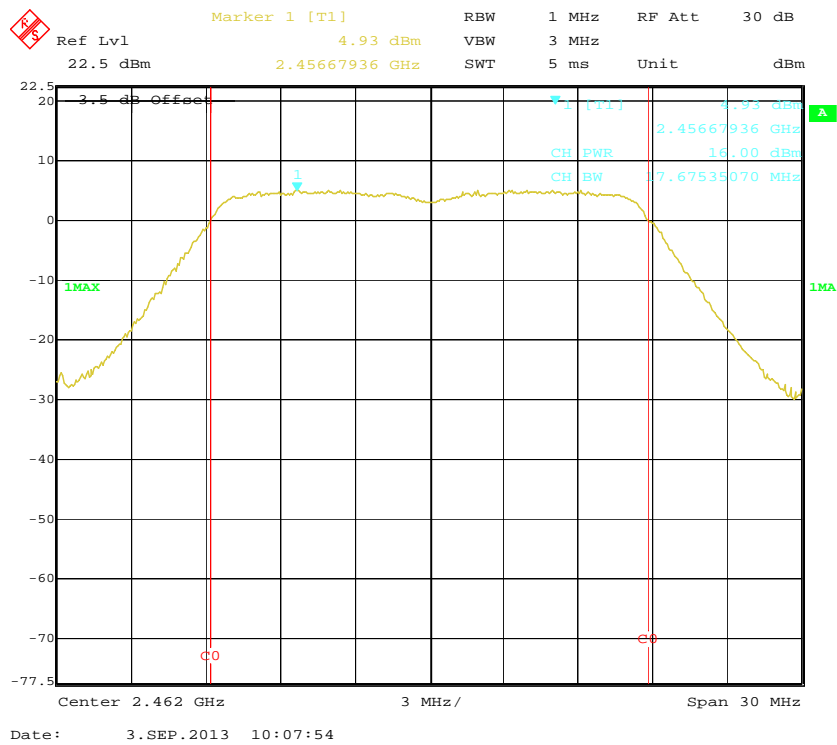

Ref Lvl 22.5 dBm

Marker 1 [T1] -2.49 dBm

RBW 1 MHz RF Att 30 dB

VBW 3 MHz

SWT 5 ms Unit dBm

2.46569739 GHz

CH PWR 8.58 dBm

CH BW 7.67535070 MHz

3.5 dB Offset

Center 2.462 GHz

3 MHz/

Span 30 MHz

Date: 3.SEP.2013 10:08:17

Marker 1 [T1] RBW 1 MHz RF Att 30 dB  
 Ref Lvl 1.89 dBm VBW 3 MHz  
 22.5 dBm 2.41388377 GHz SWT 5 ms Unit dBm


3.5 dB Offset  
 1 [T1] 1.89 dBm  
 CH PWR 2.41388377 GHz  
 CH BW 15.78 dBm  
 15.83166333 MHz

1MAX  
 1  
 1H


Center 2.422 GHz 6 MHz/  
 Span 60 MHz

Date: 3.SEP.2013 10:19:46

## 802.11n-HT40 RF Average Output Power, Low Channel

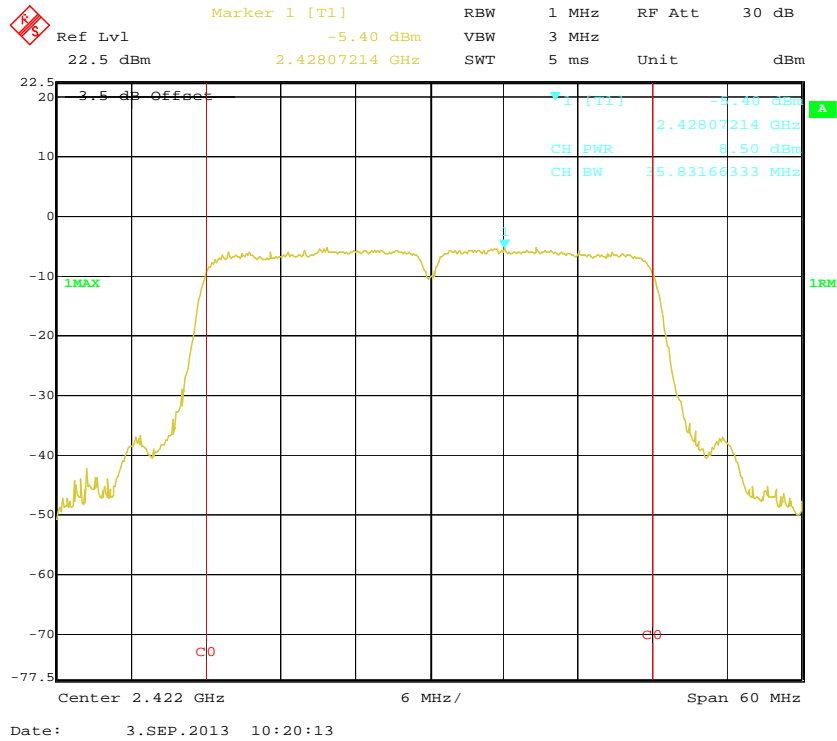

## 802.11n-HT40 RF Peak Output Power, Middle Channel

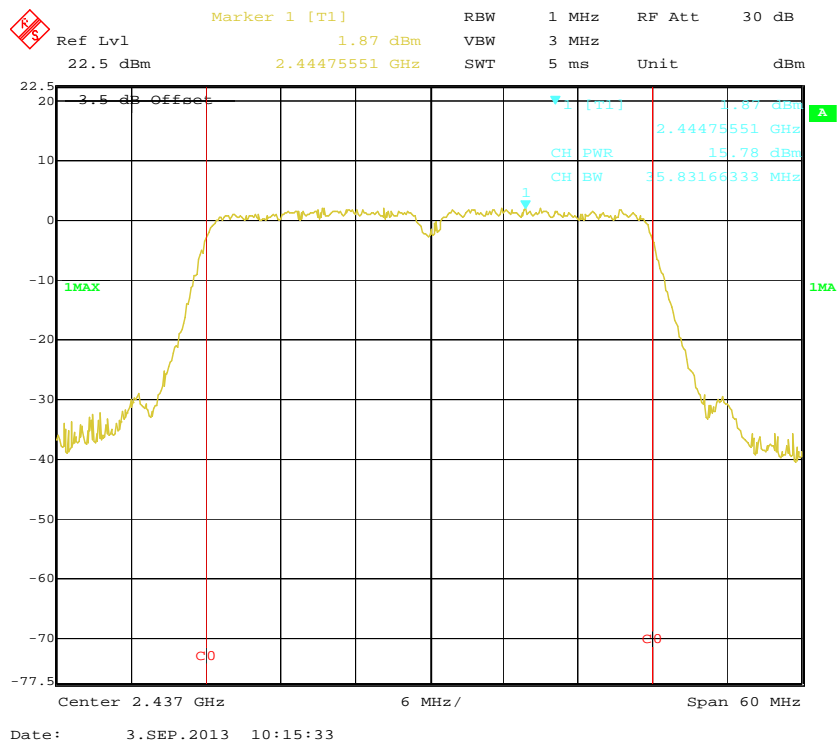

Ref Lvl 22.5 dBm  
 Marker 1 [T1] 2.42816232 GHz  
 RBW 1 MHz  
 VBW 3 MHz  
 SWT 5 ms  
 RF Att 30 dB  
 Unit dBm

3.5 dB Offset  
 1 [T1] 2.42816232 GHz  
 CH PWR 8.56 dBm  
 CH BW 55.83166333 MHz  
 1MAX  
 1RM  
 C0  
 C0  
 Center 2.437 GHz  
 6 MHz/  
 Span 60 MHz  
 Date: 3.SEP.2013 10:14:59

Marker 1 [T1] RBW 1 MHz RF Att 30 dB  
 Ref Lvl 2.22 dBm VBW 3 MHz  
 22.5 dBm 2.44364329 GHz SWT 5 ms Unit dBm


3.5 dB Offset  
 1 (T1) 2.22 dBm  
 2.44364329 GHz  
 CH PWR 15.77 dBm  
 CH BW 15.83166333 MHz

1W MAX  
 1W MAX

Center 2.452 GHz 6 MHz/ Span 60 MHz

Date: 3.SEP.2013 10:13:51

### 802.11n-HT40 RF Average Output Power, High Channel

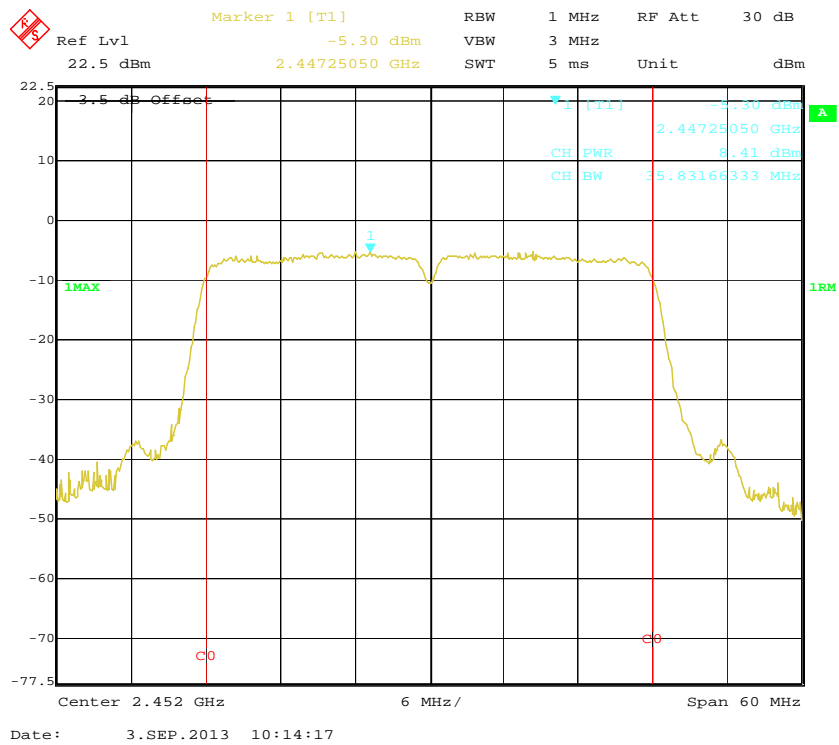


**FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE****Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

**Test Procedure**

According to KDB 558074 D01 DTS Meas Guidance v03r01

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

**\* Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**


<b>Temperature:</b>	25°C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Rocky Kang on 2013-09-03.*


**Test Result:** *Compliance*

Please refer to following plots.

### 802.11b Band Edge, Left Side

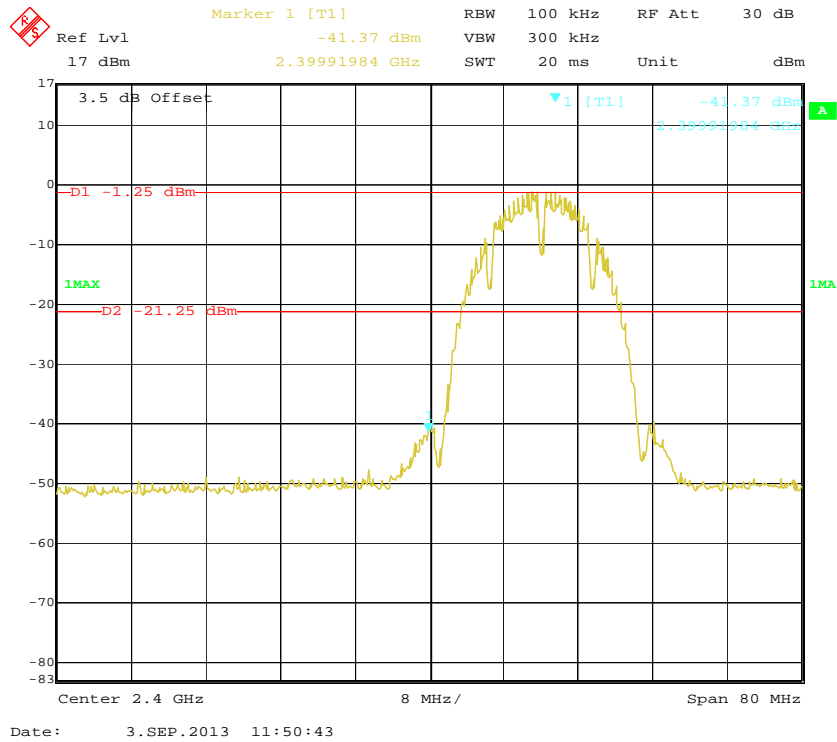


### 802.11b Band Edge, Right Side

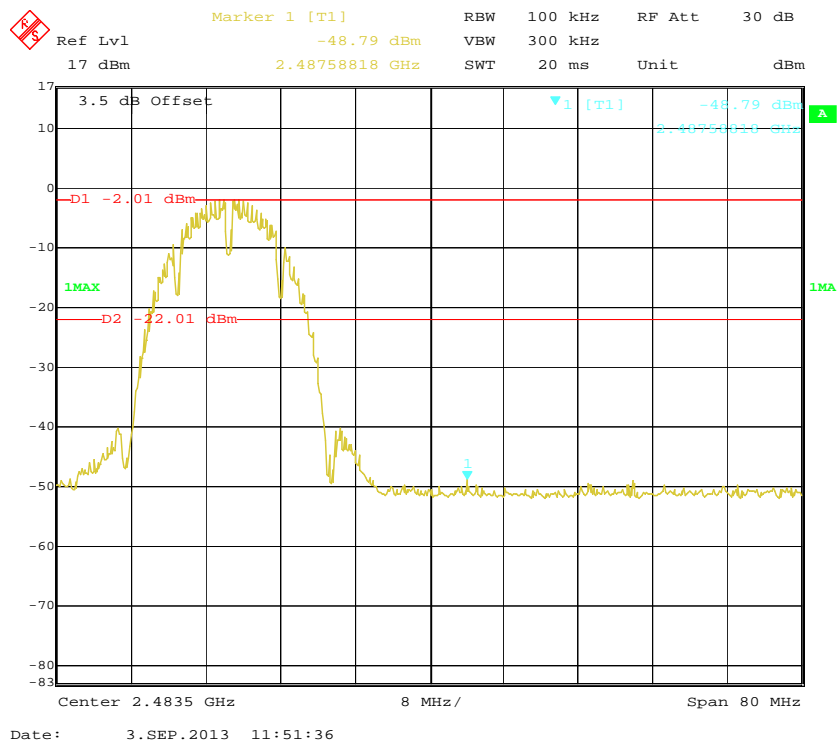





### 802.11g Band Edge, Left Side

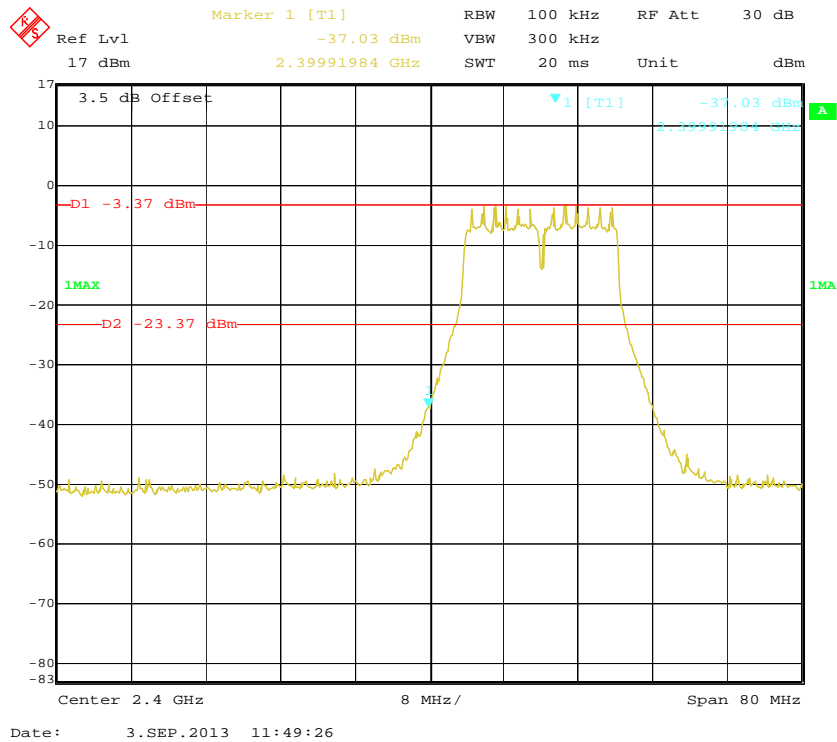


### 802.11g Band Edge, Right Side

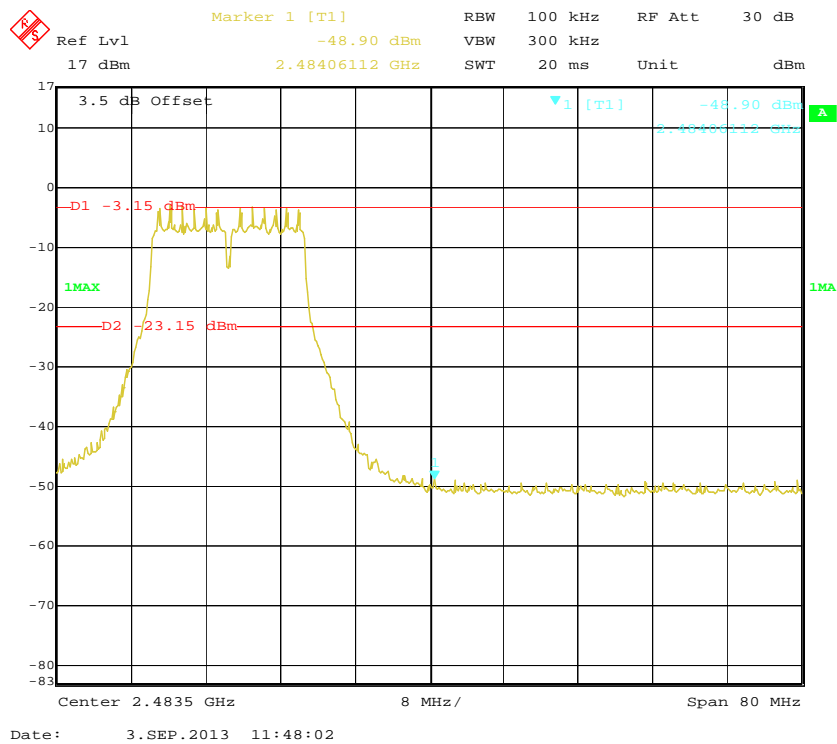


### 802.11n-HT20 Band Edge, Left Side

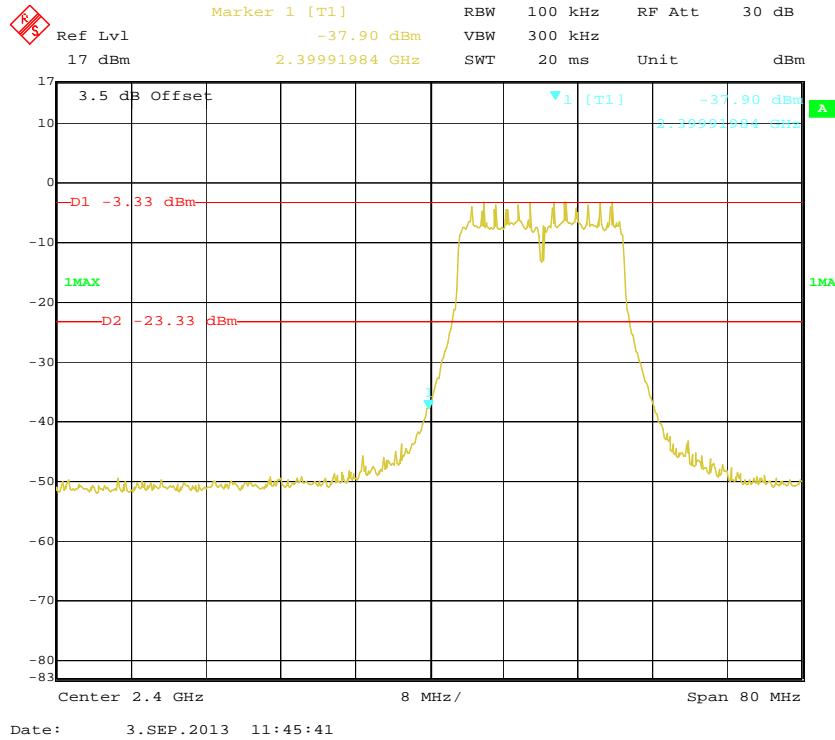


### 802.11n-HT20 Band Edge, Right Side

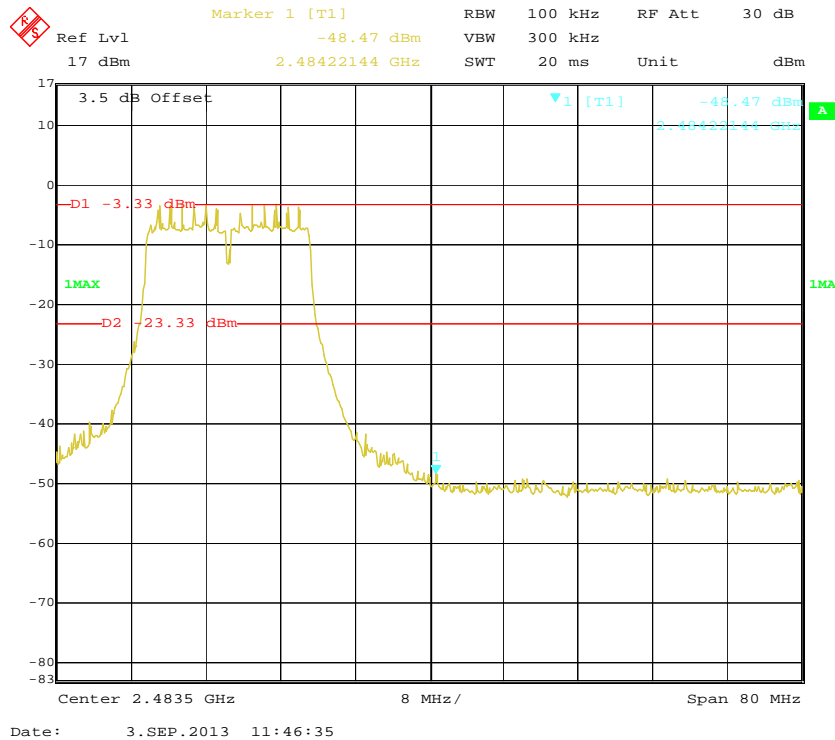

### 802.11n-HT40 Band Edge, Left Side

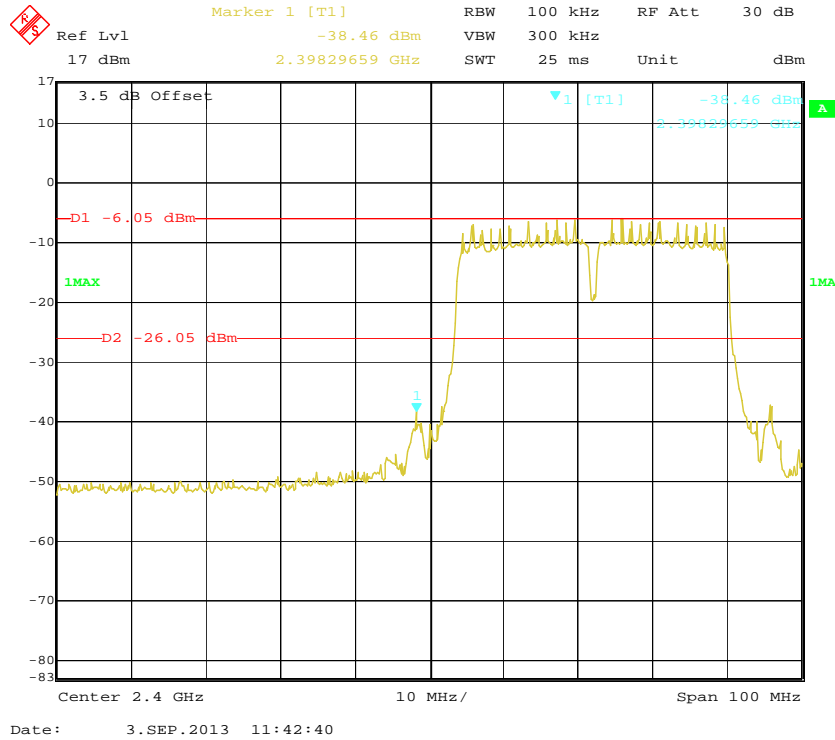

### 802.11n-HT40 Band Edge, Right Side

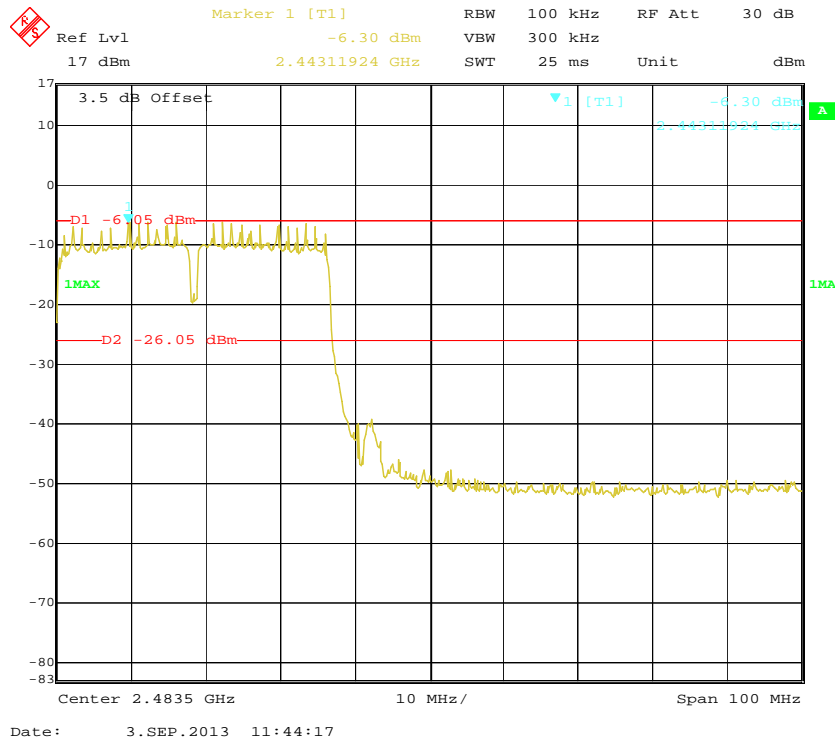

## FCC §15.247(e) - POWER SPECTRAL DENSITY


### Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r01

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to 1.5MHz span mode. And then, set RBW and VBW of spectrum analyzer to proper value. (DTS)
4. Repeat above procedures until all frequencies measured were complete.



### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions


Temperature:	25°C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

*The testing was performed by Rocky Kang on 2013-09-03.*


*EUT operation mode: Transmitting*

**Test Result: Pass**


Channel	Frequency (MHz)	Data Rate (Mbps)	Power spectral density (dBm/3 kHz)	≤Limit (dBm)
<b>802.11b mode</b>				
Low	2412	1	-17.51	8
Middle	2437	1	-17.72	8
High	2462	1	-17.44	8
<b>802.11g mode</b>				
Low	2412	6	-19.70	8
Middle	2437	6	-18.91	8
High	2462	6	-19.97	8
<b>802.11n-HT20 mode</b>				
Low	2412	MCS0	-16.94	8
Middle	2437	MCS0	-19.44	8
High	2462	MCS0	-17.47	8
<b>802.11n-HT40 mode</b>				
Low	2422	MCS0	-23.41	8
Middle	2437	MCS0	-21.52	8
High	2452	MCS0	-21.84	8

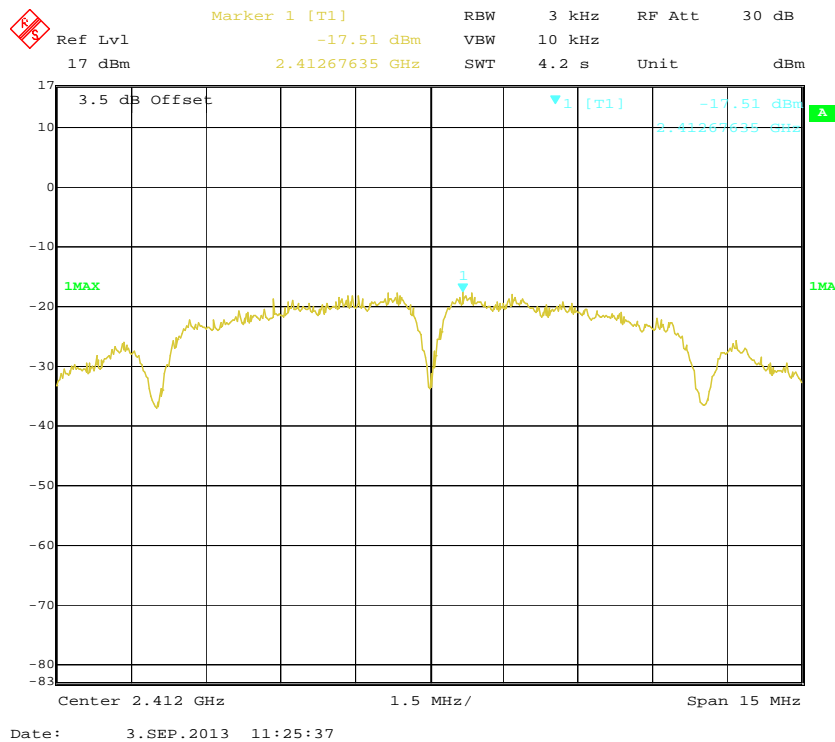**Power Spectral Density, 802.11b Low Channel**


### Power Spectral Density, 802.11b Middle Channel

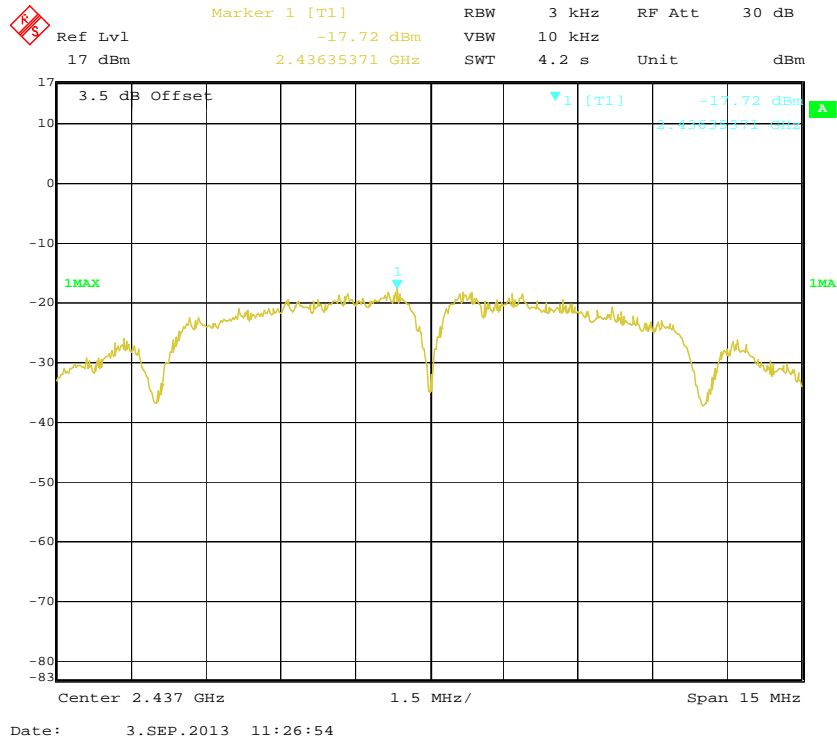


### Power Spectral Density, 802.11b High Channel

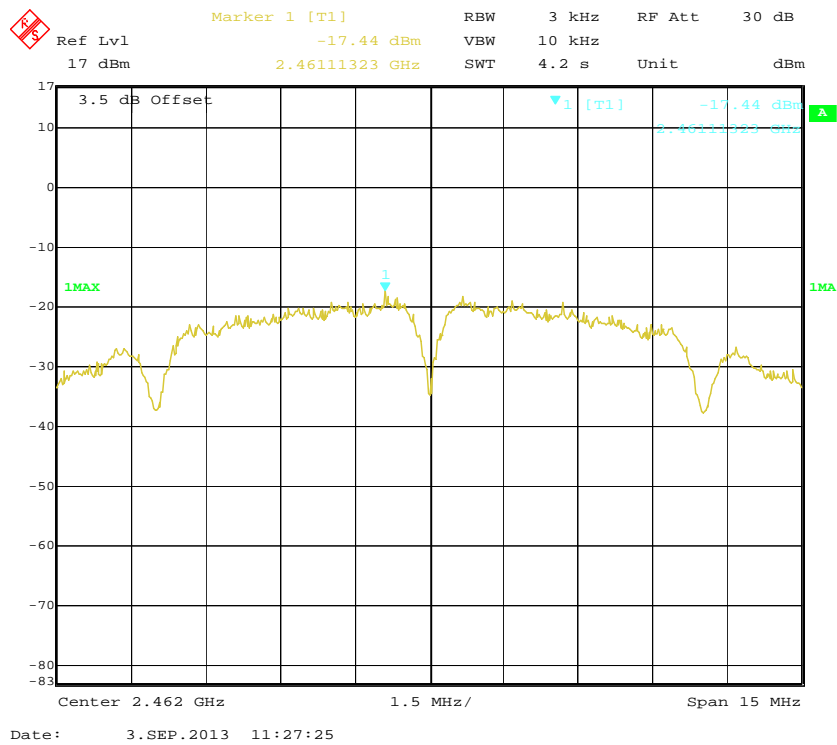


### Power Spectral Density, 802.11g Low Channel

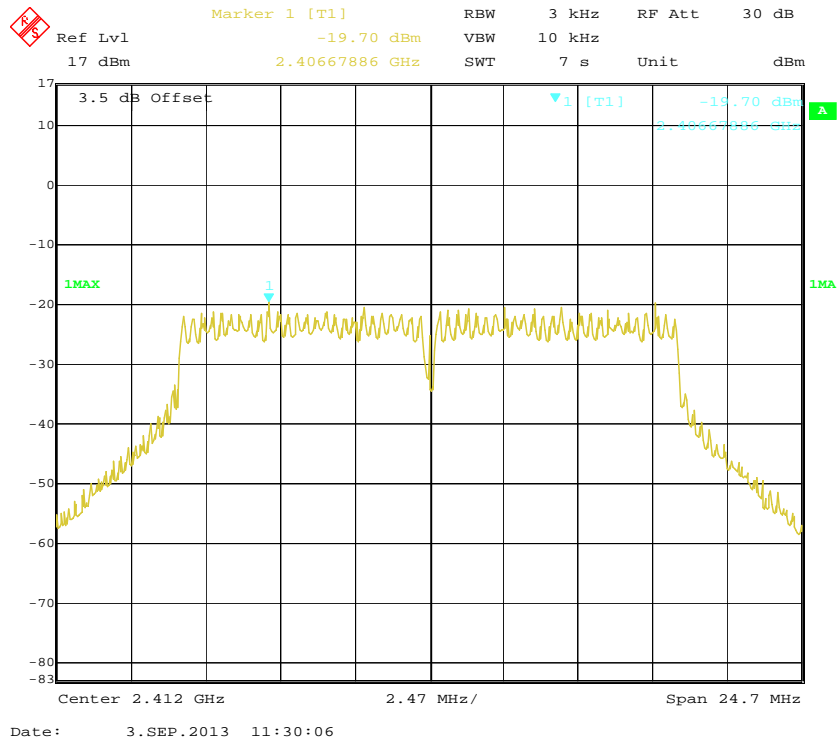


### Power Spectral Density, 802.11g Middle Channel

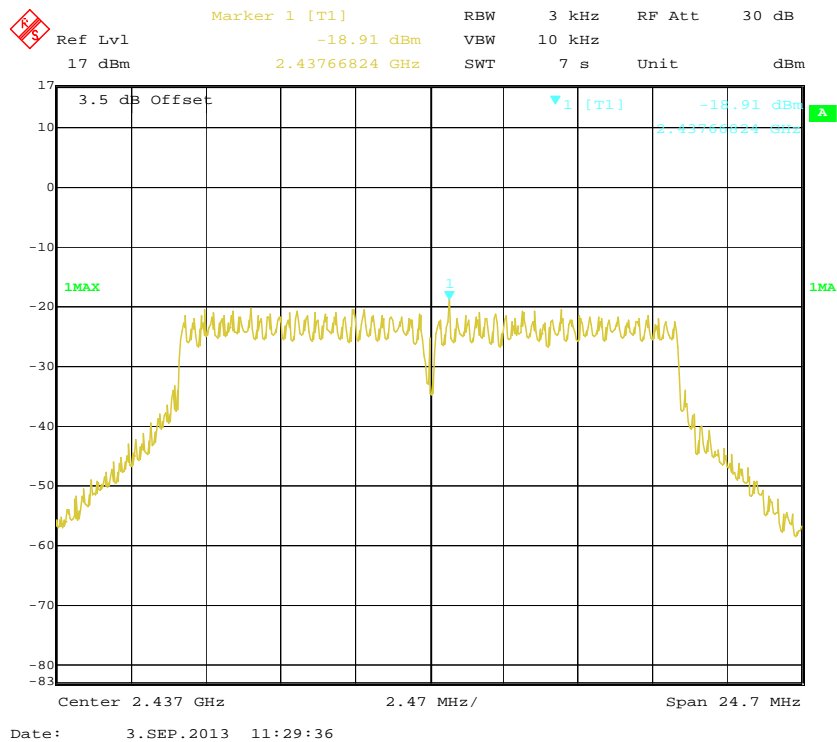



### Power Spectral Density, 802.11g High Channel

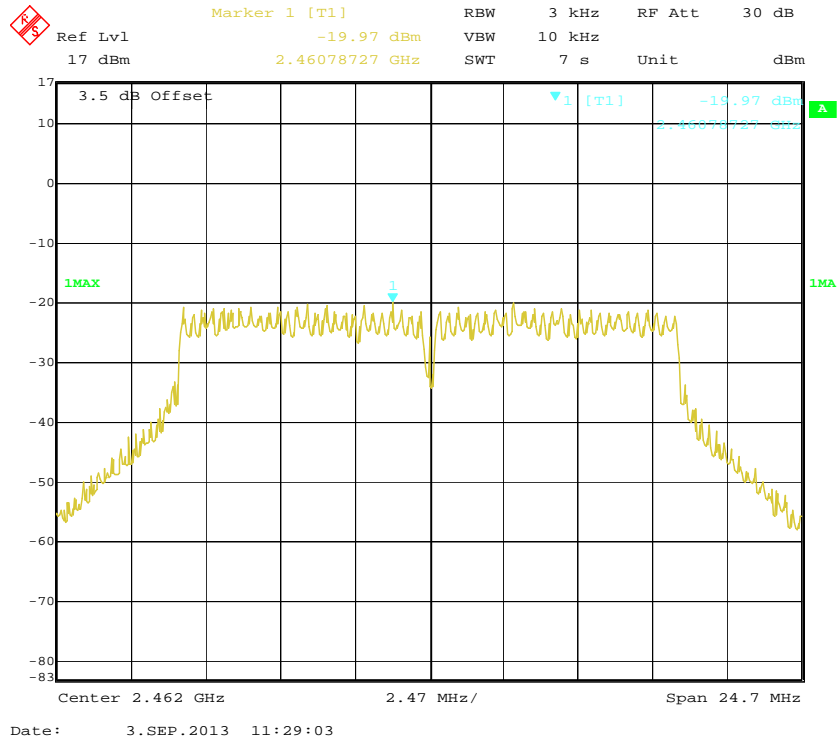


### Power Spectral Density, 802.11n-HT20 Low Channel

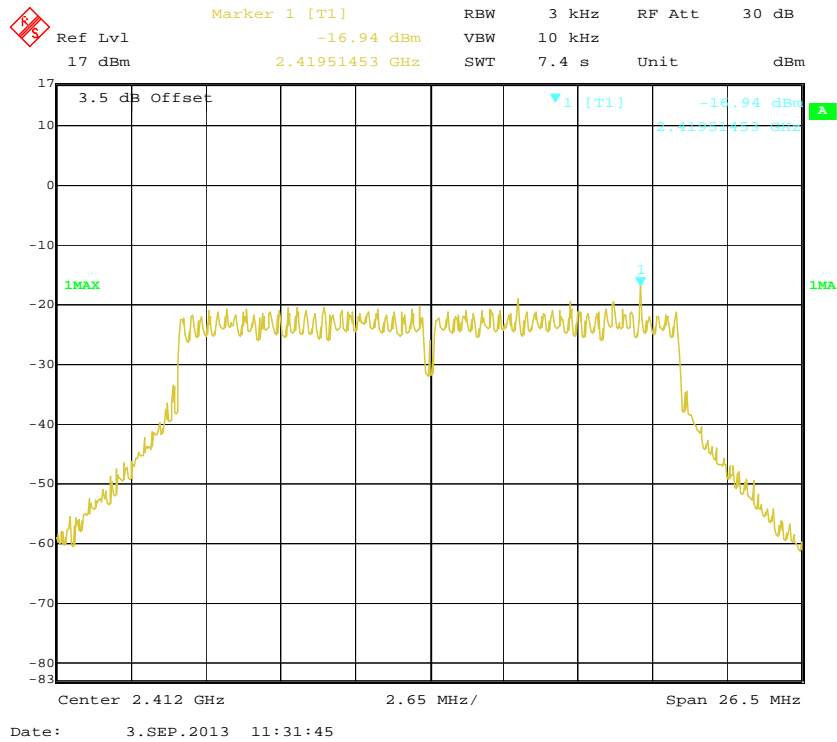

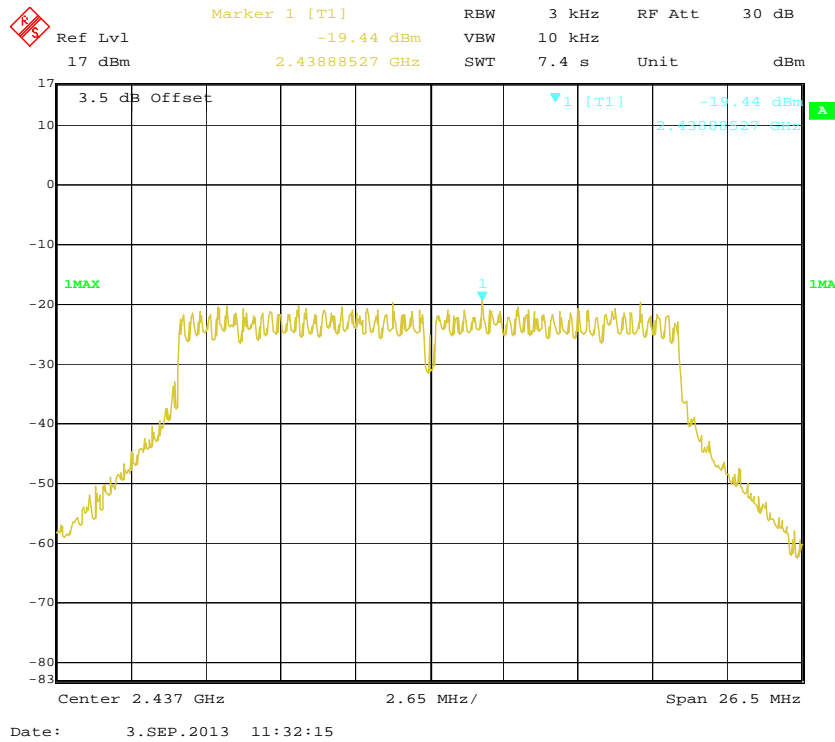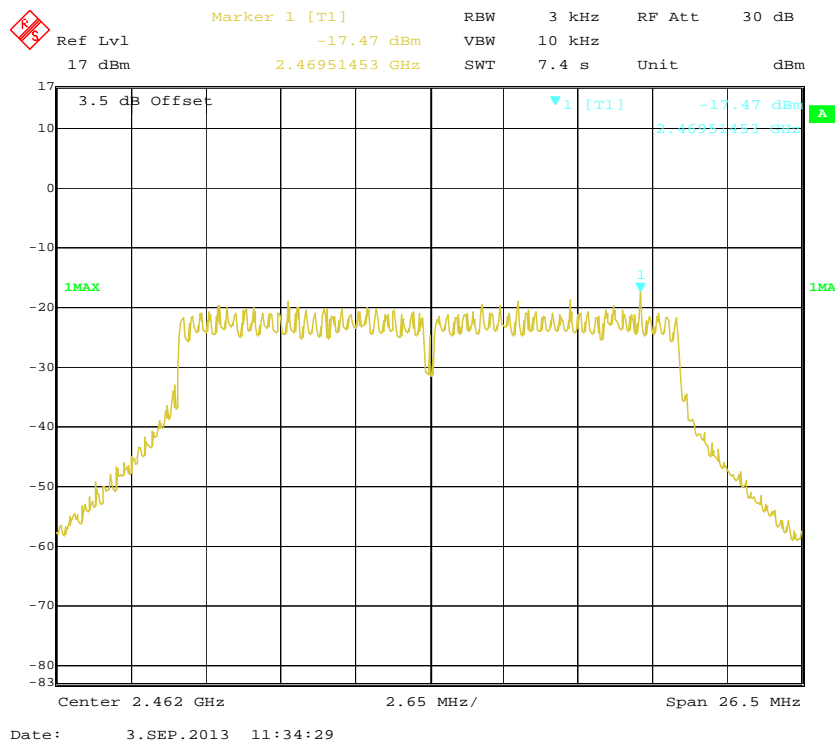


**Power Spectral Density, 802.11n-HT20 Middle Channel****Power Spectral Density, 802.11n-HT20 High Channel**


### Power Spectral Density, 802.11n-HT40 Low Channel

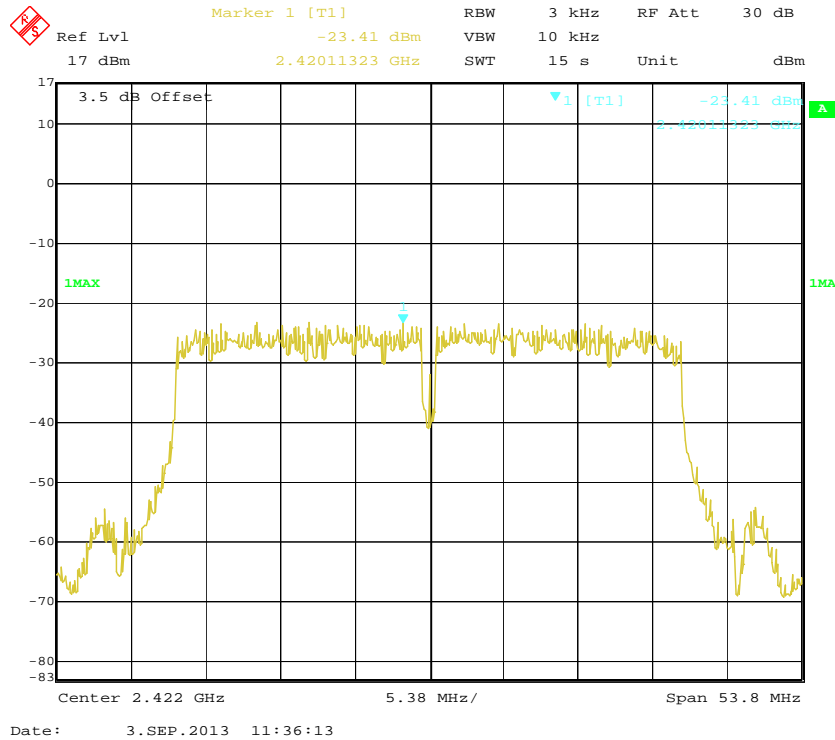

### Power Spectral Density, 802.11n-HT40 Middle Channel

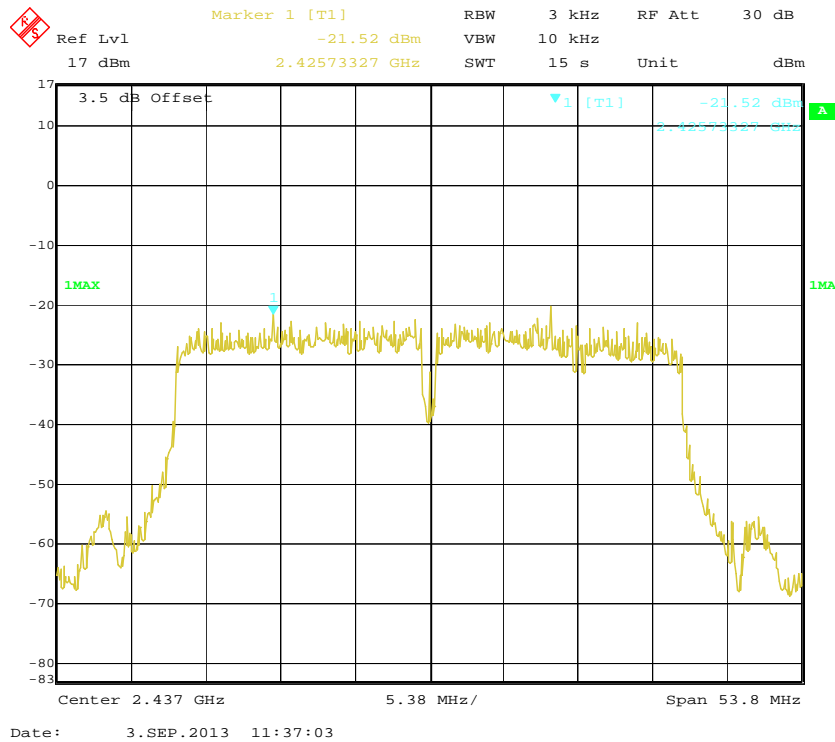

### Power Spectral Density, 802.11n-HT40 High Channel

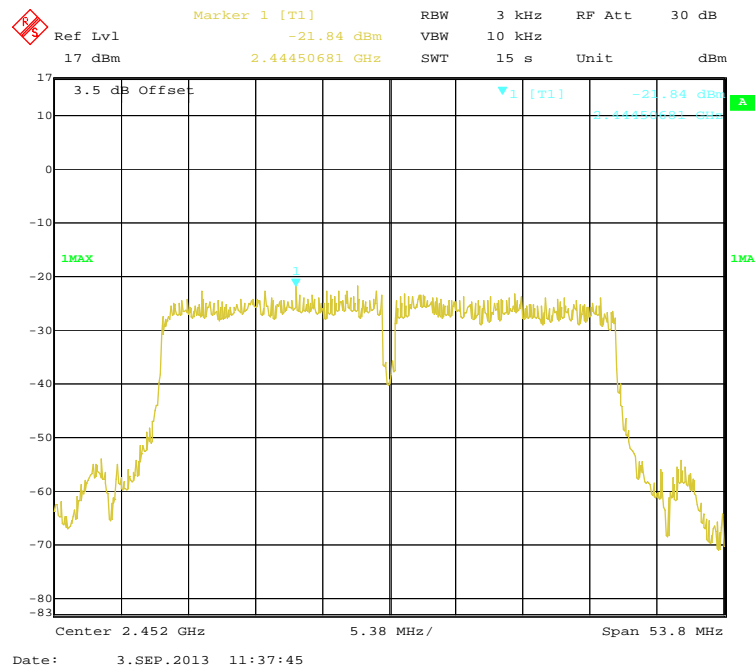

## PRODUCT SIMILARITY DECLARATION LETTER

---



Gajah International (HK) Co.,Ltd  
18/F Bel Trade Commercial Building, 1-3, Burrows Street, Wan Chai, Hong Kong.  
Tel: +852-6326 5997

---

2013-9-2

### Product Similarity Declaration

To Whom It May Concern,

We, Gajah International (HK) Co.,Ltd. hereby declare that our 7" MID, Model Number: MD7018A is electrically identical with PTAB780 that was certified by BACL. They are just different in model numbers due to marketing purposes.

Please contact me if you have any question.

A handwritten signature in red ink, appearing to read 'Ying Keong Chaw'.

Ying Keong Chaw  
General Manager

\*\*\*\*\* END OF REPORT \*\*\*\*\*