

# SAR TEST REPORT

Equipment Under Test :	Smart Phone
Model No. :	I-SM1
Market name:	Imcosys
FCC ID :	UIH I-SM1
Applicant :	ImCoSys Ltd.
Address of Applicant :	ImCoSys AG, Bundesstrasse 5, CH-6300 Zug
Date of Receipt :	2006.09.05
Date of Test :	2006.09.08 – 2006.09.14
Date of Issue :	2006.11.14

Standards:

**FCC OET Bulletin 65 supplement C,  
ANSI/IEEE C95.1, C95.3, IEEE 1528-2003**

In the configuration tested, the EUT complied with the standards specified above.

**Remarks:**

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS-CSTC Shanghai GSM Lab or testing done by SGS-CSTC Shanghai GSM Lab must approve SGS Shanghai GSM Lab in connection with distribution or use of the product described in this report in writing.


Tested by :



Date :

2006.11.14

Approved by :



Date :

2006.11.14

# Contents

<b>1. General Information .....</b>	<b>6</b>
1.1 Test Laboratory .....	6
1.2 Details of Applicant.....	6
1.3 Description of EUT(s) .....	6
1.4 Test Environment.....	7
1.5 Operation Configuration.....	7
1.6 SAM Twin Phantom .....	7
1.7 Device Holder for Transmitters .....	8
1.8 Description of Test Position.....	9
1.9 Recipes for Tissue Simulating Liquid .....	12
2.0 Measurement procedure .....	13
2.1 The SAR Measurement System .....	14
2.2 SAR System Verification .....	16
2.3 Tissue Simulant Fluid for the Frequency Band 900MHz &1900MHZ&2450MHz.	17
2.4 Test Standards and Limits.....	18
<b>2. Summary of Results.....</b>	<b>19</b>
<b>3. Instruments List .....</b>	<b>22</b>
<b>4. Measurements .....</b>	<b>24</b>
4.1 LeftHandSide-Cheek-GSM850-Low .....	24
GSM850-LeftHandSide-Cheek-Low .....	24
4.2 LeftHandSide-Cheek-GSM850-Middle .....	25
GSM850-LeftHandSide-Cheek-Middle.....	25
4.3 LeftHandSide-Cheek-GSM850-High.....	27
GSM850-LeftHandSide-Cheek-High .....	27
4.4 LeftHandSide-Tilt-GSM850-Low .....	29
GSM850-LeftHandSide-Tilt-Low .....	29
4.5 LeftHandSide-Tilt-GSM850-Middle.....	31
GSM850-LeftHandSide-Tilt-Middle .....	31
4.6 LeftHandSide-Tilt-GSM850-High .....	33
GSM850-LeftHandSide-Tilt-High.....	33
4.7 LeftHandSide-GSM850-Maximum Value-SD.....	35
GSM850-LeftHandSide-Cheek-Low+SD.....	35
4.8 LeftHandSide-GSM850-Maximum Value-BT .....	37

GSM850-LeftHandSide-Cheek-Low+BT.....	37
<b>4.9 RightHandSide-Cheek-GSM850-Low .....</b>	<b>39</b>
GSM850-RightHandSide-Cheek-Low .....	39
<b>4.10 RightHandSide-Cheek-GSM850-Middle.....</b>	<b>41</b>
GSM850-RightHandSide-Cheek-Middle .....	41
<b>4.11 RightHandSide-Cheek-GSM850-High .....</b>	<b>43</b>
GSM850-RightHandSide-Cheek-High .....	43
<b>4.12 RightHandSide-Tilt-GSM850-Low .....</b>	<b>45</b>
GSM850-RightHandSide-Tilt-Low .....	45
<b>4.13 RightHandSide-Tilt-GSM850-Middle .....</b>	<b>47</b>
GSM850-RightHandSide-Tilt-Middle .....	47
<b>4.14 RightHandSide-Tilt-GSM850-High .....</b>	<b>49</b>
GSM850-RightHandSide-Tilt-High.....	49
<b>4.15 RightHandSide-GSM850-Maximum Value-SD .....</b>	<b>51</b>
GSM850-RightHandSide-Cheek-Low+SD .....	51
<b>4.16 RightHandSide-GSM850-Maximum Value-BT .....</b>	<b>53</b>
GSM850-RightHandSide-Cheek-Low+BT .....	53
<b>4.17 Body-Worn-GSM850-GPRS-Low .....</b>	<b>55</b>
GSM850-Body-Worn-GPRS-Low-1.5cm.....	55
<b>4.18 Body-Worn-GSM850-GPRS-Middle.....</b>	<b>57</b>
GSM850-Body-Worn-GPRS-Middle-1.5cm .....	57
<b>4.19 Body-Worn-GSM850-GPRS-High .....</b>	<b>59</b>
GSM850-Body-Worn-GPRS-High-1.5cm .....	59
<b>4.20 Body-Worn-GSM850-GPRS-Maximum Value-SD .....</b>	<b>61</b>
GSM850-Body-Worn-GPRS-Low-1.5cm+SD .....	61
<b>4.21 Body-Worn-GSM850-GPRS-Maximum Value-BT .....</b>	<b>63</b>
GSM850-Body-Worn-GPRS-Low-1.5cm+BT .....	63
<b>4.21 LeftHandSide-Cheek-PCS1900-Low .....</b>	<b>65</b>
PCS1900-LeftHandSide-Cheek-Low .....	65
<b>4.22 LeftHandSide-Cheek-PCS1900-Middle .....</b>	<b>67</b>
PCS1900-LeftHandSide-Cheek-Middle .....	67
<b>4.23 LeftHandSide-Cheek-PCS1900-High.....</b>	<b>69</b>
PCS1900-LeftHandSide-Cheek-High.....	69
<b>4.24 LeftHandSide-Tilt-PCS1900-Low .....</b>	<b>71</b>
PCS1900-LeftHandSide-Tilt-Low .....	71

<b>4.25 LeftHandSide-Tilt-PCS1900-Middle.....</b>	<b>73</b>
PCS1900-LeftHandSide-Tilt-Middle.....	73
<b>4.26 LeftHandSide-Tilt-PCS1900-High .....</b>	<b>75</b>
PCS1900-LeftHandSide-Tilt-High .....	75
<b>4.27 LeftHandSide-PCS1900-Maximum Value-SD .....</b>	<b>77</b>
PCS1900-LeftHandSide-Cheek-High+SD .....	77
<b>4.28 LeftHandSide-PCS1900-Maximum Value-BT.....</b>	<b>79</b>
PCS1900-LeftHandSide-Cheek-High+BT .....	79
<b>4.29 RightHandSide-Cheek-PCS1900-Low.....</b>	<b>81</b>
PCS1900-RightHandSide-Cheek-Low .....	81
<b>4.30 RightHandSide-Cheek-PCS1900-Middle .....</b>	<b>83</b>
PCS1900-RightHandSide-Cheek-Middle .....	83
<b>4.31 RightHandSide-Cheek-PCS1900-High.....</b>	<b>85</b>
PCS1900-RightHandSide-Cheek-High.....	85
<b>4.32 RightHandSide-Tilt-PCS1900-Low .....</b>	<b>87</b>
PCS1900-RightHandSide-Tilt-Low .....	87
<b>4.33 RightHandSide-Tilt-PCS1900-Middle .....</b>	<b>89</b>
PCS1900-RightHandSide-Tilt-Middle.....	89
<b>4.34 RightHandSide-Tilt-PCS1900-High .....</b>	<b>91</b>
PCS1900-RightHandSide-Tilt-High .....	91
<b>4.35 RightHandSide-PCS1900-Maximum Value-SD.....</b>	<b>93</b>
PCS1900-RightHandSide-Cheek-High+SD .....	93
<b>4.36RightHandSide-PCS1900-Maximum Value-BT .....</b>	<b>95</b>
PCS1900-RightHandSide-Cheek-High+BT .....	95
<b>4.37 Body-Worn-PCS1900-GPRS-Low.....</b>	<b>97</b>
PCS1900-Body-Worn-GPRS-Low-1.5cm .....	97
<b>4.38 Body-Worn-PCS1900-GPRS-Middle.....</b>	<b>99</b>
PCS1900-Body-Worn-GPRS-Middle-1.5cm .....	99
<b>4.39 Body-Worn-PCS1900-GPRS-High.....</b>	<b>101</b>
PCS1900-Body-Worn-GPRS-High-1.5cm .....	101
<b>4.40 Body-Worn-PCS1900-GPRS-Maximum Value-SD .....</b>	<b>103</b>
PCS1900-Body-Worn-GPRS-High-1.5cm+SD .....	103
<b>4.41 Body-Worn-PCS1900-GPRS-Maximum Value-BT .....</b>	<b>105</b>
PCS1900-Body-Worn-GPRS-High-1.5cm+BT .....	105
<b>4.42 Body-Worn-802.11b-Low .....</b>	<b>107</b>

WiFi802.11b-Body-Worn-Low-1.5cm.....	107
<b>4.43 Body-Worn-802.11b-Low+BT.....</b>	<b>109</b>
WiFi802.11b-Body-Worn-20061114-2-Low-BT .....	109
<b>4.44 Body-Worn-802.11b-Low+SD .....</b>	<b>111</b>
WiFi802.11b-Body-Worn-20061114-2-Low-SD .....	111
<b>4.45 Body-Worn-802.11b-Mid .....</b>	<b>113</b>
WiFi802.11b-Body-Worn-Middle-1.5cm .....	113
<b>4.46 Body-Worn-802.11b-High.....</b>	<b>115</b>
WiFi802.11b-Body-Worn-High-1.5cm .....	115
<b>Appendix .....</b>	<b>118</b>
1. Photographs of Test Setup .....	118
2. Photographs of the EUT .....	121
3. Photographs of the battery .....	122
4. Photograph of the charger.....	122
5. Probe Calibration certificate .....	123
6. Uncertainty analysis.....	132
7. Phantom description.....	133

# 1. General Information

## 1.1 Test Laboratory

GSM Lab  
 SGS-CSTC Standards Technical Services Co.Ltd Shanghai Branch  
 9F, the 3<sup>rd</sup> Building, No.889, Yishan Rd, Xuhui District, Shanghai, China  
 Zip code: 200233  
 Telephone: +86 (0) 21 6495 1616  
 Fax: +86 (0) 21 6495 3679  
 Internet: <http://www.cn.sgs.com>

## 1.2 Details of Applicant

Name: ImCoSys Ltd.

Address: ImCoSys AG, Bundesstrasse 5, CH-6300 Zug

## 1.3 Description of EUT(s)

Brand name	Imcosys	
Model No.	I-SM1	
Market Name	Imcosys	
Serial No.	IMEI: 35212301001001-9	
State of sample	Production	
Battery Type	Lithium-Ion	
Antenna Type	Inner Antenna	
Operation Mode	GSM850/PCS1900	
Modulation Mode	GMSK	
Frequency range	GSM850	Tx: 824~849 MHz
		Rx: 869~894 MHz
	PCS1900	Tx: 1850~1910 MHz
		Rx: 1930~1990 MHz
Maximum RF Conducted Power	GSM850: 31.7dBm, PCS1900: 28.7dBm	
GPRS	MultiSlot class 10 uplink 2TS	
802.11b Max Conducted Power	16.7dBm	
802.11b Modulation Type	CCK	
802.11b Data Rate	11Mbps	

#### **1.4 Test Environment**

Ambient temperature: 22.0° C

Tissue Simulating Liquid: 22° C

Relative Humidity: 29%~35%

#### **1.5 Operation Configuration**

Configuration 1: GSM 850, LeftHandSide Cheek & 15 ° Tilt Position

Configuration 2: GSM 850, RightHandSide Cheek & 15 ° Tilt Position

Configuration 3: GPRS 850, BodyWorn (1.5 cm between EUT and phantom)

Configuration 4: PCS 1900, LeftHandSide Cheek & 15 ° Tilt Position

Configuration 5: PCS 1900, RightHandSide Cheek & 15 ° Tilt Position

Configuration 6: GPRS 1900, BodyWorn (1.5 cm between EUT and phantom)

Configuration 7: 802.11b, BodyWorn (1.5 cm between EUT and phantom)

#### **1.6 SAM Twin Phantom**



The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm). It has three measurement areas:

- Left hand

- Right hand
- Flat phantom

A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on the cover are possible.

On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

**Phantom specification:**

Construction: The shell corresponds to the specifications of Specific Anthropomorphic Mannequin(SAM) Phantom defined in IEEE 1528-2003, EN 50361:2001 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid.

Shell Thickness  $2 \pm 0.2 \text{ mm}$

Filling Volume Approx. 25 liters

Dimensions Height: 850mm Length: 1000mm Width: 500mm

**1.7 Device Holder for Transmitters**

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source in 5mm distance, a positioning uncertainty of  $\pm 0.5 \text{ mm}$  would produce a SAR uncertainty of  $\pm 20\%$ . An accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions, in which the devices must be measured, are defined by the standards.



The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centers for both scales are the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon_r=3$  and loss tangent  $\tan \delta=0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

## 1.8 Description of Test Position

### 1.8.1 SAM Phantom Shape

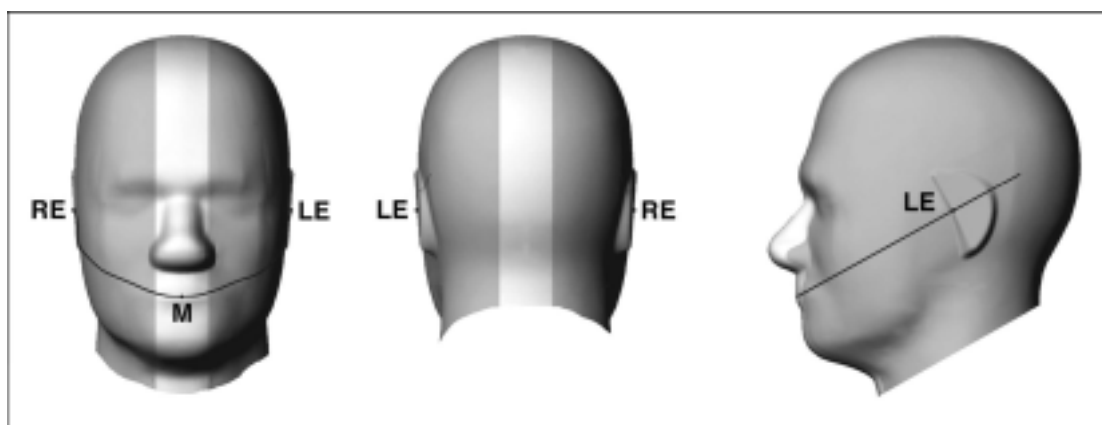


Figure 1—front, back, and side views of SAM (model for the phantom shell). Full-head model is for illustration purposes only—procedures in this recommended practice are intended primarily for the phantom setup of Figure 2. Note: The center strip including the nose region has a different thickness tolerance.

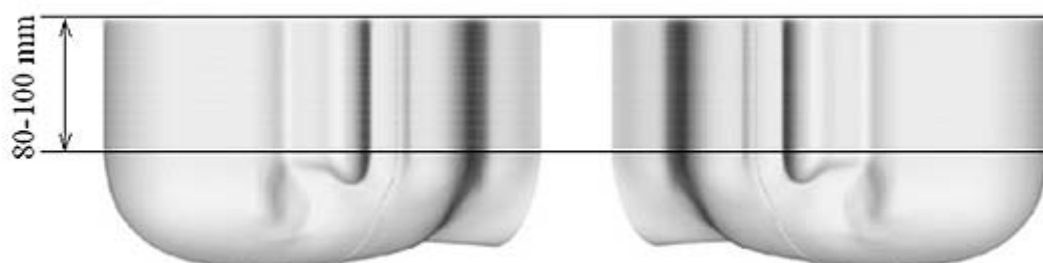


Figure 2—Sagittally bisected phantom with extended perimeter (shown placed on its side as used for SAR measurements)

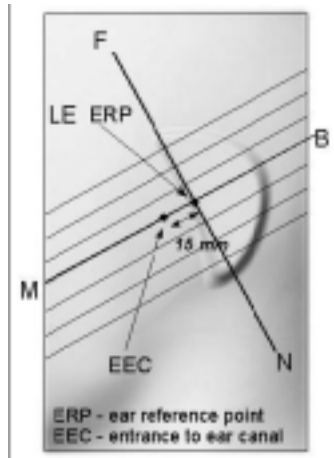


Figure 3—Close-up side view of phantom showing the ear region, N-F and B-M lines, and seven cross-sectional plane locations

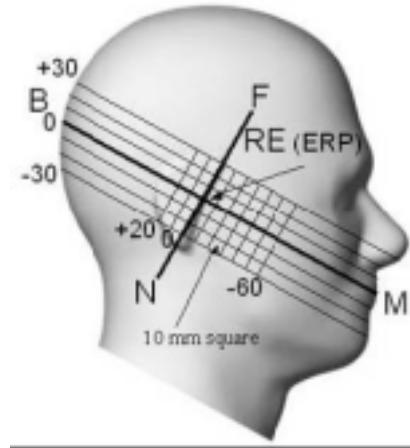


Figure 4—Side view of the phantom showing relevant markings and seven cross-sectional plane locations

1.8.2 The following pictures present the different DUT constructions.

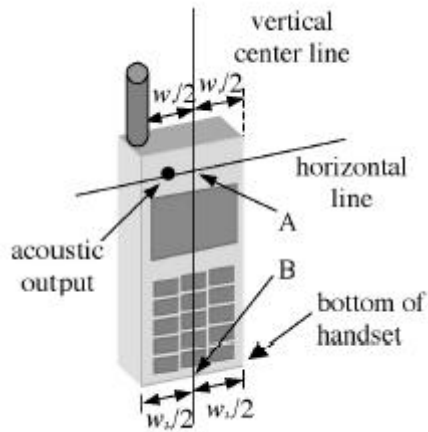


Figure 5a—Handset vertical and horizontal reference lines—“fixed case”

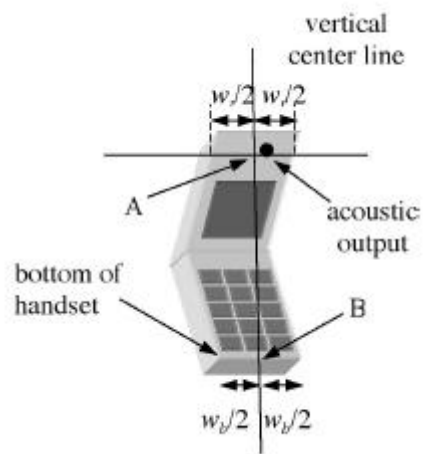



Figure 5b—Handset vertical and horizontal reference lines—“clam-shell case”

1.8.3 Definition of the “cheek” position:

- a) Position the device with the vertical centre line of the body of the device and the horizontal line crossing the centre of the ear piece in a plane parallel to the sagittal plane of the phantom ("initial position" see Figure 6). While maintaining the device in this plane, align the vertical centre line with the reference plane containing the three ear and mouth reference points (M, RE and LE) and align the centre of the ear piece with the line RE-LE;
- b) Translate the mobile phone box towards the phantom with the ear piece aligned with the line LE-RE until the phone touches the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the box until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.

#### **1.8.4 Definition of the "tilted" position:**

- a) Position the device in the "cheek" position described above;
- b) While maintaining the device in the reference plane described above and pivoting against the ear, move it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost.

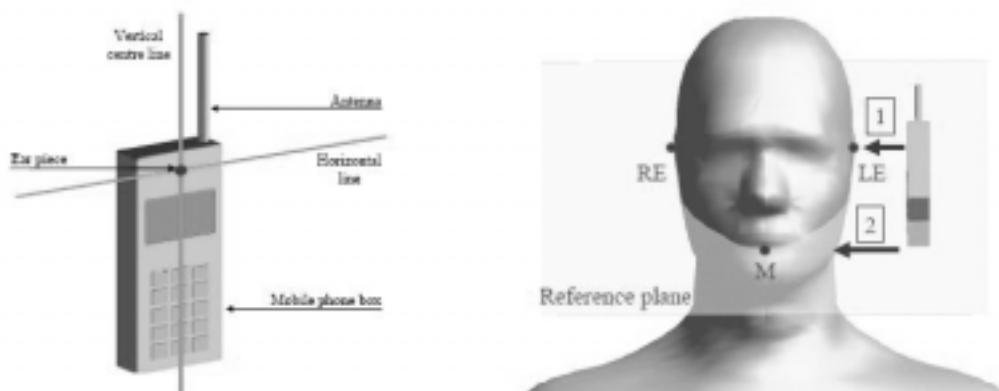

**Figure 6 - Definition of the reference lines and points, on the phone and on the phantom and initial position**

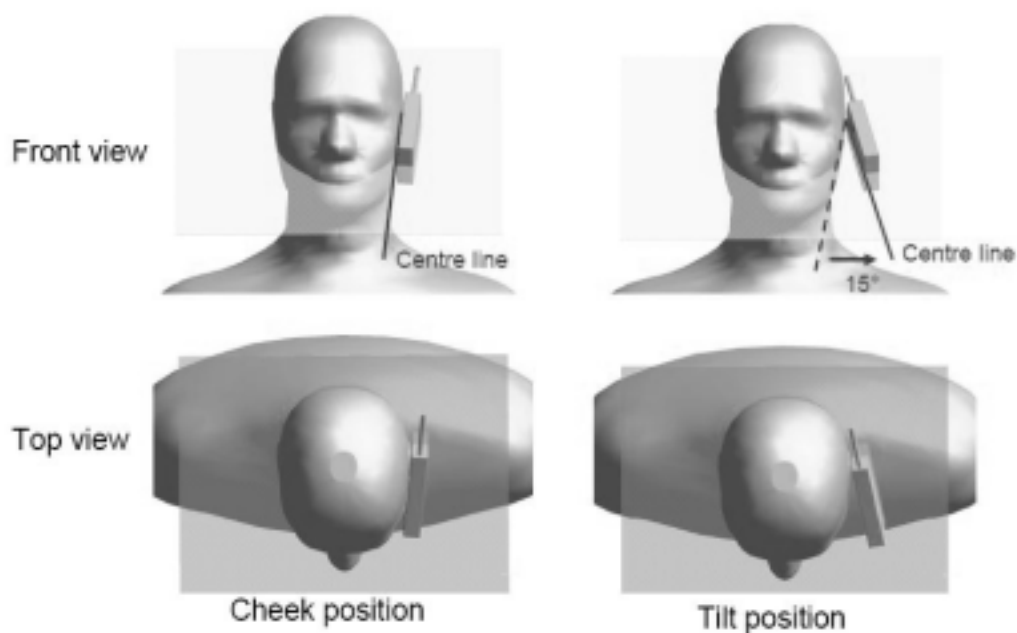


Figure 7 -“Cheek” and “tilt” positions of the mobile phone on the left side

### 1.9 Recipes for Tissue Simulating Liquid

The following tables give the recipes for tissue simulating liquids to be used in different frequency bands.

Ingredient	835MHz	1900MHz
Water	40.29%	55.24%
Sugar	57.90%	-
Salt (NaCl)	1.38%	0.31%
DGBE	-	44.45%
Preventol	0.18%	-
HEC	0.24%	-
Relative Permittivity	41.5	40.0
Conductivity (S/m)	0.90	1.40

Table 1: Composition of the Brain Tissue Equivalent Matter

Ingredient	835MHz	1900MHz
Water	50.75%	70.17%
Sugar	48.21%	-

Salt (NaCl)	0.94%	0.39%
DGBE	-	29.44%
Preventol	0.10%	-
HEC	0.00	-
Relative Permittivity	55.2	53.3
Conductivity (S/m)	0.97	1.52

Table 2: Composition of the Body Tissue Equivalent Matter

## 2.0 Measurement procedure

### Step 1: Power reference measurement

The SAR measurement was taken at a selected spatial reference point to monitor power variations during testing. This fixed location point was measured and used as a reference value.

### Step 2: Area scan

The SAR distribution at the exposed side of the head was measured at a distance of 3.9mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 20mm\*20mm. Based on the area scan data, the area of the maximum absorption was determined by spline interpolation.

### Step 3: Zoom scan

Around this point, a volume of 30mm\*30mm\*34mm (fine resolution volume scan, zoom scan) was assessed by measuring 7\*7\*7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

The data at the surface was extrapolated, since the center of the dipoles is 2.1mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. (This can be variable. Refer to the probe specification) The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The volume was integrated with the trapezoidal algorithm. One thousand points (10\*10\*10) were interpolated to calculate the average. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

**Step 4: Power reference measurement (drift)**

The SAR value at the same location as in step 1 was again measured. ( If the value changed by more than 5%, the evaluation is repeated.)

**2.1 The SAR Measurement System**

A photograph of the SAR measurement System is given in Fig.8.

This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (Speag Dasy 4 professional system). A Model ES3DV3 3088 E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation  $SAR = \sigma (|E_i|^2) / \rho$  where  $\sigma$  and  $\rho$  are the conductivity and mass density of the tissue-simulant.

The DASY4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software. An arm extension for accommodation the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.



- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 2000.
- DASY4 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand, right-hand and body-worn usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validating the proper functioning of the system.

## 2.2 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. 9. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within  $\pm 10\%$  from the target SAR values. These tests were done at 900MHz & 1900MHz & 2450 MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1 (SAR values are normalized to 1W forward power delivered to the dipole). During the tests, the ambient temperature of the laboratory was in the range 22°C, the relative humidity was in the range 60% and the liquid depth above the ear reference points was above 15 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

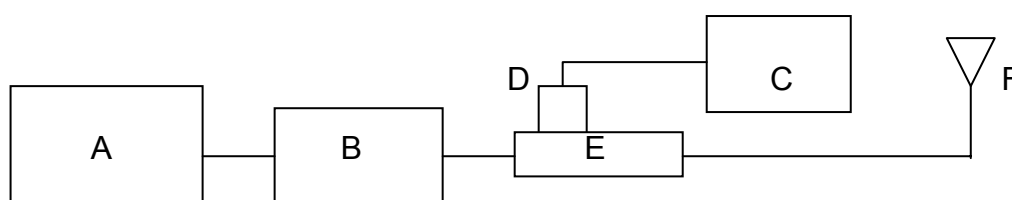


Fig. 9 the microwave circuit arrangement used for SAR system verification

- A. Agilent Model E4438C Signal Generator
- B. Mini-Circuit Model ZHL-42 Preamplifier
- C. Agilent Model E4416A Power Meter
- D. Agilent Model 8481H Power Sensor
- E. HT CP6100 20N Dual directional coupler
- F. Reference dipole antenna



Validation Kit	Frequency MHz	Target SAR 1g (250mW)	Target SAR 10g (250mW)	Measured SAR 1g	Measured SAR 10g	Measured Date
ES3DV3 SN3088	900 Head	2.6	1.67	2.69	1.71	2006-09-08
ES3DV3 SN3088	900 Body	2.69	1.74	2.75	1.78	2006-09-12
ES3DV3 SN3088	1900 Head	9.89	5.16	9.69	5.09	2006-09-11
ES3DV3 SN3088	1900 Body	9.81	5.22	9.75	5.16	2006-09-12
ET3DV6 SN1774	2450 Body	13.1	6.03	13.23	6.12	2006-09-14

Table 3. Result System Validation

### 2.3 Tissue Simulant Fluid for the Frequency Band 900MHz & 1900MHz&2450MHz

The dielectric properties for this body-simulant fluid were measured by using the HP Model 85070D Dielectric Probe (rates frequency band 200 MHz to 20 GHz) in conjunction with Agilent E5071B Network Analyzer (300 KHz-8500 MHz). The Conductivity ( $\sigma$ ) and Permittivity ( $\rho$ ) are listed in Table 2. For the SAR measurement given in this report. The temperature variation of the Tissue Simulant Fluid was 22°C.

Frequency (MHz)	Tissue Type	Limit/Measured	Permittivity ( $\rho$ )	Conductivity ( $\sigma$ )	Simulated Tissue Temp (°C)
900	Head	Measured, 2006-09-08	41.88	0.917	21.9
		Recommended Limit	41.5±5%	0.97±5%	20-24
	Body	Measured, 2006-09-12	53.55	0.967	22.5
		Recommended Limit	55.0±5%	1.05±5%	20-24
1900	Head	Measured, 2006-09-11	38.58	1.453	22.3
		Recommended Limit	40.0±5%	1.40±5%	20-24

	<b>Body</b>	<b>Measured, 2006-09-12</b>	<b>53.55</b>	<b>1.564</b>	<b>22.6</b>
		<b>Recommended Limit</b>	<b>53.3±5%</b>	<b>1.52±5%</b>	<b>20-24</b>
<b>2450</b>	<b>Body</b>	<b>Measured, 2006-09-14</b>	<b>51.62</b>	<b>1.943</b>	<b>22.2</b>
		<b>Recommended Limit</b>	<b>52.5±5%</b>	<b>2.00±5%</b>	<b>20-24</b>

Table 4. Dielectric parameters for the Frequency Band 900MHz&amp;1900MHZ&amp;2450MHz

## 2.4 Test Standards and Limits

According to FCC 47 CFR §2.1093(d) the limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3KHz to 300GHz," ANSI/IEEE C95.1-1992, Copyright 1992 by the Institute of Electrical & Electronics Engineers, Inc., New York, New York 10071.

<b>Human Exposure</b>	<b>Uncontrolled Environment General Population</b>
Spatial Peak SAR (Brain)	1.60 mW/g (averaged over a mass of 1g)

Table 5. RF Exposure Limits

### Notes:

1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.

## 2. Summary of Results

Mode	Test Configuration		SAR, Averaged over 1g(W/kg)			Temperature ( )	Verdict
	Channel/Power(dBm)		Low/31.8	Middle/31.9	High/32.1		
GSM850	Left	Cheek	0.861	0.739	0.648	22	Pass
		Tilt	0.488	0.449	0.405	22	Pass
		SD Using	0.851	-	-	22	Pass
		BT Using	0.828	-	-	22	Pass
	Right	Cheek	0.895	0.765	0.662	22	Pass
		Tilt	0.560	0.502	0.458	22	Pass
		SD Using	0.925	-	-	22	Pass
		BT Using	0.921	-	-	22	Pass
	Body	Distance 1.5cm	0.790	0.757	0.753	22	Pass
		SD Using	0.739	-	-	22	Pass
		BT Using	0.904	-	-	22	Pass

Mode	Test Configuration		SAR, Averaged over 1g(W/kg)			Temperature ( )	Verdict
	Channel/Power(dBm)		Low/28.7	Middle/28.8	High/28.1		
PCS1900	Left	Cheek	0.346	0.350	0.390	22	Pass
		Tilt	0.155	0.152	0.185	22	Pass
		SD Using	-	-	0.332	22	Pass
		BT Using	-	-	0.340	22	Pass
	Right	Cheek	0.598	0.606	0.715	22	Pass
		Tilt	0.181	0.181	0.207	22	Pass

		SD Using	-	-	0.734	22	Pass
		BT Using	-	-	0.732	22	Pass
	Body	Distance 1.5cm	0.299	0.311	0.377	22	Pass
		SD Using	-	-	0.380	22	Pass
		BT Using	-	-	0.384	22	Pass

Mode	Test Configuration		SAR, Averaged over 1g(W/kg)			Temperature ( )	Verdict
	Channel/Power(dBm)		Low/16.6	Middle/16.7	High/16.5		
WiFi 802.11b	Body	Distance 1.5cm	0.048	0.038	0.042	22	Pass
		SD Using	0.040			22	Pass
		BT Using	0.037			22	Pass

### Maximum Values of 1g SAR

Frequency Band(MHz)	EUT position	Conducted Output Power (dBm)	1g Average (W/Kg)	Power Drift (dB)	Amb. Temp ( )	Verdict
850	LeftHandSide Cheek, Low Channel	31.8	0.861	0.087	22	PASS
	RightHandSide Cheek, Low Channel SD Using	31.8	0.925	-0.050	22	PASS
	GPRS,BodyWorn, Low Channel BT Using	31.8	0.904	-0.074	22	PASS
1900	LeftHandSide Cheek, High Channel	28.1	0.390	0.024	22	PASS
	RightHandSide Cheek ,High Channel SD Using	28.1	0.734	0.017	22	PASS
	GPRS,BodyWorn, High Channel BT Using	28.1	0.384	-0.020	22	PASS
2450	802.11b ,BodyWorn,Low Channel	16.6	0.048	0.130	22	PASS

Note:

1. In GSM 850 band, the low, middle and high channels are CH128/824.2MHz, CH189/836.4MHz and CH251/848.8MHz separately.
2. In PCS 1900 band, the low, middle and high channels are CH512/1805.2MHz, CH661/1880.0MHz and CH810/1909.8MHz separately.
3. In ISM 2450 band, the low, middle and high channels are CH01/2412MHz, CH06/2437MHz and CH11/2462MHz separately
4. For the Bodyworn measurements the sample was only placed with the antenna toward the phantom since this position delivers the highest SAR values.
5. For the Bodyworn measurements, the distance from the sample to the phantom is 1.5 cm.
6. As the Mobile Station(MS) can not have the GSM/GPRS established simultaneously with 802.11b enabled, the 802.11b SAR tests were performed separately.
7. For all the tests, the maximum power drift is -0.317dB

### 3. Instruments List

Instrument	Model	Serial number	NO.	Date of last Calibration
Desktop PC	COMPAQ EVO	N/A	GSM-SAR-025	N/A
Dasy 4 software	V 4.6 build 23	N/A	GSM-SAR-001	N/A
Probe	ES3DV3	3088	GSM-SAR-034	2005.09.13
Probe	ET3DV6	1774	GSM-SAR-071	2005.10.26
DAE	DAE3	569	GSM-SAR-023	2005.11.17
Phantom	SAM 12	TP-1283	GSM-SAR-005	N/A
Robot	RX90L	F03/5V32A1/A01	GSM-SAR-008	N/A
900MHz system validation dipole	D900V2	184	GSM-SAR-013	2005.9.22
1900MHz system validation dipole	D1900V2	5d028	GSM-SAR-020	2005.9.25
2450MHz system validation dipole	D2450V2	733	GSM-SAR-019	2005.9.27
Dielectric probe kit	85070D	US01440168	GSM-SAR-016	2005.12.19
Agilent network analyzer	E5071B	MY42100549	GSM-SAR-007	2005.12.19
Agilent signal generator	E4438	14438CATO-19719	GSM-SAR-008	2005.12.19
Mini-Circuits preamplifier	ZHL-42	D041905	GSM-SAR-033	2006.04.19
Agilent power meter	E4416A	GB41292095	GSM-SAR-010	2005.12.19
Agilent power sensor	8481H	MY41091234	GSM-SAR-011	2005.12.19
HT CP6100 20N Coupling	6100	SCP301480120	GSM-SAR-012	2005.12.20

Order No: GSM10002674-2

Date: Nov 14, 2006

Page: 23 of 133

R&S Universal radio communication tester	CMU200	103633	GSM-AUD-002	2005.12.20
---	--------	--------	-------------	------------

## 4. Measurements

### 4.1 LeftHandSide-Cheek-GSM850-Low

Date/Time: 2006-9-9 11:04:50

Test Laboratory: SGS-GSM

#### GSM850-LeftHandSide-Cheek-Low

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: GSM850-GSM Mode; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used:  $f = 824.2 \text{ MHz}$ ;  $\sigma = 0.875 \text{ mho/m}$ ;  $\epsilon_r = 42.4$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.91, 5.91, 5.91); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Cheek Position - Low/Area Scan (61x101x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.885 mW/g

**Cheek Position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$


Reference Value = 12.2 V/m; Power Drift = 0.087 dB

Peak SAR (extrapolated) = 1.14 W/kg



SAR(1 g) = 0.861 mW/g; SAR(10 g) = 0.620 mW/g

Maximum value of SAR (measured) = 0.935 mW/g

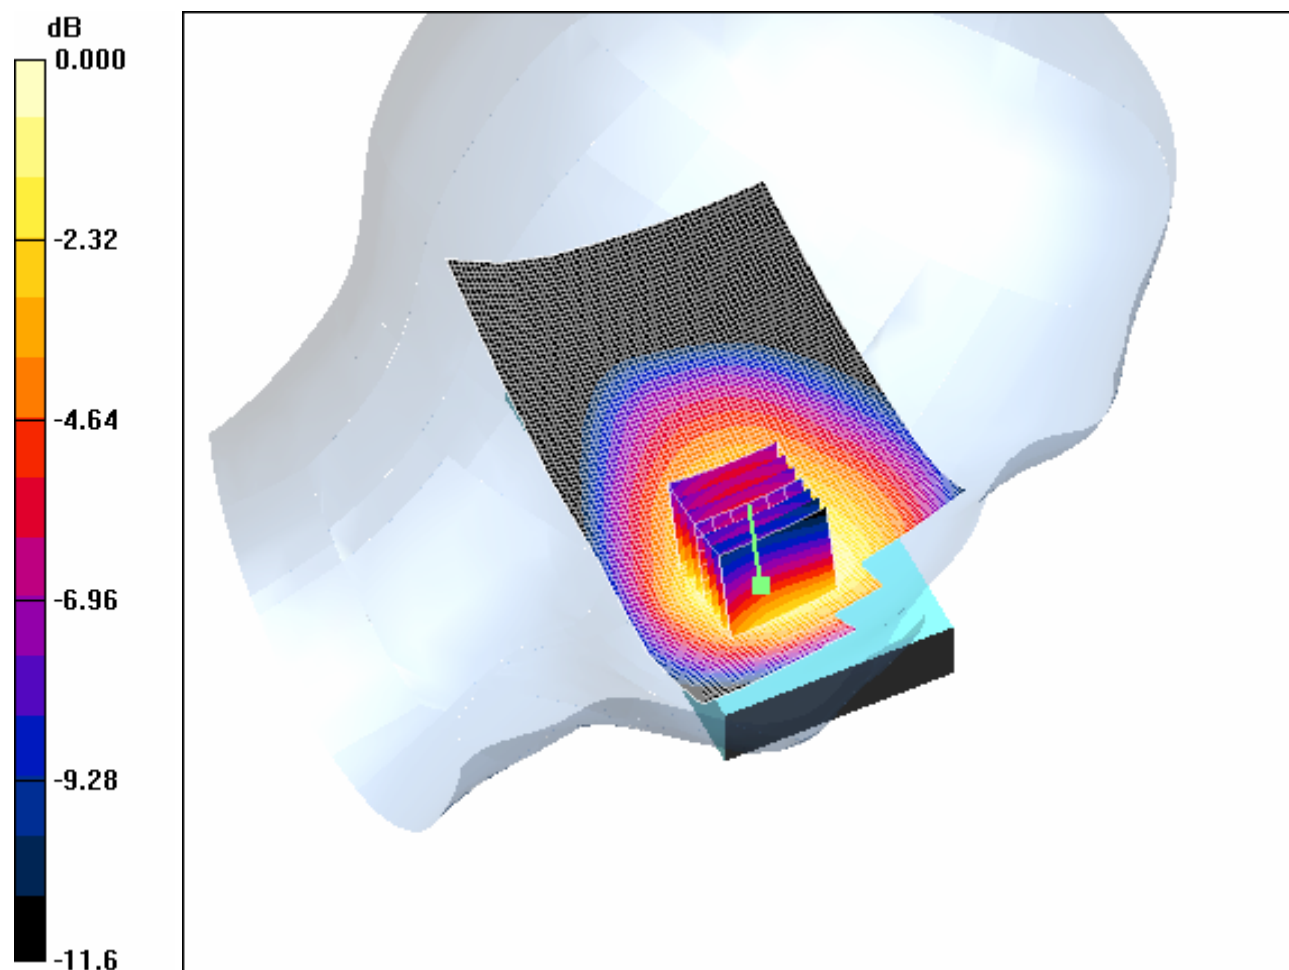

0 dB = 0.935mW/g

#### 4.2 LeftHandSide-Cheek-GSM850-Middle

Date/Time: 2006-9-9 11:27:52

Test Laboratory: SGS-GSM

GSM850-LeftHandSide-Cheek-Middle

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: GSM850-GSM Mode; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used:  $f = 836.4 \text{ MHz}$ ;  $\sigma = 0.886 \text{ mho/m}$ ;  $\epsilon_r = 42.3$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

**DASY4 Configuration:**

- Probe: ES3DV3 - SN3088; ConvF(5.91, 5.91, 5.91); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Cheek Position - Middle/Area Scan (61x101x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.763 mW/g


**Cheek Position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 11.4 V/m; Power Drift = 0.105 dB

Peak SAR (extrapolated) = 0.967 W/kg

**SAR(1 g) = 0.739 mW/g; SAR(10 g) = 0.535 mW/g**

Maximum value of SAR (measured) = 0.784 mW/g

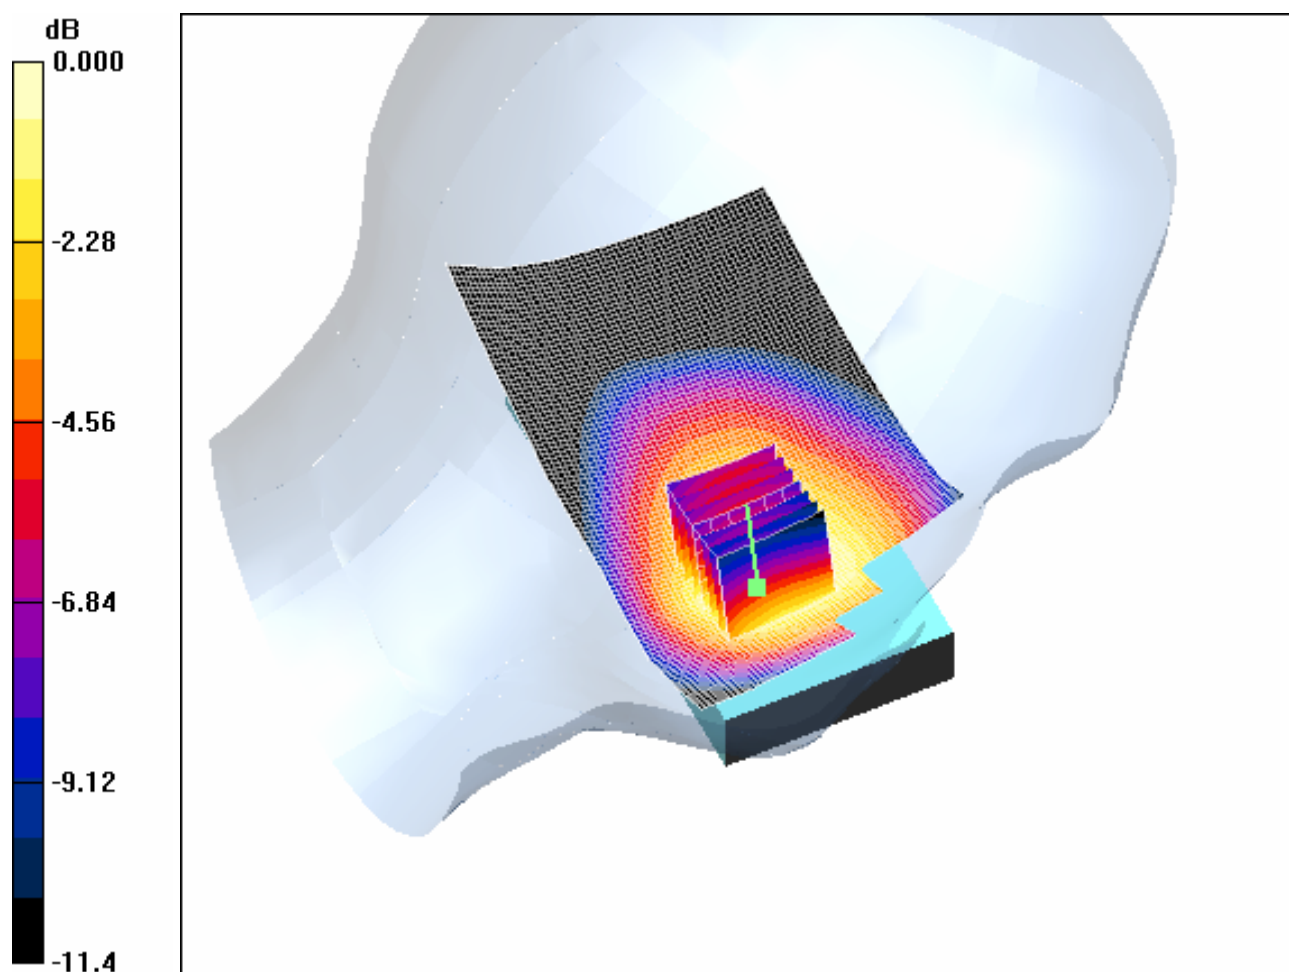

0 dB = 0.784mW/g

#### **4.3 LeftHandSide-Cheek-GSM850-High**

Date/Time: 2006-9-9 11:52:03

Test Laboratory: SGS-GSM

#### **GSM850-LeftHandSide-Cheek-High**

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: GSM850-GSM Mode; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used:  $f = 848.8 \text{ MHz}$ ;  $\sigma = 0.896 \text{ mho/m}$ ;  $\epsilon_r = 42.3$ ;  $\mu_r =$

1000 kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.91, 5.91, 5.91); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Cheek Position - High/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.670 mW/g


**Cheek Position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.9 V/m; Power Drift = 0.060 dB

Peak SAR (extrapolated) = 0.865 W/kg

**SAR(1 g) = 0.648 mW/g; SAR(10 g) = 0.465 mW/g**

Maximum value of SAR (measured) = 0.694 mW/g

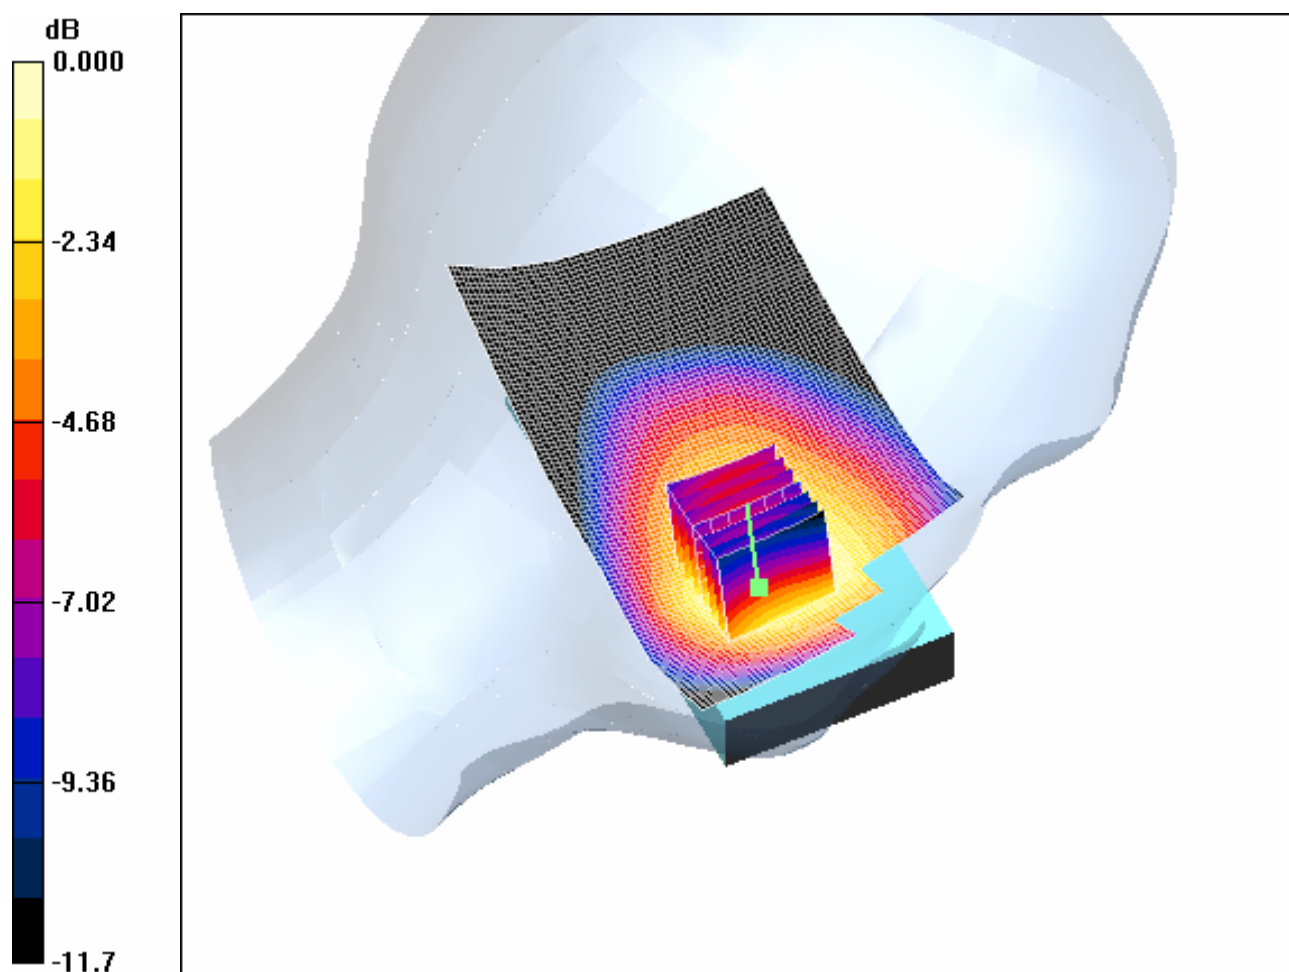

0 dB = 0.694mW/g

#### 4.4 LeftHandSide-Tilt-GSM850-Low

Date/Time: 2006-9-9 12:21:42

Test Laboratory: SGS-GSM

#### GSM850-LeftHandSide-Tilt-Low

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: GSM850-GSM Mode; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.875$  mho/m;  $r = 42.4$ ;  $\epsilon =$

1000 kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.91, 5.91, 5.91); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Tilt Position - Low/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.517 mW/g


**Tilt Position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.0 V/m; Power Drift = -0.056 dB

Peak SAR (extrapolated) = 0.615 W/kg

**SAR(1 g) = 0.488 mW/g; SAR(10 g) = 0.366 mW/g**

Maximum value of SAR (measured) = 0.512 mW/g

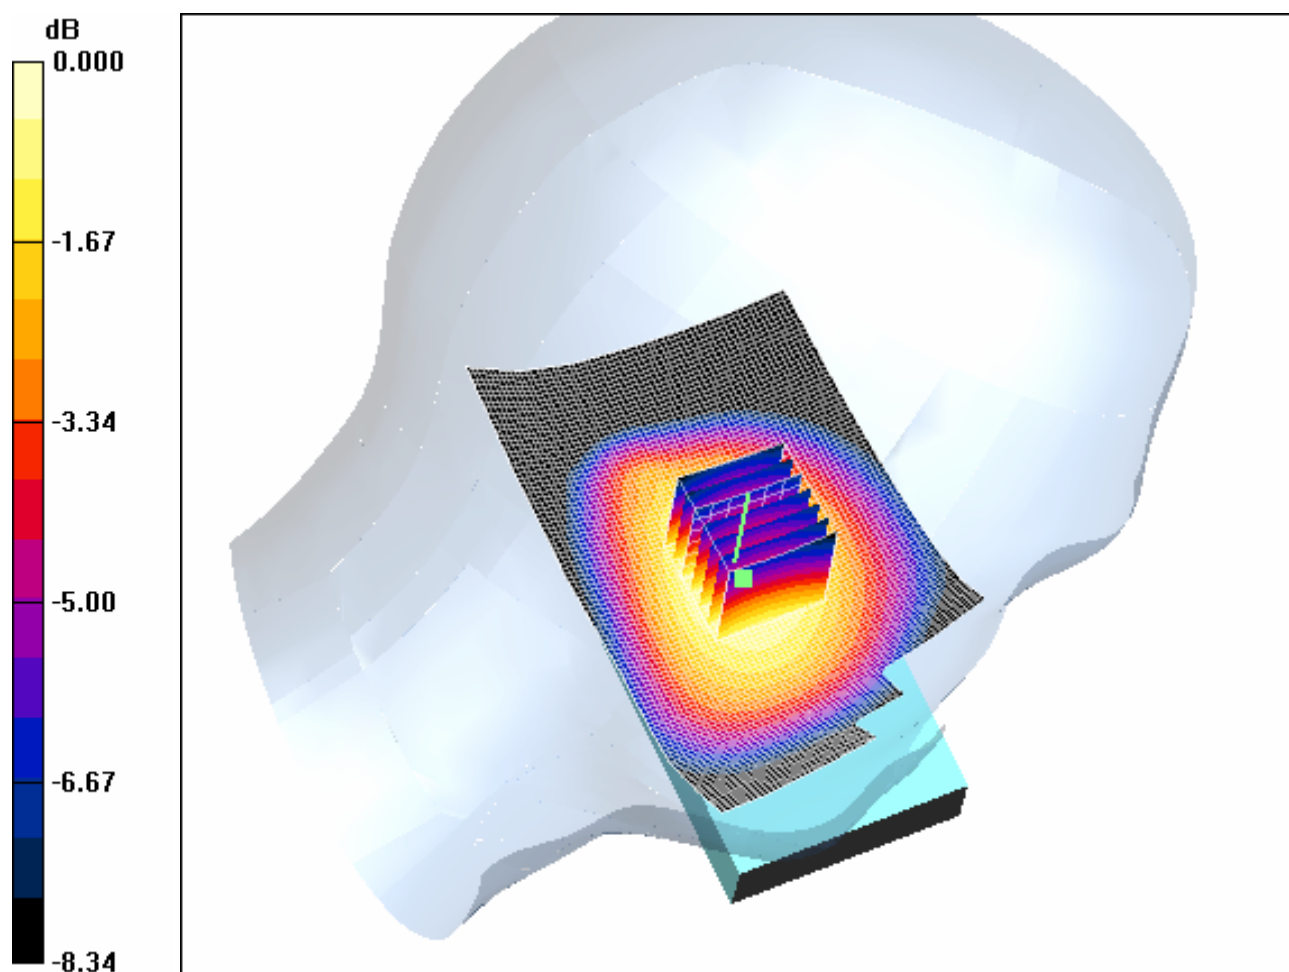

0 dB = 0.512mW/g

#### 4.5 LeftHandSide-Tilt-GSM850-Middle

Date/Time: 2006-9-9 12:47:06

Test Laboratory: SGS-GSM

#### GSM850-LeftHandSide-Tilt-Middle

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: GSM850-GSM Mode; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used:  $f = 836.4 \text{ MHz}$ ;  $\sigma = 0.886 \text{ mho/m}$ ;  $r = 42.3$ ;  $\epsilon =$

1000 kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.91, 5.91, 5.91); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Tilt Position - Middle/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.467 mW/g

**Tilt Position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 18.1 V/m; Power Drift = 0.012 dB

Peak SAR (extrapolated) = 0.576 W/kg

**SAR(1 g) = 0.449 mW/g; SAR(10 g) = 0.335 mW/g**

Maximum value of SAR (measured) = 0.477 mW/g



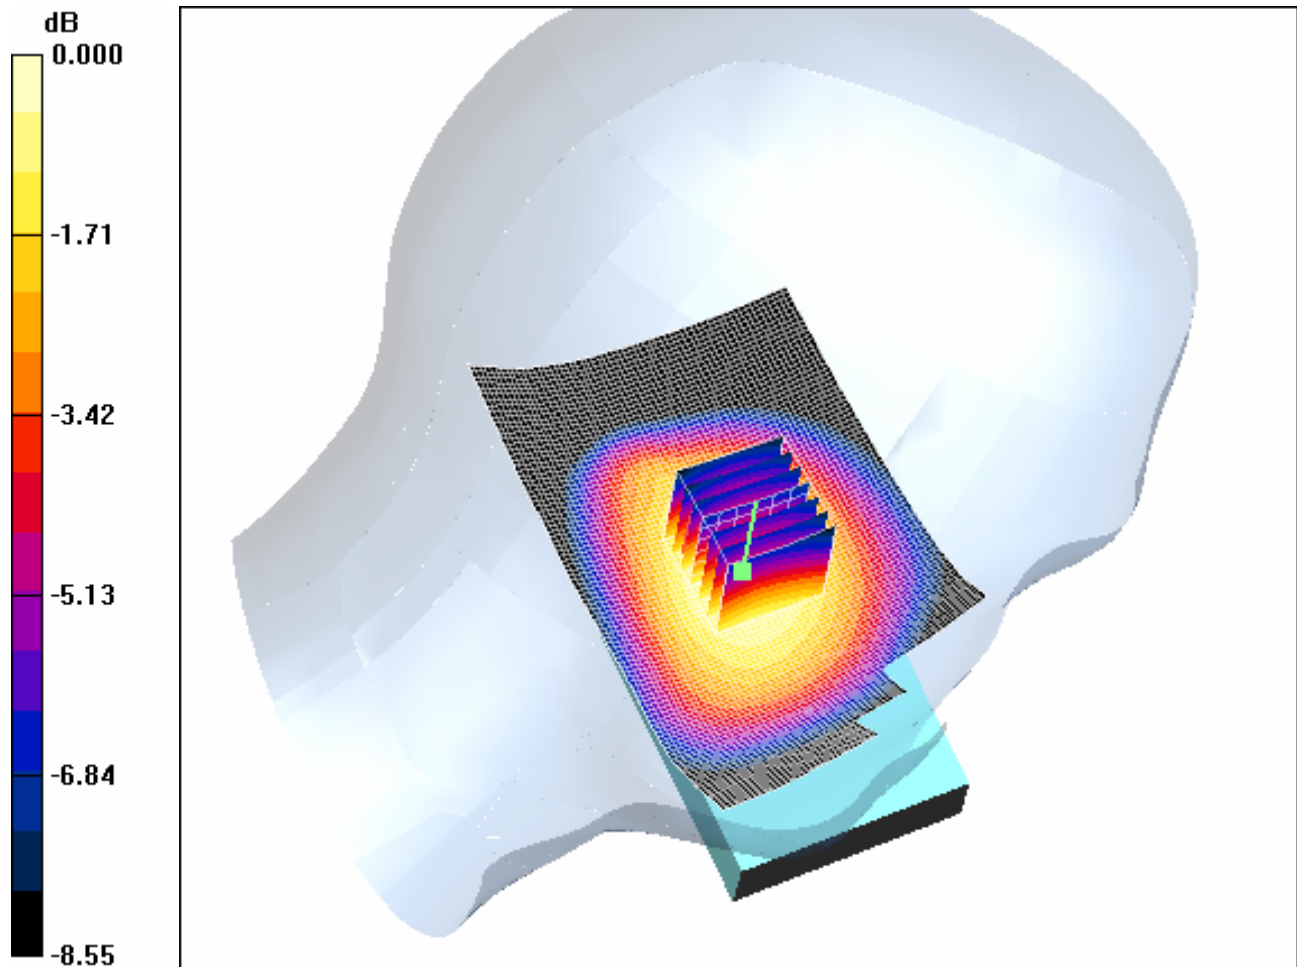

0 dB = 0.477mW/g

#### 4.6 LeftHandSide-Tilt-GSM850-High

Date/Time: 2006-9-9 13:08:53

Test Laboratory: SGS-GSM

#### GSM850-LeftHandSide-Tilt-High

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: GSM850-GSM Mode; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used:  $f = 848.8$  MHz;  $\sigma = 0.896$  mho/m;  $\epsilon_r = 42.3$ ;  $\mu_r =$

1000 kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.91, 5.91, 5.91); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Tilt Position - High/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.425 mW/g


**Tilt Position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.3 V/m; Power Drift = 0.017 dB

Peak SAR (extrapolated) = 0.513 W/kg

**SAR(1 g) = 0.405 mW/g; SAR(10 g) = 0.302 mW/g**

Maximum value of SAR (measured) = 0.427 mW/g

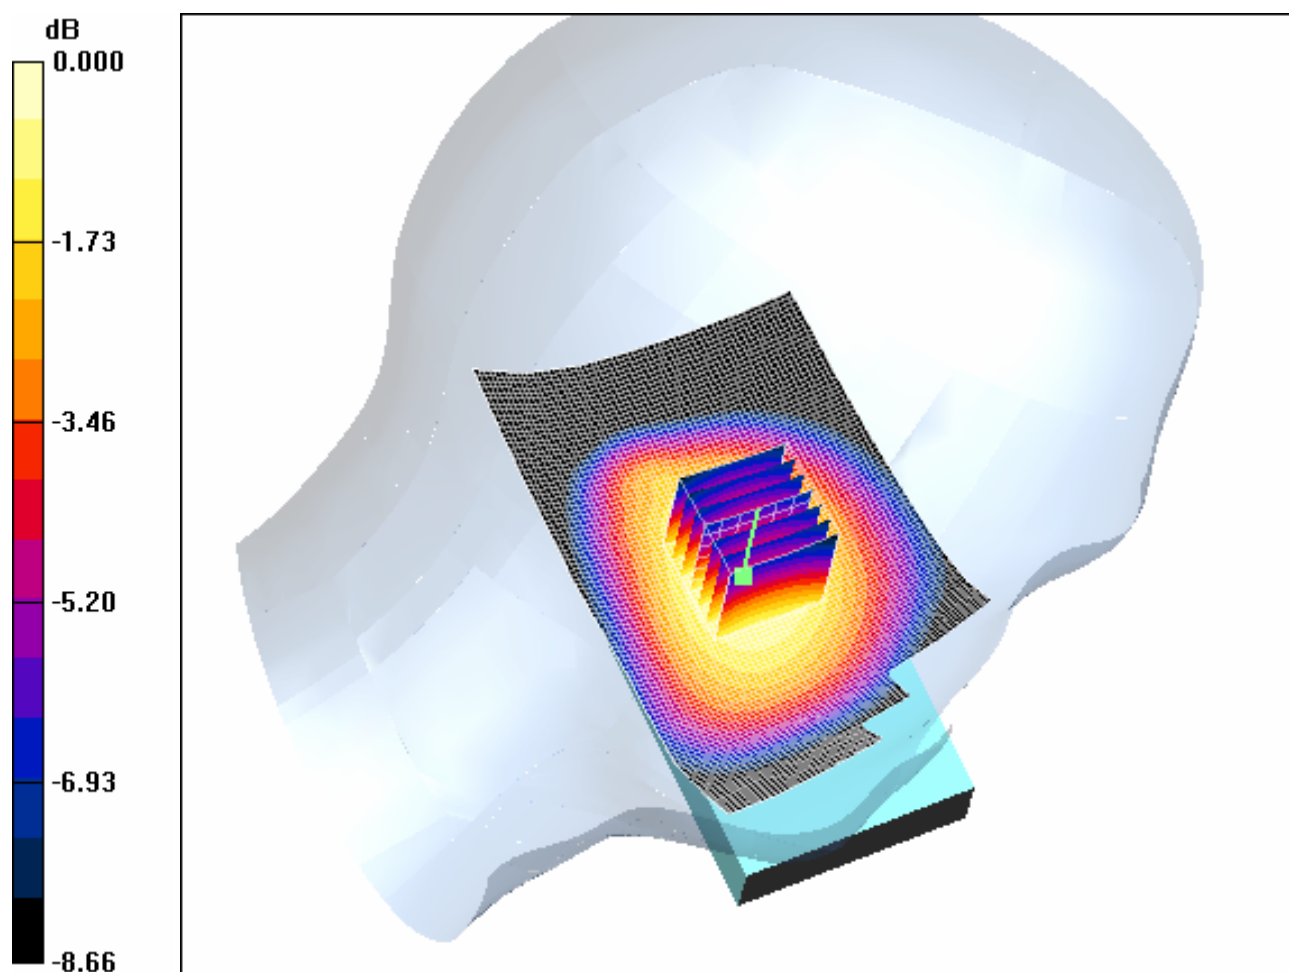

0 dB = 0.427mW/g

#### 4.7 LeftHandSide-GSM850-Maximum Value-SD

Date/Time: 2006-9-9 13:38:26

Test Laboratory: SGS-GSM

#### GSM850-LeftHandSide-Cheek-Low+SD

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: GSM850-GSM Mode; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.875$  mho/m;  $\epsilon_r = 42.4$ ;  $\mu_r =$

1000 kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.91, 5.91, 5.91); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Cheek Position - Low+SD/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.892 mW/g


**Cheek Position - Low+SD/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.4 V/m; Power Drift = -0.042 dB

Peak SAR (extrapolated) = 1.12 W/kg

**SAR(1 g) = 0.851 mW/g; SAR(10 g) = 0.617 mW/g**

Maximum value of SAR (measured) = 0.909 mW/g

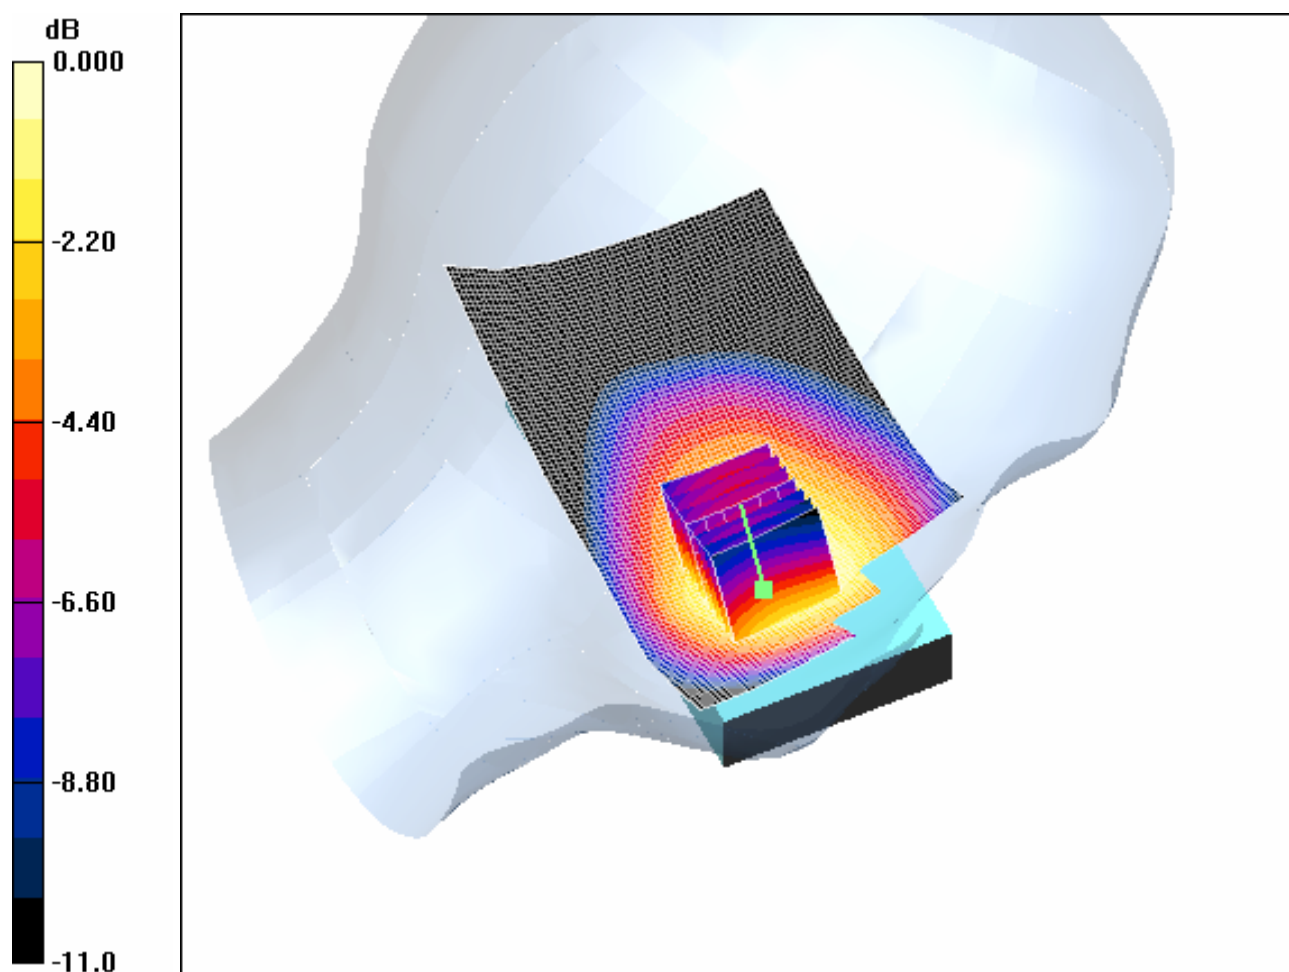

0 dB = 0.909mW/g

#### **4.8 LeftHandSide-GSM850-Maximum Value-BT**

Date/Time: 2006-9-9 14:05:59

Test Laboratory: SGS-GSM

#### **GSM850-LeftHandSide-Cheek-Low+BT**

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: GSM850-GSM Mode; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.875$  mho/m;  $\epsilon_r = 42.4$ ;  $\mu_r = 1$

1000 kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.91, 5.91, 5.91); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Cheek Position - Low+BT/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.868 mW/g


**Cheek Position - Low+BT/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.1 V/m; Power Drift = 0.006 dB

Peak SAR (extrapolated) = 1.08 W/kg

**SAR(1 g) = 0.828 mW/g; SAR(10 g) = 0.607 mW/g**

Maximum value of SAR (measured) = 0.879 mW/g

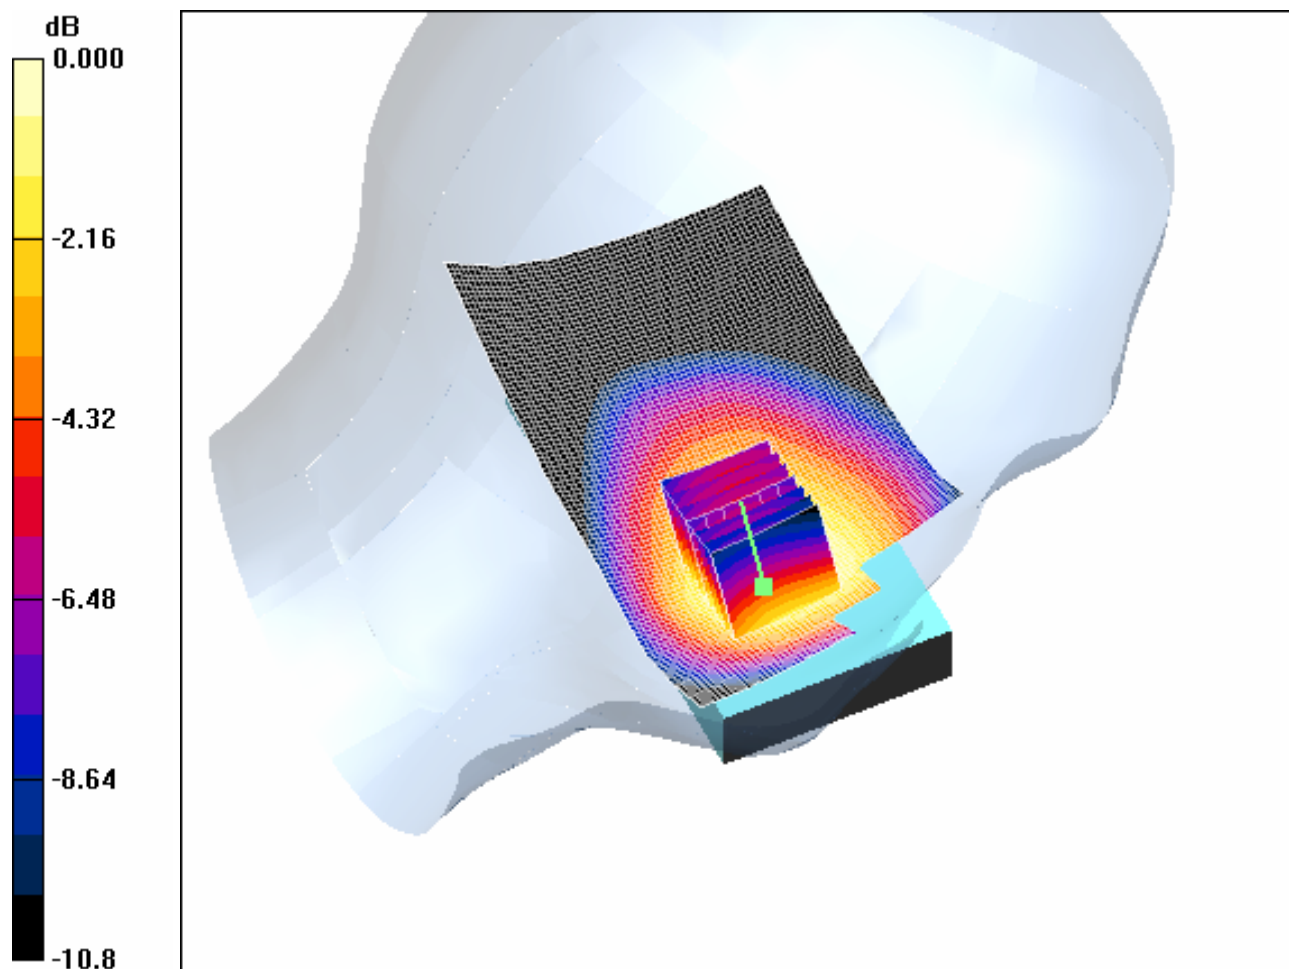

0 dB = 0.879mW/g

#### 4.9 RightHandSide-Cheek-GSM850-Low

Date/Time: 2006-9-8 10:42:37

Test Laboratory: SGS-GSM

#### GSM850-RightHandSide-Cheek-Low

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: GSM850-GSM Mode; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.875$  mho/m;  $\epsilon_r = 42.4$ ;  $\mu_r =$

1000 kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.91, 5.91, 5.91); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Cheek Position - Low/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.968 mW/g

**Cheek Position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 14.4 V/m; Power Drift = 0.058 dB

Peak SAR (extrapolated) = 1.36 W/kg

**SAR(1 g) = 0.895 mW/g; SAR(10 g) = 0.600 mW/g**

Maximum value of SAR (measured) = 0.961 mW/g



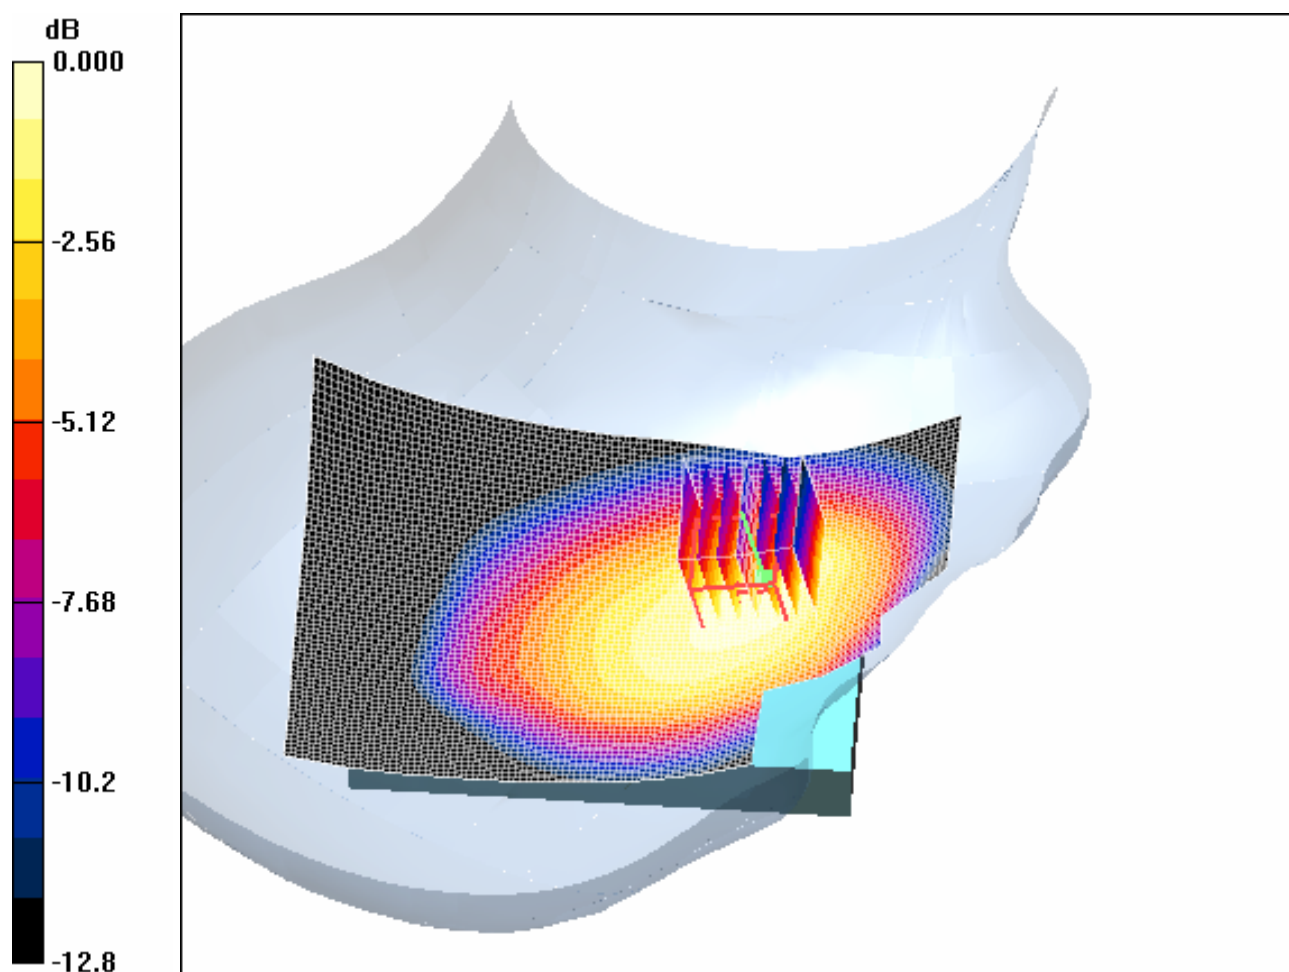

0 dB = 0.961mW/g

#### **4.10 RightHandSide-Cheek-GSM850-Middle**

Date/Time: 2006-9-8 11:28:48

Test Laboratory: SGS-GSM

#### **GSM850-RightHandSide-Cheek-Middle**

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: GSM850-GSM Mode; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.886$  mho/m;  $\epsilon_r = 42.3$ ;  $\mu_r =$

1000 kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.91, 5.91, 5.91); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Cheek Position - Middle/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.832 mW/g


**Cheek Position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.6 V/m; Power Drift = 0.138 dB

Peak SAR (extrapolated) = 1.17 W/kg

**SAR(1 g) = 0.765 mW/g; SAR(10 g) = 0.514 mW/g**

Maximum value of SAR (measured) = 0.831 mW/g

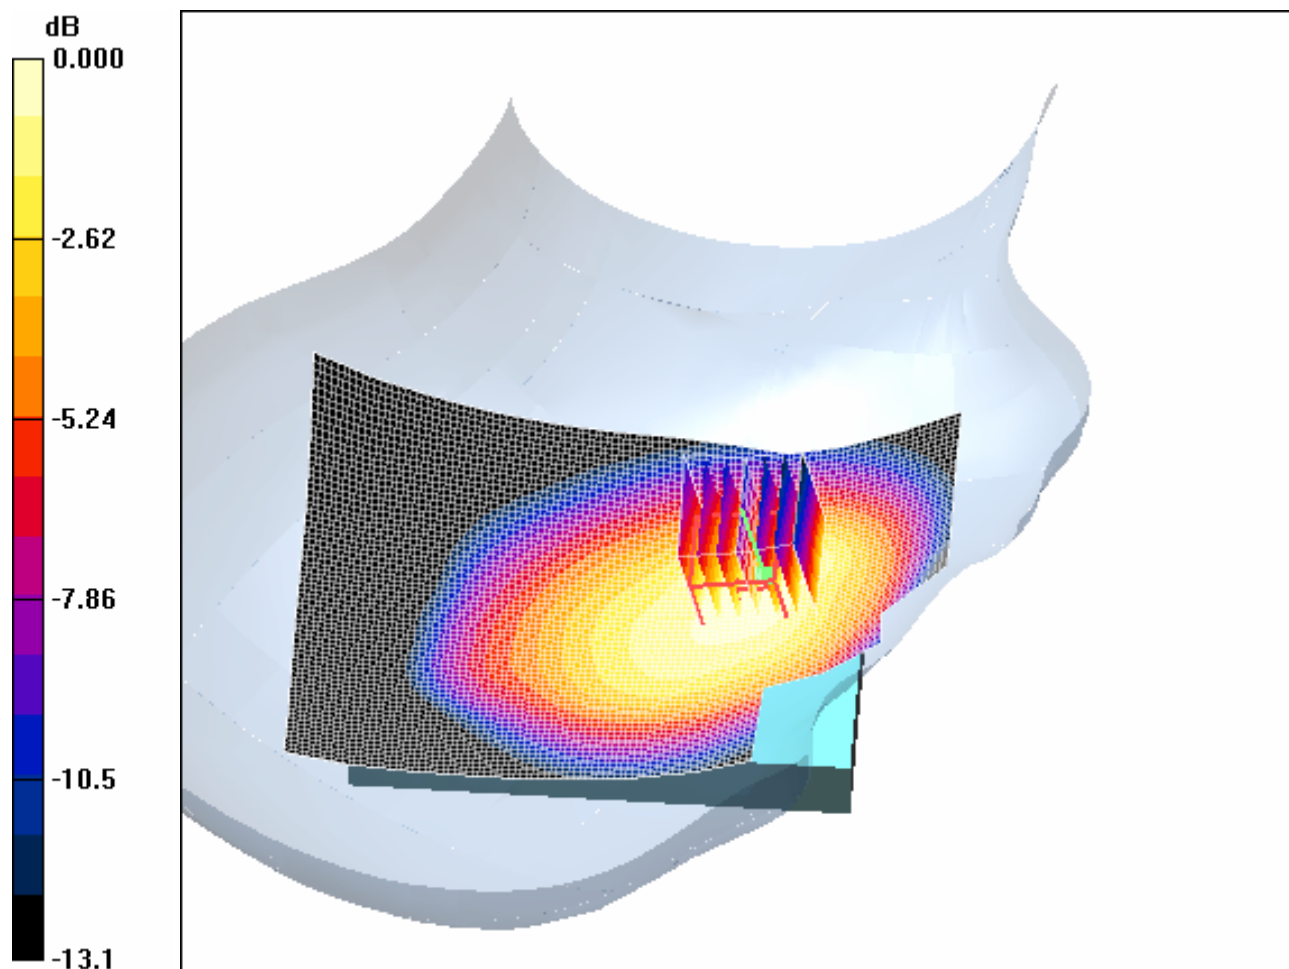

0 dB = 0.831mW/g

#### 4.11 RightHandSide-Cheek-GSM850-High

Date/Time: 2006-9-8 12:36:39

Test Laboratory: SGS-GSM

#### GSM850-RightHandSide-Cheek-High

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: GSM850-GSM Mode; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used:  $f = 848.8$  MHz;  $\sigma = 0.896$  mho/m;  $\epsilon_r = 42.3$ ;  $\mu_r = 1$

1000 kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.91, 5.91, 5.91); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Cheek Position - High/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.719 mW/g


**Cheek Position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.8 V/m; Power Drift = 0.041 dB

Peak SAR (extrapolated) = 1.03 W/kg

**SAR(1 g) = 0.662 mW/g; SAR(10 g) = 0.440 mW/g**

Maximum value of SAR (measured) = 0.720 mW/g

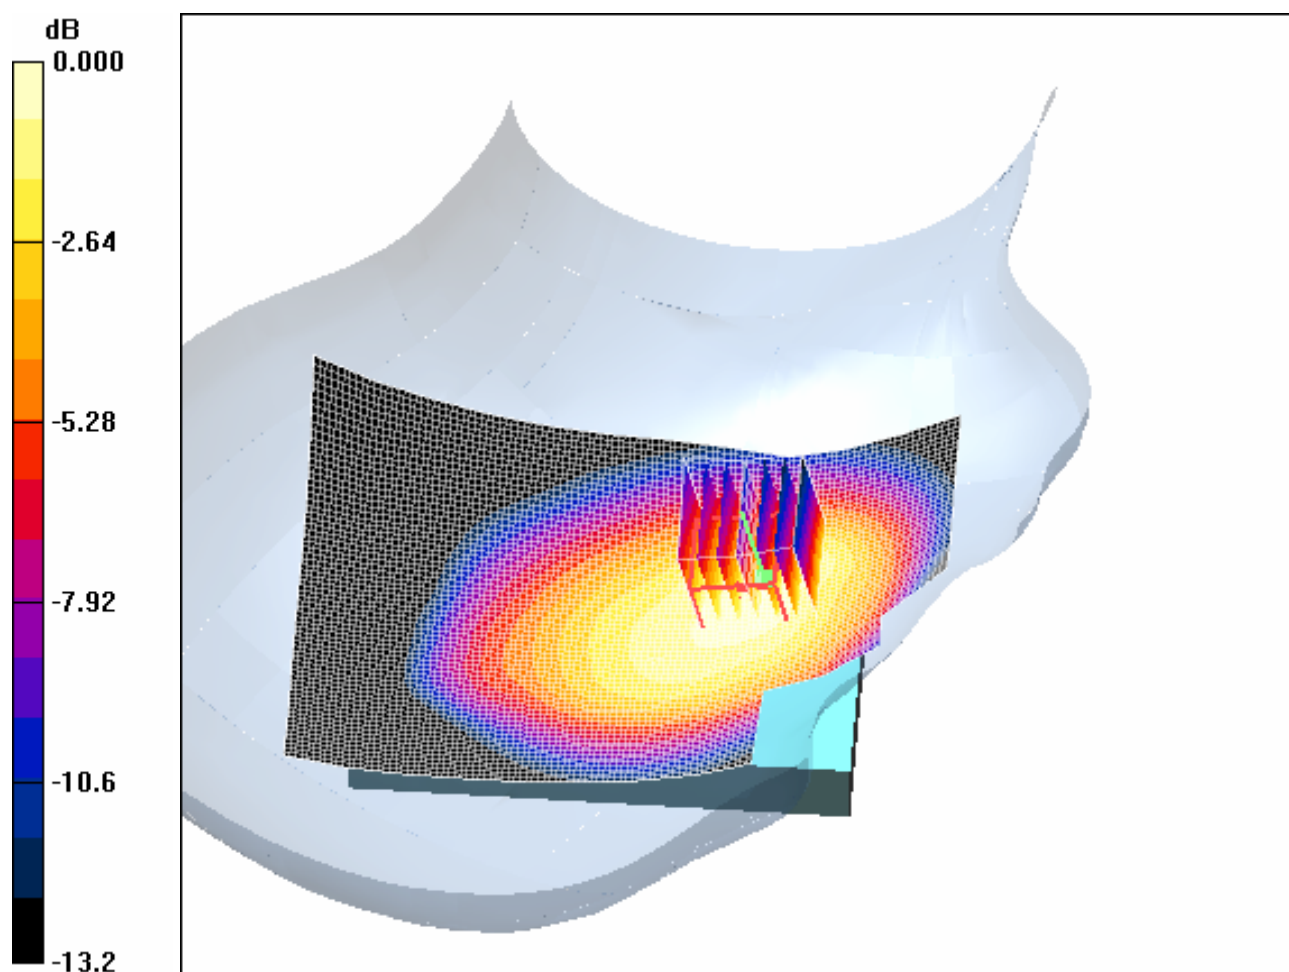

0 dB = 0.720mW/g

#### 4.12 RightHandSide-Tilt-GSM850-Low

Date/Time: 2006-9-8 13:05:26

Test Laboratory: SGS-GSM

#### GSM850-RightHandSide-Tilt-Low

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: GSM850-GSM Mode; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.875$  mho/m;  $r = 42.4$ ;  $\epsilon =$

1000 kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.91, 5.91, 5.91); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Tilt position - Low/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.594 mW/g


**Tilt position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.9 V/m; Power Drift = -0.044 dB

Peak SAR (extrapolated) = 0.711 W/kg

**SAR(1 g) = 0.560 mW/g; SAR(10 g) = 0.418 mW/g**

Maximum value of SAR (measured) = 0.591 mW/g

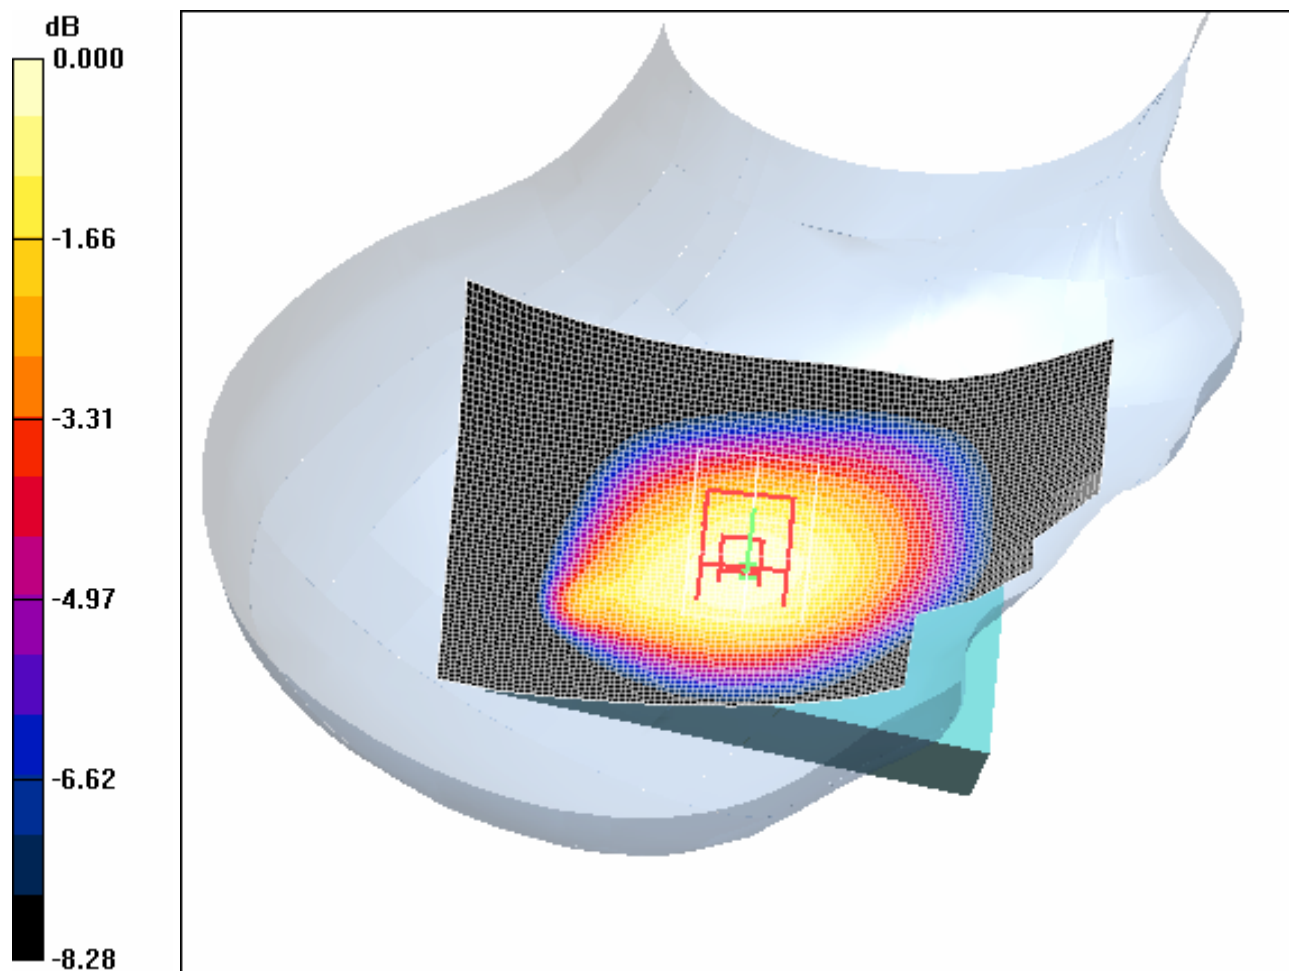

0 dB = 0.591mW/g

#### 4.13 RightHandSide-Tilt-GSM850-Middle

Date/Time: 2006-9-8 13:30:59

Test Laboratory: SGS-GSM

#### GSM850-RightHandSide-Tilt-Middle

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: GSM850-GSM Mode; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used:  $f = 836.4 \text{ MHz}$ ;  $\sigma = 0.886 \text{ mho/m}$ ;  $r = 42.3$ ;  $\epsilon =$

1000 kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.91, 5.91, 5.91); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Tilt position -Middle/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.531 mW/g

**Tilt position -Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 19.7 V/m; Power Drift = 0.024 dB

Peak SAR (extrapolated) = 0.639 W/kg

**SAR(1 g) = 0.502 mW/g; SAR(10 g) = 0.372 mW/g**

Maximum value of SAR (measured) = 0.530 mW/g



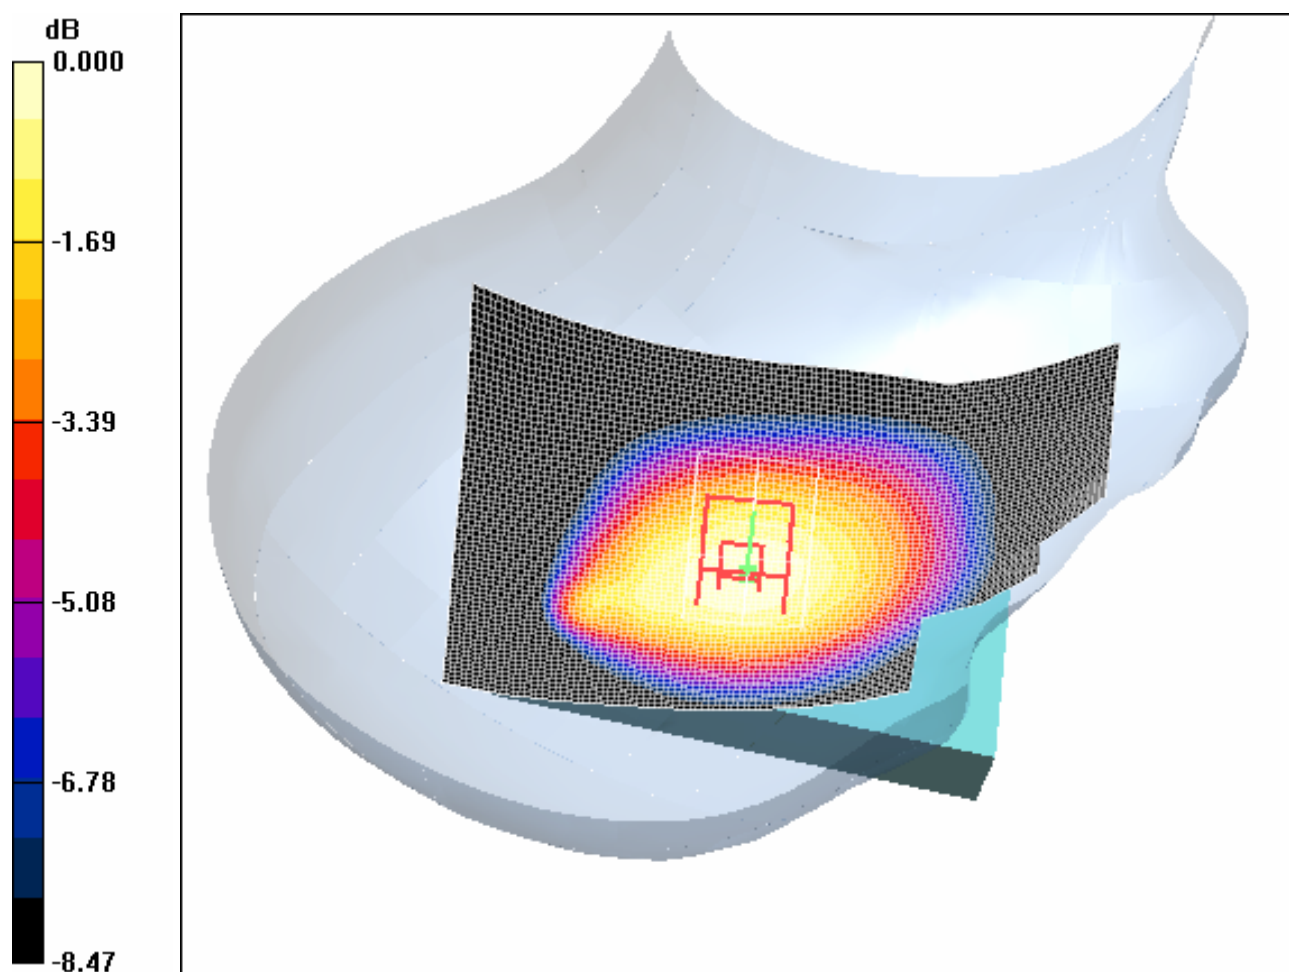

0 dB = 0.530mW/g

#### 4.14 RightHandSide-Tilt-GSM850-High

Date/Time: 2006-9-8 13:56:16

Test Laboratory: SGS-GSM

#### GSM850-RightHandSide-Tilt-High

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: GSM850-GSM Mode; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used:  $f = 848.8$  MHz;  $\sigma = 0.896$  mho/m;  $r = 42.3$ ;  $\epsilon =$

1000 kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.91, 5.91, 5.91); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Tilt position - High/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.484 mW/g


**Tilt position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.8 V/m; Power Drift = 0.049 dB

Peak SAR (extrapolated) = 0.587 W/kg

**SAR(1 g) = 0.458 mW/g; SAR(10 g) = 0.339 mW/g**

Maximum value of SAR (measured) = 0.485 mW/g

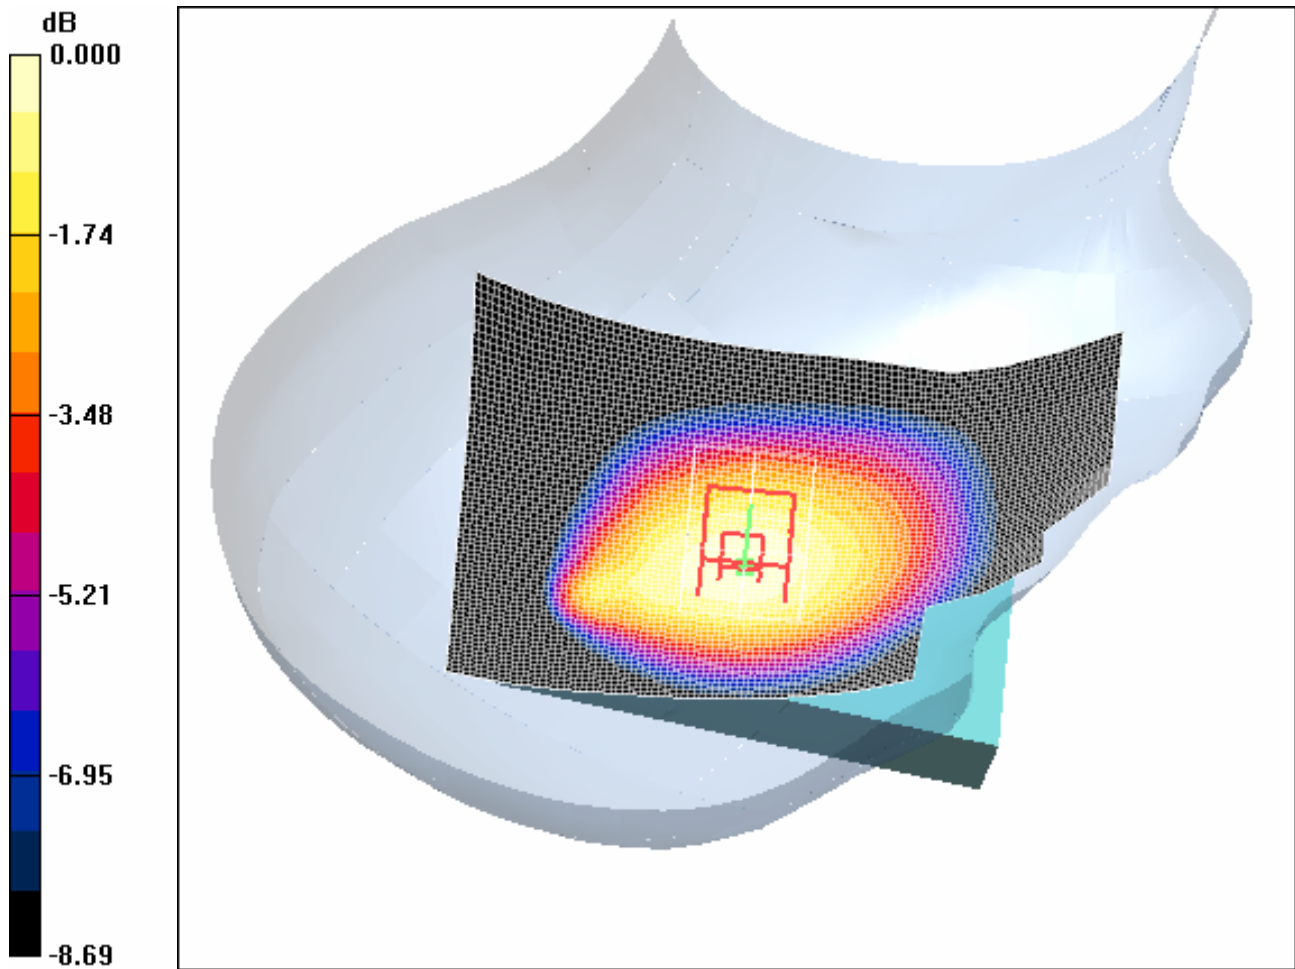

0 dB = 0.485mW/g

#### 4.15 RightHandSide-GSM850-Maximum Value-SD

Date/Time: 2006-9-8 15:36:34

Test Laboratory: SGS-GSM

#### GSM850-RightHandSide-Cheek-Low+SD

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: GSM850-GSM Mode; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.875$  mho/m;  $r = 42.4$ ;  $\epsilon =$

1000 kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.91, 5.91, 5.91); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Cheek Position - Low+SD 2/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.01 mW/g


**Cheek Position - Low+SD 2/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.7 V/m; Power Drift = -0.050 dB

Peak SAR (extrapolated) = 1.41 W/kg

**SAR(1 g) = 0.925 mW/g; SAR(10 g) = 0.616 mW/g**

Maximum value of SAR (measured) = 1.000 mW/g

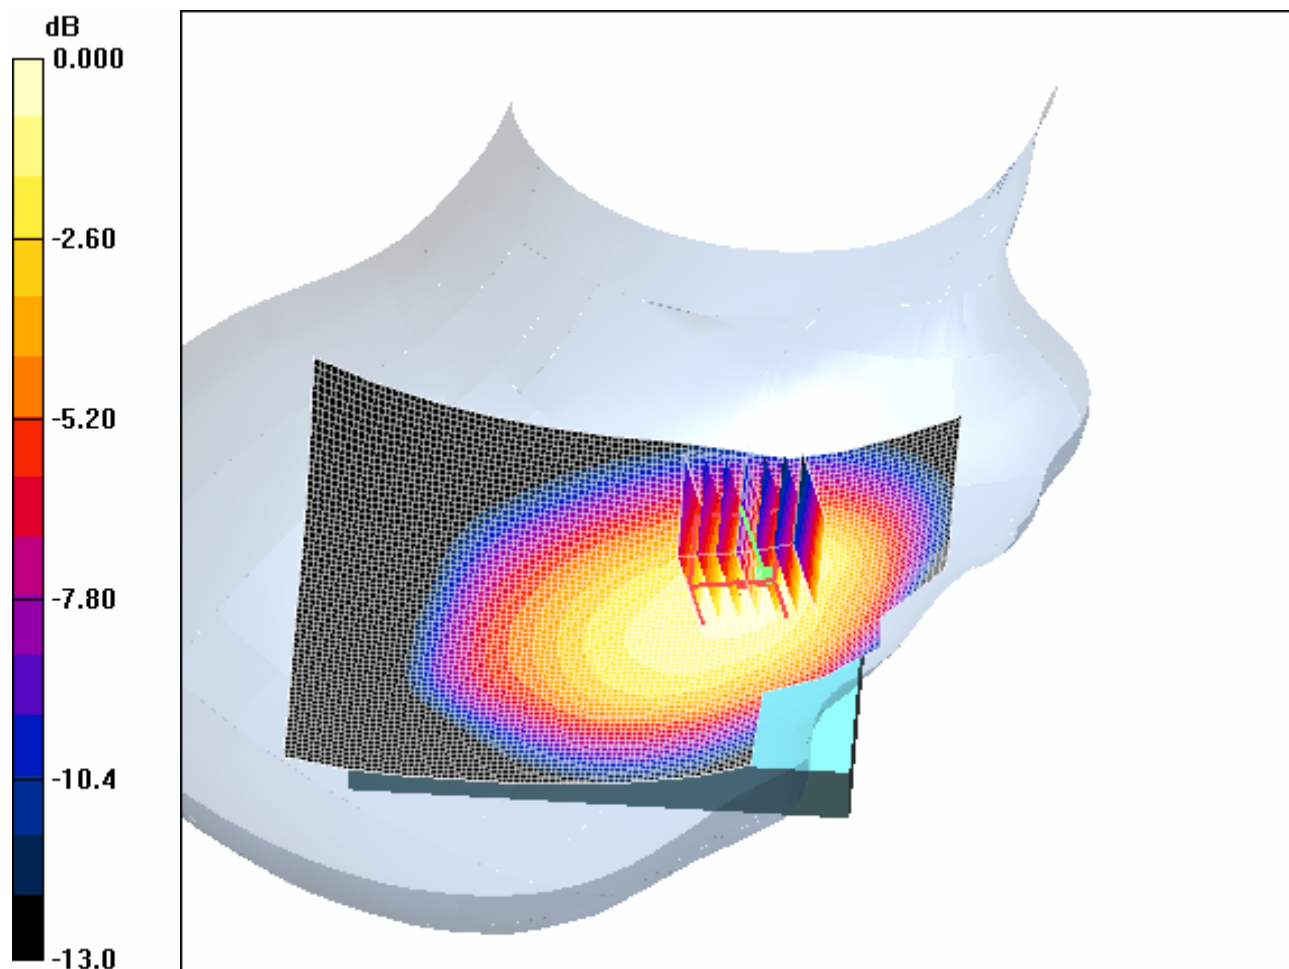

0 dB = 1.00mW/g

#### 4.16 RightHandSide-GSM850-Maximum Value-BT

Date/Time: 2006-9-8 16:14:31

Test Laboratory: SGS-GSM

#### GSM850-RightHandSide-Cheek-Low+BT

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: GSM850-GSM Mode; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used:  $f = 824.2 \text{ MHz}$ ;  $\sigma = 0.875 \text{ mho/m}$ ;  $\epsilon_r = 42.4$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.91, 5.91, 5.91); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Cheek Position - Low+BT/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.01 mW/g


**Cheek Position - Low+BT/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.6 V/m; Power Drift = 0.034 dB

Peak SAR (extrapolated) = 1.43 W/kg

**SAR(1 g) = 0.921 mW/g; SAR(10 g) = 0.613 mW/g**

Maximum value of SAR (measured) = 1.00 mW/g

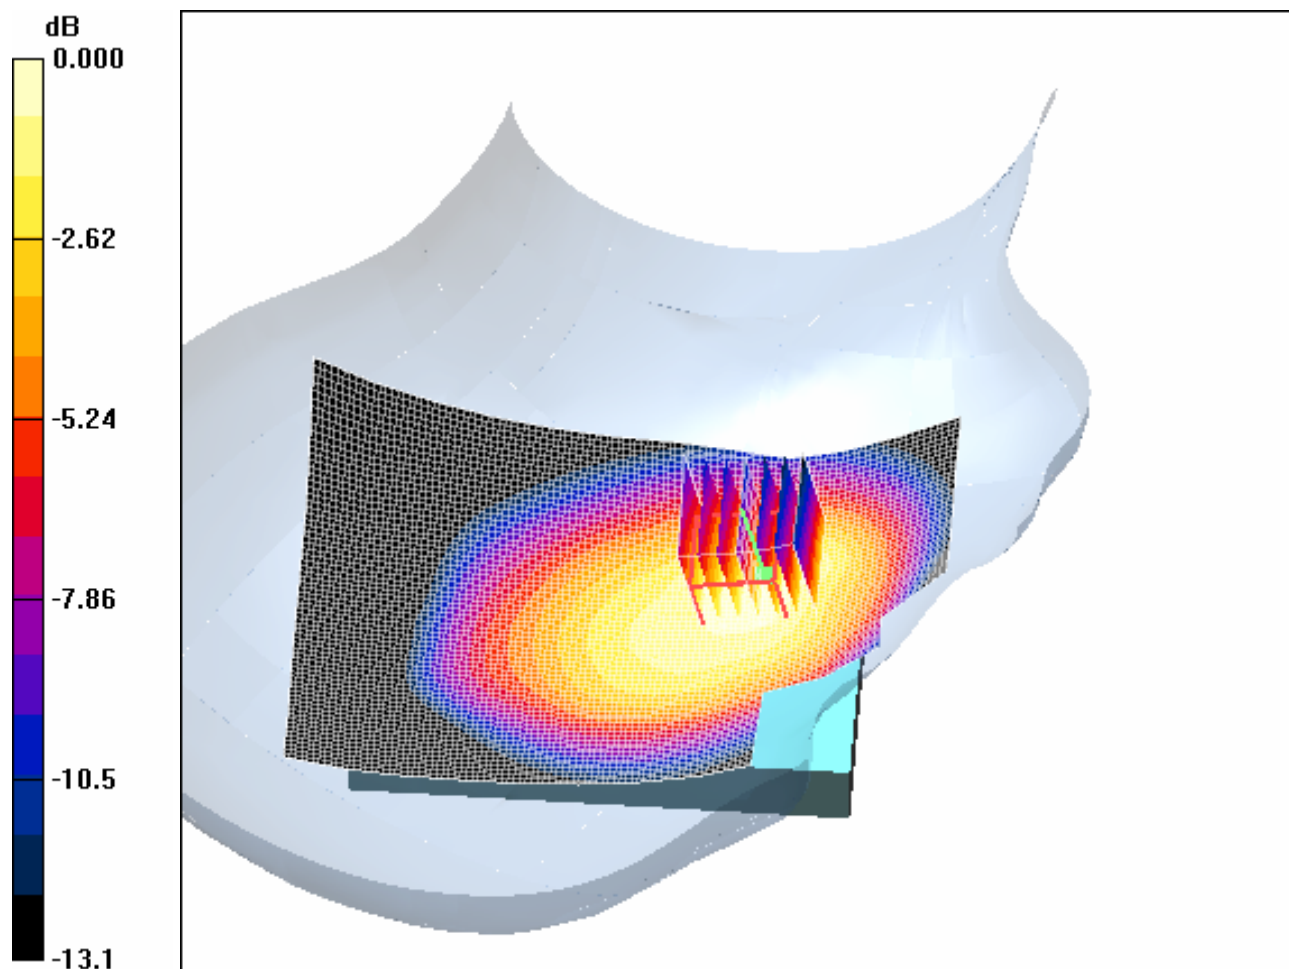

0 dB = 1.00mW/g

#### 4.17 Body-Worn-GSM850-GPRS-Low

Date/Time: 2006-9-12 16:31:16

Test Laboratory: SGS-GSM

GSM850-Body-Worn-GPRS-Low-1.5cm

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: GSM850-GPRS Mode; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium: HSL850-Body Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.933$  mho/m;  $\epsilon_r = 55.2$ ;  $\mu_r = 1$

1000 kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.83, 5.83, 5.83); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Body Worn - Low(retest)/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.838 mW/g

**Body Worn - Low(retest)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 19.5 V/m; Power Drift = -0.111 dB

Peak SAR (extrapolated) = 0.999 W/kg

**SAR(1 g) = 0.790 mW/g; SAR(10 g) = 0.590 mW/g**

Maximum value of SAR (measured) = 0.835 mW/g



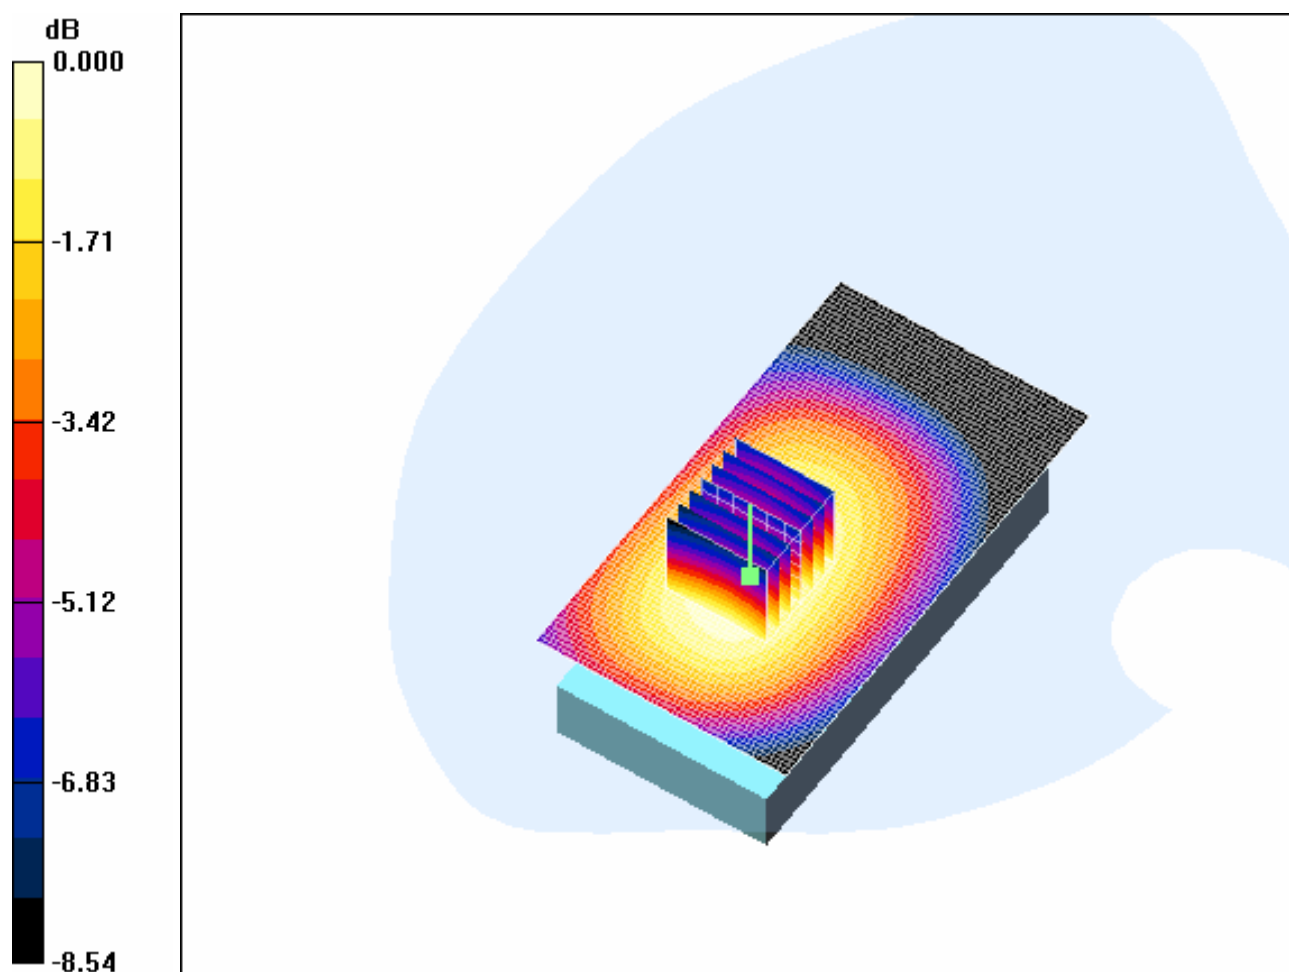

0 dB = 0.835mW/g

#### 4.18 Body-Worn-GSM850-GPRS-Middle

Date/Time: 2006-9-12 10:50:32

Test Laboratory: SGS-GSM

GSM850-Body-Worn-GPRS-Middle-1.5cm

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: GSM850-GPRS Mode; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: HSL850-Body Medium parameters used:  $f = 836.4 \text{ MHz}$ ;  $\sigma = 0.945 \text{ mho/m}$ ;  $\epsilon_r = 55.1$ ;  $\mu_r =$

1000 kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.83, 5.83, 5.83); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Body Worn - Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.803 mW/g


**Body Worn - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.5 V/m; Power Drift = 0.036 dB

Peak SAR (extrapolated) = 0.976 W/kg

**SAR(1 g) = 0.757 mW/g; SAR(10 g) = 0.559 mW/g**

Maximum value of SAR (measured) = 0.805 mW/g

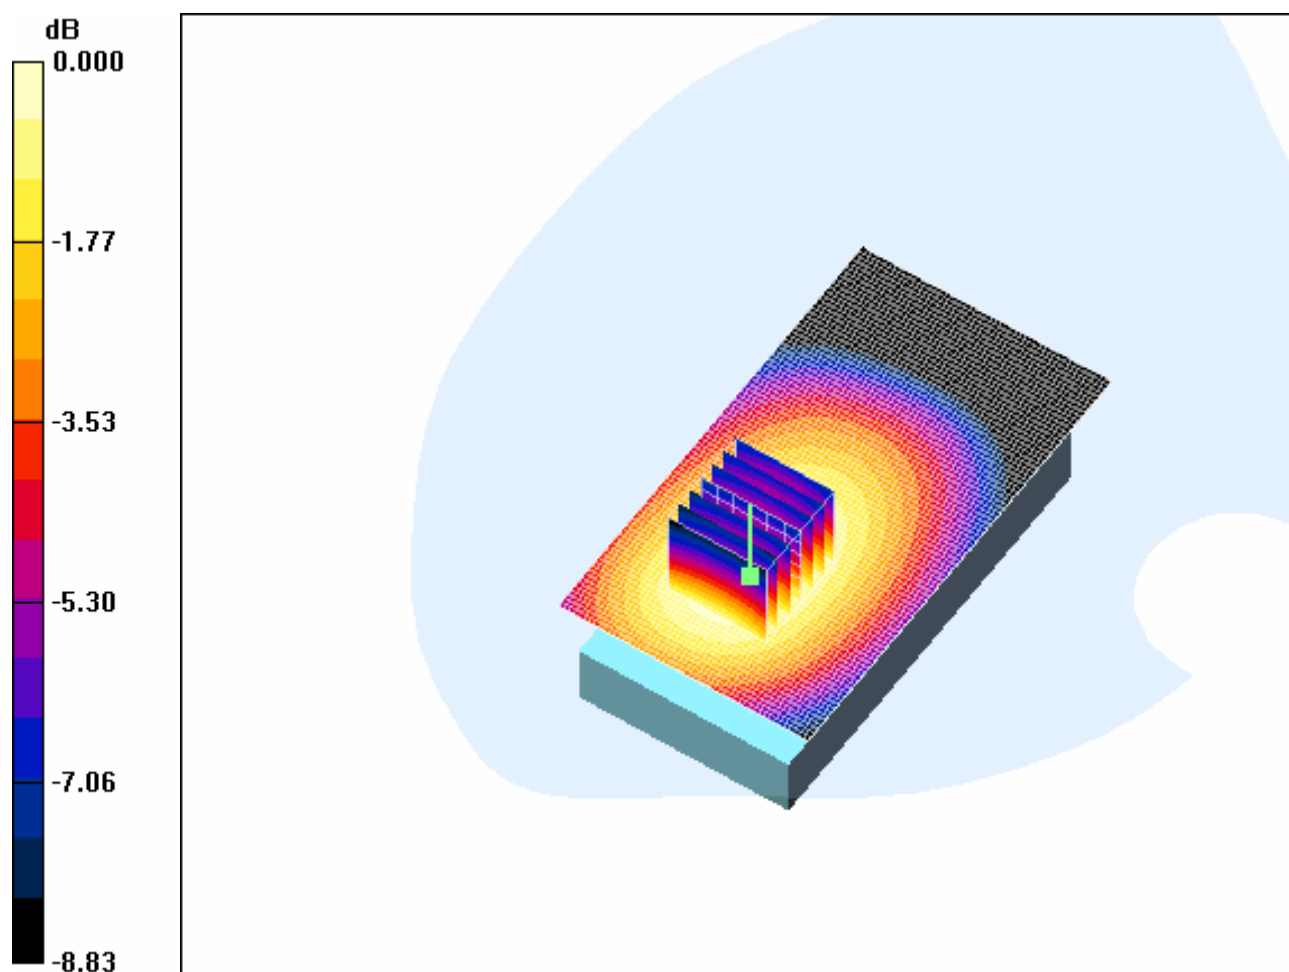

0 dB = 0.805mW/g

#### 4.19 Body-Worn-GSM850-GPRS-High

Date/Time: 2006-9-12 11:10:16

Test Laboratory: SGS-GSM

GSM850-Body-Worn-GPRS-High-1.5cm

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: GSM850-GPRS Mode; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: HSL850-Body Medium parameters used:  $f = 848.8 \text{ MHz}$ ;  $\sigma = 0.957 \text{ mho/m}$ ;  $r = 54.9$ ;  $\epsilon =$

1000 kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.83, 5.83, 5.83); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Body Worn - High/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.797 mW/g


**Body Worn - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.7 V/m; Power Drift = 0.033 dB

Peak SAR (extrapolated) = 0.963 W/kg

**SAR(1 g) = 0.753 mW/g; SAR(10 g) = 0.558 mW/g**

Maximum value of SAR (measured) = 0.799 mW/g

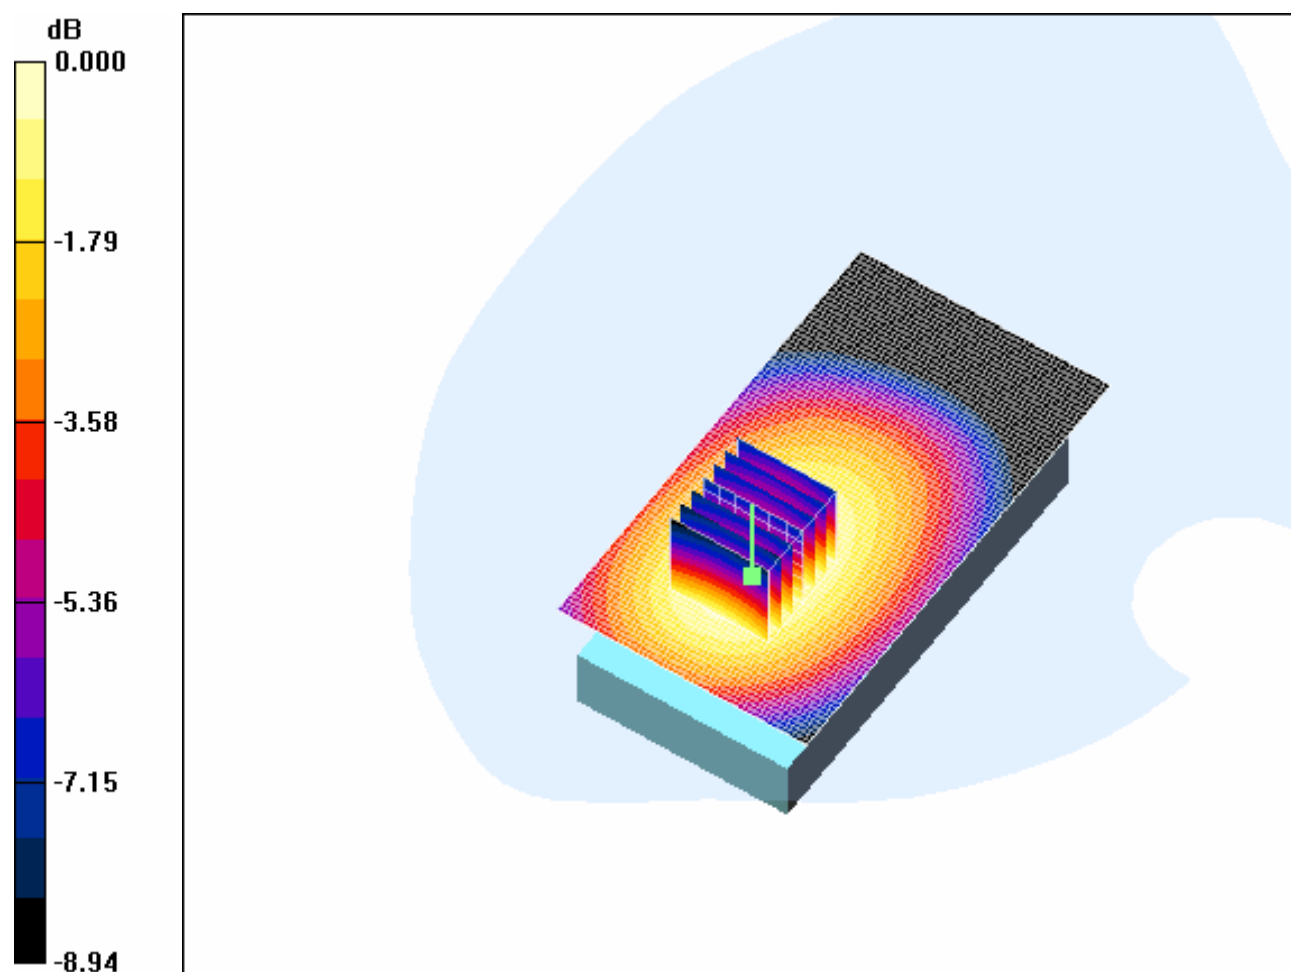

0 dB = 0.799mW/g

#### 4.20 Body-Worn-GSM850-GPRS-Maximum Value-SD

Date/Time: 2006-9-12 14:12:58

Test Laboratory: SGS-GSM

#### GSM850-Body-Worn-GPRS-Low-1.5cm+SD

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: GSM850-GPRS Mode; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium: HSL850-Body Medium parameters used:  $f = 824.2 \text{ MHz}$ ;  $\sigma = 0.933 \text{ mho/m}$ ;  $r = 55.2$ ;  $\epsilon =$

1000 kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.83, 5.83, 5.83); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Body Worn - Low+SD/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.788 mW/g


**Body Worn - Low+SD/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.1 V/m; Power Drift = -0.173 dB

Peak SAR (extrapolated) = 0.945 W/kg

**SAR(1 g) = 0.739 mW/g; SAR(10 g) = 0.554 mW/g**

Maximum value of SAR (measured) = 0.776 mW/g

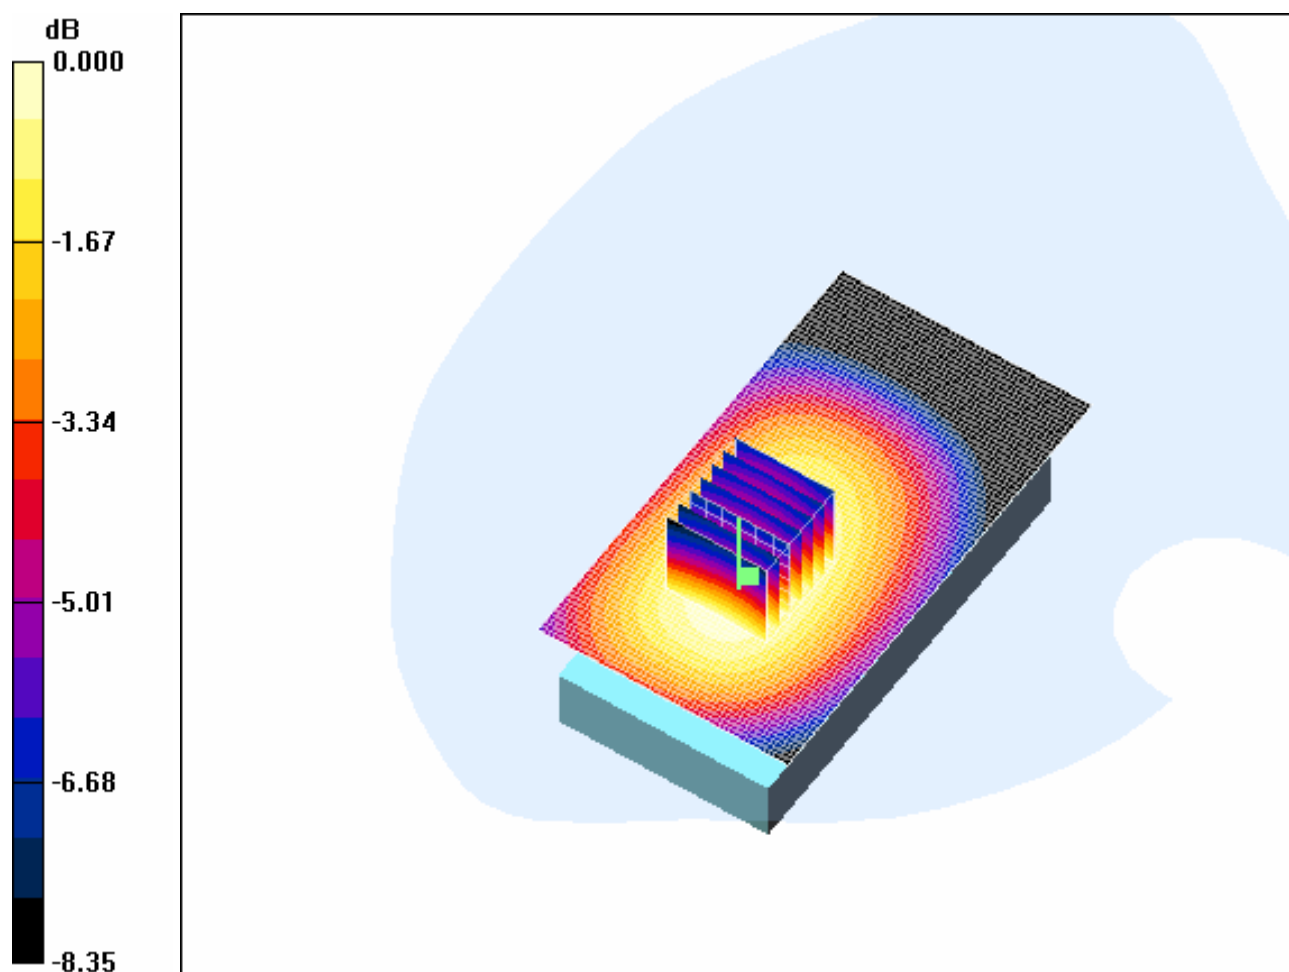

0 dB = 0.776mW/g

#### 4.21 Body-Worn-GSM850-GPRS-Maximum Value-BT

Date/Time: 2006-9-12 15:12:30

Test Laboratory: SGS-GSM

GSM850-Body-Worn-GPRS-Low-1.5cm+BT

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: GSM850-GPRS Mode; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium: HSL850-Body Medium parameters used:  $f = 824.2 \text{ MHz}$ ;  $\sigma = 0.933 \text{ mho/m}$ ;  $r = 55.2$ ;  $\epsilon =$

1000 kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.83, 5.83, 5.83); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Body Worn - Low+BT/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.959 mW/g

**Body Worn - Low+BT/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 19.4 V/m; Power Drift = -0.074 dB

Peak SAR (extrapolated) = 1.13 W/kg

**SAR(1 g) = 0.904 mW/g; SAR(10 g) = 0.681 mW/g**

Maximum value of SAR (measured) = 0.953 mW/g



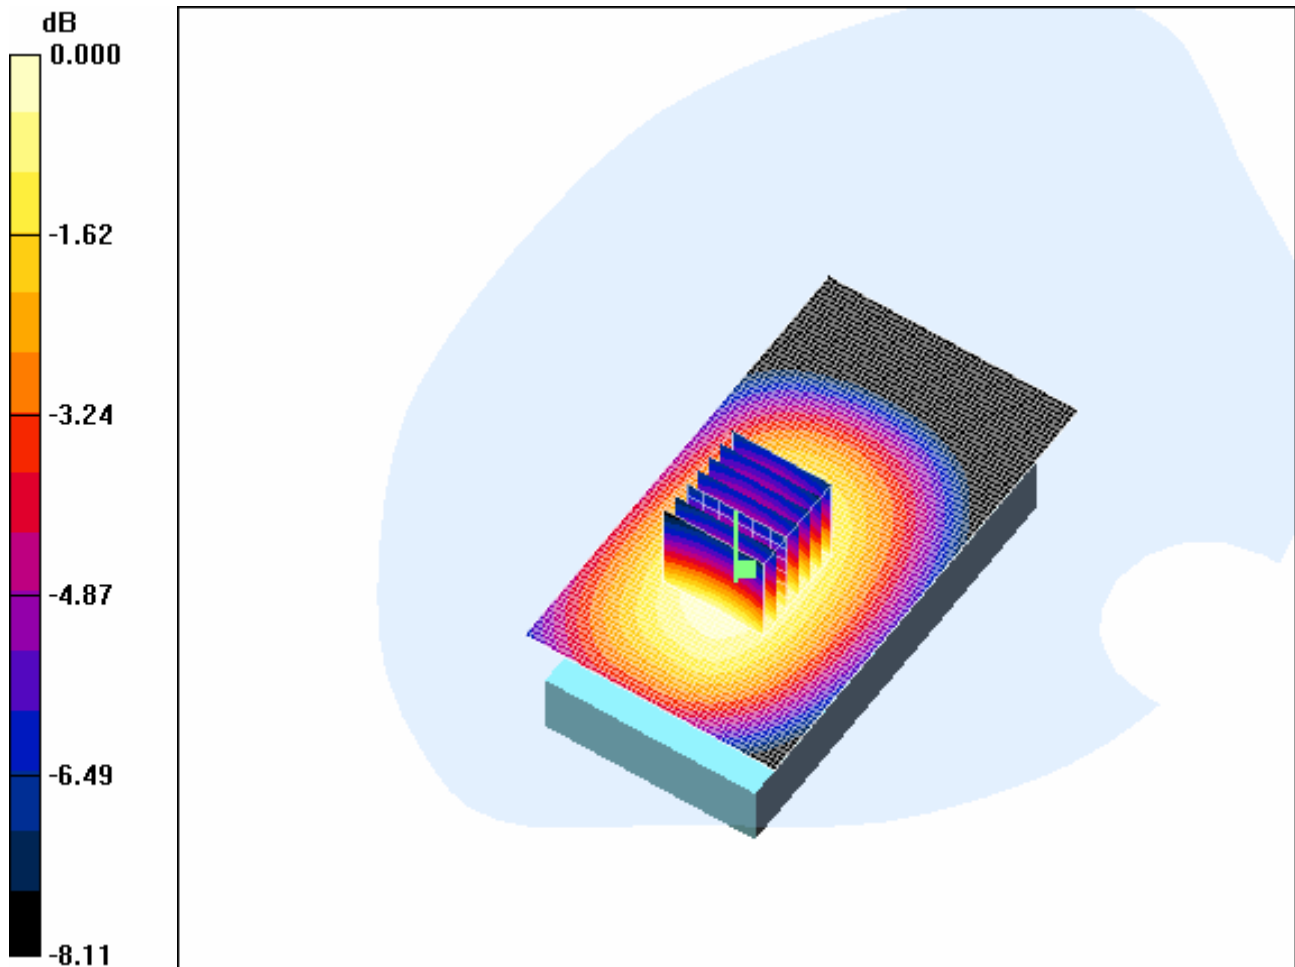

0 dB = 0.953mW/g

#### 4.21 LeftHandSide-Cheek-PCS1900-Low

Date/Time: 2006-9-11 15:05:54

Test Laboratory: SGS-GSM

#### PCS1900-LeftHandSide-Cheek-Low

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: PCS1900-GSM Mode; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used:  $f = 1850.2 \text{ MHz}$ ;  $\sigma = 1.41 \text{ mho/m}$ ;  $\epsilon_r = 38.7$ ;  $\mu_r =$

1000 kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.93, 4.93, 4.93); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Cheek Position - Low/Area Scan (71x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.384 mW/g


**Cheek Position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.45 V/m; Power Drift = -0.030 dB

Peak SAR (extrapolated) = 0.536 W/kg

**SAR(1 g) = 0.346 mW/g; SAR(10 g) = 0.216 mW/g**

Maximum value of SAR (measured) = 0.372 mW/g

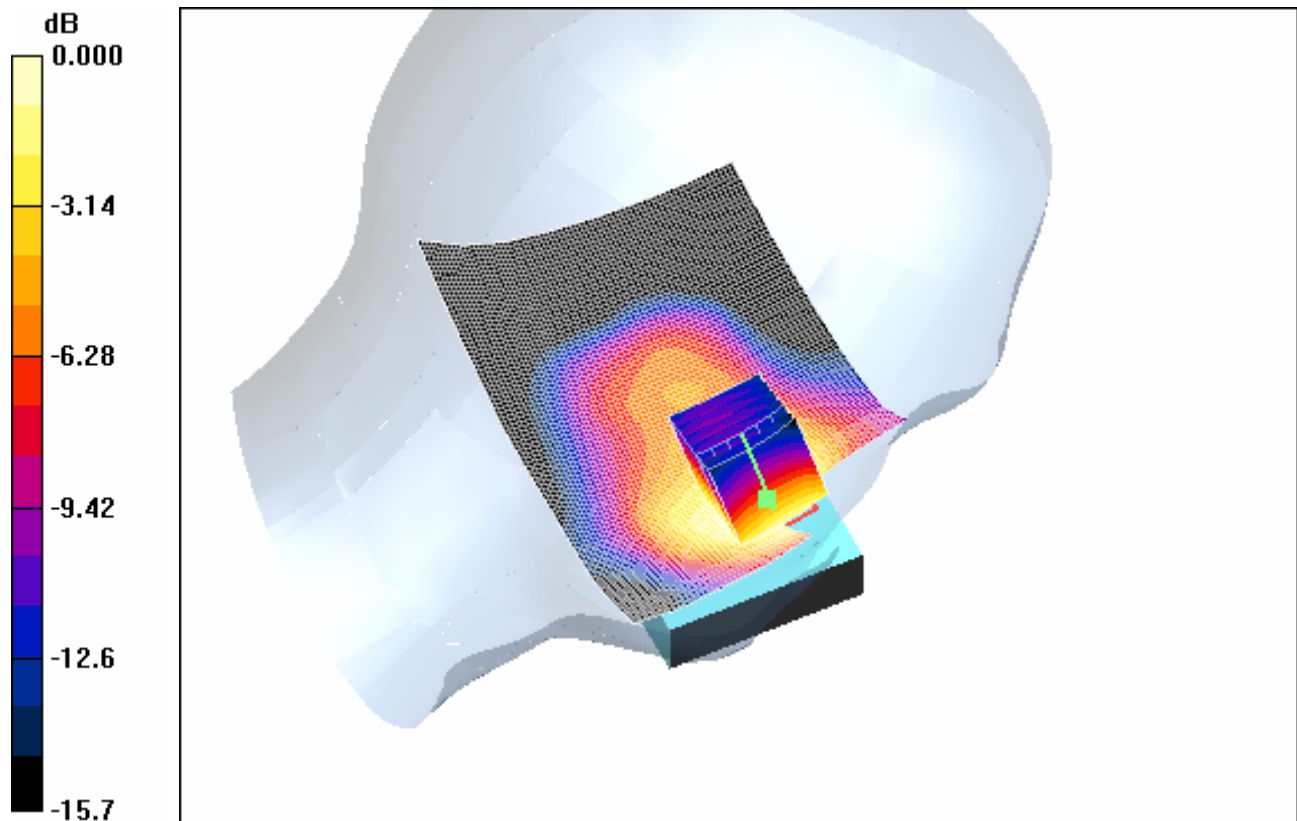

0 dB = 0.372mW/g

#### **4.22 LeftHandSide-Cheek-PCS1900-Middle**

Date/Time: 2006-9-11 14:41:29

Test Laboratory: SGS-GSM

#### **PCS1900-LeftHandSide-Cheek-Middle**

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: PCS1900-GSM Mode; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.44$  mho/m;  $\epsilon_r = 38.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.93, 4.93, 4.93); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Cheek Position - Middle/Area Scan (71x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.387 mW/g


**Cheek Position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.12 V/m; Power Drift = -0.239 dB

Peak SAR (extrapolated) = 0.540 W/kg

**SAR(1 g) = 0.350 mW/g; SAR(10 g) = 0.217 mW/g**

Maximum value of SAR (measured) = 0.375 mW/g

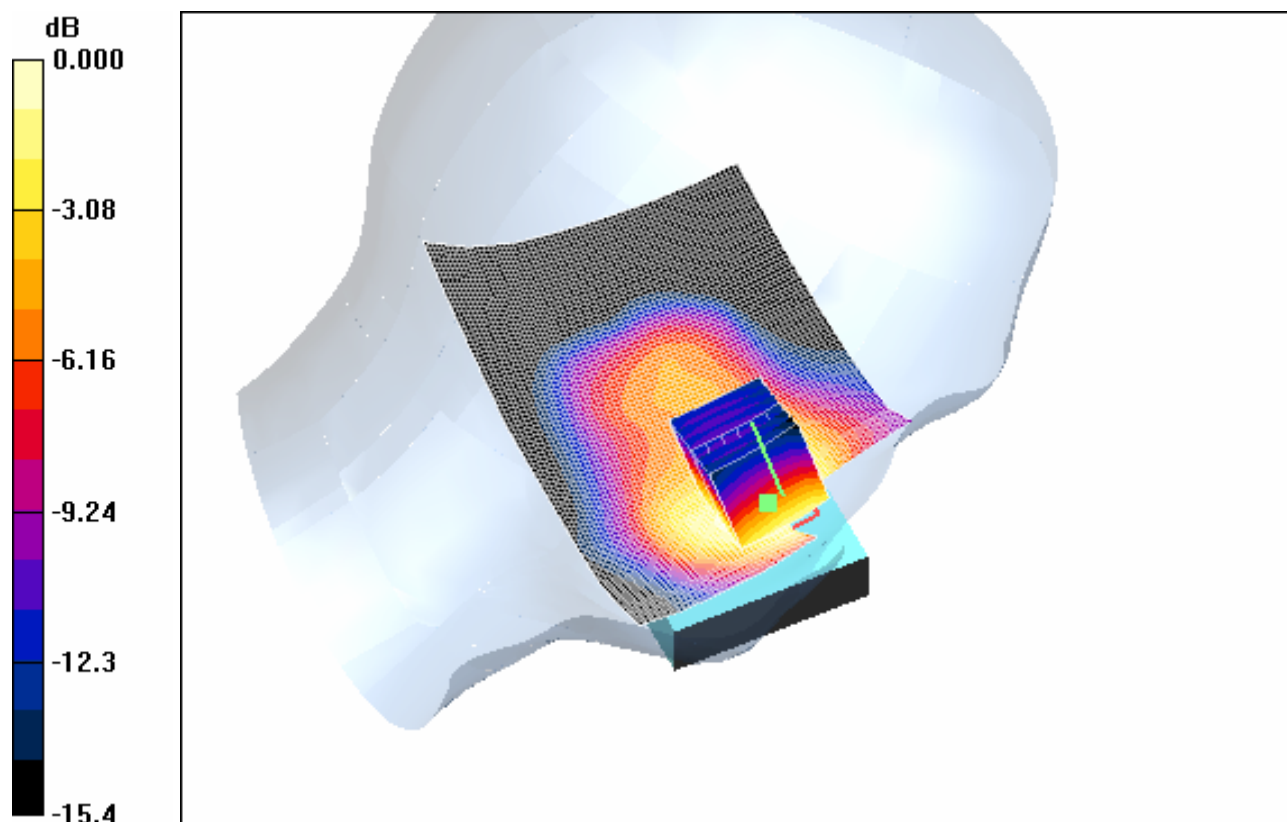

0 dB = 0.375mW/g

#### **4.23 LeftHandSide-Cheek-PCS1900-High**

Date/Time: 2006-9-11 15:33:54

Test Laboratory: SGS-GSM

#### **PCS1900-LeftHandSide-Cheek-High**

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: PCS1900-GSM Mode; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used:  $f = 1909.8 \text{ MHz}$ ;  $\sigma = 1.47 \text{ mho/m}$ ;  $\epsilon_r = 38.4$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.93, 4.93, 4.93); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Cheek Position - High/Area Scan (71x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.433 mW/g


**Cheek Position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.64 V/m; Power Drift = 0.024 dB

Peak SAR (extrapolated) = 0.606 W/kg

**SAR(1 g) = 0.390 mW/g; SAR(10 g) = 0.243 mW/g**

Maximum value of SAR (measured) = 0.424 mW/g

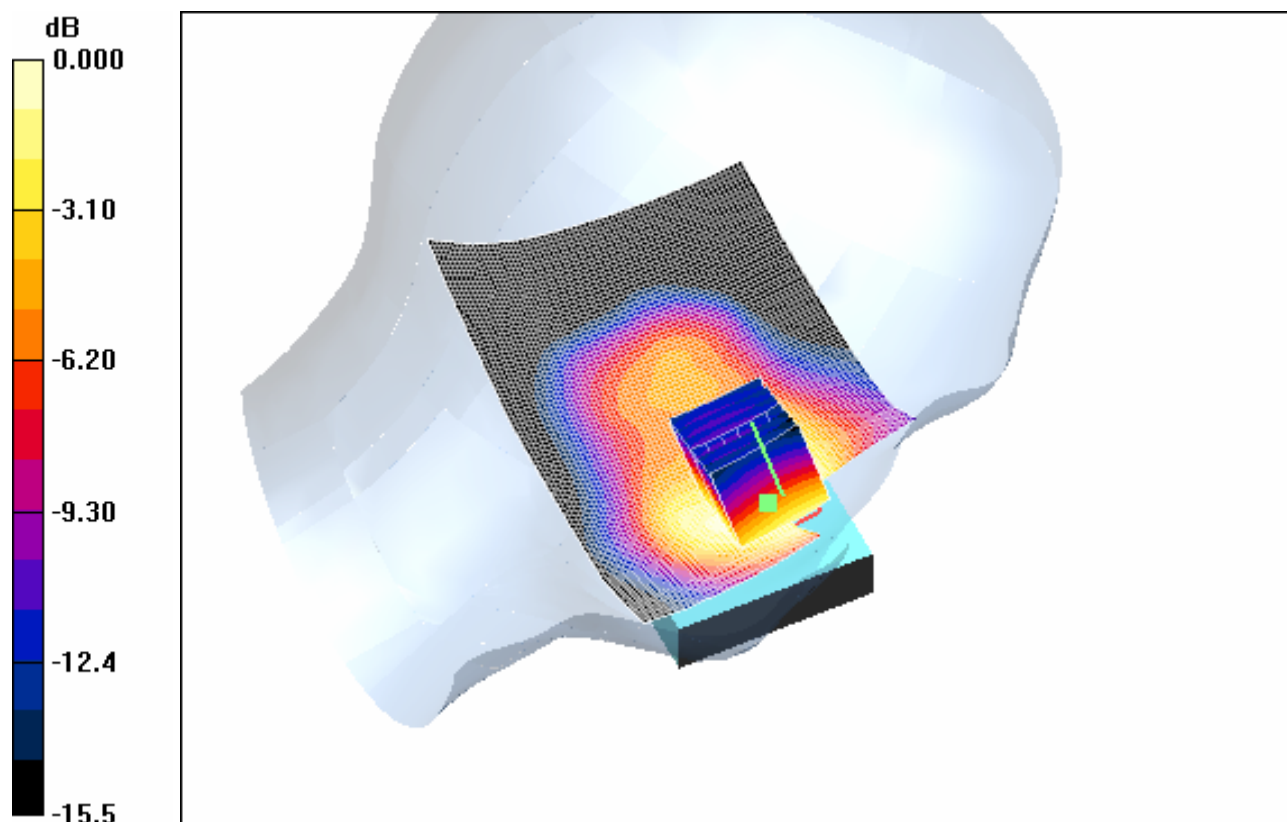

0 dB = 0.424mW/g

#### **4.24 LeftHandSide-Tilt-PCS1900-Low**

Date/Time: 2006-9-11 16:49:00

Test Laboratory: SGS-GSM

#### **PCS1900-LeftHandSide-Tilt-Low**

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: PCS1900-GSM Mode; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used:  $f = 1850.2 \text{ MHz}$ ;  $\sigma = 1.41 \text{ mho/m}$ ;  $\epsilon_r = 38.7$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.93, 4.93, 4.93); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Tilt Position - Low/Area Scan (71x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.176 mW/g

**Tilt Position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 9.23 V/m; Power Drift = -0.062 dB

Peak SAR (extrapolated) = 0.231 W/kg

**SAR(1 g) = 0.155 mW/g; SAR(10 g) = 0.098 mW/g**

Maximum value of SAR (measured) = 0.168 mW/g



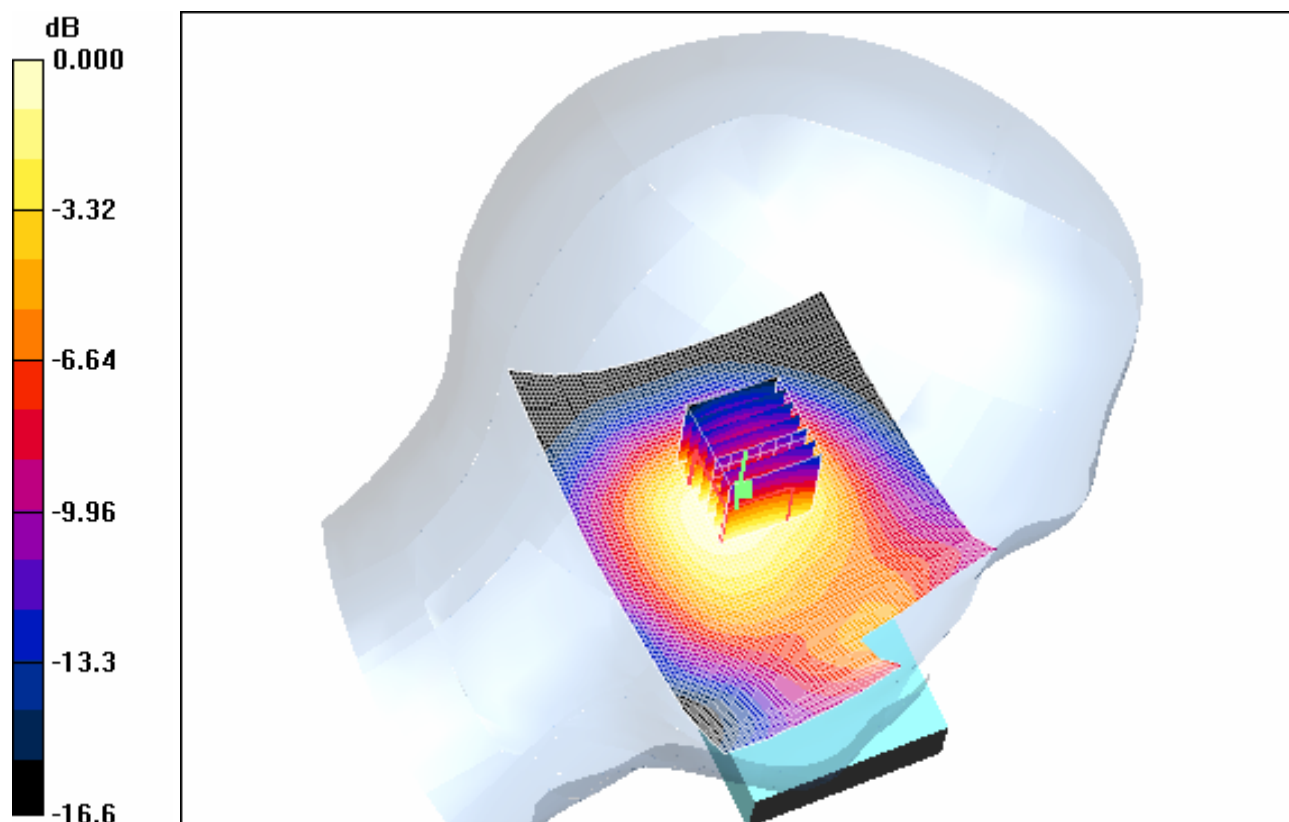

0 dB = 0.168mW/g

#### **4.25 LeftHandSide-Tilt-PCS1900-Middle**

Date/Time: 2006-9-11 15:59:43

Test Laboratory: SGS-GSM

#### **PCS1900-LeftHandSide-Tilt-Middle**

**DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9**

Communication System: PCS1900-GSM Mode; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.44$  mho/m;  $\epsilon_r = 38.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.93, 4.93, 4.93); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Tilt Position - Middle/Area Scan (71x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.175 mW/g


**Tilt Position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.27 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 0.226 W/kg

**SAR(1 g) = 0.152 mW/g; SAR(10 g) = 0.096 mW/g**

Maximum value of SAR (measured) = 0.164 mW/g

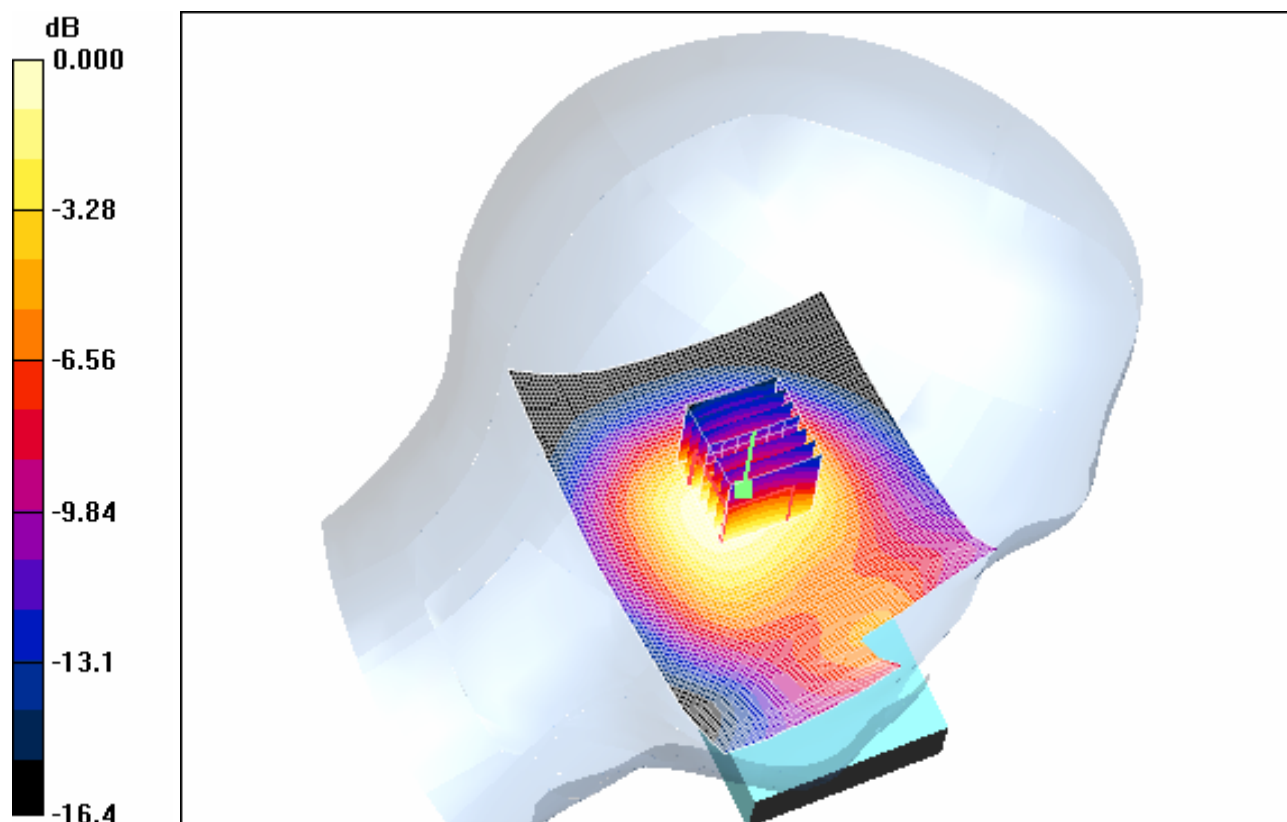

0 dB = 0.164mW/g

#### **4.26 LeftHandSide-Tilt-PCS1900-High**

Date/Time: 2006-9-11 16:24:01

Test Laboratory: SGS-GSM

#### **PCS1900-LeftHandSide-Tilt-High**

**DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9**

Communication System: PCS1900-GSM Mode; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used:  $f = 1909.8 \text{ MHz}$ ;  $\sigma = 1.47 \text{ mho/m}$ ;  $\epsilon_r = 38.4$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.93, 4.93, 4.93); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Tilt Position - High/Area Scan (71x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.213 mW/g


**Tilt Position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.5 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 0.284 W/kg

**SAR(1 g) = 0.185 mW/g; SAR(10 g) = 0.115 mW/g**

Maximum value of SAR (measured) = 0.200 mW/g

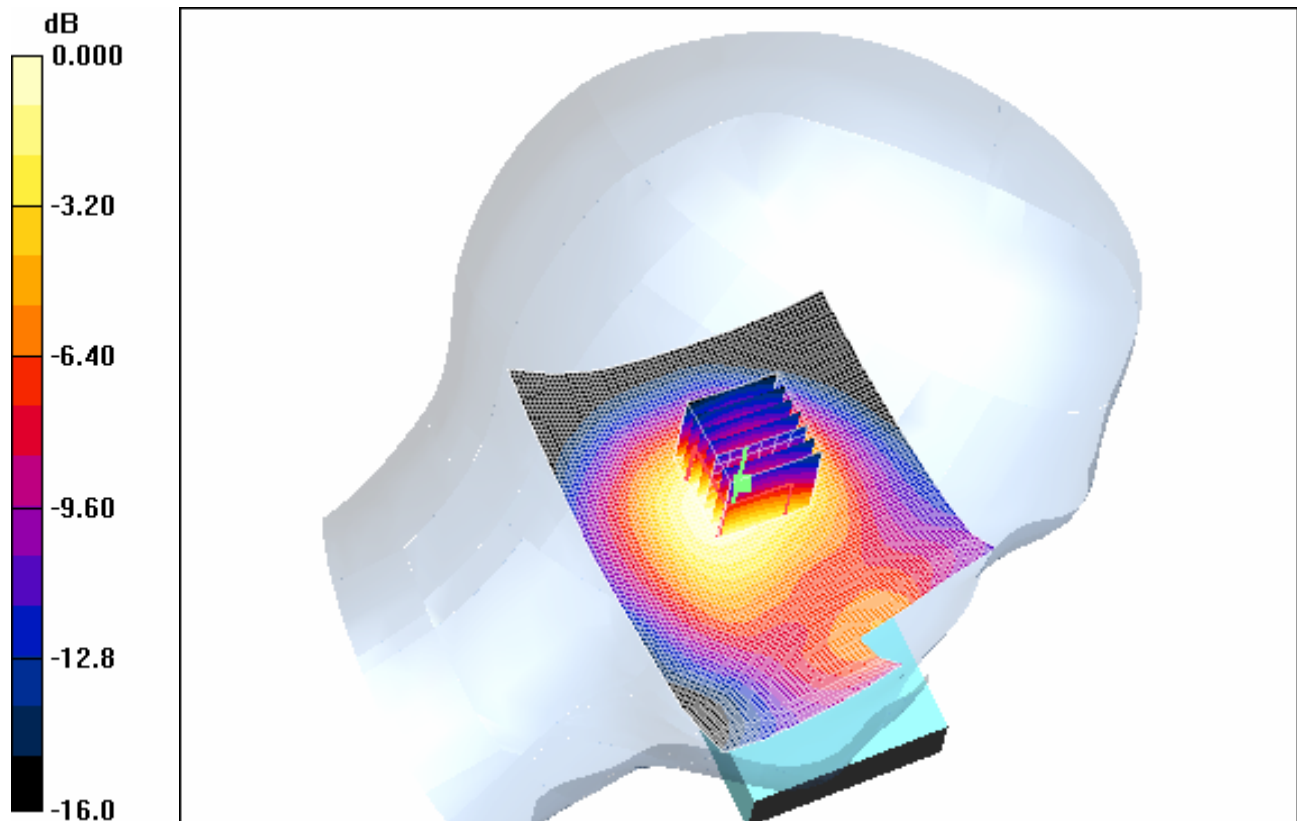

0 dB = 0.200mW/g

#### **4.27 LeftHandSide-PCS1900-Maximum Value-SD**

Date/Time: 2006-9-11 17:20:06

Test Laboratory: SGS-GSM

#### **PCS1900-LeftHandSide-Cheek-High+SD**

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: PCS1900-GSM Mode; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used:  $f = 1909.8 \text{ MHz}$ ;  $\sigma = 1.47 \text{ mho/m}$ ;  $\epsilon_r = 38.4$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.93, 4.93, 4.93); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Cheek Position - High+SD/Area Scan (71x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.375 mW/g


**Cheek Position - High+SD/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.31 V/m; Power Drift = 0.049 dB

Peak SAR (extrapolated) = 0.516 W/kg

**SAR(1 g) = 0.332 mW/g; SAR(10 g) = 0.210 mW/g**

Maximum value of SAR (measured) = 0.357 mW/g

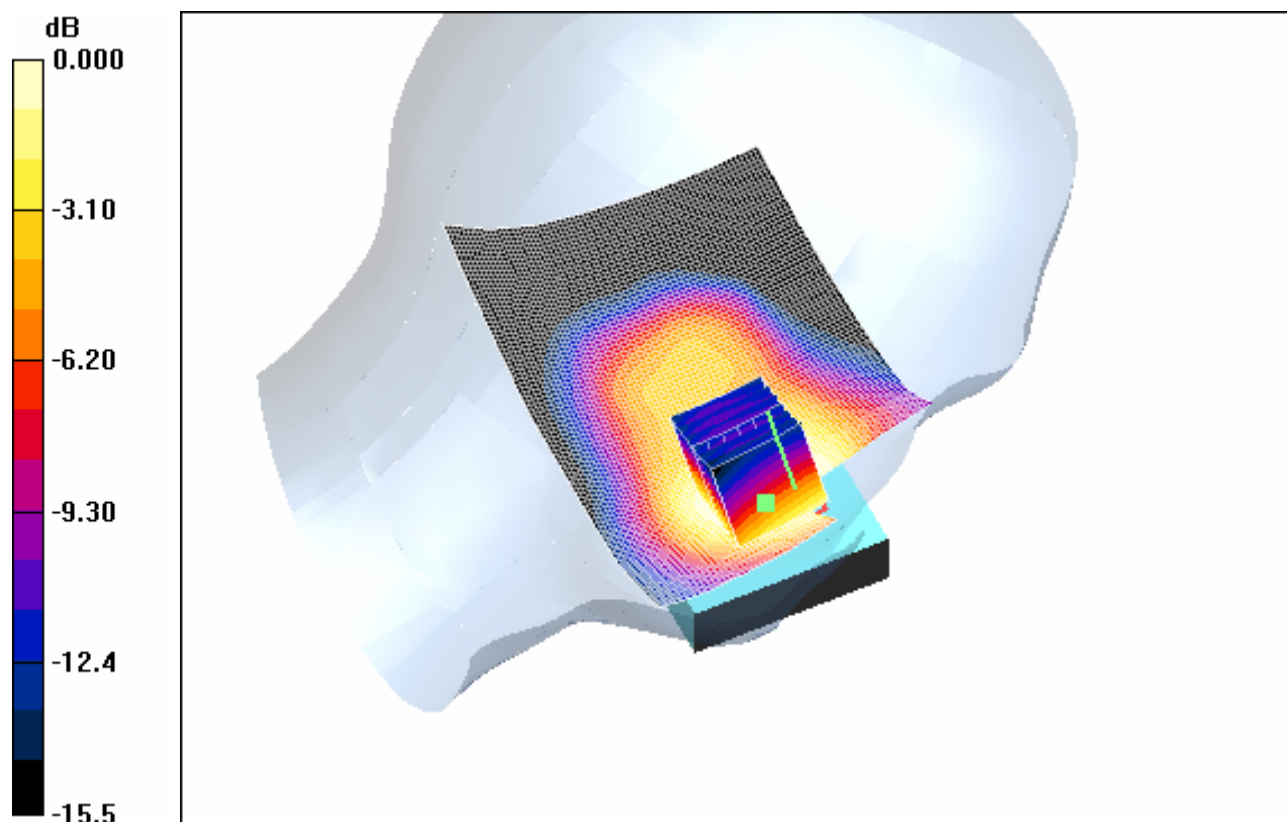

0 dB = 0.357mW/g

#### **4.28 LeftHandSide-PCS1900-Maximum Value-BT**

Date/Time: 2006-9-11 17:46:51

Test Laboratory: SGS-GSM

#### **PCS1900-LeftHandSide-Cheek-High+BT**

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: PCS1900-GSM Mode; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used:  $f = 1909.8 \text{ MHz}$ ;  $\sigma = 1.47 \text{ mho/m}$ ;  $\epsilon_r = 38.4$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.93, 4.93, 4.93); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Cheek Position - High+BT/Area Scan (71x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.378 mW/g

**Cheek Position - High+BT/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 6.18 V/m; Power Drift = -0.089 dB

Peak SAR (extrapolated) = 0.528 W/kg

**SAR(1 g) = 0.340 mW/g; SAR(10 g) = 0.214 mW/g**

Maximum value of SAR (measured) = 0.370 mW/g



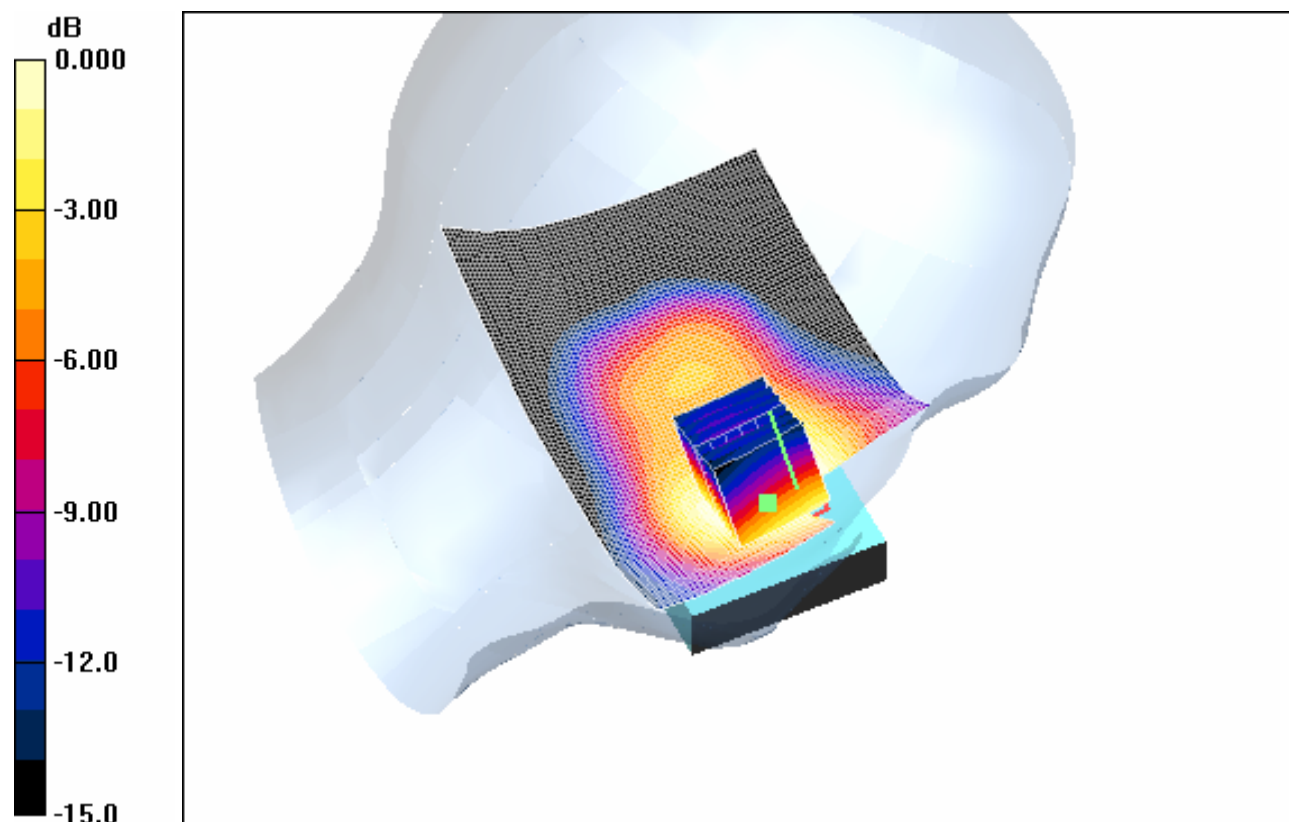

0 dB = 0.370mW/g

#### 4.29 RightHandSide-Cheek-PCS1900-Low

Date/Time: 2006-9-11 10:43:37

Test Laboratory: SGS-GSM

#### PCS1900-RightHandSide-Cheek-Low

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: PCS1900-GSM Mode; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used:  $f = 1850.2 \text{ MHz}$ ;  $\sigma = 1.41 \text{ mho/m}$ ;  $\epsilon_r = 38.7$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.93, 4.93, 4.93); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Cheek Position - Low/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.660 mW/g


**Cheek Position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.66 V/m; Power Drift = 0.042 dB

Peak SAR (extrapolated) = 0.986 W/kg

**SAR(1 g) = 0.598 mW/g; SAR(10 g) = 0.332 mW/g**

Maximum value of SAR (measured) = 0.667 mW/g

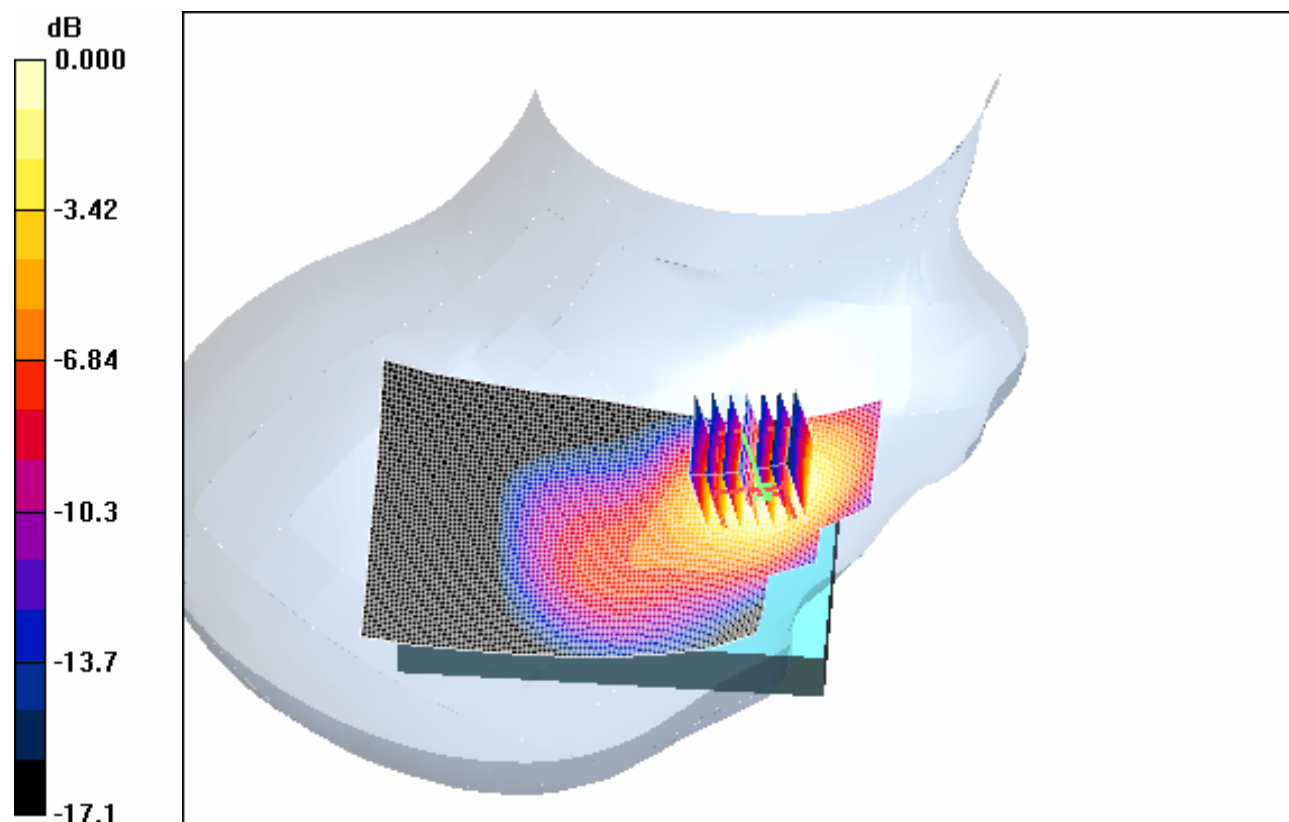

0 dB = 0.667mW/g

#### 4.30 RightHandSide-Cheek-PCS1900-Middle

Date/Time: 2006-9-11 11:07:43

Test Laboratory: SGS-GSM

#### PCS1900-RightHandSide-Cheek-Middle

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: PCS1900-GSM Mode; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.44$  mho/m;  $\epsilon_r = 38.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.93, 4.93, 4.93); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Cheek Position - Middle/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.663 mW/g


**Cheek Position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.88 V/m; Power Drift = -0.050 dB

Peak SAR (extrapolated) = 1.01 W/kg

**SAR(1 g) = 0.606 mW/g; SAR(10 g) = 0.336 mW/g**

Maximum value of SAR (measured) = 0.673 mW/g

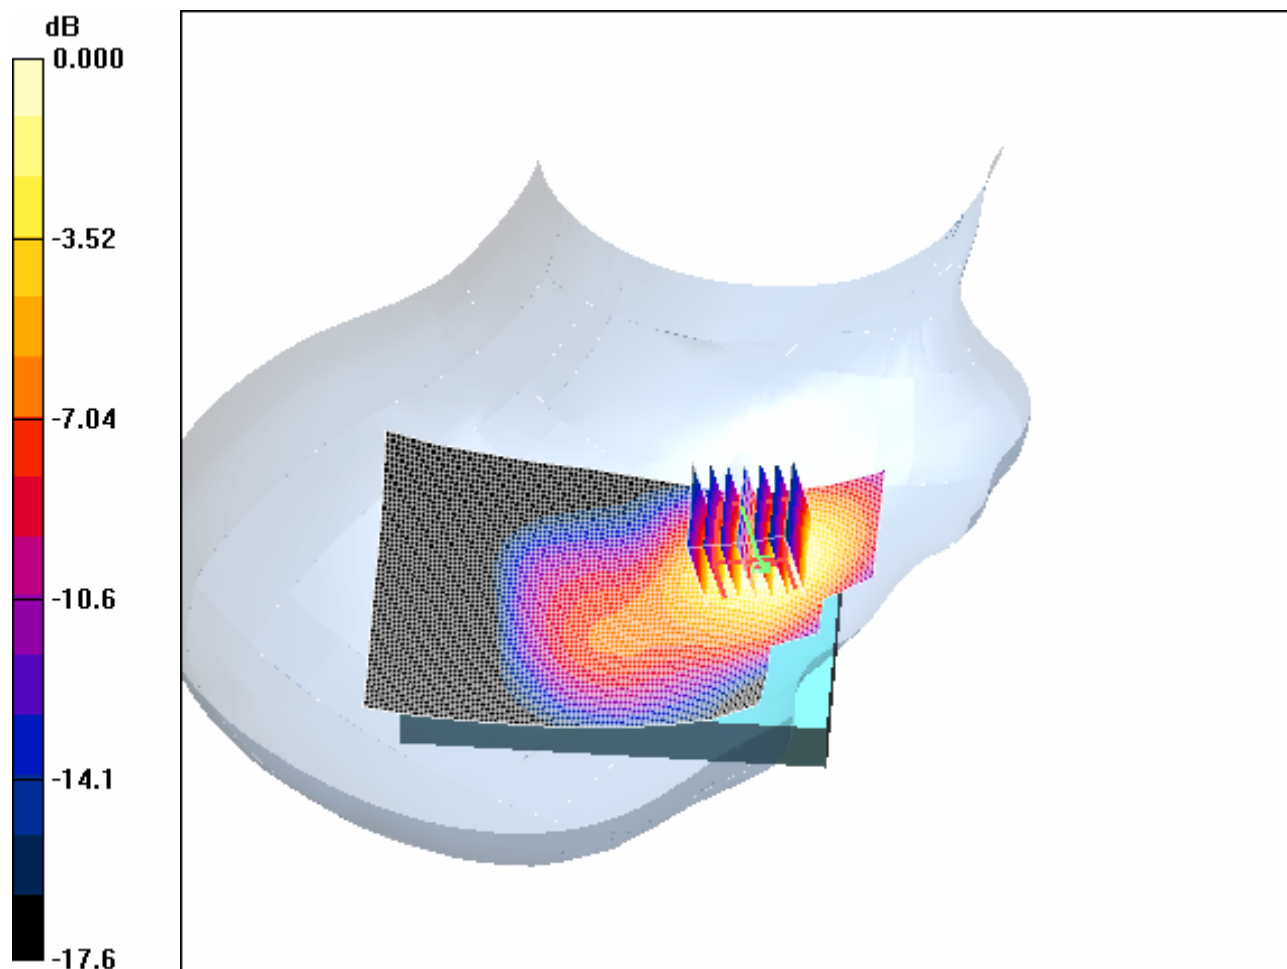

0 dB = 0.673mW/g

#### 4.31 RightHandSide-Cheek-PCS1900-High

Date/Time: 2006-9-11 13:42:40

Test Laboratory: SGS-GSM

PCS1900-RightHandSide-Cheek-High

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: PCS1900-GSM Mode; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used:  $f = 1909.8 \text{ MHz}$ ;  $\sigma = 1.47 \text{ mho/m}$ ;  $\epsilon_r = 38.4$ ;  $\mu_r =$

1000 kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.93, 4.93, 4.93); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Cheek Position - High 2/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.789 mW/g


**Cheek Position - High 2/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.21 V/m; Power Drift = 0.072 dB

Peak SAR (extrapolated) = 1.21 W/kg

**SAR(1 g) = 0.715 mW/g; SAR(10 g) = 0.390 mW/g**

Maximum value of SAR (measured) = 0.797 mW/g

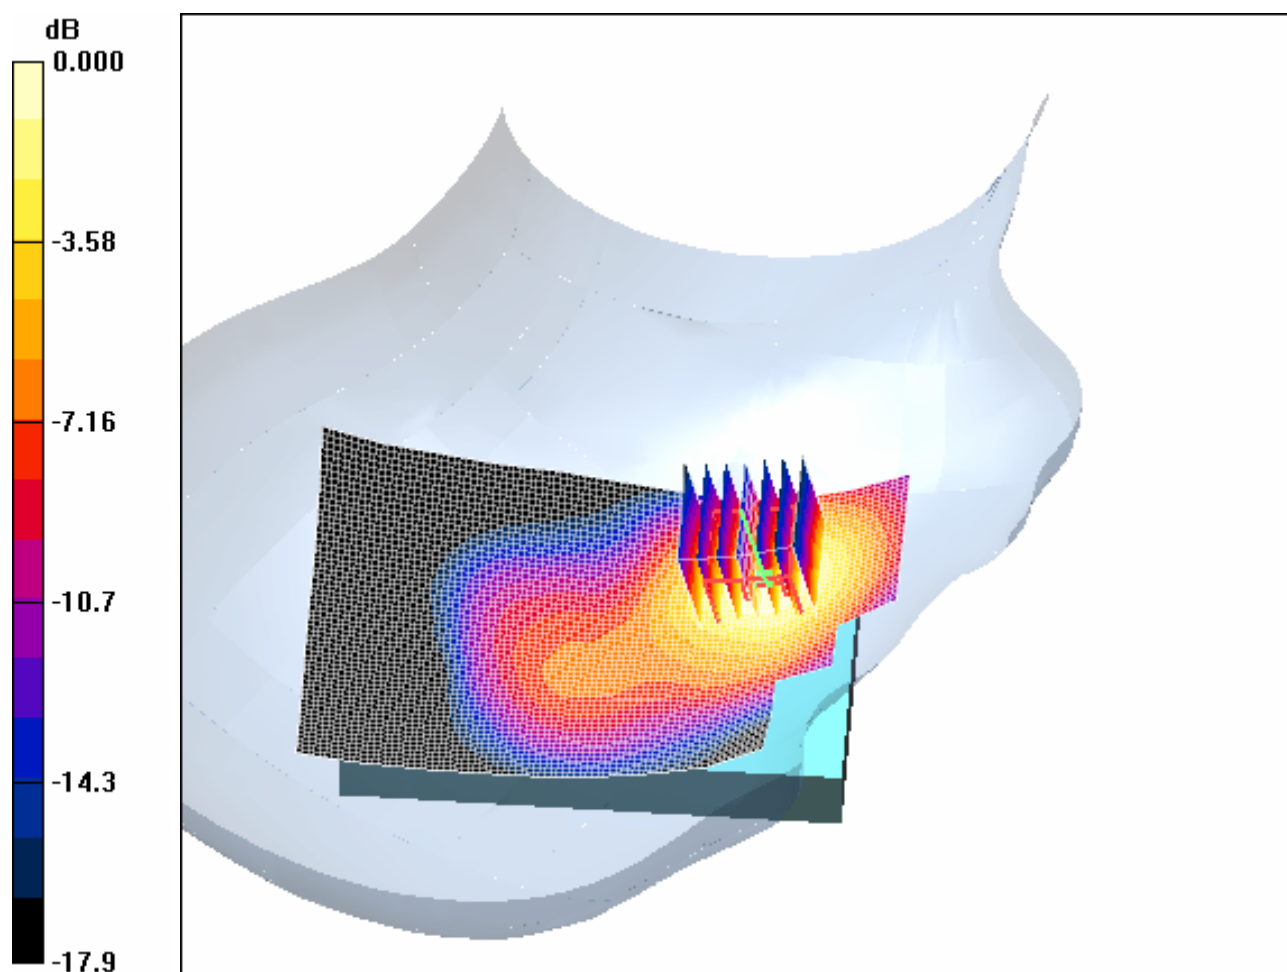

0 dB = 0.797mW/g

#### 4.32 RightHandSide-Tilt-PCS1900-Low

Date/Time: 2006-9-11 12:01:48

Test Laboratory: SGS-GSM

PCS1900-RightHandSide-Tilt-Low

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: PCS1900-GSM Mode; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used:  $f = 1850.2$  MHz;  $\sigma = 1.41$  mho/m;  $r = 38.7$ ;  $\epsilon =$

1000 kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.93, 4.93, 4.93); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Tilt position - Low/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.203 mW/g

**Tilt position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 9.49 V/m; Power Drift = -0.042 dB

Peak SAR (extrapolated) = 0.270 W/kg

**SAR(1 g) = 0.181 mW/g; SAR(10 g) = 0.113 mW/g**

Maximum value of SAR (measured) = 0.194 mW/g



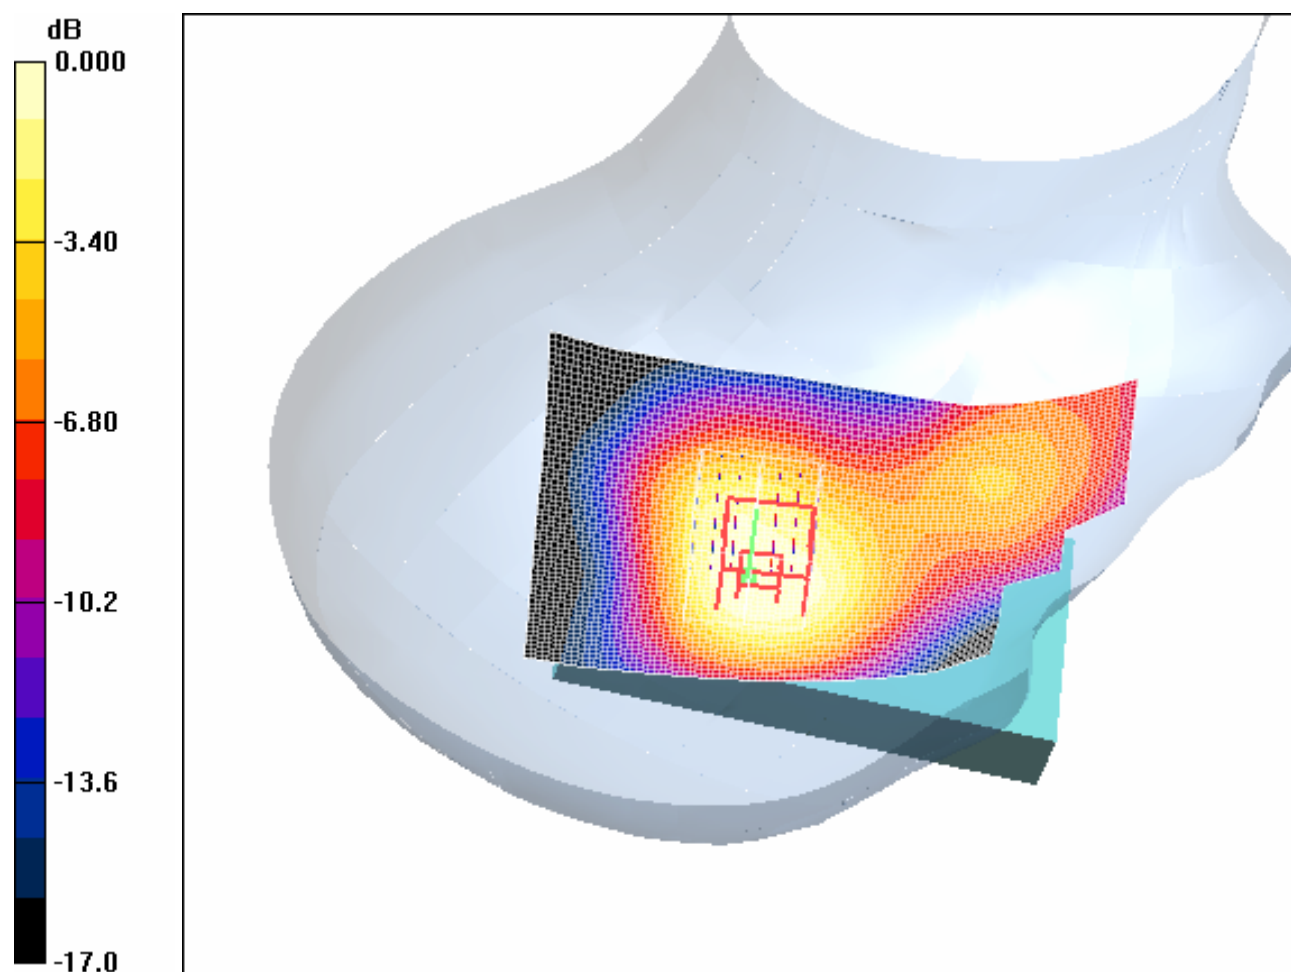

0 dB = 0.194mW/g

#### 4.33 RightHandSide-Tilt-PCS1900-Middle

Date/Time: 2006-9-11 12:23:52

Test Laboratory: SGS-GSM

#### PCS1900-RightHandSide-Tilt-Middle

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: PCS1900-GSM Mode; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.44$  mho/m;  $\epsilon_r = 38.5$ ;  $\mu_r =$

1000 kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.93, 4.93, 4.93); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Tilt position -Middle/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.204 mW/g


**Tilt position -Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.66 V/m; Power Drift = 0.035 dB

Peak SAR (extrapolated) = 0.275 W/kg

**SAR(1 g) = 0.181 mW/g; SAR(10 g) = 0.112 mW/g**

Maximum value of SAR (measured) = 0.195 mW/g

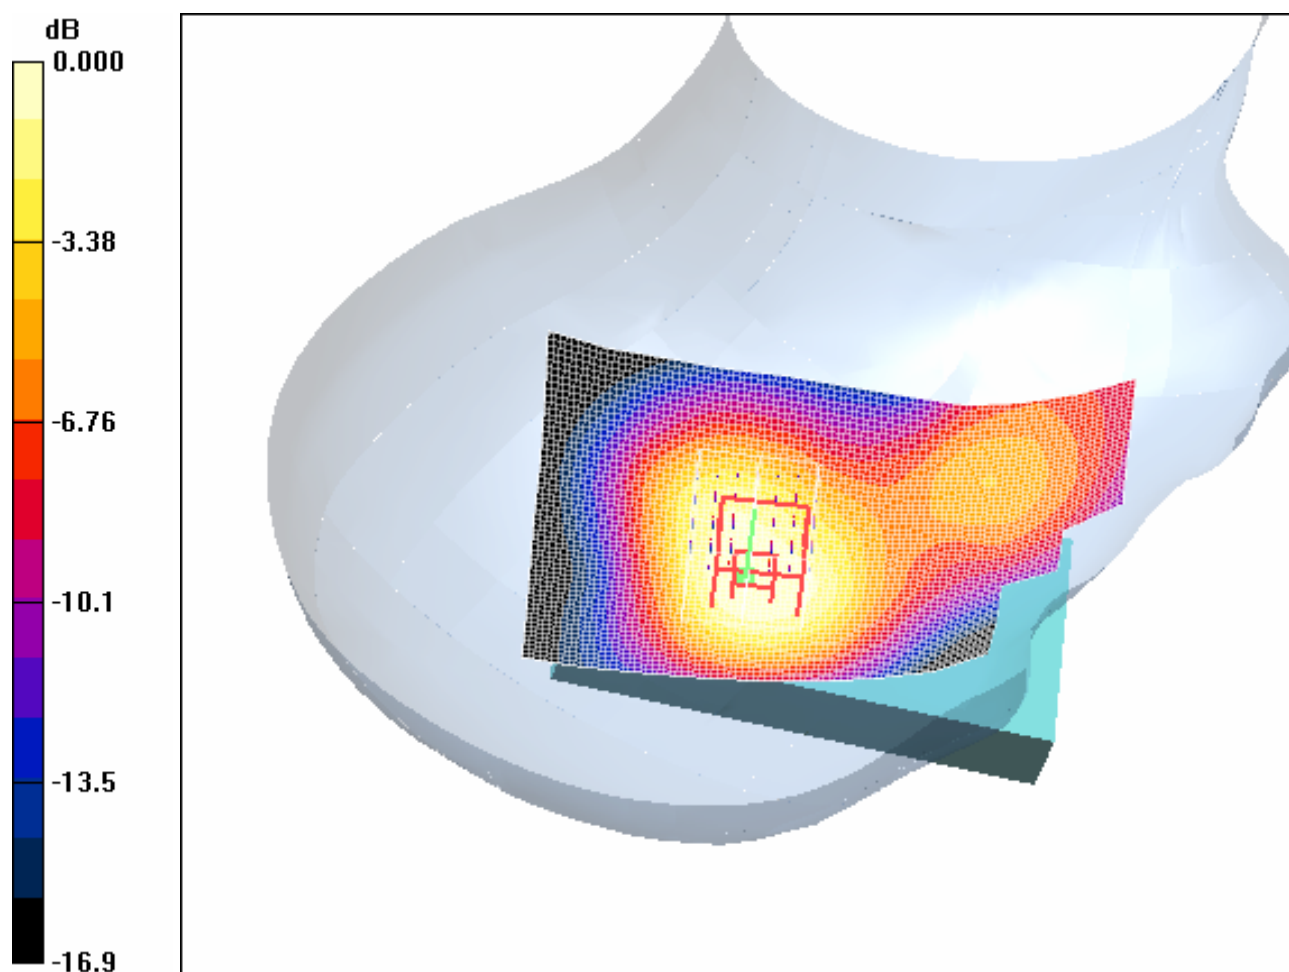

0 dB = 0.195mW/g

#### 4.34 RightHandSide-Tilt-PCS1900-High

Date/Time: 2006-9-11 12:46:11

Test Laboratory: SGS-GSM

PCS1900-RightHandSide-Tilt-High

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: PCS1900-GSM Mode; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used:  $f = 1909.8 \text{ MHz}$ ;  $\sigma = 1.47 \text{ mho/m}$ ;  $\epsilon_r = 38.4$ ;  $\mu_r = 1$

1000 kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.93, 4.93, 4.93); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Tilt position - High/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.234 mW/g


**Tilt position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.6 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 0.317 W/kg

**SAR(1 g) = 0.207 mW/g; SAR(10 g) = 0.127 mW/g**

Maximum value of SAR (measured) = 0.223 mW/g

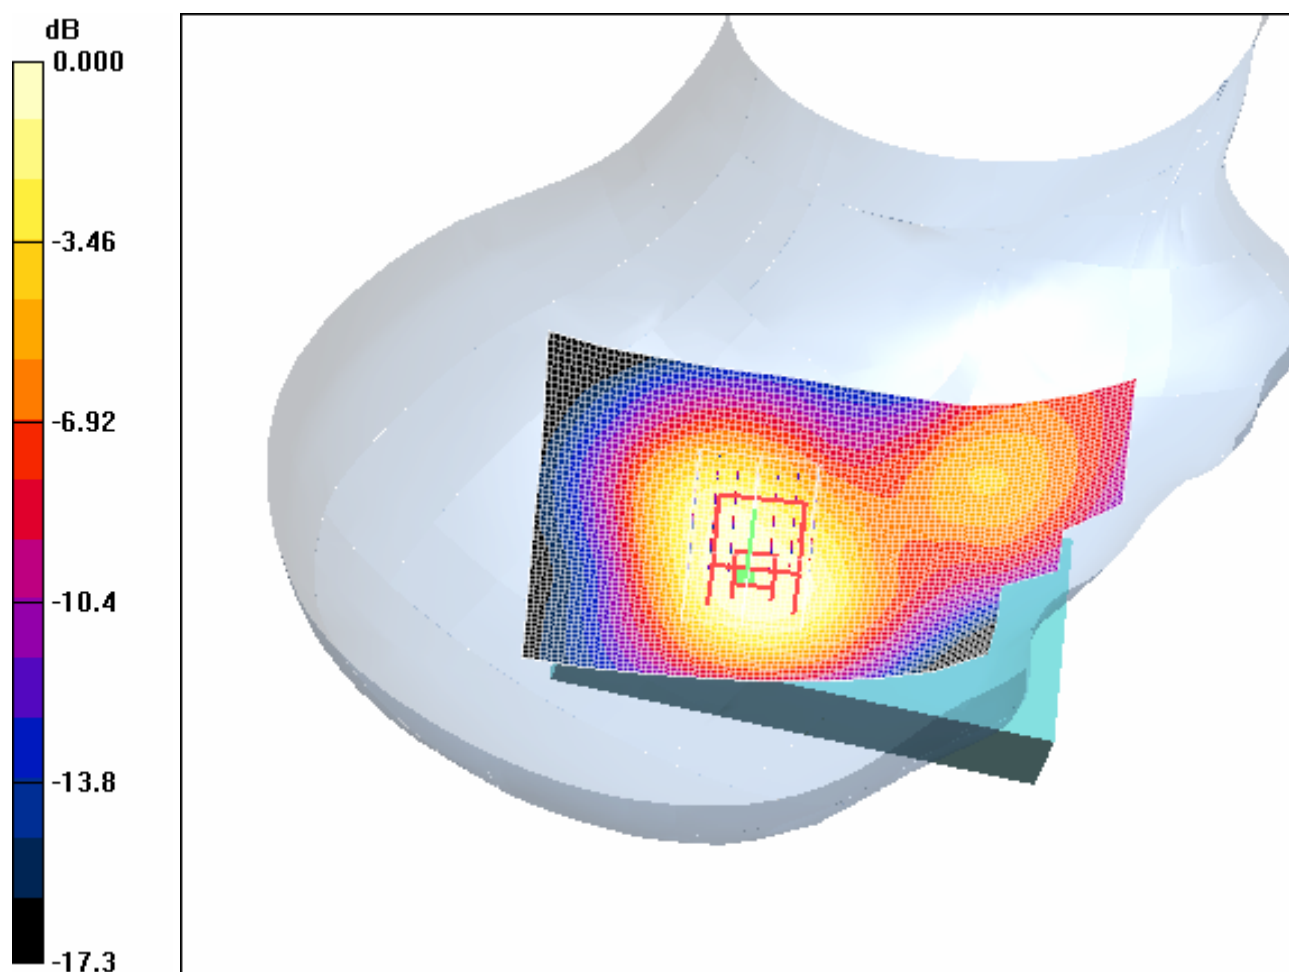

0 dB = 0.223mW/g

#### 4.35 RightHandSide-PCS1900-Maximum Value-SD

Date/Time: 2006-9-11 13:12:11

Test Laboratory: SGS-GSM

PCS1900-RightHandSide-Cheek-High+SD

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: PCS1900-GSM Mode; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used:  $f = 1909.8 \text{ MHz}$ ;  $\sigma = 1.47 \text{ mho/m}$ ;  $\epsilon_r = 38.4$ ;  $\mu_r =$

1000 kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.93, 4.93, 4.93); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Cheek Position - High+SD/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.806 mW/g


**Cheek Position - High+SD/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.15 V/m; Power Drift = 0.017 dB

Peak SAR (extrapolated) = 1.27 W/kg

**SAR(1 g) = 0.734 mW/g; SAR(10 g) = 0.400 mW/g**

Maximum value of SAR (measured) = 0.820 mW/g

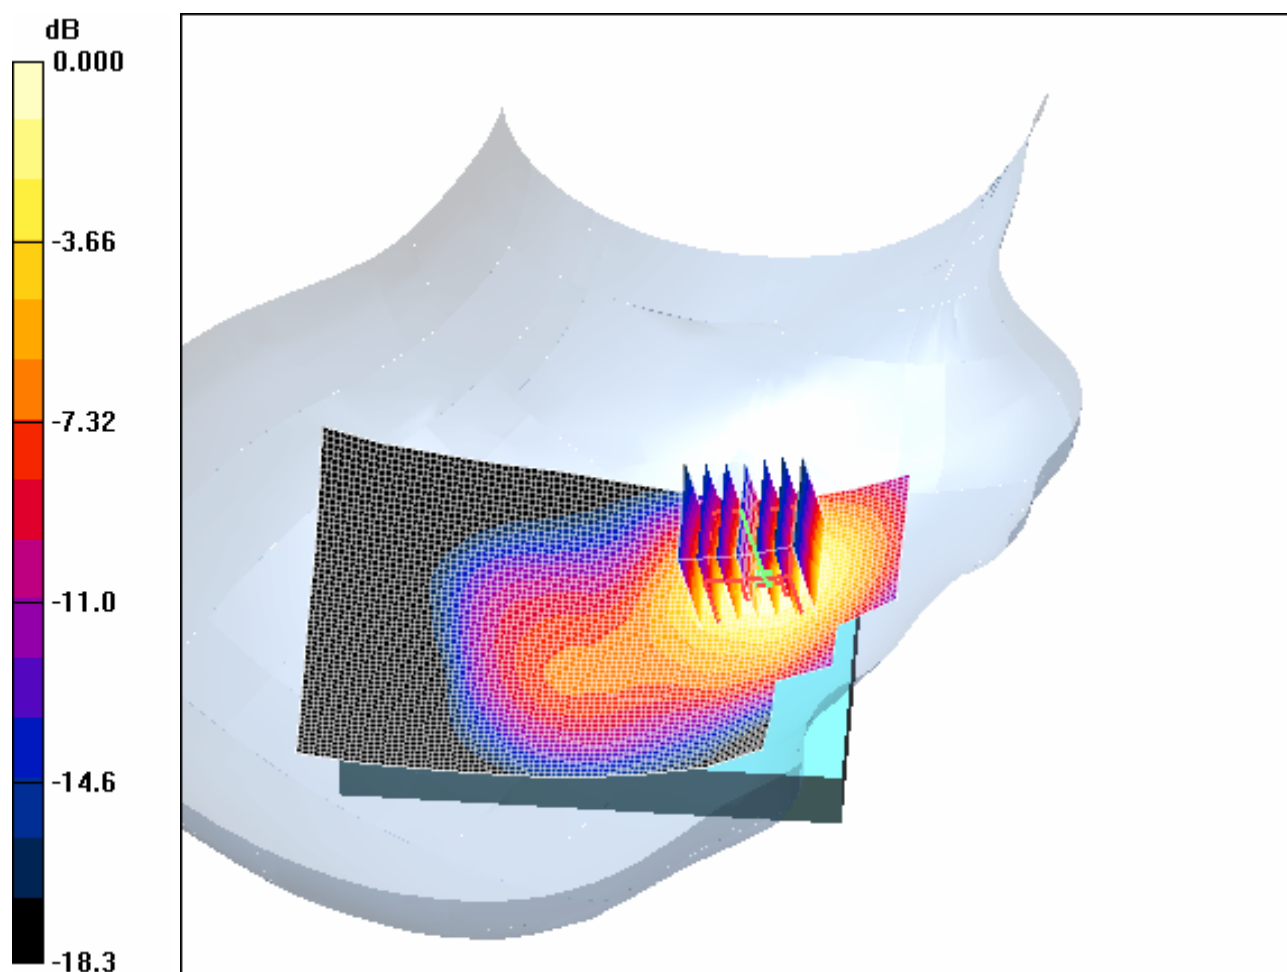

0 dB = 0.820mW/g

#### **4.36RightHandSide-PCS1900-Maximum Value-BT**

Date/Time: 2006-9-11 14:08:35

Test Laboratory: SGS-GSM

**PCS1900-RightHandSide-Cheek-High+BT**

**DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9**

Communication System: PCS1900-GSM Mode; Frequency: 1909.8 MHz;Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used:  $f = 1909.8 \text{ MHz}$ ;  $\sigma = 1.47 \text{ mho/m}$ ;  $\epsilon_r = 38.4$ ;  $\mu_r =$

1000 kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.93, 4.93, 4.93); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Cheek Position - High+BT/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.810 mW/g

**Cheek Position - High+BT/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 6.14 V/m; Power Drift = -0.033 dB

Peak SAR (extrapolated) = 1.25 W/kg

**SAR(1 g) = 0.732 mW/g; SAR(10 g) = 0.398 mW/g**

Maximum value of SAR (measured) = 0.821 mW/g



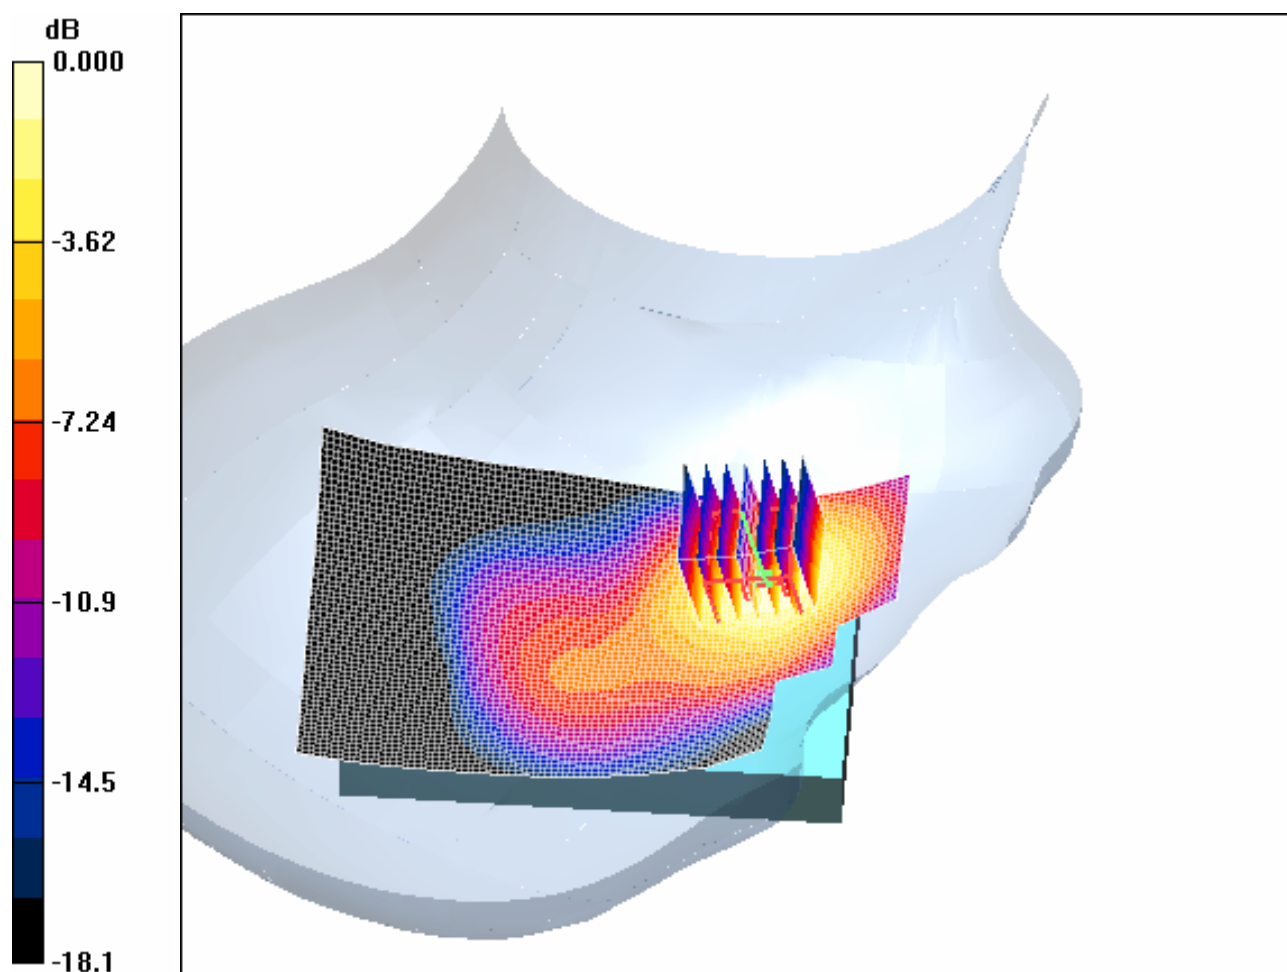

0 dB = 0.821mW/g

#### 4.37 Body-Worn-PCS1900-GPRS-Low

Date/Time: 2006-9-12 18:46:08

Test Laboratory: SGS-GSM

PCS1900-Body-Worn-GPRS-Low-1.5cm

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: GSM1900-GPRS Mode; Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium: 1900-Body Medium parameters used:  $f = 1850.2$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 53.5$ ;  $\mu_r = 1000$

kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.53, 4.53, 4.53); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Body Worn - Low/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.323 mW/g


**Body Worn - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.6 V/m; Power Drift = -0.063 dB

Peak SAR (extrapolated) = 0.431 W/kg

**SAR(1 g) = 0.299 mW/g; SAR(10 g) = 0.195 mW/g**

Maximum value of SAR (measured) = 0.318 mW/g

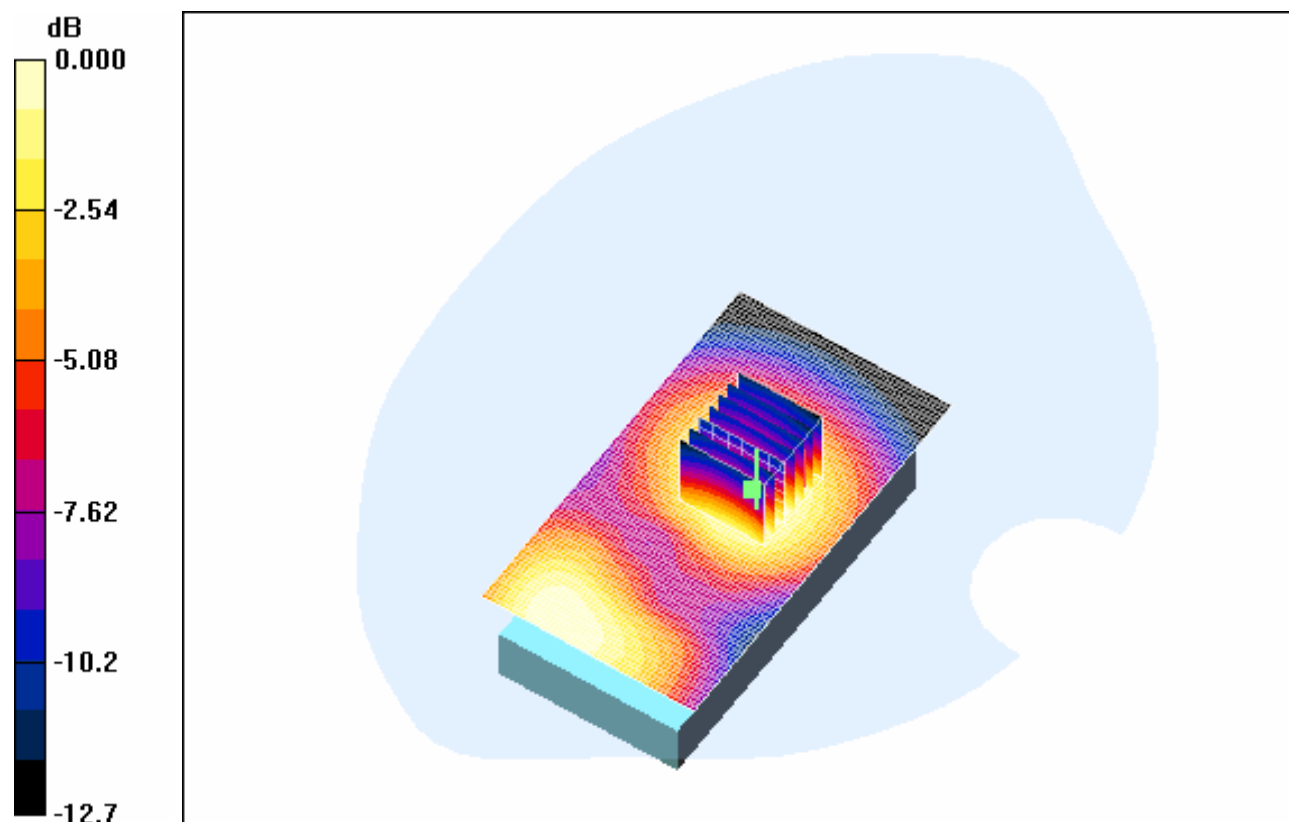

0 dB = 0.318mW/g

#### 4.38 Body-Worn-PCS1900-GPRS-Middle

Date/Time: 2006-9-12 19:08:43

Test Laboratory: SGS-GSM

PCS1900-Body-Worn-GPRS-Middle-1.5cm

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: GSM1900-GPRS Mode; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium: 1900-Body Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.55 \text{ mho/m}$ ;  $\epsilon_r = 53.6$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.53, 4.53, 4.53); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Body Worn - Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.351 mW/g


**Body Worn - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.7 V/m; Power Drift = -0.046 dB

Peak SAR (extrapolated) = 0.481 W/kg

**SAR(1 g) = 0.311 mW/g; SAR(10 g) = 0.196 mW/g**

Maximum value of SAR (measured) = 0.339 mW/g

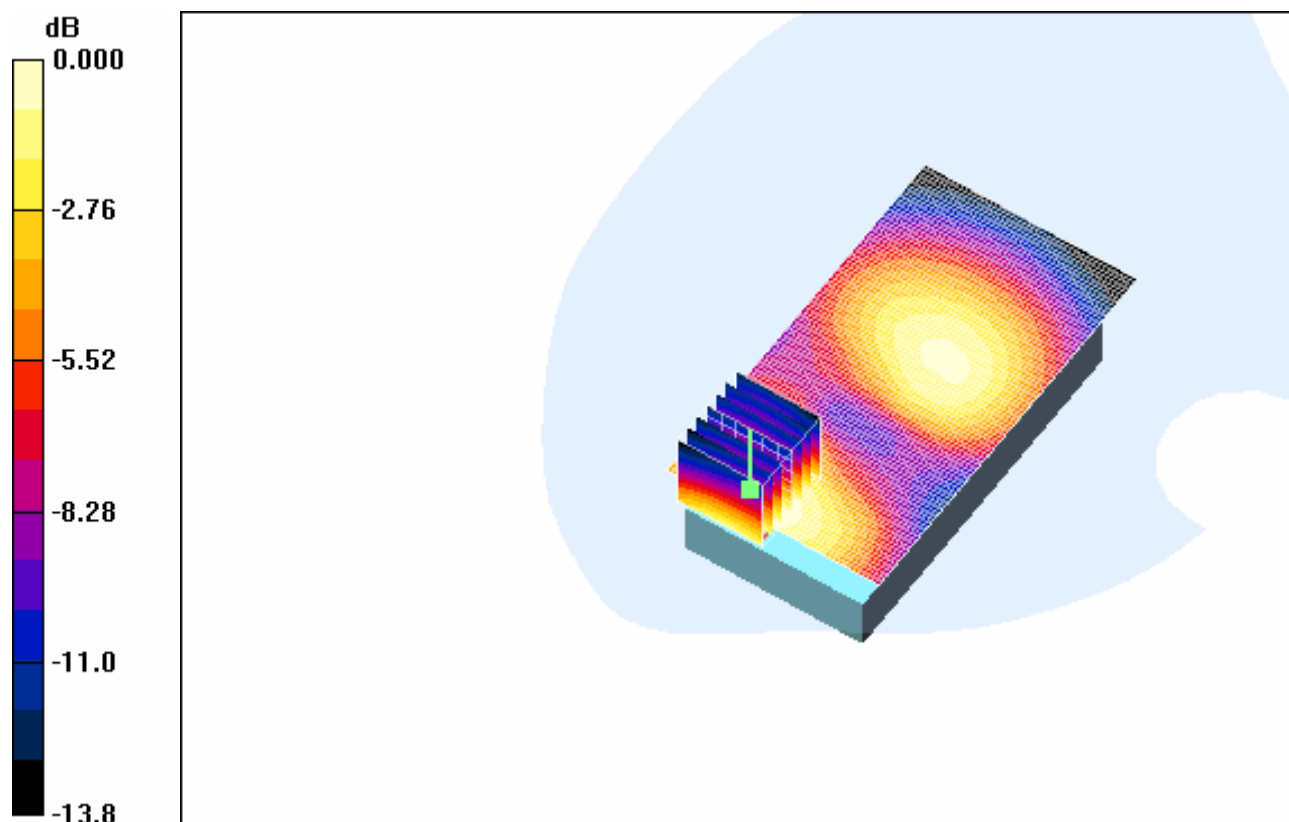

0 dB = 0.339mW/g

#### 4.39 Body-Worn-PCS1900-GPRS-High

Date/Time: 2006-9-12 19:30:15

Test Laboratory: SGS-GSM

PCS1900-Body-Worn-GPRS-High-1.5cm

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: GSM1900-GPRS Mode; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium: 1900-Body Medium parameters used:  $f = 1909.8$  MHz;  $\sigma = 1.59$  mho/m;  $\epsilon_r = 53.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.53, 4.53, 4.53); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Body Worn - High/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.417 mW/g


**Body Worn - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.1 V/m; Power Drift = -0.049 dB

Peak SAR (extrapolated) = 0.583 W/kg

**SAR(1 g) = 0.377 mW/g; SAR(10 g) = 0.237 mW/g**

Maximum value of SAR (measured) = 0.403 mW/g

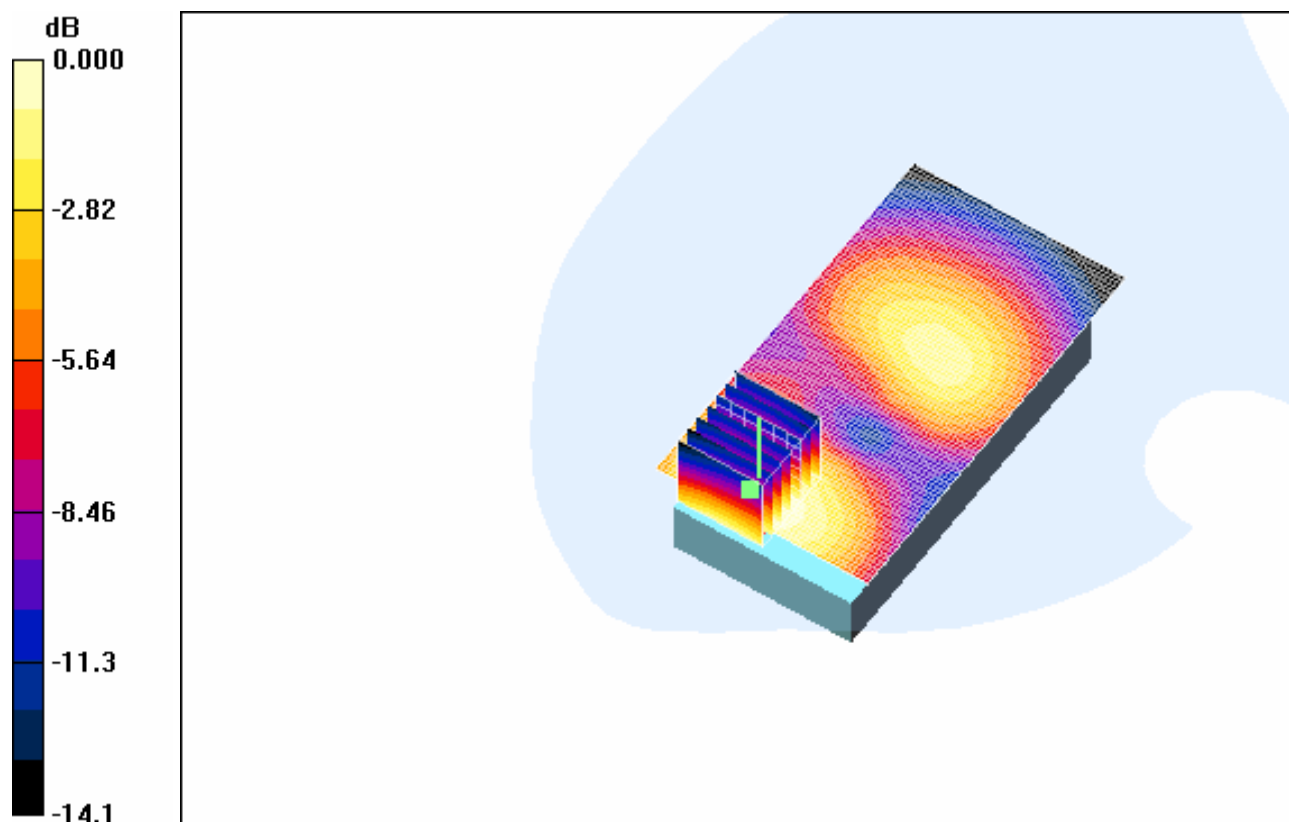

0 dB = 0.403mW/g

#### 4.40 Body-Worn-PCS1900-GPRS-Maximum Value-SD

Date/Time: 2006-9-12 19:55:18

Test Laboratory: SGS-GSM

PCS1900-Body-Worn-GPRS-High-1.5cm+SD

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: GSM1900-GPRS Mode; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium: 1900-Body Medium parameters used:  $f = 1909.8 \text{ MHz}$ ;  $\sigma = 1.59 \text{ mho/m}$ ;  $\epsilon_r = 53.5$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.53, 4.53, 4.53); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Body Worn - High+SD/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.421 mW/g

**Body Worn - High+SD/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 12.4 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 0.585 W/kg

**SAR(1 g) = 0.380 mW/g; SAR(10 g) = 0.238 mW/g**

Maximum value of SAR (measured) = 0.406 mW/g



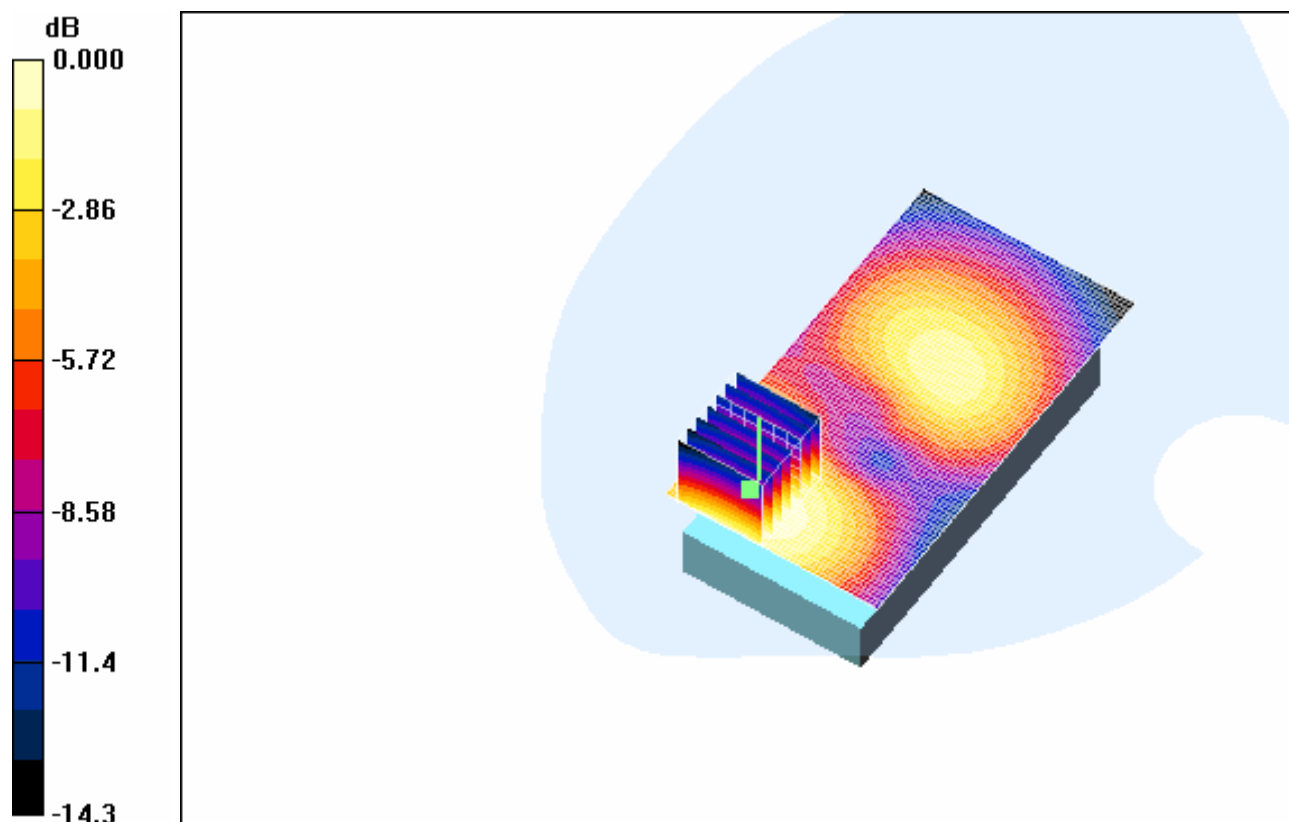

0 dB = 0.406mW/g

#### 4.41 Body-Worn-PCS1900-GPRS-Maximum Value-BT

Date/Time: 2006-9-12 20:21:04

Test Laboratory: SGS-GSM

#### PCS1900-Body-Worn-GPRS-High-1.5cm+BT

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: GSM1900-GPRS Mode; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium: 1900-Body Medium parameters used:  $f = 1909.8 \text{ MHz}$ ;  $\sigma = 1.59 \text{ mho/m}$ ;  $\epsilon_r = 53.5$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.53, 4.53, 4.53); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Body Worn - High+BT/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.437 mW/g


**Body Worn - High+BT/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.91 V/m; Power Drift = -0.020 dB

Peak SAR (extrapolated) = 0.599 W/kg

**SAR(1 g) = 0.384 mW/g; SAR(10 g) = 0.243 mW/g**

Maximum value of SAR (measured) = 0.412 mW/g

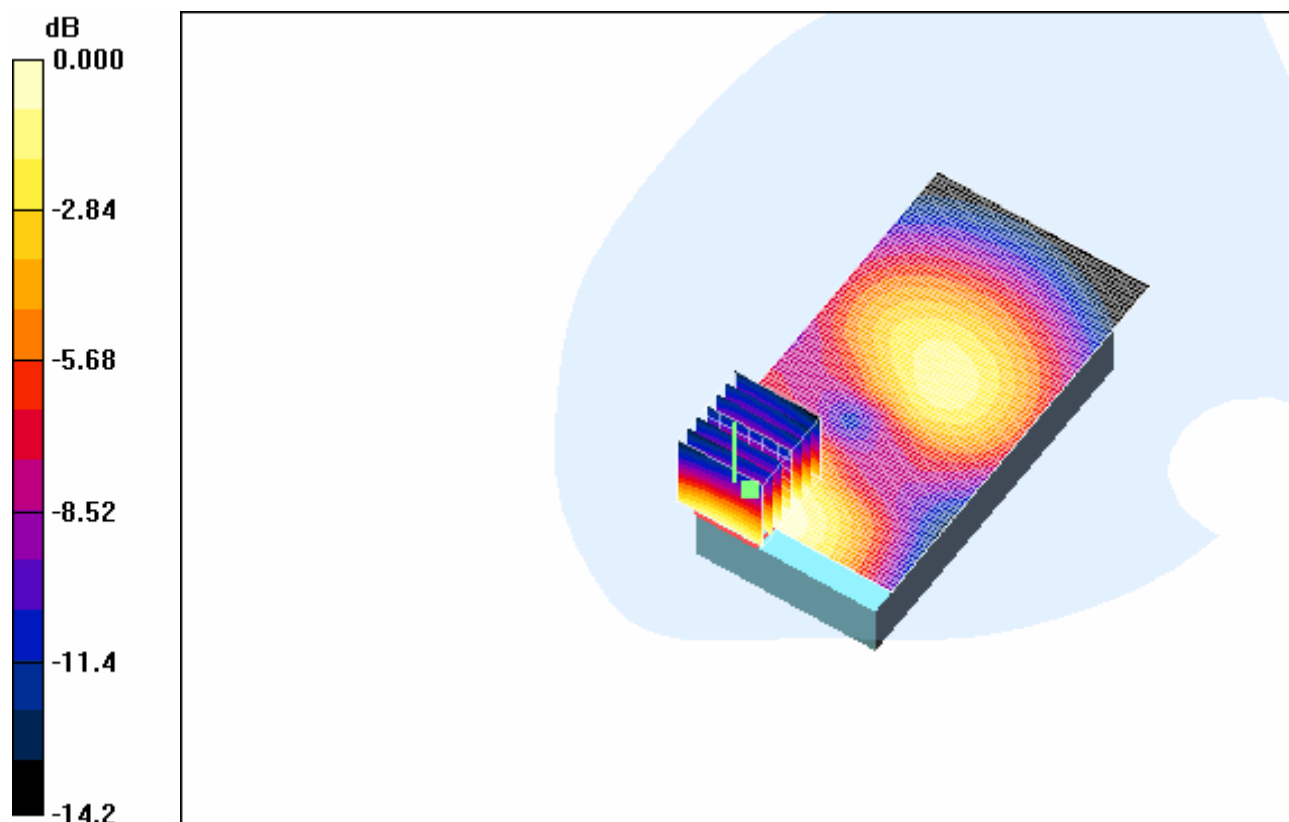

0 dB = 0.412mW/g

#### **4.42 Body-Worn-802.11b-Low**

Date/Time: 2006-9-14 11:23:05

Test Laboratory: SGS-GSM

#### **WiFi802.11b-Body-Worn-Low-1.5cm**

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: WiFi802.11b Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.88$  mho/m;  $\epsilon_r = 51.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(4.35, 4.35, 4.35); Calibrated: 2005-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Body Worn - Low/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.054 mW/g


**Body Worn - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.44 V/m; Power Drift = 0.130 dB

Peak SAR (extrapolated) = 0.096 W/kg

**SAR(1 g) = 0.048 mW/g; SAR(10 g) = 0.027 mW/g**

Maximum value of SAR (measured) = 0.051 mW/g

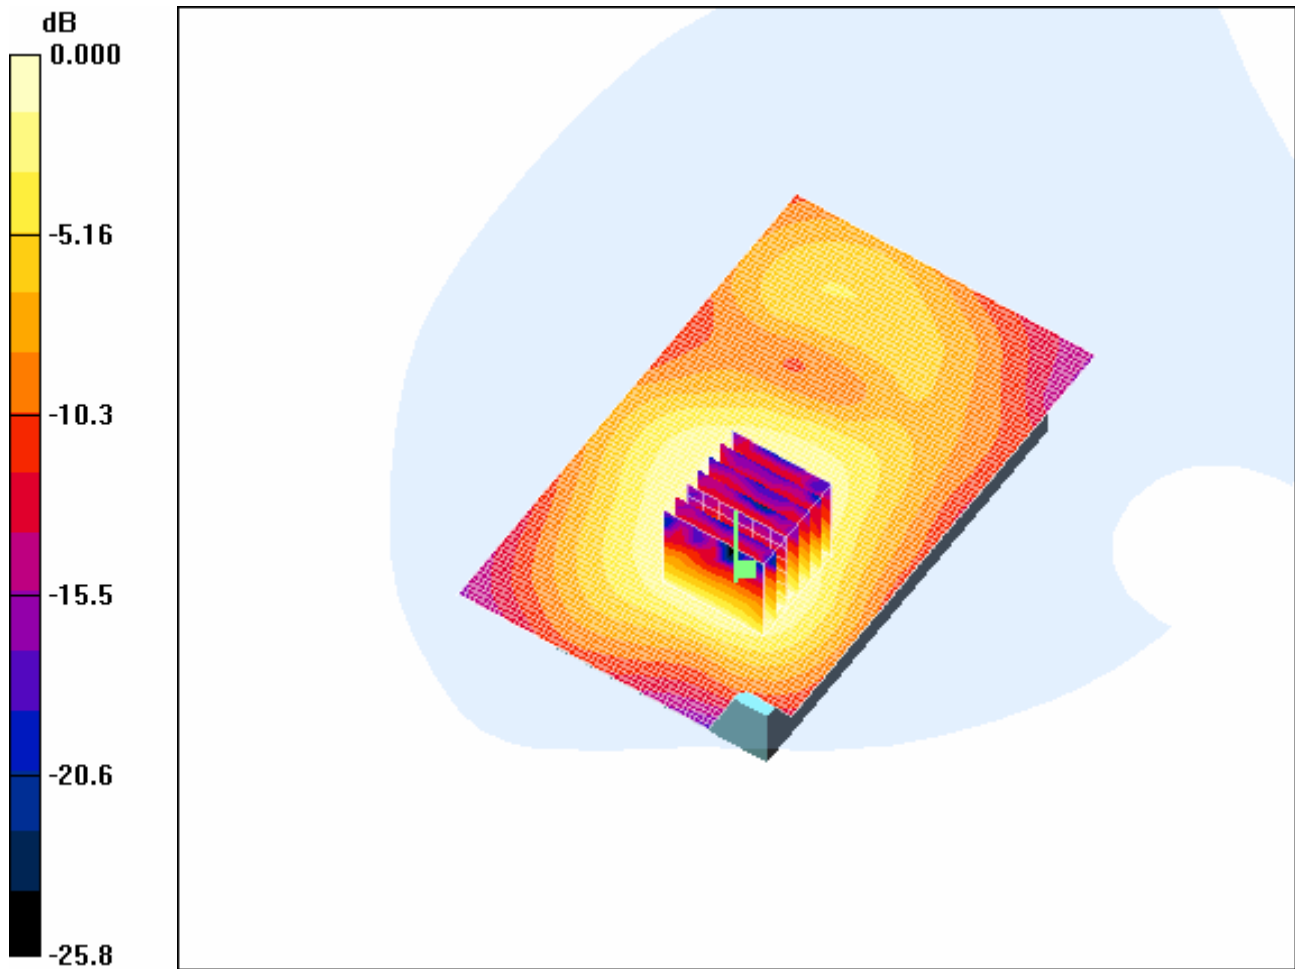

0 dB = 0.051mW/g

#### **4.43 Body-Worn-802.11b-Low+BT**

Date/Time: 2006-9-14 10:20:40

Test Laboratory: SGS-GSM

WiFi802.11b-Body-Worn-20061114-2-Low-BT

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: WiFi802.11b Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.88$  mho/m;  $r = 51.9$ ;  $\epsilon = 1000$

kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(4.35, 4.35, 4.35); Calibrated: 2005-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Body Worn -Low +BT/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.041 mW/g


**Body Worn -Low +BT/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.45 V/m; Power Drift = -0.317 dB

Peak SAR (extrapolated) = 0.073 W/kg

**SAR(1 g) = 0.037 mW/g; SAR(10 g) = 0.020 mW/g**

Maximum value of SAR (measured) = 0.039 mW/g

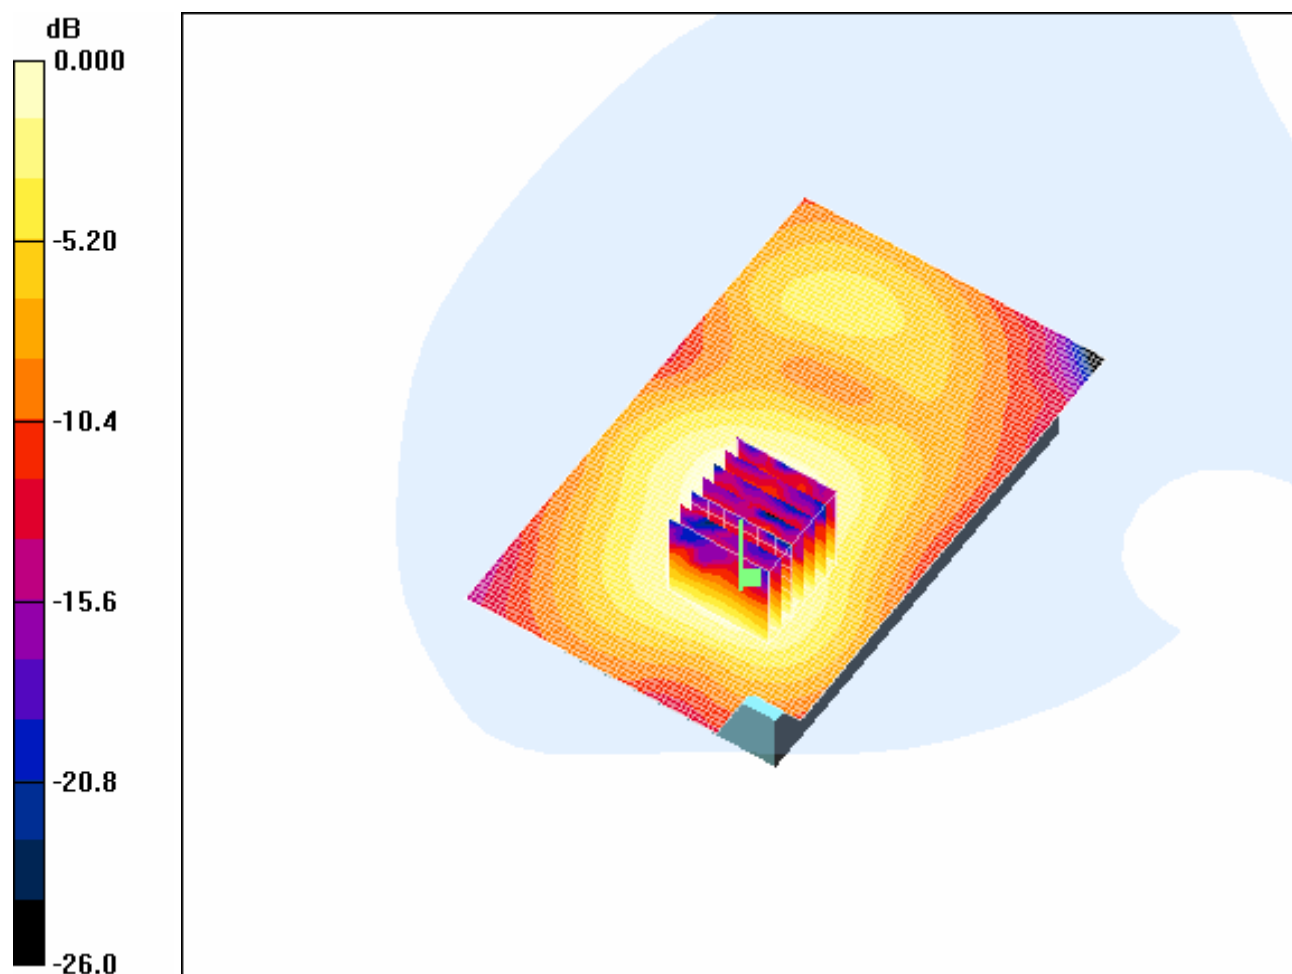

0 dB = 0.039mW/g

#### 4.44 Body-Worn-802.11b-Low+SD

Date/Time: 2006-9-14 13:46:11

Test Laboratory: SGS-GSM

WiFi802.11b-Body-Worn-20061114-2-Low-SD-1.5cm

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: WiFi802.11b Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.88$  mho/m;  $r = 51.9$ ;  $\epsilon = 1000$

kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(4.35, 4.35, 4.35); Calibrated: 2005-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Body Worn -Low +SD/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.045 mW/g

**Body Worn -Low +SD/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 2.02 V/m; Power Drift = -0.243 dB

Peak SAR (extrapolated) = 0.081 W/kg

**SAR(1 g) = 0.040 mW/g; SAR(10 g) = 0.022 mW/g**

Maximum value of SAR (measured) = 0.042 mW/g



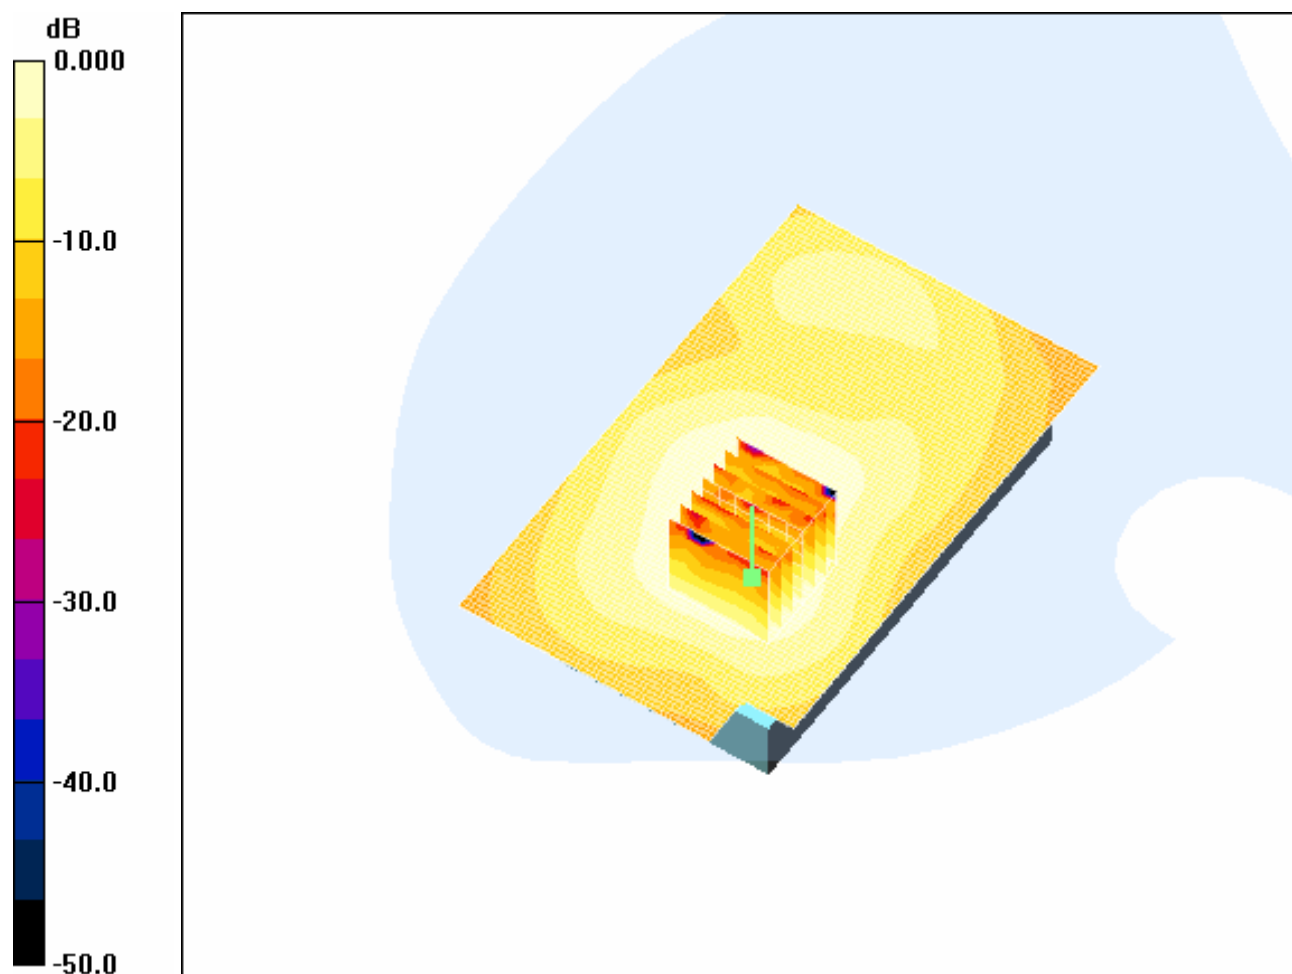

0 dB = 0.042mW/g

#### **4.45 Body-Worn-802.11b-Mid**

Date/Time: 2006-9-14 10:20:40

Test Laboratory: SGS-GSM

WiFi802.11b-Body-Worn-Middle-1.5cm

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: WiFi802.11b Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.93$  mho/m;  $\epsilon_r = 51.8$ ;  $\mu_r = 1000$

kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(4.35, 4.35, 4.35); Calibrated: 2005-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Body Worn - Middle/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.043 mW/g


**Body Worn - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.46 V/m; Power Drift = -0.317 dB

Peak SAR (extrapolated) = 0.075 W/kg

**SAR(1 g) = 0.038 mW/g; SAR(10 g) = 0.021 mW/g**

Maximum value of SAR (measured) = 0.041 mW/g

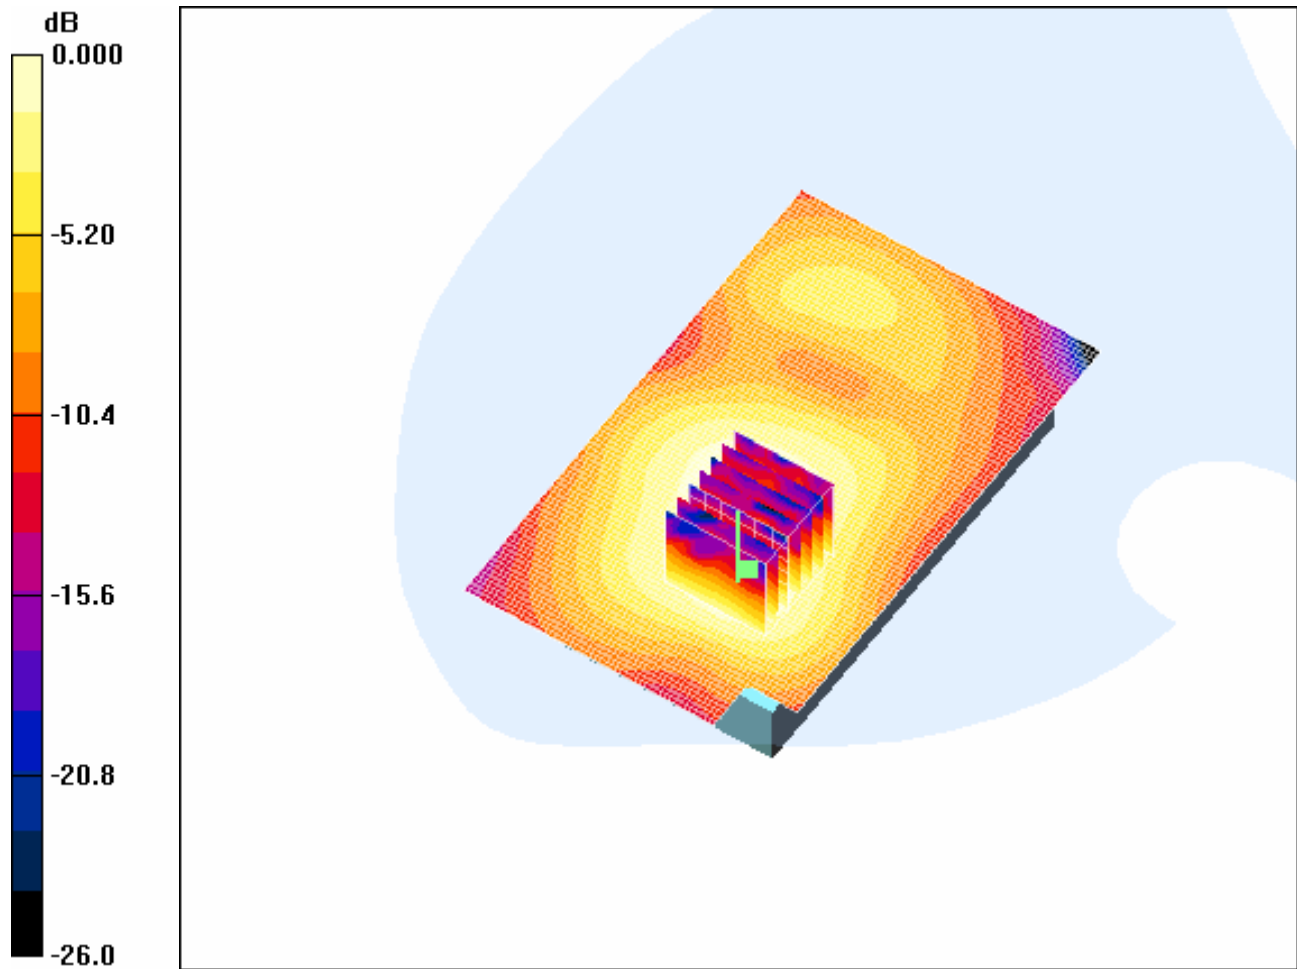

0 dB = 0.041mW/g

#### 4.46 Body-Worn-802.11b-High

Date/Time: 2006-9-14 13:04:37

Test Laboratory: SGS-GSM

WiFi802.11b-Body-Worn-High-1.5cm

DUT: GSM10002674A20; Type: Body; Serial: 35212301001001-9

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: WiFi802.11b Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.96$  mho/m;  $\epsilon_r = 51.7$ ;  $\mu_r = 1000$

kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(4.35, 4.35, 4.35); Calibrated: 2005-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**Body Worn - High/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.047 mW/g


**Body Worn - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.93 V/m; Power Drift = -0.068 dB

Peak SAR (extrapolated) = 0.087 W/kg

**SAR(1 g) = 0.042 mW/g; SAR(10 g) = 0.023 mW/g**

Maximum value of SAR (measured) = 0.045 mW/g

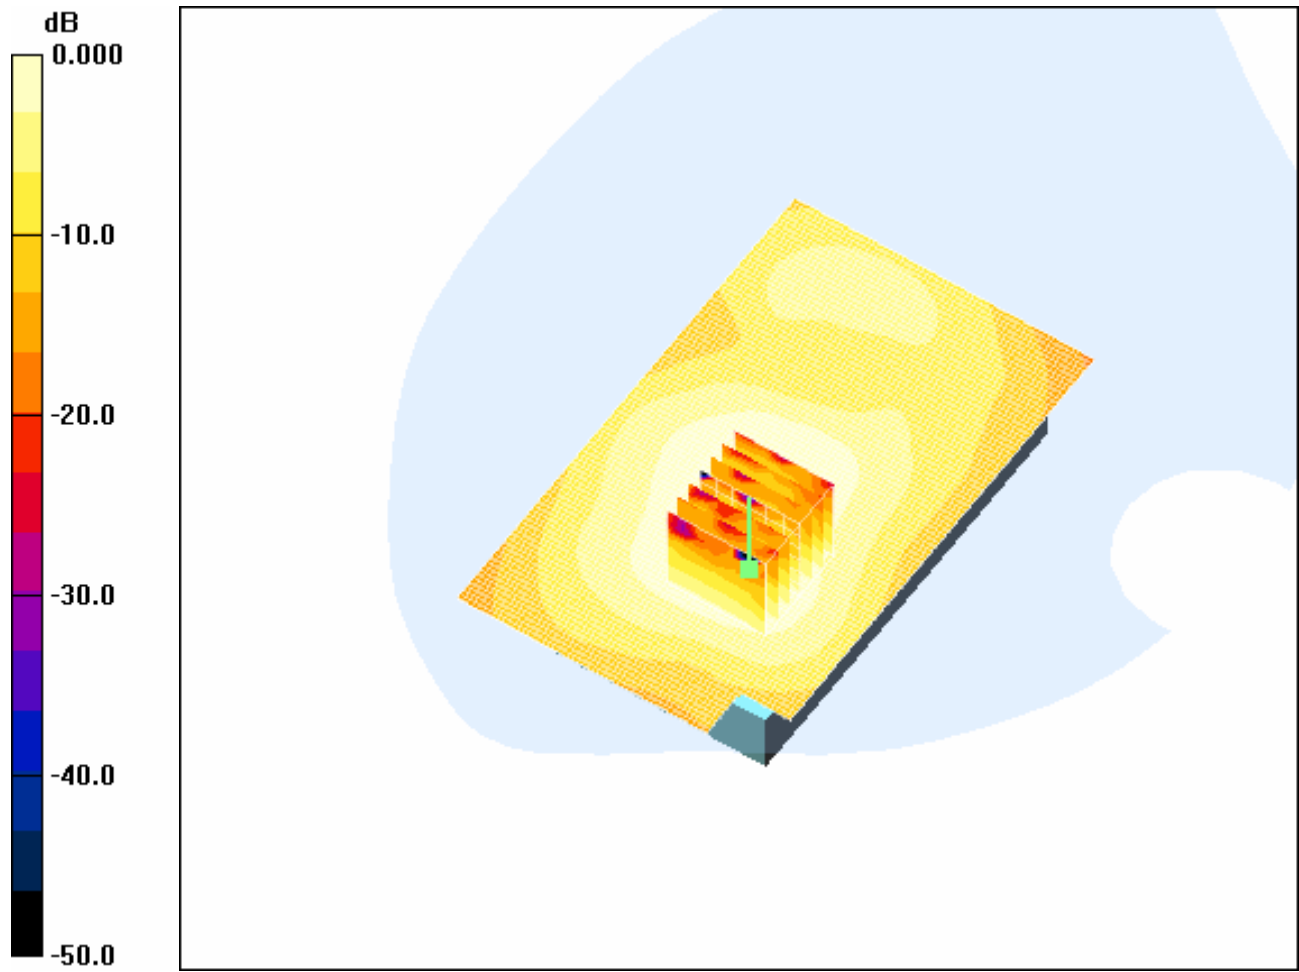

0 dB = 0.045mW/g

## Appendix

### 1. Photographs of Test Setup

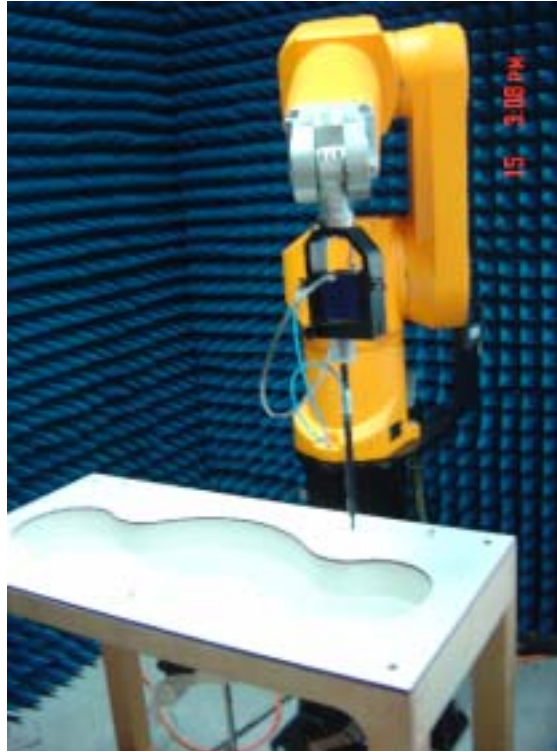


Fig.1 Photograph of the SAR measurement System

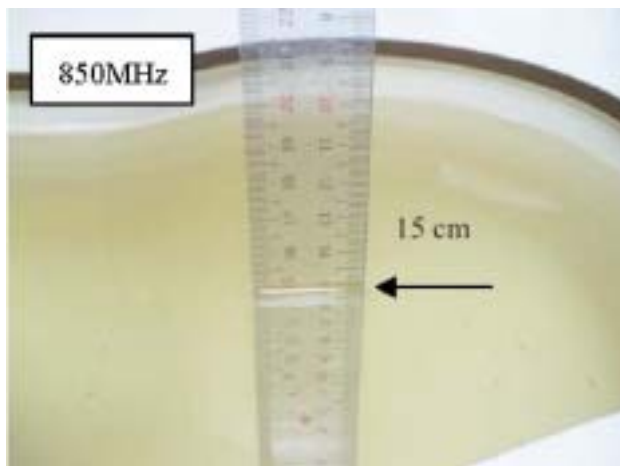


Fig.2 Photograph of the Tissue Simulant  
Fluid Liquid depth 15cm  
for Left-Head Side

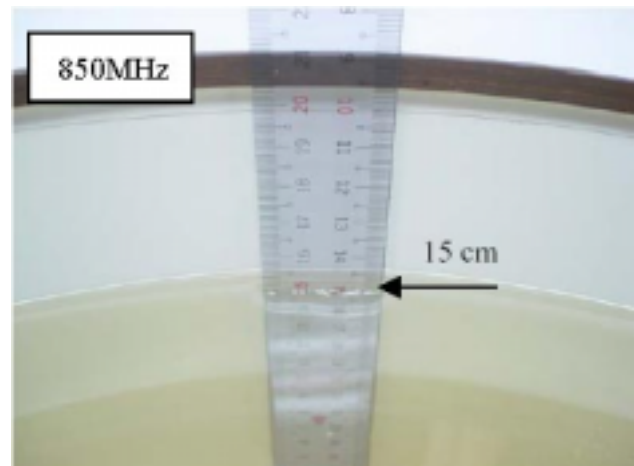


Fig.3 Photograph of the Tissue Simulant  
Liquid depth 15cm for Body-Worn

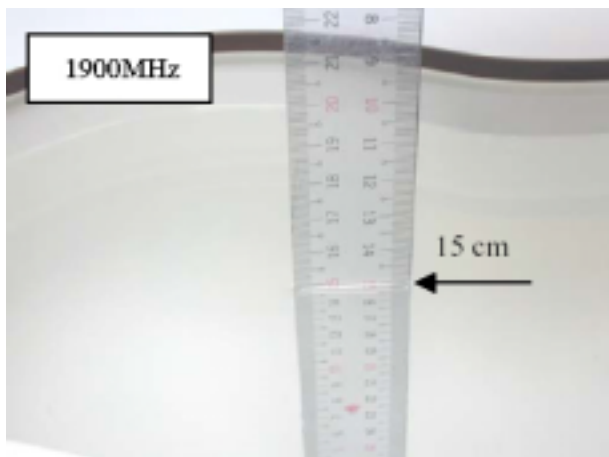


Fig.4 Photograph of the Tissue Simulant Fluid Liquid depth 15cm for Right-Head Side

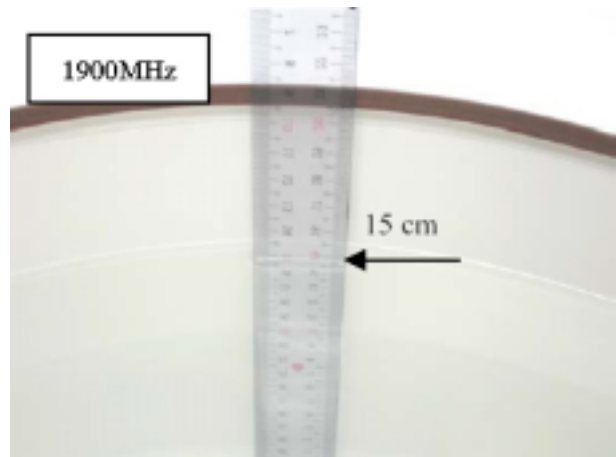


Fig.5 Photograph of the Tissue Simulant Liquid depth 15cm for Body-Worn



Fig.6 Photograph of the Left Hand Side Cheek status

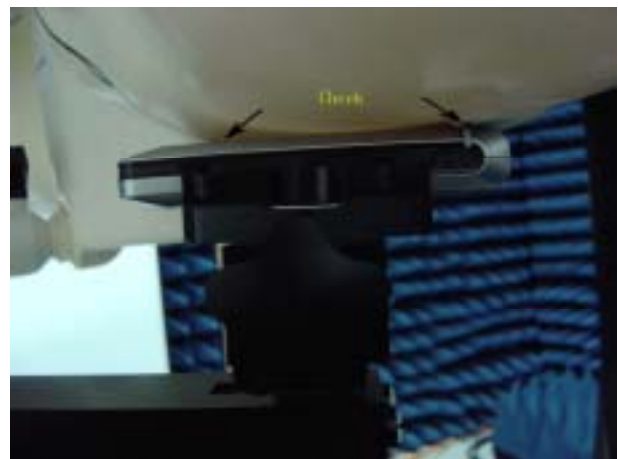


Fig.7 Photograph of the Left Hand Side Tilt status





Fig.8 Photograph of the Right Hand Side Cheek status

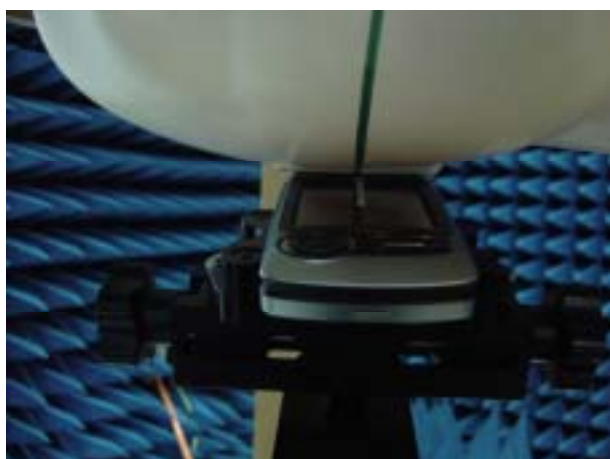


Fig.9 Photograph of the Right Hand Side Tilt status



Fig.10-1 Photograph of the BodyWorn status (GPRS)



## 2. Photographs of the EUT



Fig.11 Front View



Fig.12 Back View

### **3. Photographs of the battery**



Fig.13 Front view of battery

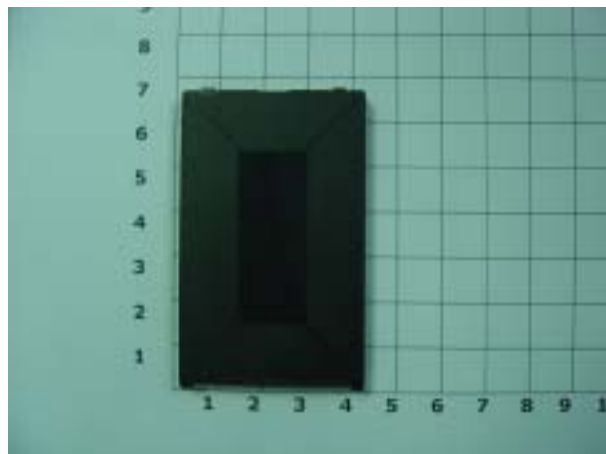


Fig.14 Back view of battery

### **4. Photograph of the charger**



Fig.14 Charger

**5. Probe Calibration certificate**

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client: SGS-CSTS (MTT)

Certificate No: ES3-3088\_Sep05

**CALIBRATION CERTIFICATE**

Object: ES3DV3 - SN:3088

Calibration procedure(s): QA CAL-01.v5  
Calibration procedure for dosimetric E-field probes

Calibration date: September 13, 2005

Condition of the calibrated item: In Tolerance

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^{\circ}\text{C}$  and humidity  $< 75\%$ .

Calibration Equipment used (M&amp;TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	0B41293874	3-May-05 (METAS, No. 251-00486)	May-06
Power sensor E4412A	MY41485277	3-May-05 (METAS, No. 251-00486)	May-06
Power sensor E4412A	MY41485087	3-May-05 (METAS, No. 251-00486)	May-06
Reference 3 dB Attenuator	SN: S5054 (30)	11-Aug-05 (METAS, No. 251-00486)	Aug-06
Reference 20 dB Attenuator	SN: S5066 (20b)	3-May-05 (METAS, No. 251-00487)	May-06
Reference 30 dB Attenuator	SN: S5129 (30b)	11-Aug-05 (METAS, No. 251-00500)	Aug-06
Reference Probe ES3DV2	SN: 3013	7-Jan-05 (SPEAG, No. ES3-3013_Jan05)	Jan-06
DAE4	SN: 654	29-Nov-04 (SPEAG, No. DAE4-654_Nov04)	Nov-05

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642UD1700	4-Aug-09 (SPEAG, in house check Dec-03)	In house check: Dec-05
Network Analyzer HP 8753C	US37300585	18-Oct-01 (SPEAG, in house check Nov-04)	In house check: Nov-05

	Name	Function	Signature
Calibrated by:	Nico Vellari	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: September 15, 2005

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 106**

#### Glossary:

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
Polarization $\phi$	$\phi$ rotation around probe axis
Polarization $\theta$	$\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis

#### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001

#### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\theta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not effect the E<sup>2</sup>-field uncertainty inside TSL (see below ConF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConF whereby the uncertainty corresponds to that given for ConF. A frequency dependent ConF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical Isotropy (3D deviation from isotropy)**: In a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

ES3DV3 SN:3088

September 13, 2005

# Probe ES3DV3

## SN:3088

Manufactured:	July 20, 2005
Calibrated:	September 13, 2005

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

ES3DV3 SN:3088

September 13, 2005

**DASY - Parameters of Probe: ES3DV3 SN:3088****Sensitivity in Free Space<sup>A</sup>****Diode Compression<sup>B</sup>**

NormX	1.32 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP X	95 mV
NormY	1.24 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Y	95 mV
NormZ	1.23 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Z	95 mV

**Sensitivity in Tissue Simulating Liquid (Conversion Factors)**

Please see Page 8.

**Boundary Effect**

TSL 900 MHz Typical SAR gradient: 5 % per mm

Sensor Center to Phantom Surface Distance		3.0 mm	4.0 mm
SAR <sub>iso</sub> [%]	Without Correction Algorithm	5.8	2.7
SAR <sub>iso</sub> [%]	With Correction Algorithm	0.0	0.1

TSL 1750 MHz Typical SAR gradient: 10 % per mm

Sensor Center to Phantom Surface Distance		3.0 mm	4.0 mm
SAR <sub>iso</sub> [%]	Without Correction Algorithm	7.6	4.5
SAR <sub>iso</sub> [%]	With Correction Algorithm	0.1	0.2

**Sensor Offset**

Probe Tip to Sensor Center 2.0 mm

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.


<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Page 8).<sup>B</sup> Numerical linearization parameter: uncertainty not required.

ES3DV3 SN:3088

September 13, 2005

### Frequency Response of E-Field

(TEM-Cell: 01110 EXX, Waveguide: R22)

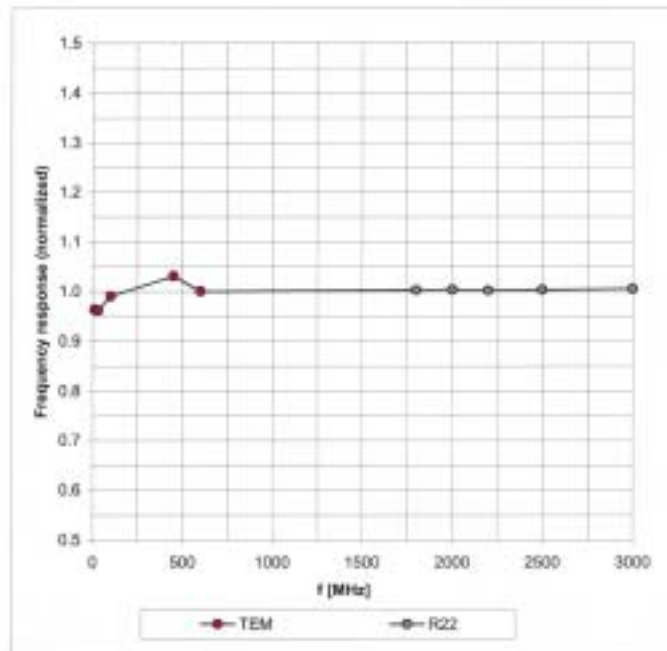


Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )



ES3DV3 SN:3088

September 13, 2005

# Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

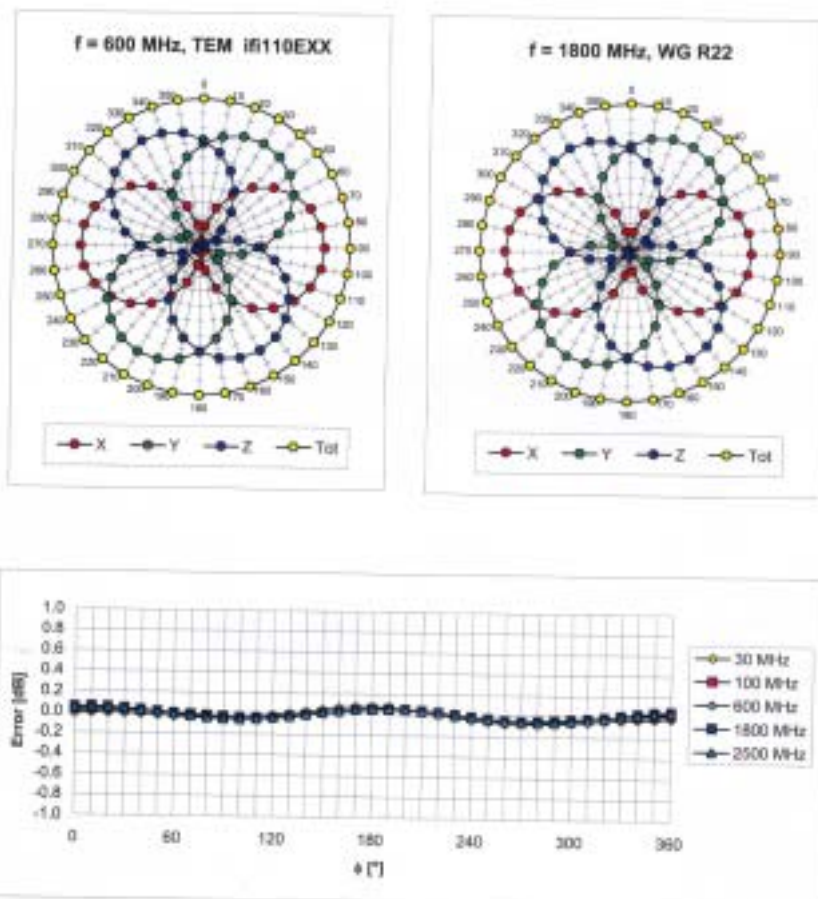


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )



ES3DV3 SN:3088

September 13, 2005

**Dynamic Range  $f(\text{SAR}_{\text{head}})$**   
(Waveguide R22,  $f = 1800 \text{ MHz}$ )

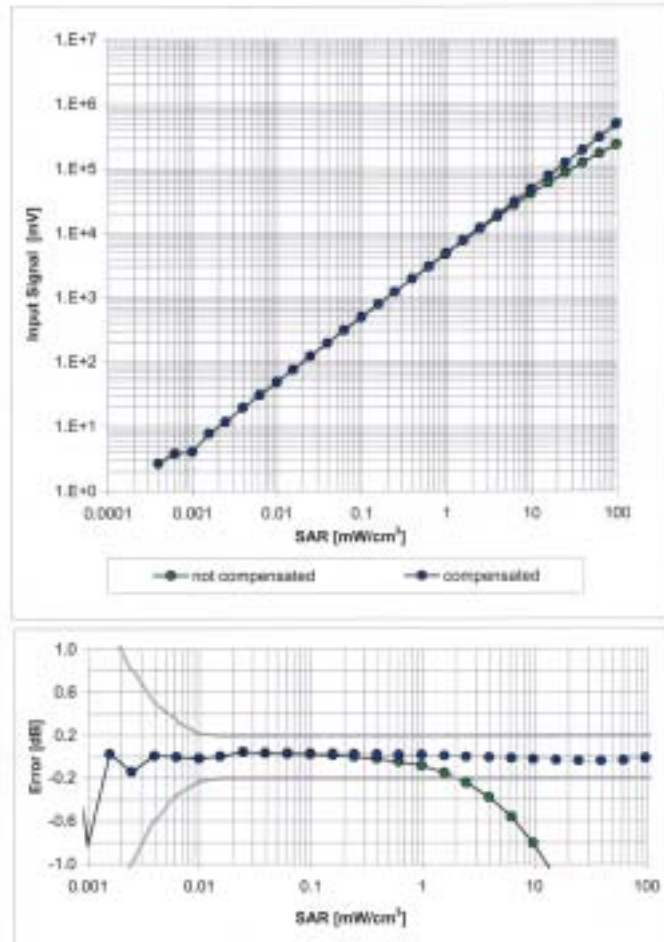


Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

ES3DV3 SN:3088

September 13, 2005

## Conversion Factor Assessment

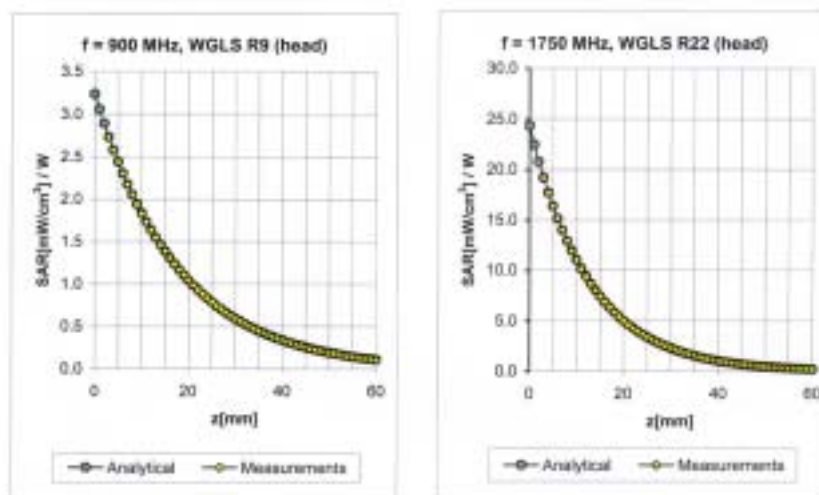

f [MHz]	Validity [MHz] <sup>2</sup>	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.47	1.40	5.91 ± 11.0% (k=2)
1750	± 50 / ± 100	Head	40.1 ± 5%	1.37 ± 5%	0.24	2.39	4.97 ± 11.0% (k=2)
1900	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.27	2.28	4.93 ± 11.0% (k=2)
2000	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.25	2.34	4.87 ± 11.0% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.61	1.25	5.83 ± 11.0% (k=2)
1750	± 50 / ± 100	Body	53.4 ± 5%	1.49 ± 5%	0.28	2.53	4.61 ± 11.0% (k=2)
1900	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.28	2.57	4.53 ± 11.0% (k=2)
2000	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.32	2.11	4.47 ± 11.0% (k=2)


<sup>2</sup> The validity of a 100 MHz only applies for DASV v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

ES3DV3 SN:3088

September 13, 2005

### Deviation from Isotropy in HSL

Error ( $\phi$ ,  $\theta$ ),  $f = 900$  MHz

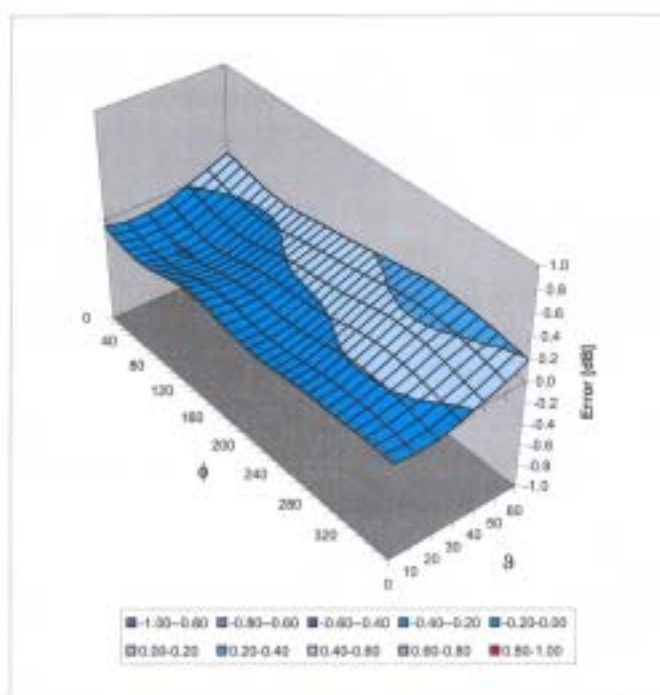

Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  ( $k=2$ )

**6. Uncertainty analysis**

Error Description	Tol. (± %)	Prob. dist.	Div.	(c <sub>i</sub> ) (1g)	(c <sub>i</sub> ) (10g)	Std. unc. (± %)		(v <sub>i</sub> )
Measurement System								
Probe Calibration	4.8	N	1	1	1	4.8	4.8	∞
Axial Isotropy	4.7	R	√3	1	1	2.7	2.7	∞
Hemispherical Isotropy	0	R	√3	1	1	0	0	∞
Boundary Effects	1.0	R	√3	1	1	0.6	0.6	∞
Linearity	4.7	R	√3	1	1	2.7	2.7	∞
System Detection Limit	1.0	R	√3	1	1	0.6	0.6	∞
Readout Electronics	1.0	N	1	1	1	1.0	1.0	∞
Response Time	0	R	√3	1	1	0	0	∞
Integration Time	0	R	√3	1	1	0	0	∞
RF Ambient Conditions	3.0	R	√3	1	1	1.7	1.7	∞
Probe Positioner	0.4	R	√3	1	1	0.2	0.2	∞
Probe Positioning	2.9	R	√3	1	1	1.7	1.7	∞
Algorithms for Max. SAR Eval.	1.0	R	√3	1	1	0.6	0.6	∞
Dipole								
Dipole Axis to Liquid Distance	2.0	R	√3	1	1	1.2	1.2	∞
Input power and SAR drift meas.	4.7	R	√3	1	1	2.7	2.7	∞
Phantom and Tissue Param.								
Phantom Uncertainty	4.0	R	√3	1	1	2.3	2.3	∞
Liquid Conductivity (target)	5.0	R.	√3	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (meas.)	2.5	N	1	0.64	0.43	1.6	1.1	∞
Liquid Permittivity (target)	5.0	R	√3	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (meas.)	2.5	N	1	0.6	0.49	1.5	1.2	∞
Combined Stdandard Uncertainty						8.4	8.1	∞
Coverage Factor for 95%		kp=2						
Expanded Uncertainty						16.8	16.2	

Dasy4 Uncertainty Budget

## 7. Phantom description

**Schmid & Partner  
Engineering AG**

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

**Certificate of conformity / First Article Inspection**

Item	SAM Twin Phantom V4.0
Type No	QD 000 P40 CA
Series No	TP-1150 and higher
Manufacturer / Origin	Untersee Composites Hauptstr. 69 CH-8559 Fruttwilen Switzerland

**Tests**

The series production process used allows the limitation to test of first articles. Complete tests were made on the pre-series Type No. QD 000 P40 AA, Serial No. TP-1001 and on the series first article Type No. QD 000 P40 BA, Serial No. TP-1006. Certain parameters have been retested using further series units (called samples).

Test	Requirement	Details	Units tested
Shape	Compliance with the geometry according to the CAD model.	ITIS CAD File (*)	First article, Samples
Material thickness	Compliant with the requirements according to the standards	2mm +/- 0.2mm in specific areas	First article, Samples
Material parameters	Dielectric parameters for required frequencies	200 MHz - 3 GHz Relative permittivity < 5 Loss tangent < 0.05	Material sample TP 104-5
Material resistivity	The material has been tested to be compatible with the liquids defined in the standards	Liquid type HSL 1800 and others according to the standard.	Pre-series, First article

**Standards**

[1] CENELEC EN 50361

[2] IEEE P1528-200x draft 6.5

[3] IEC PT 62209 draft 0.9

(\*) The ITIS CAD file is derived from [2] and is also within the tolerance requirements of the shapes of [1] and [3].

**Conformity**

Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standard [1] and draft standards [2] and [3].

Date

28.02.2002

Signature / Stamp

*F. Bommelt***Schmid & Partner  
Engineering AG**Zeughausstrasse 43, CH-8004 Zurich  
Tel. +41 1 245 97 00, Fax +41 1 245 97 79*Volker Kappeler***The end**