

Test Report Serial Number: Test Report Date: Project Number: 45461350R1.4 19 August 2016 1350

EMC Test Report - New Filing

Applicant:



4RF Limited PO Box 13-506 Wellington, New Zealand 6032 New Zealand

FCC ID:

UIPSQ757M160

Product Model Number / HVIN

SQ757M160

IC Registration Number

Product Name / PMN

Aprisa SR & Aprisa SR+

In Accordance With:

FCC 47 CFR §2.1093

Radiofrequency Radiation Exposure Evaluation: Portable Devices

Health Canada Safety Code 6

Limits of Human Exposure to Radiofrequency Electromagnetic Energy in the Frequency Range from 3kHz to 300GHz

Approved By:

Ben Hewson, President

Celltech Labs Inc. 21-364 Lougheed Rd. Kelowna, BC, V1X 7R8

Canada





Industry Canada



Test Lab Certificate: 2470.01

IC Registration 3874A-1

FCC Registration: 714830



Test Report S/N: **45461350-R1.4**

TABLE OF CONTENTS

1.0 REVISION LOG
2.0 TEST RESULT SUMMARY
3.0 PASS/FAIL CRITERIA4
4.0 SCOPE
5.0 REFERENCES
6.0 FACILITIES AND ACCREDITATIONS
7.0 GENERAL INFORMATION
APPENDIX A - RF CONDUCTED OUTPUT POWER
APPENDIX B - OCCUPIED BANDWIDTH
APPENDIX C - BAND EDGE
APPENDIX D - EMISSIONS IN 1559 – 1610MHZ BAND
APPENDIX E - CONDUCTED SPURIOUS EMISSIONS AT THE ANTENNA TERMINAL
APPENDIX F - RADIATED TX SPURIOUS EMISSIONS
APPENDIX G - RECEIVER RADIATED EMISSIONS
APPENDIX H - FREQUENCY STABILITY
APPENDIX I - EQUIPMENT LIST AND CALIBRATION
APPENDIX J - MEASUREMENT UNCERTAINTY
APPENDIX K - SETUP PHOTOS
APPENDIX L - EXTERNAL PHOTOS
APPENDIX M - INTERNAL PHOTOS
APPENDIX N - LABEL LOCATION
APPENDIX O - LABEL SAMPLE



Test Report S/N: **45461350-R1.4**

1.0 REVISION LOG

Tested By:	Art Voss
Prepared By:	Art Voss
Reviewed By:	Ben Hewson
La acces Missessite and	Decembellan

Issue Number	Description	Ву	Issue Date
1.0	Initial Release	Art Voss	22 July 2016
1.1	Corrections per TCB	Art Voss	3 August 2016
1.2	Corrections per TCB	Art Voss	5 August 2016
1.3	Corrections per TCB	Art Voss	9 August 2016
1.4	Corrections per Client	Art Voss	19 August 2016



Test Report S/N: 45461350-R1.4

2.0 TEST RESULT SUMMARY

	TEST SUMMARY				
Referenced	Standard(s):	FCC CFR Title 47 Parts 2, 27, 15B			
Appendix	Description of Test	Procedure	Limit	Test	Result
Appendix	Description of Test	Reference	Reference	Date	Nesuit
Α	Conducted Power (Fundemental)	ANSI/TIA/EIA-603-D	§27.50(b)(1)	30 June 2016	Pass
^	Conducted Fower (Fundemental)	ANSI C63.4:2014	§2.1046	30 Julie 2010	газэ
В	Occupied Randwidth	ANSI/TIA/EIA-603-D	82 1040	00 1 0040	Pass
D	Occupied Bandwidth	ANSI C63.4:2014	§2.1049	30 June 2016	Pass
С	Band Edge	ANSI/TIA/EIA-603-D	§27.53(c)	5 July 2016	Pass
	Band Edge	ANSI C63.4:2014			Pass
D	Emissions in 1550-1610MHz Band	ANSI/TIA/EIA-603-D	\$27 F2(f)	14 July 2016	Pass
	ETHISSIONS III 1990-1010MHZ Band	ANSI C63.4:2014	§27.53(f)		
E	Conducted TX Spurious Emissions	ANSI/TIA/EIA-603-D	§27.53(c)	15 July 2016	Pass
	Conducted 1x Spundus Emissions	ANSI C63.4:2014	§2.1051	15 July 2016	Pass
F	Radiated TX Spurious Emissions	ANSI/TIA/EIA-603-D	§27.53(c)	14 July 2016	Pass
ŗ	Radiated 17 Spullous Effissions	ANSI C63.4:2014	§2.1053	14 July 2016	Fa55
G	Radiated Receiver Emissions	ANSI C63.4:2014	§15 Subpart B	14 July 2016	Pass
	Radiated Receiver Emissions	ANOI 003.4.2014	310 Subpart B	14 July 2010	1 000
Н	Frequency Stability	ANSI/TIA/EIA-603-D	§27.54	22 July 2016	16 Pass
П		ANSI C63.4:2014	§2.1055	22 July 2010	

3.0 PASS/FAIL CRITERIA

Unless otherwise noted in the Appendices, the pass/fail criteria are the limits set forth in the reference standards. The DUT is considered to have passed the requirements if the data collected during the described measurement procedure is no greater than the specified limits as defined. The pass/fail statements made in this report only apply to the unit(s) tested.

I attest to the accuracy of the data reported herein and that all tests and measurements were performed by me or by trained personnel under my direct supervision. The results of this investigation are based solely on the test sample(s) provided by the client and were not modified in any manner by Celltech Labs Inc. This test report has been completed in accordance with ISO/IEC 17025.

July Yours

Art Voss, P.Eng. Technical Manager Celltech Labs Inc.

19 August 2016 Date





Test Report S/N: 45461350-R1.4

4.0 SCOPE

This report outlines the measurements made and results collected during electromagnetic emissions testing of the:

4RF Aprisa Model SQ757M160 transceiver FCC ID: UIPSQ757M160, SR and SR+ Variants

The measurement results were applied against the applicable EMC requirements and limits outlined in the technical rules and regulations set forth in the Federal Communication's Commission Code of Federal Regulations Title 47 Part 2, Part 15 Subpart B and Part 27.

Note: The SR is identical to the SR+ with the exception that it has one less interface port and has a different marketing name. The RF Section, Control, Processing and Power Supply circuitry are the same.

5.0 REFERENCES

	Normative References
ANSI / ISO 17025:2005	General Requirements for competence of testing and calibration laboratories
IEEE/ANSI C63.4:2014	Methods of Measurement of Radio-Noise Emissions from Low-Voltage
	Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI/TIA/EIA-603-D	Land Mobile FM or PM Communication Equipment Measurement and Performance Standards
CFR Title 47 Part 2	Code of Federal Regulations
Title 47:	Telecommunication
Part 2:	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
CFR Title 47 Part 27	Code of Federal Regulations
Title 47:	Telecommunication
Part 27:	Miscellaneous Wireless Communications Services
CFR Title 47 Part 15	Code of Federal Regulations
Title 47:	Telecommunication
Part 15:	Radio Frequency Devices
Subpart B:	Unintensional Radiators



Test Report S/N: 45461350-R1.4

6.0 FACILITIES AND ACCREDITATIONS

The facilities used in collecting the test results outlined in this report are located at 21-364 Lougheed Road, Kelowna, British Columbia, Canada V1X 7R8. The radiated emissions site conforms to the requirements set forth in ANSI C63.4 and is filed and listed with Industry Canada under File Number IC 3874A-1. Celltech test site is listed with the FCC as an accredited test facility. Celltech is accredited to ISO 17025, through accrediting body A2LA and with certificate 2470.01.

7.0 GENERAL INFORMATION

Client Information				
Applicant Name	4RF Limited			
	26 Glover St.			
Applicant Address	Welling, New Zealand, 6032			
	New Zealng			
	DUT Information			
Device Identifier(s):	FCC ID: UIPSQ757M160			
Device Type:	Licensed Non-Broadcast Station Transmitter (TNB)			
Type of Equipment:	Digital Transceiver			
Device Model(s) / HVIN:	SQ757M160			
Device Marketing Name / PMN:	Aprisa SR and Aprisa SR+			
Firmware Version ID Number / FVIN:	n/a			
Host Marketing Name / HMN:	n/a			
Test Sample Serial No.:	T/A Sample - Identical Prototype			
Transmit Frequency Range:	757-758MHz, 787-788MHz			
Number of Channels:	n/a			
Manuf. Max. Rated Output Power:	QPSK: 37dBm, 16QAM: 35dBm, 64QAM: 34dBm			
Manuf. Max. Rated BW/Data Rate:	350kHz, 250kbps			
Antenna Make and Model:	ZDA Communications US LLC M/N ZDAFP750-10-60D			
Antenna Type and Gain:	Dual Polarization Flat Panel 10dBi			
Maximum Antenna Gain:	18dBi			
Modulation:	QPKS, 16QAM, 64QAM			
Mode:	Periodic Burst			
Emission Designator:	12K5G1D, 25K0G1D, 50K0G1D 12K5D1D, 25K0D1D, 50K0D1D			
DUT Power Source:	10-30VDC External			
Deviation(s) from standard/procedure:	None			
Modification of DUT:	None			




Test Report S/N: **45461350-R1.4**

APPENDIX A - RF Conducted Output Power

	Test Conditions			
Normati	ve Reference	FCC 47 CFR §2.1046, §27.50(b)(9), KDB 971168 D01v02r01		
Limits				
47 CFR	2 §27.50(b)(9)	30Watts ERP		
Environ	mental Conditi	ons (Typical)		
Tempera	ature	25°C		
Humidit	у	<60%		
Barome	tric Pressure	101 +/- 3kPa		
Equipme	ent List			
Asset Number	Manufacturer	Model Number	Description	
00241	R&S	FSU40	Spectrum Analyzer	
Set-Up D	Set-Up Drawing			
	DUT R&S FSP40 Spectrum Analyzer			



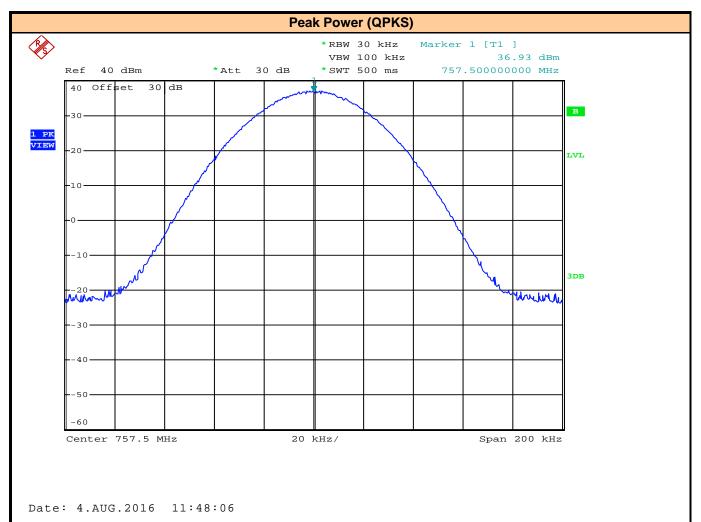

Frequency:	757.5MHz
Bandwidth:	12.5kHz
Modulation:	QPSK




Test Report S/N: 45461350-R1.4



Date: 4.AUG.2016 12:07:42

Frequency:	787.5MHz
Bandwidth:	12.5kHz
Modulation:	QPSK



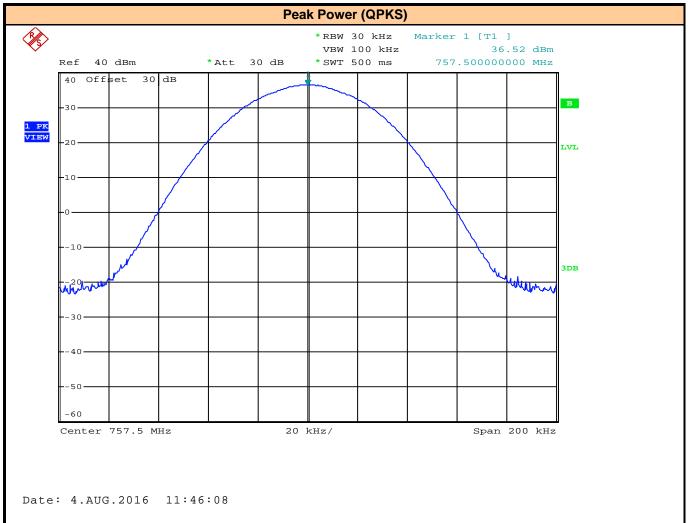

Frequency:	757.5MHz
Bandwidth:	25kHz
Modulation:	QPSK






Frequency:	787.5MHz
Bandwidth:	25kHz
Modulation:	QPSK



Test Report S/N: 45461350-R1.4

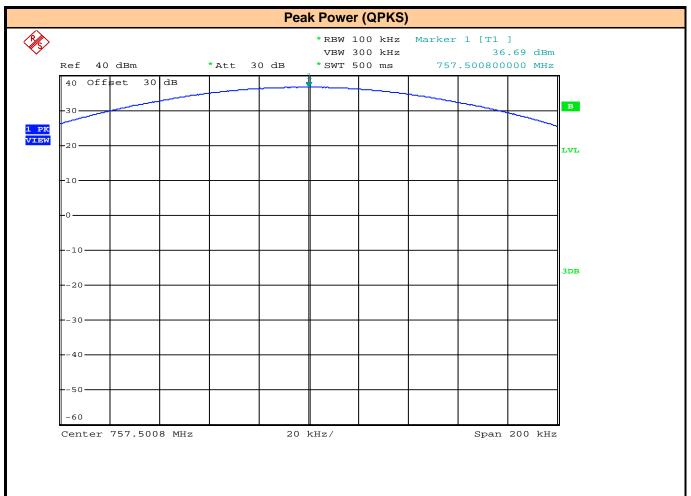

Date: 4.AUG.2016 11:37:42

Frequency:	757.5MHz
Bandwidth:	50kHz
Modulation:	QPSK



Test Report S/N: 45461350-R1.4




Date: 4.AUG.2016 11:41:51

Frequency:	787.5MHz
Bandwidth:	50kHz
Modulation:	QPSK



Test Report S/N: 45461350-R1.4

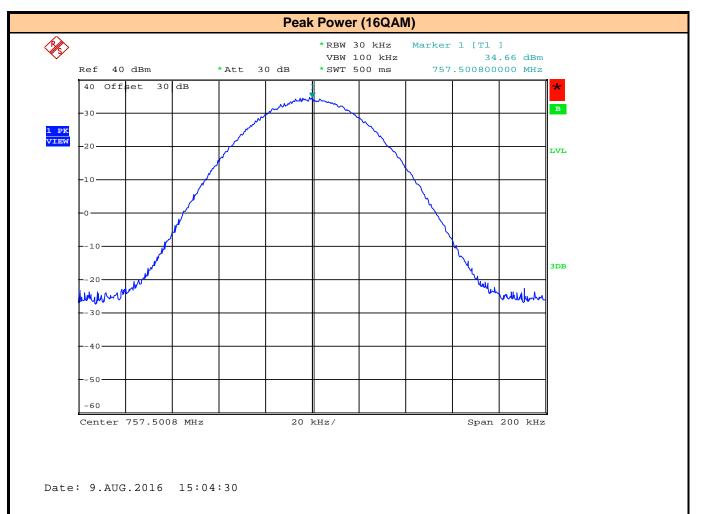

Frequency:	757.5MHz
Bandwidth:	12.5kHz
Modulation:	16QAM






Date: 9.AUG.2016 15:05:43

Frequency:	787.5MHz
Bandwidth:	12.5kHz
Modulation:	16QAM




Test Report S/N: 45461350-R1.4

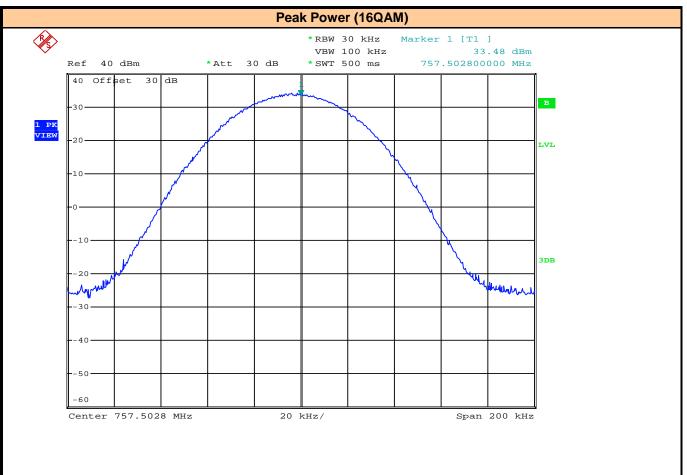

Date: 9.AUG.2016 15:08:48


Frequency:	757.5MHz
Bandwidth:	25kHz
Modulation:	16QAM



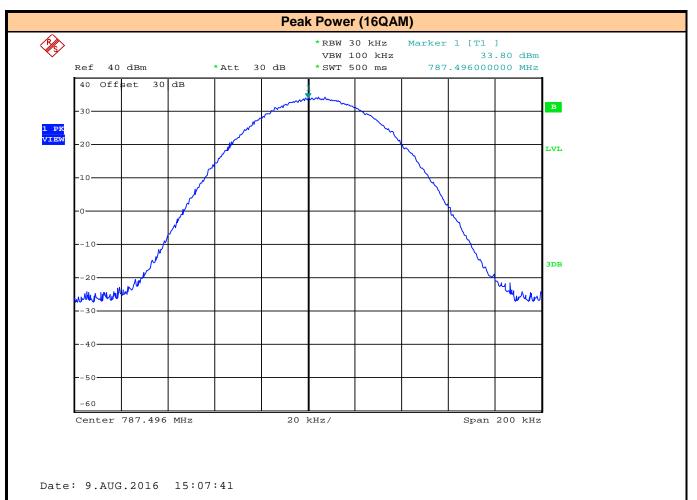

Frequency:	787.5MHz
Bandwidth:	25kHz
Modulation:	16QAM




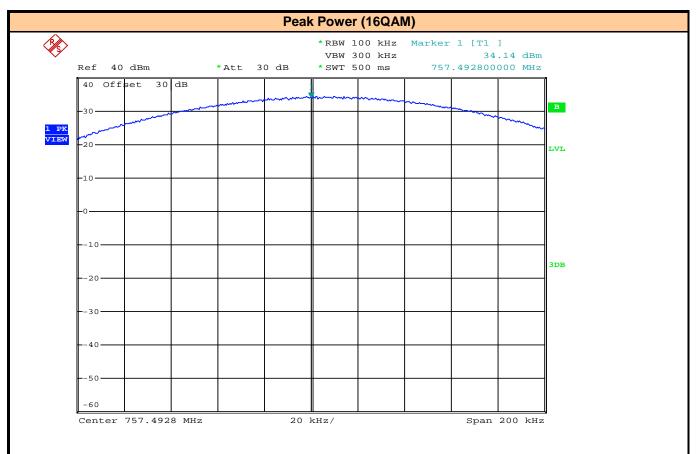

Date: 9.AUG.2016 15:10:50

Frequency:	757.5MHz
Bandwidth:	50kHz
Modulation:	16QAM



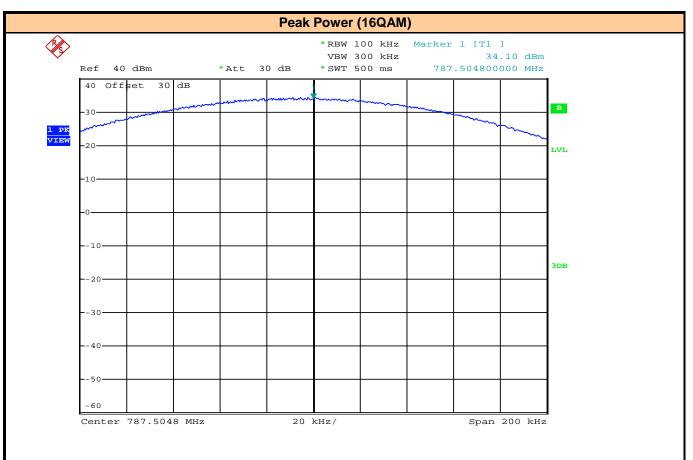

Date: 9.AUG.2016 15:12:09

Frequency:	787.5MHz
Bandwidth:	50kHz
Modulation:	16QAM





Date: 9.AUG.2016 15:42:45

Frequency:	757.5MHz
Bandwidth:	50kHz
Modulation:	64QAM



Test Report S/N: 45461350-R1.4

§27.50(b)(9) Peak Output Power of Fundemental												
					Antenna							
				Antenna	Gain	Cable						
Freq	Bandwidth	Modulation		Gain*	Correction*	Loss	ERP	ERP	Limit	Limit	Margin	Margin
			[E _{Meas}]	[G _T]	[G _c]	[L _C]						
(MHz)	(kHz)		(dBm)	(dBi)		(dB)	(dBm)	(W)	(dBm)	(W)	(dB)	(W)
757.5	12.5	QPSK	36.93	10	-2.15	0.47	44.31	26.98	44.80	30.00	0.49	3.02
787.5	12.5	QPSK	36.71	10	-2.15	0.47	44.09	25.64	44.80	30.00	0.71	4.36
757.5	25	QPSK	36.52	10	-2.15	0.47	43.90	24.55	44.80	30.00	0.90	5.45
787.5	25	QPSK	36.39	10	-2.15	0.47	43.77	23.82	44.80	30.00	1.03	6.18
757.5	50	QPSK	36.69	10	-2.15	0.47	44.07	25.53	44.80	30.00	0.73	4.47
787.5	50	QPSK	36.73	10	-2.15	0.47	44.11	25.76	44.80	30.00	0.69	4.24
757.5	12.5	16QAM***	34.66	10	-2.15	0.47	42.04	16.00	44.80	30.00	2.76	14.00
787.5	12.5	16QAM***	33.62	10	-2.15	0.47	41.00	12.59	44.80	30.00	3.80	17.41
757.5	25	16QAM***	33.48	10	-2.15	0.47	40.86	12.19	44.80	30.00	3.94	17.81
787.5	25	16QAM***	33.80	10	-2.15	0.47	41.18	13.12	44.80	30.00	3.62	16.88
757.5	50	16QAM***	34.11	10	-2.15	0.47	41.49	14.09	44.80	30.00	3.31	15.91
787.5	50	16QAM***	34.10	10	-2.15	0.47	41.48	14.06	44.80	30.00	3.32	15.94
787.5	50	64QAM***	33.13	10	-2.15	0.47	40.51	11.25	44.80	30.00	4.29	18.75

 $ERP = P_{Meas} + G_T + G_{C} - L_{C}$

Margin = Limit - ERP

Result:

Complies

^{*} The Gain of the ZDAP750-10-60D used for compliance to §27.53(f) is assumed for this calculation

^{**} Correction to dBd

^{***} The output power setting is automatically reduced to: 16QAM = 35dBm, 64QAM = 34dBm




Test Report S/N: **45461350-R1.4**

APPENDIX B - Occupied Bandwidth


	Test Conditions						
Normati	Normative Reference FCC 47 CFR §2.1049, KDB 971168 D01v02r01						
Limits							
47 CI	The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured						
Environ	Environmental Conditions (Typical)						
Tempera	ature	25°C					
Humidit	у	<60%					
Barome	tric Pressure	101 +/- 3kPa					
Equipme	ent List						
Asset Number	Manufacturer	Model Number	Description				
00241	R&S	FSU40	Spectrum Analyzer				
Set-Up D	rawing						
			R&S FSP40 Spectrum Analyzer				



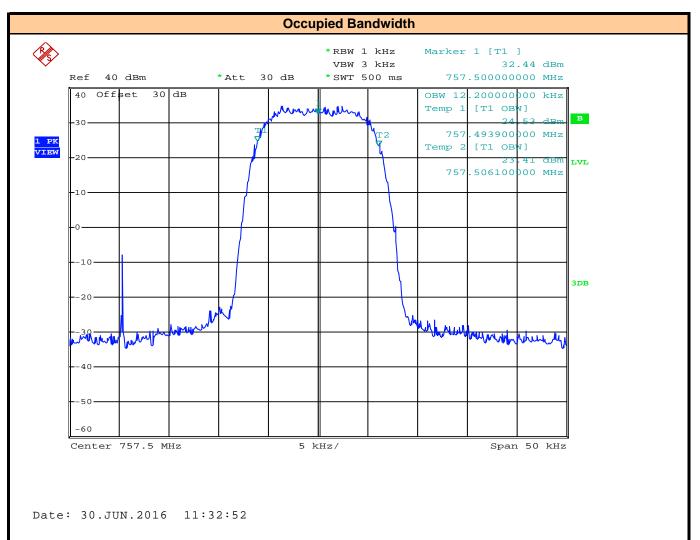


Channel Frequency:	757.500
Rated Bandwidth:	12.5kHz
Modulation:	QPSK
Measured Occupied Bandwidth:	12.2kHz
Authorized Bandwidth:	12.5kHz
Result:	Complies



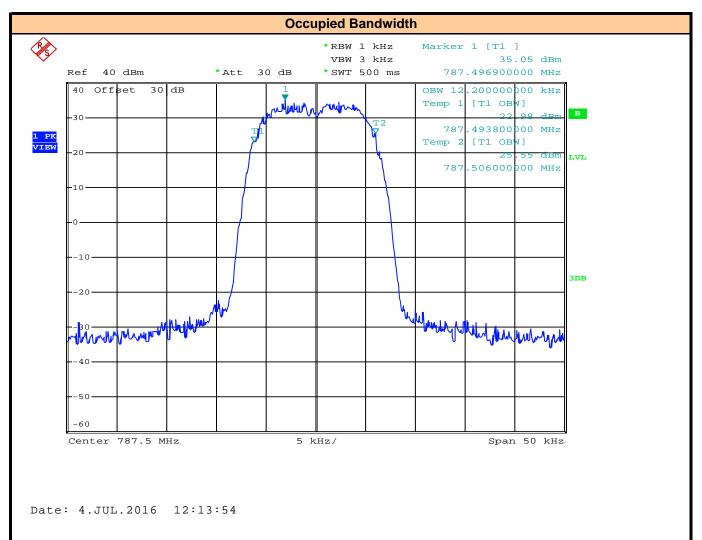

Channel Frequency:	787.500
Rated Bandwidth:	12.5kHz
Modulation:	QPSK
Measured Occupied Bandwidth:	12.2kHz
Authorized Bandwidth:	12.5kHz
Result:	Complies



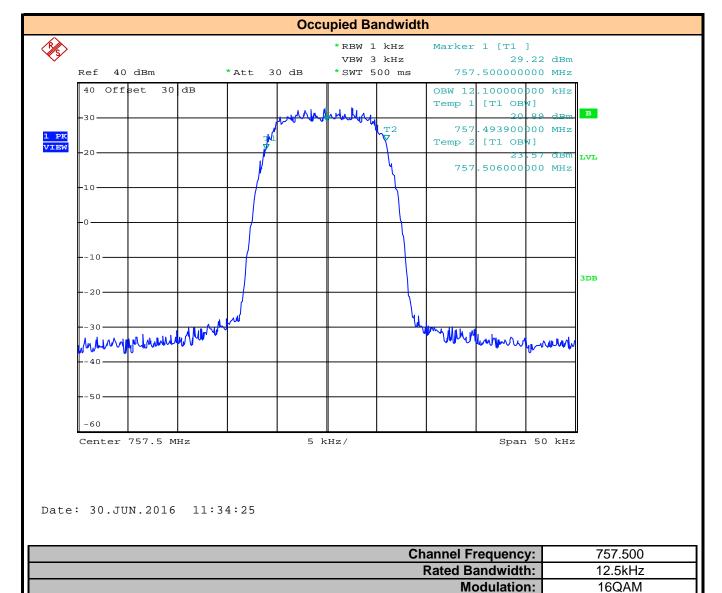

Measured Occupied Bandwidth:

Authorized Bandwidth:

Result:

12.1kHz


12.5kHz

Complies




Result:

Complies

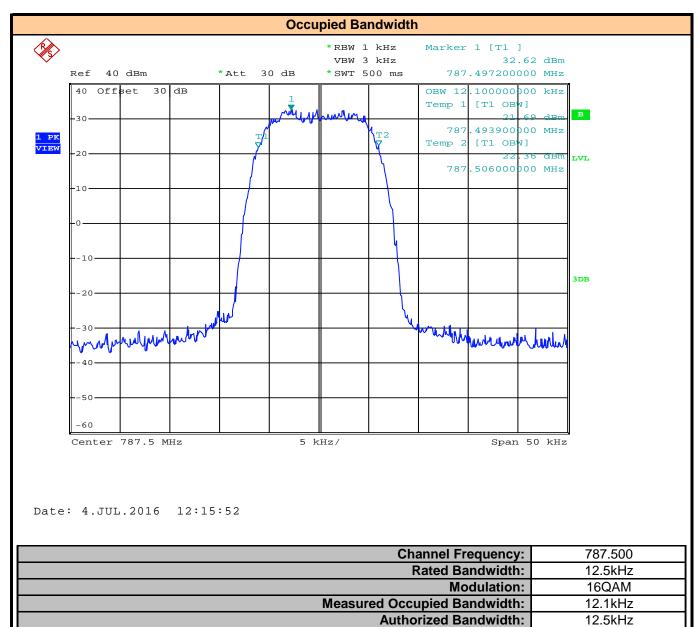




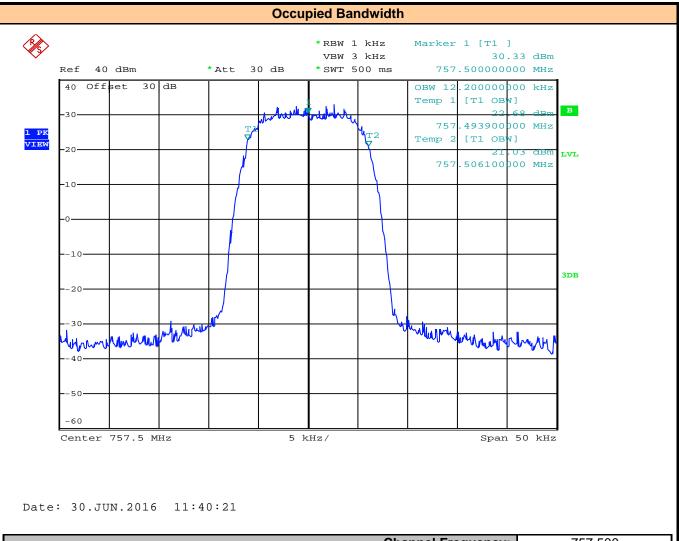

Channel Frequency:	757.500
Rated Bandwidth:	12.5kHz
Modulation:	64QAM
Measured Occupied Bandwidth:	12.2kHz
Authorized Bandwidth:	12.5kHz
Result:	Complies




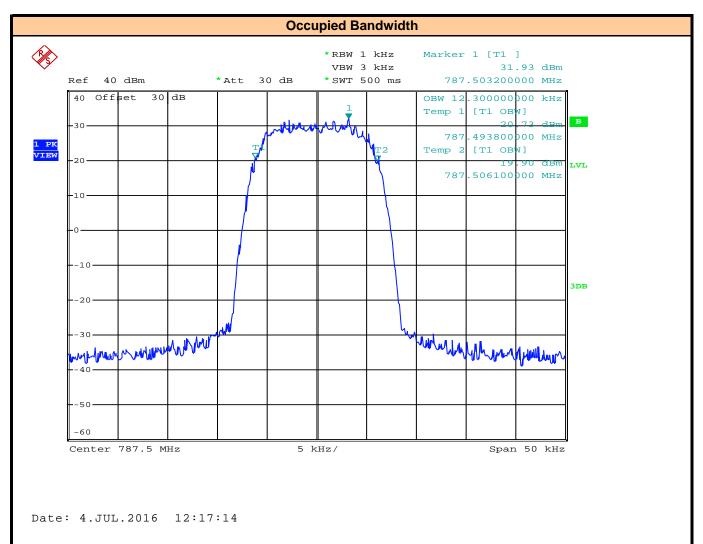

Channel Frequency:	787.500
Rated Bandwidth:	12.5kHz
Modulation:	64QAM
Measured Occupied Bandwidth:	12.3kHz
Authorized Bandwidth:	12.5kHz
Result:	Complies




Test Report S/N: 45461350-R1.4

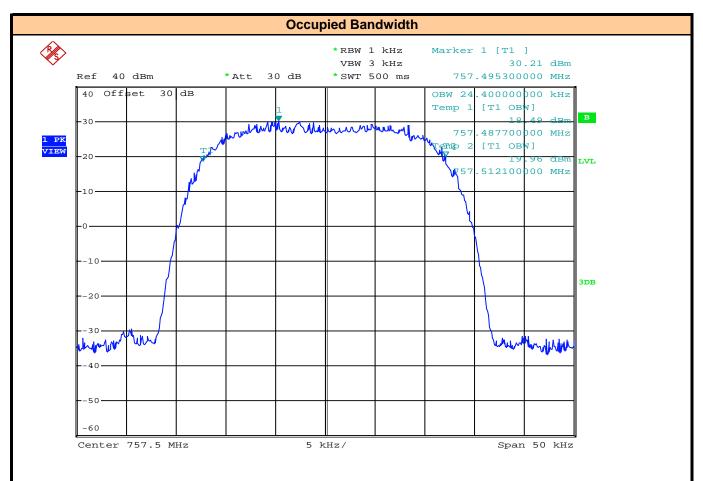

Date: 4.JUL.2016 15:29:26

Channel Frequency:	757.500
Rated Bandwidth:	25kHz
Modulation:	QPSK
Measured Occupied Bandwidth:	24.4kHz
Authorized Bandwidth:	25kHz
Result:	Complies




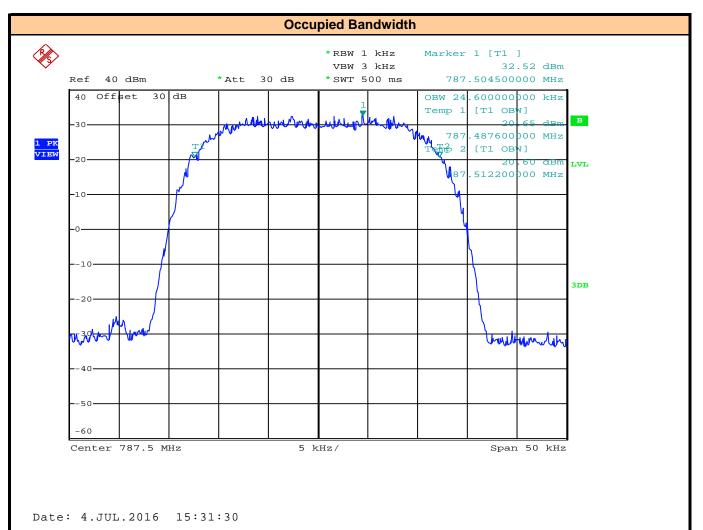

Channel Frequency:	787.500
Rated Bandwidth:	25kHz
Modulation:	QPSK
Measured Occupied Bandwidth:	24.6kHz
Authorized Bandwidth:	25kHz
Result:	Complies



Test Report S/N: 45461350-R1.4

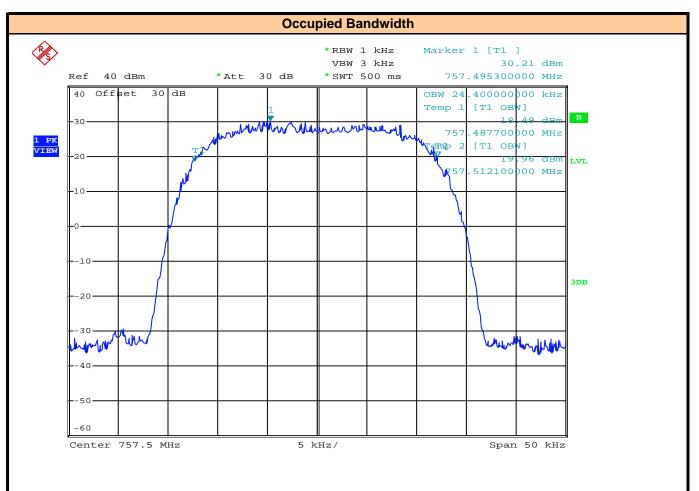


Date: 4.JUL.2016 15:29:26

Channel Frequency:	757.500
Rated Bandwidth:	25kHz
Modulation:	16QAM
Measured Occupied Bandwidth:	24.4kHz
Authorized Bandwidth:	25kHz
Result:	Complies



Test Report S/N: 45461350-R1.4

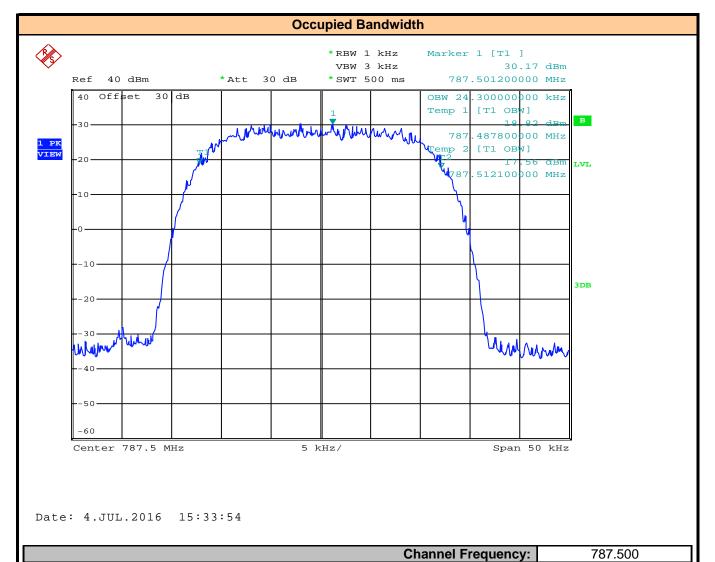

Rated Bandwidth:

Authorized Bandwidth:

Measured Occupied Bandwidth:

Modulation:

Result:

25kHz

16QAM

24.3kHz

25kHz

Complies



Test Report S/N: 45461350-R1.4




Date: 4.JUL.2016 15:26:30

Channel Frequency:	757.500
Rated Bandwidth:	25kHz
Modulation:	64QAM
Measured Occupied Bandwidth:	24.1kHz
Authorized Bandwidth:	25kHz
Result:	Complies



Test Report S/N: 45461350-R1.4

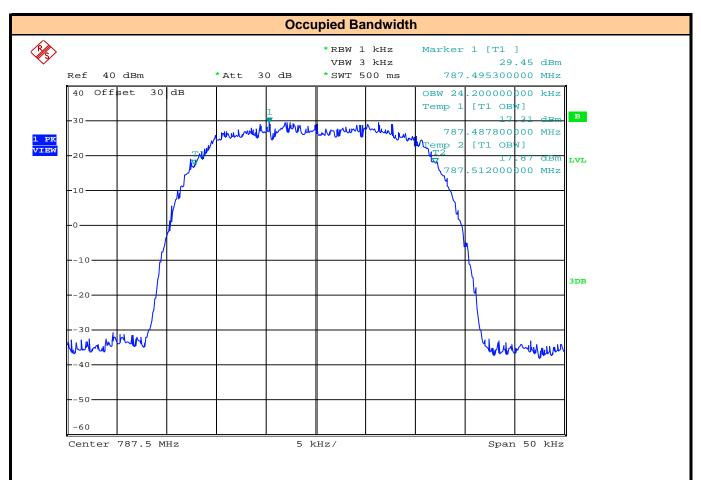


Date: 4.JUL.2016 15:36:01

Channel Frequency:	787.500
Rated Bandwidth:	25kHz
Modulation:	64QAM
Measured Occupied Bandwidth:	24.2kHz
Authorized Bandwidth:	25kHz
Result:	Complies




Test Report S/N: 45461350-R1.4

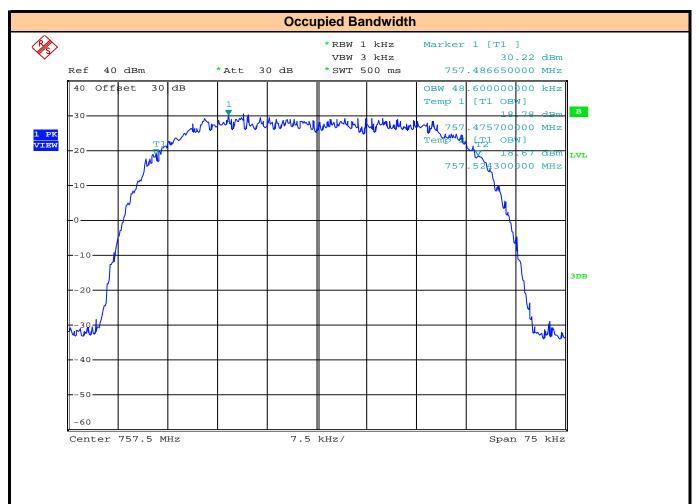

Date: 4.JUL.2016 15:47:41


Channel Frequency:	757.500
Rated Bandwidth:	50kHz
Modulation:	QPSK
Measured Occupied Bandwidth:	48.6kHz
Authorized Bandwidth:	50kHz
Result:	Complies



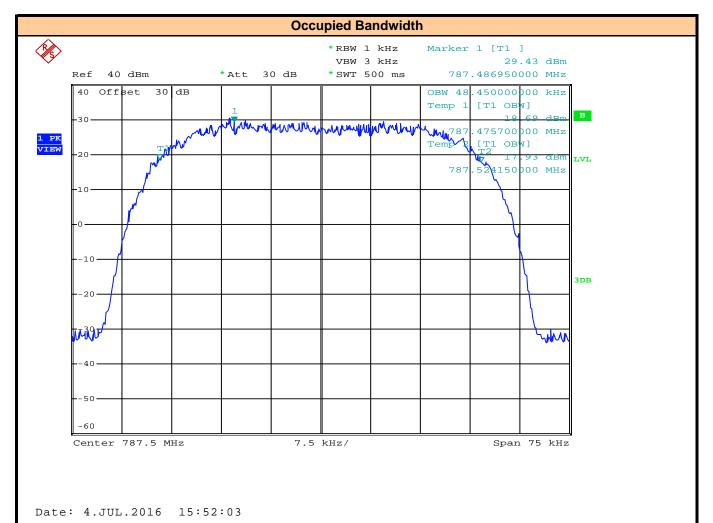


Channel Frequency:	787.500
Rated Bandwidth:	50kHz
Modulation:	QPSK
Measured Occupied Bandwidth:	48.5kHz
Authorized Bandwidth:	50kHz
Result:	Complies



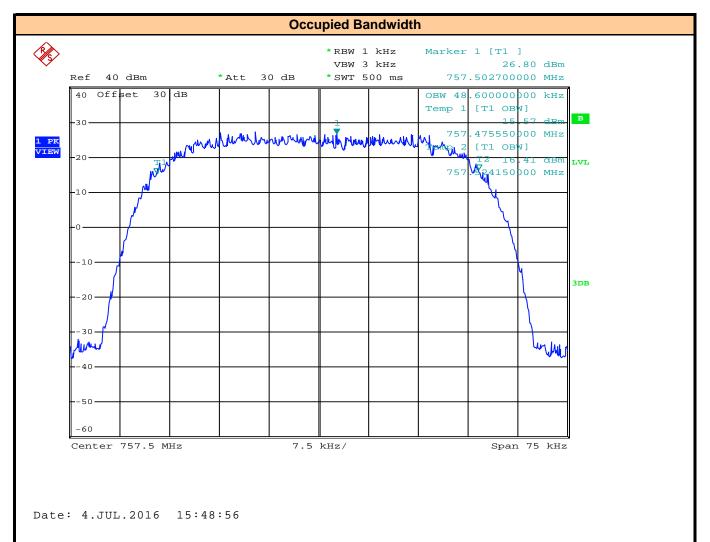


Channel Frequency:	757.500
Rated Bandwidth:	50kHz
Modulation:	16QAM
Measured Occupied Bandwidth:	48.6kHz
Authorized Bandwidth:	50kHz
Result:	Complies



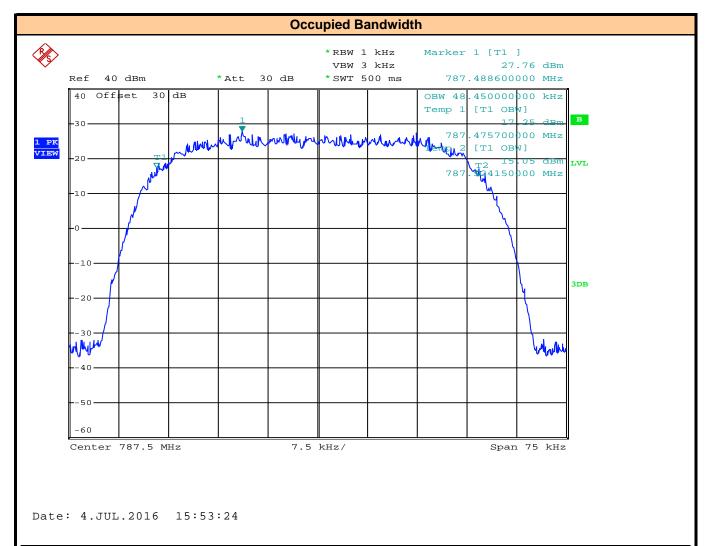

Channel Frequency:	787.500
Rated Bandwidth:	50kHz
Modulation:	16QAM
Measured Occupied Bandwidth:	48.5kHz
Authorized Bandwidth:	50kHz
Result:	Complies



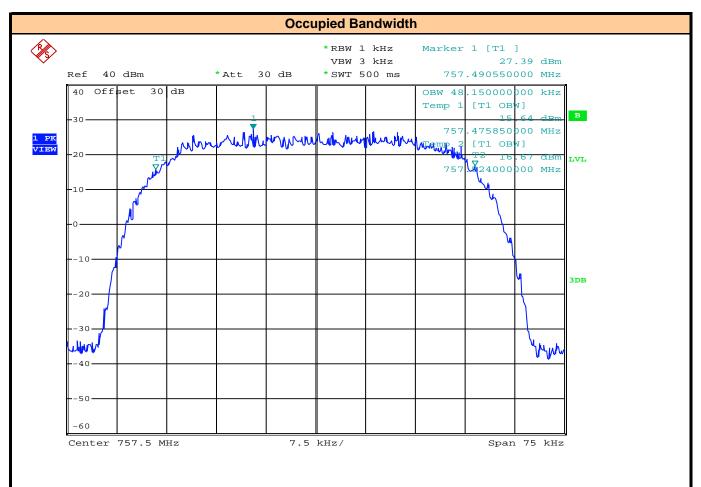


Date: 4.JUL.2016 15:50:11

Channel Frequency:	757.500
Rated Bandwidth:	50kHz
Modulation:	64QAM
Measured Occupied Bandwidth:	48.2kHz
Authorized Bandwidth:	50kHz
Result:	Complies



Test Report S/N: 45461350-R1.4

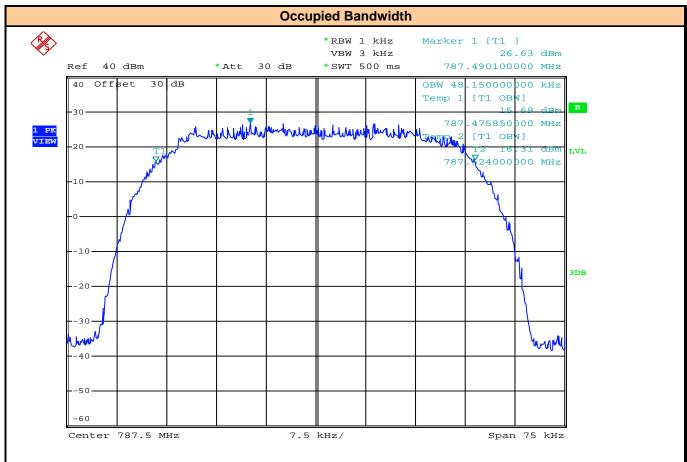

Date: 4.JUL.2016 15:55:00

Channel Frequency:	787.500
Rated Bandwidth:	50kHz
Modulation:	64QAM
Measured Occupied Bandwidth:	48.2kHz
Authorized Bandwidth:	50kHz
Result:	Complies



Test Report S/N: **45461350-R1.4**

APPENDIX C - Band Edge

	Test Conditions		
Normati	Normative Reference FCC 47 CFR §27.53(c), KDB 971168 D01v02r01		
Limits			
emission outside t transmitter power with the following: 47 CFR §27.53(c) (1) On any frequen		emission outside the licer transmitter power (P) with with the following: (1) On any frequency outs	46–758 MHz band and the 776–788 MHz band, the power of any asee's frequency band(s) of operation shall be attenuated below the ain the licensed band(s) of operation, measured in watts, in accordance side the 746–758 MHz band, the power of any emission shall be not below the transmitter power (P) by at least 43 + 10 log (P) dB;
	(2) On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least 43 + 10 log (P) dB;		
Environ	mental Conditi	ons (Typical)	
Tempera	ature	25°C	
Humidit	idity <60%		
Barome	Barometric Pressure 101 +/- 3kPa		
Equipme	ent List		
Asset Number	Manufacturer	Model Number	Description
00241	R&S	FSU40	Spectrum Analyzer
Set-Up Drawing			
	-		D.Ohm Load R&S FSP40 Spectrum Analyzer




Bandwidth:



12.5kHz



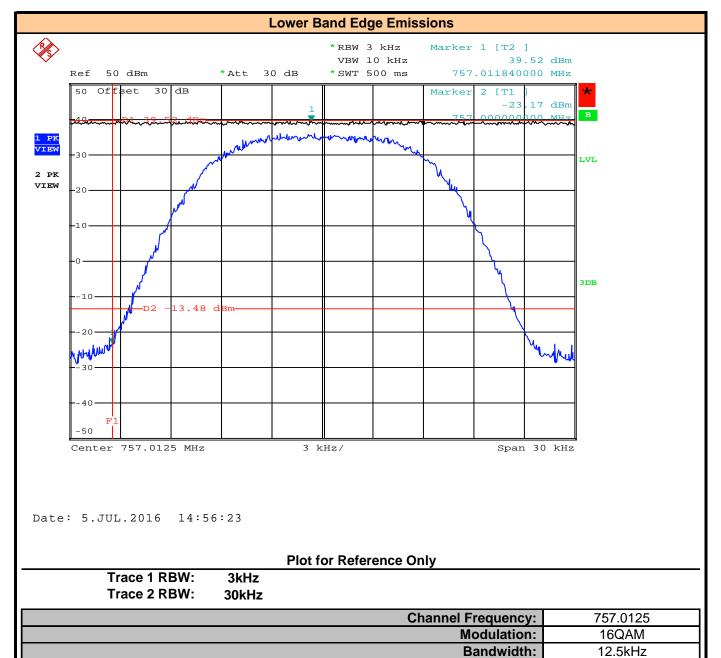








Test Report S/N: 45461350-R1.4

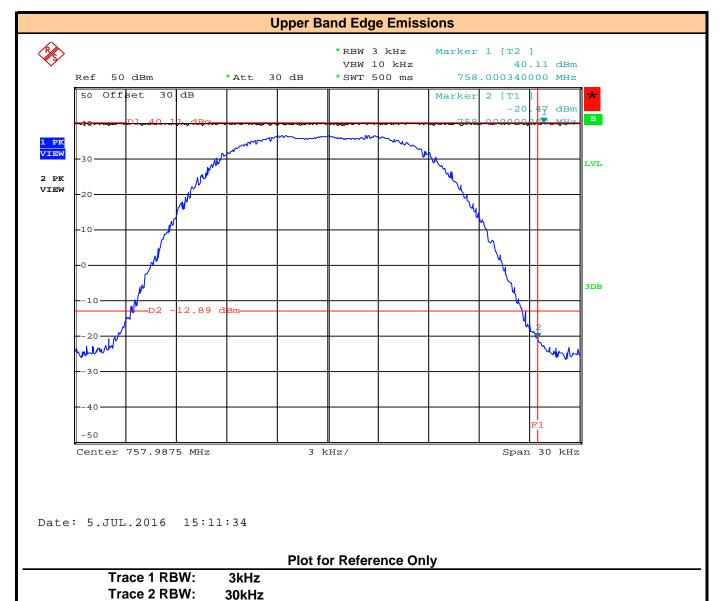

Channel Frequency:

Modulation: Bandwidth: 757.9875 QPSK

12.5kHz







Bandwidth:



12.5kHz



Test Report S/N: 45461350-R1.4



Plot for Reference Only

Trace 1 RBW: 3kHz Trace 2 RBW: 30kHz

Channel Frequency:	787.0125
Modulation:	QPSK
Bandwidth:	12.5kHz



Bandwidth:

Test Report S/N: 45461350-R1.4




12.5kHz



Test Report S/N: 45461350-R1.4

Test Report Issue Date: 19 August 2016

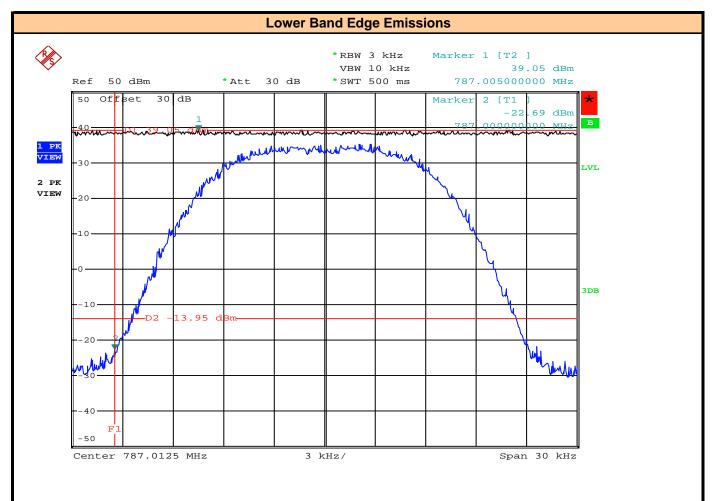

Date: 5.JUL.2016 15:41:16

Plot for Reference Only

Trace 1 RBW: 3kHz Trace 2 RBW: 30kHz

Channel Frequency:	787.0125
Modulation:	64QAM
Bandwidth:	12.5kHz



Test Report S/N: 45461350-R1.4



Date: 5.JUL.2016 15:21:13

Plot for Reference Only


Trace 1 RBW: 3kHz Trace 2 RBW: 30kHz

Channel Frequency:	787.9875
Modulation:	QPSK
Bandwidth:	12.5kHz








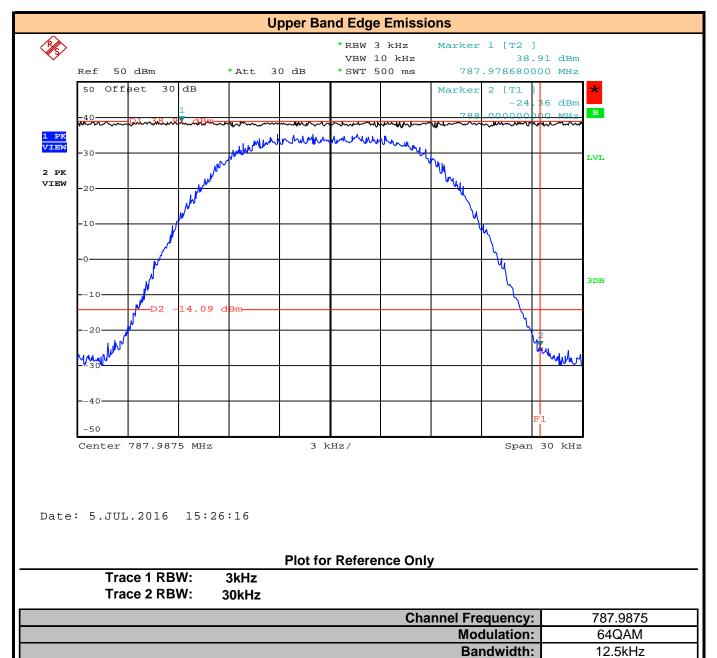



Test Report S/N: 45461350-R1.4

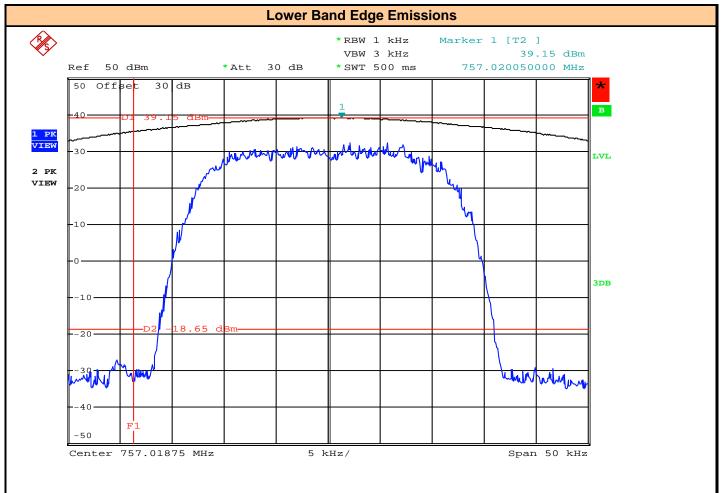

Date: 15.JUL.2016 12:00:36


Plot for Reference Only

Trace 1 RBW: 1kHz Trace 2 RBW: 30kHz

Channel Frequency:	757.01875
Modulation:	QPSK
Bandwidth:	25kHz



Test Report S/N: 45461350-R1.4

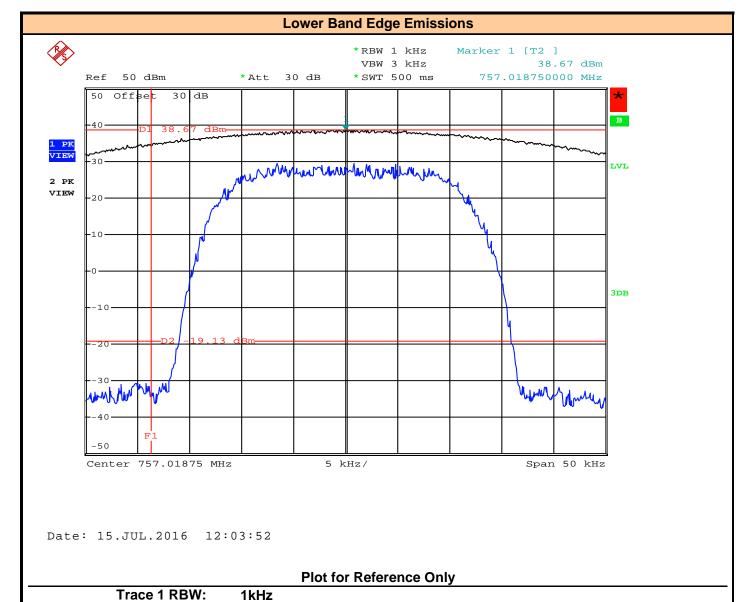


Channel Frequency:	757.01875
Modulation:	16QAM
Bandwidth:	25kHz

Trace 2 RBW:



Test Report S/N: 45461350-R1.4

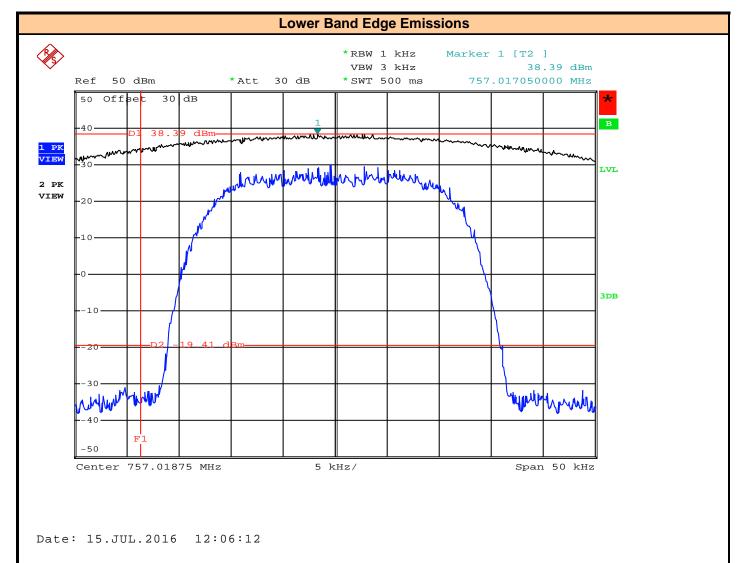


Plot for Reference Only

Trace 1 RBW: 1kHz Trace 2 RBW: 30kHz


Channel Frequency:	757.01875
Modulation:	64QAM
Bandwidth:	25kHz



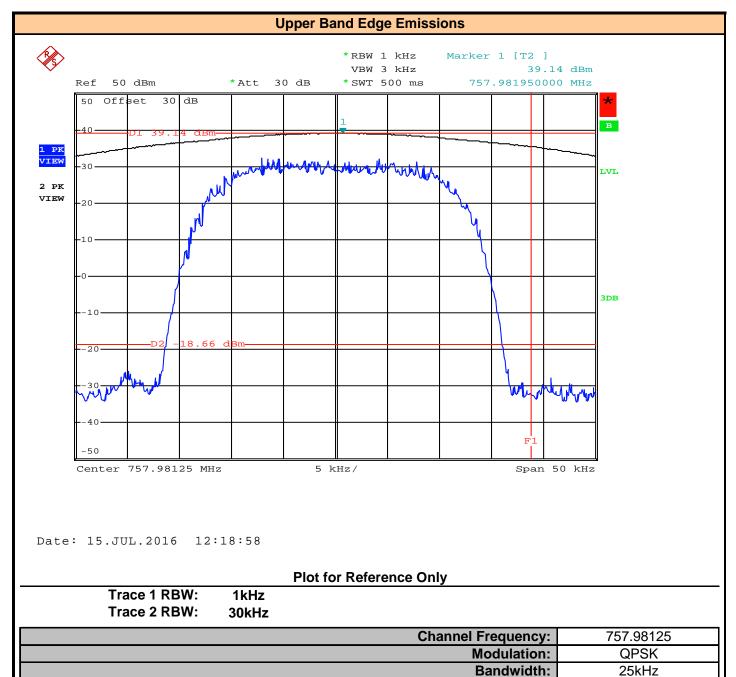



Test Report S/N: 45461350-R1.4

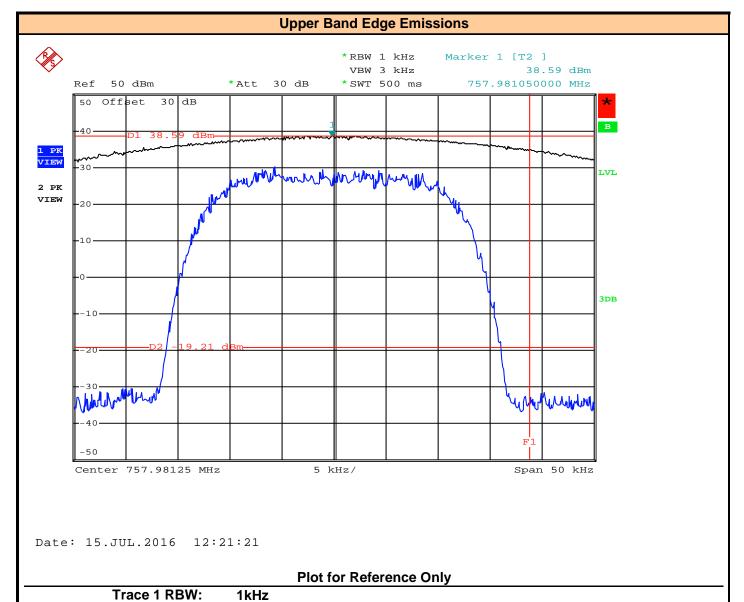

Trace 2 RBW:

30kHz

Channel Frequency:

Modulation:


Bandwidth:

757.98125

16QAM



Test Report S/N: 45461350-R1.4

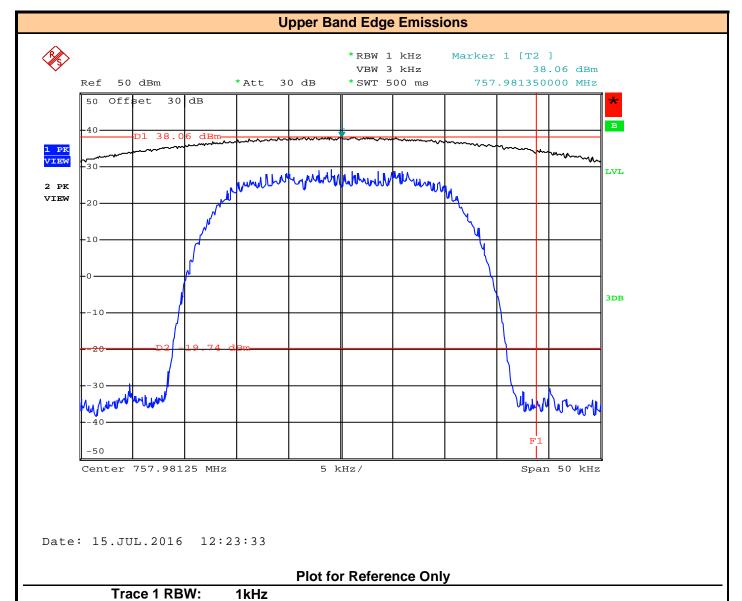

Trace 2 RBW:

30kHz

Channel Frequency:

Modulation:


Bandwidth:

757.98125

64QAM




Modulation: Bandwidth:

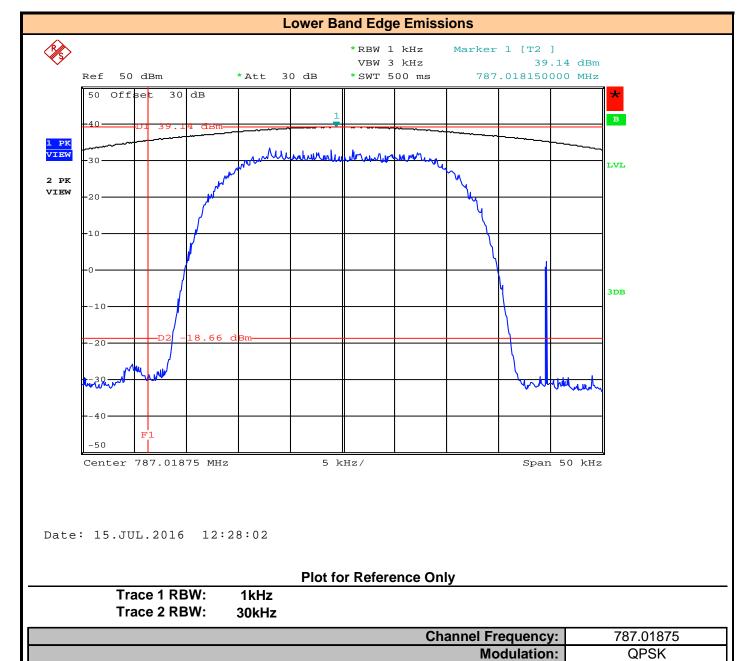



Test Report S/N: 45461350-R1.4

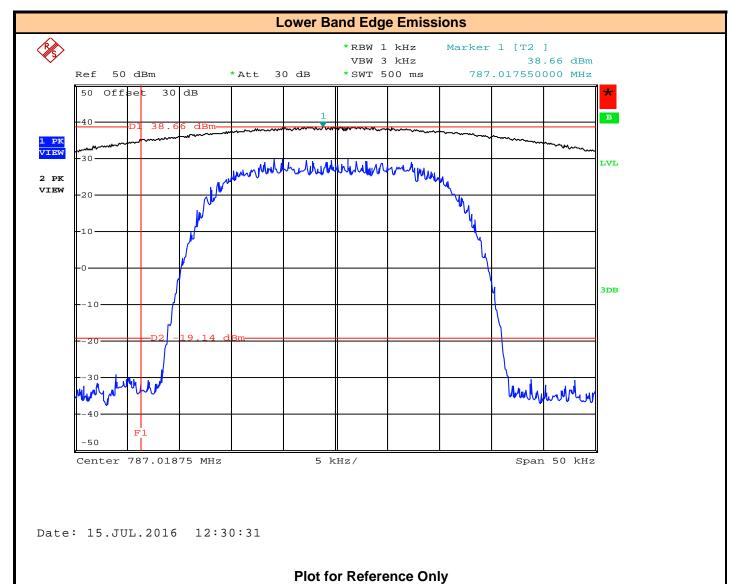

Channel Frequency:	787.01875
Modulation:	16QAM
Bandwidth:	25kHz


Trace 1 RBW:

Trace 2 RBW:

1kHz



Test Report S/N: 45461350-R1.4

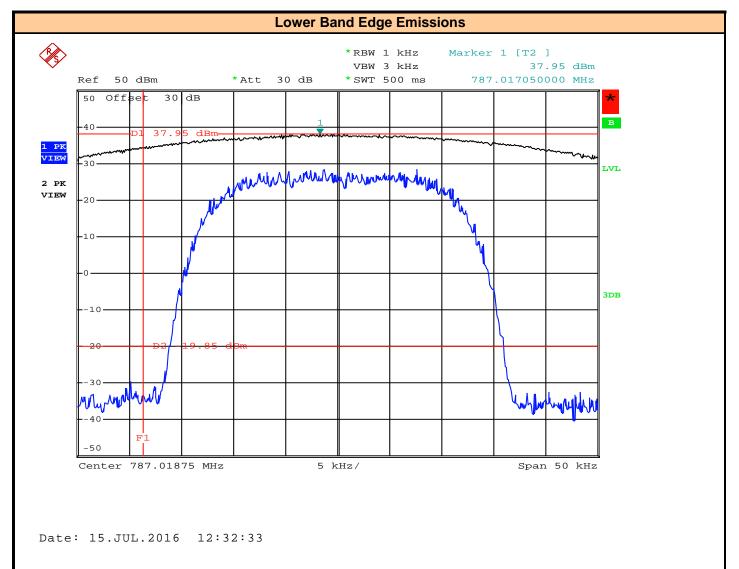

Plot for Reference Only

Trace 1 RBW: 1kHz Trace 2 RBW: 30kHz

Channel Frequency:	787.01875
Modulation:	64QAM
Bandwidth:	25kHz





Trace 2 RBW:

30kHz

Channel Frequency:


Modulation:

Bandwidth:

787.98125

QPSK



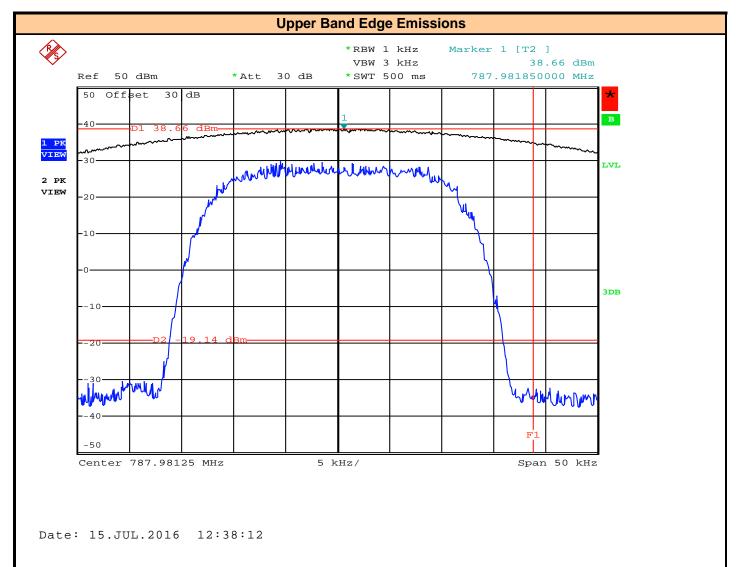


Plot for Reference Only

Trace 1 RBW: 1kHz Trace 2 RBW: 30kHz


Channel Frequency:	787.98125
Modulation:	16QAM
Bandwidth:	25kHz



Bandwidth:

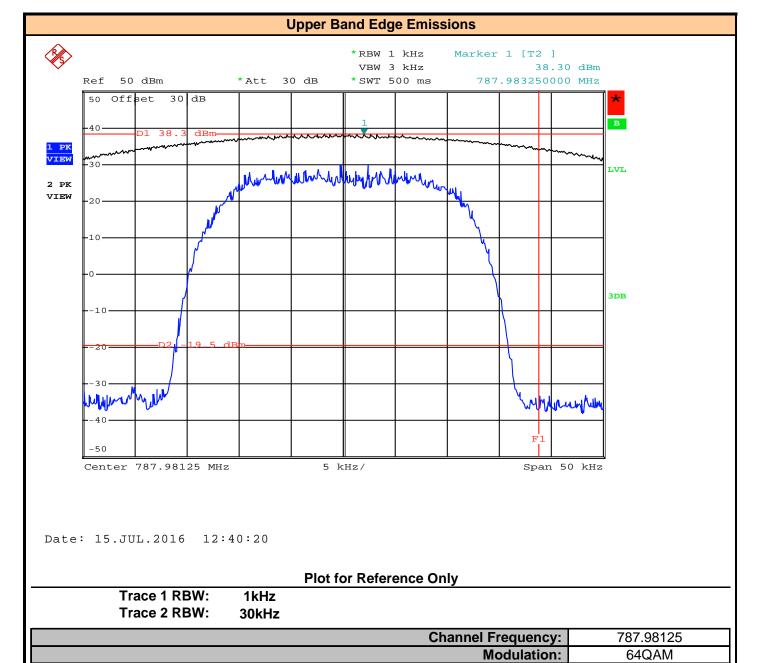




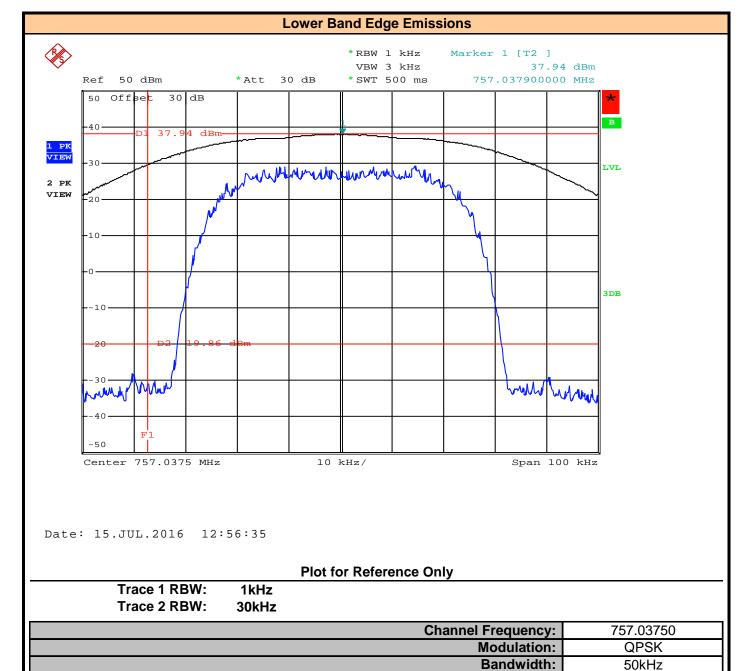



Test Report S/N: 45461350-R1.4

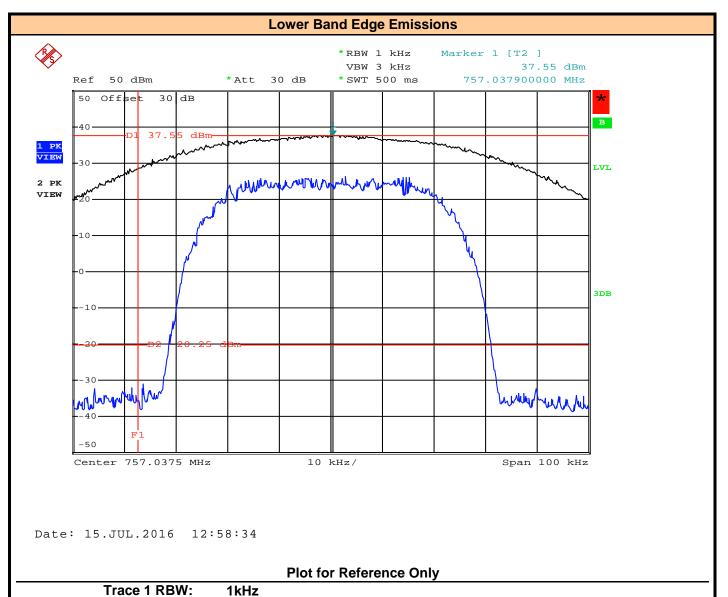


Channel Frequency:	757.03750
Modulation:	16QAM
Bandwidth:	50kHz

Trace 2 RBW:



Test Report S/N: 45461350-R1.4

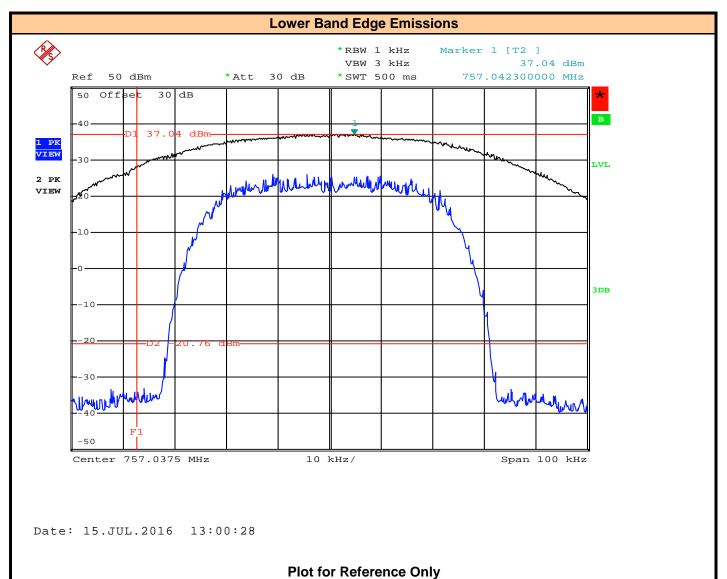

Channel Frequency:	757.03750
Modulation:	64QAM
Bandwidth:	50kHz


Trace 1 RBW:

Trace 2 RBW:

1kHz



Test Report S/N: 45461350-R1.4

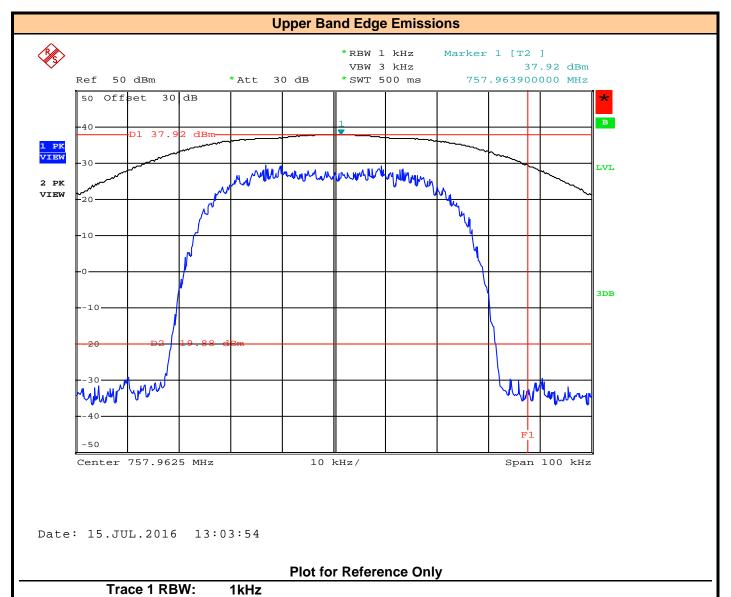


Modulation	QPSK
Bandwidth	50kHz

Channel Frequency:

Trace 2 RBW:


30kHz

757 96250

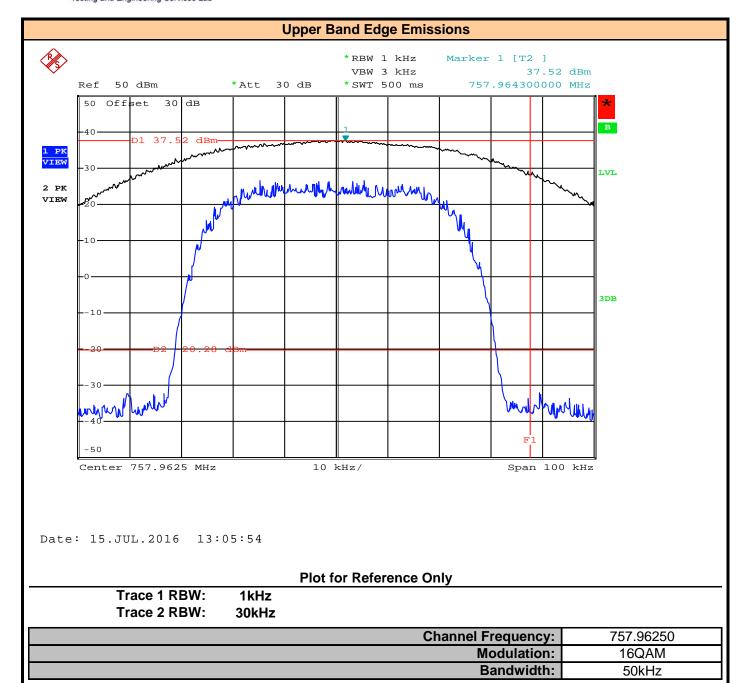



Test Report S/N: 45461350-R1.4

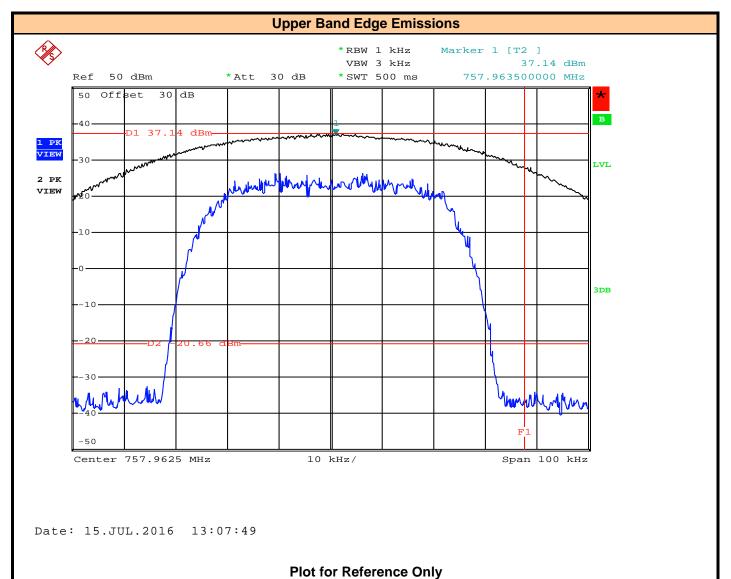


Channel Frequency:	757.96250
Modulation:	64QAM
Bandwidth:	50kHz

Trace 1 RBW:

Trace 2 RBW:

1kHz



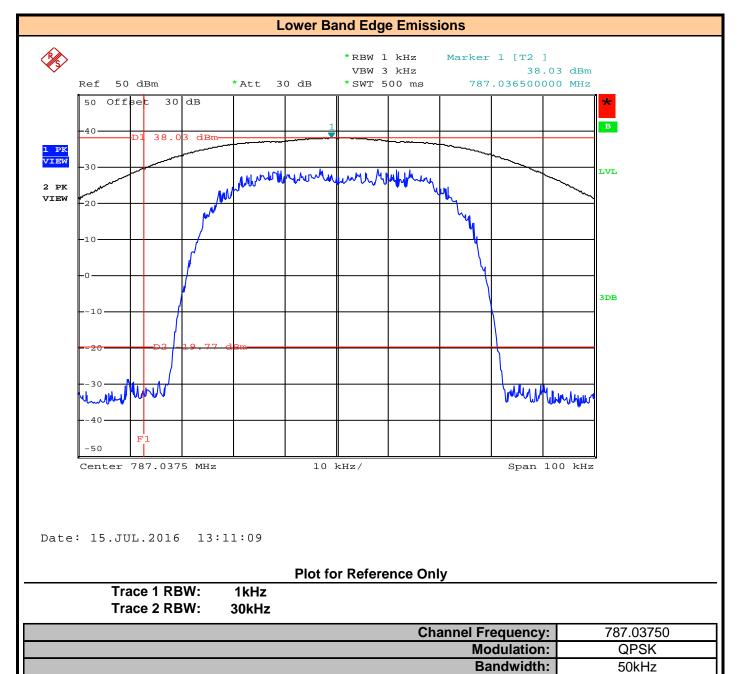




Test Report S/N: 45461350-R1.4





Test Report S/N: 45461350-R1.4

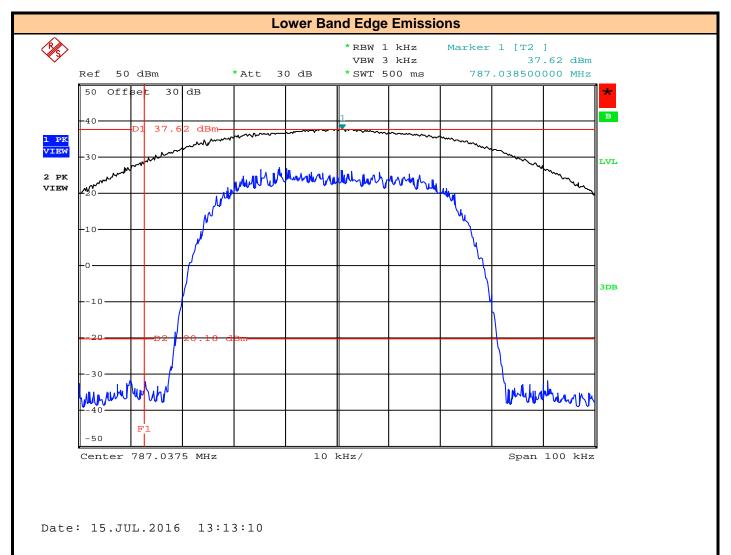


Plot for Reference Only

Trace 1 RBW: 1kHz Trace 2 RBW: 30kHz

Channel Frequency:	787.03750
Modulation:	16QAM
Bandwidth:	50kHz



Test Report S/N: 45461350-R1.4 Test Report Issue Date: 19 August 2016

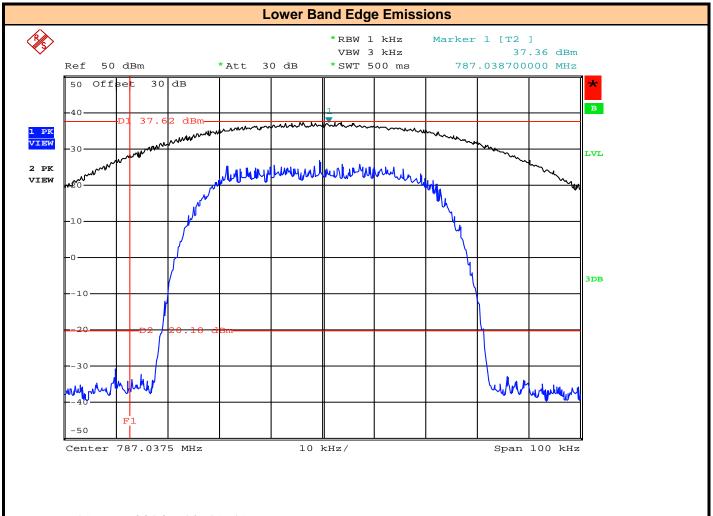

Date: 15.JUL.2016 13:15:17


Plot for Reference Only

Trace 1 RBW: 1kHz Trace 2 RBW: 30kHz

Channel Frequency:	787.03750
Modulation:	64QAM
Bandwidth:	50kHz




Test Report S/N: 45461350-R1.4

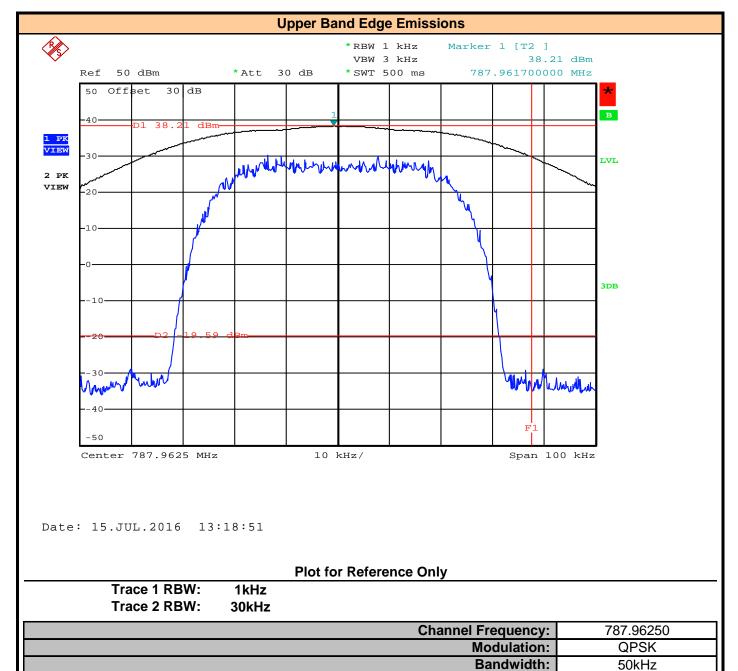



Test Report S/N: 45461350-R1.4

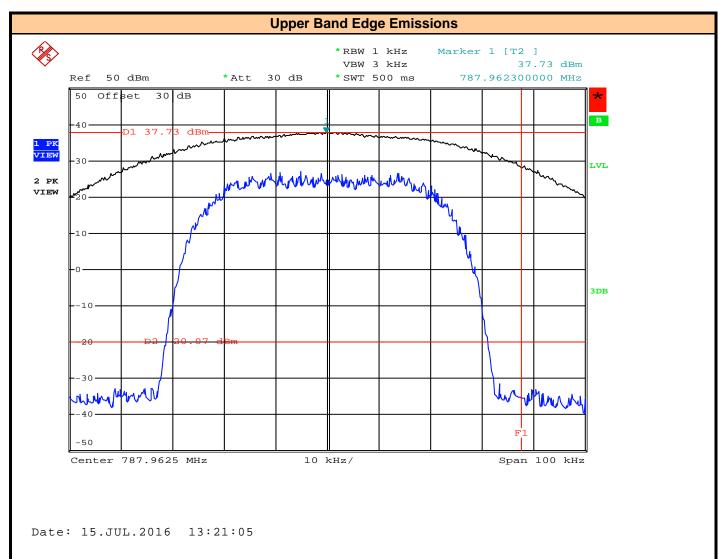

Plot for Reference Only

Channel Frequency:

Modulation:

Bandwidth:

Trace 1 RBW:

Trace 2 RBW:

1kHz

30kHz


787.96250

16QAM

50kHz



Test Report S/N: 45461350-R1.4

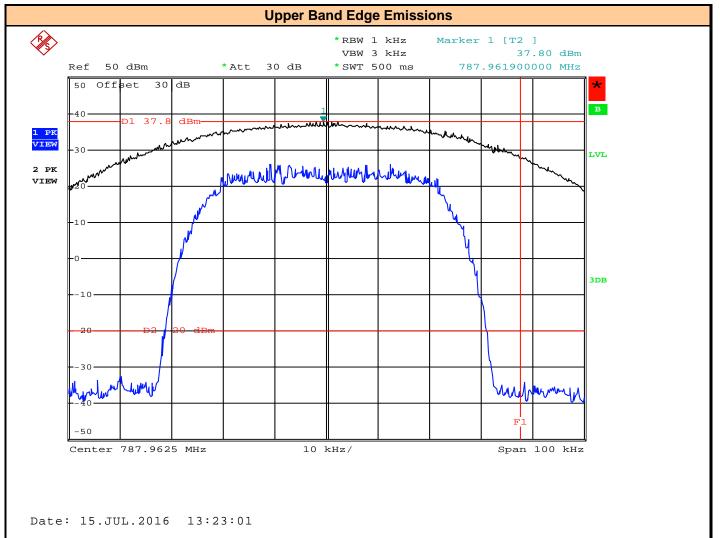

Plot for Reference Only

Trace 1 RBW: 1kHz Trace 2 RBW: 30kHz

Channel Frequency:	787.96250
Modulation:	64QAM
Bandwidth:	50kHz



Test Report S/N: 45461350-R1.4

§27.53(c) Band Edge Emissions (5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately 47 CFR §27.53(c) outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed; In general, scaling of RBW is appropriate only when the signal is noise-like and is relatively flat across the spectrum KDB 971168 D02 under measurment.

Scaling of RBW

For 3kHz Instrument RBW, Limit = 43 + 10Log(P) + 10Log(30kHz/3kHz) = 53 + 10Log(P)

For 1kHz Instrument RRW Limit - 43 ± 10Log(P) ± 10Log(30kHz/1kHz) - 57.8 ± 10Log(P)

For 1kHz Instrument RBW	or 1kHz Instrument RBW, Limit = 43 + 10Log(P) + 10Log(30kHz/1kHz) = 57.8 + 10Log(P)										
	Measurement Results										
				In	Band						
Freq	DUT	DUT	Instrument	Band	Edge	Attenuation	Limit	Margin			
	BW	Modulation	RBW								
(MHz)	(kHz)		(kHz)	(dBm)	(dBm)	[dB]	(W)	(dB)			
757.0125	12.5	QPSK	3.0	40.1	-18.8	58.9	53.0	5.89			
757.0125	12.5	16QAM	3.0	39.5	-23.2	62.7	53.0	9.72			
757.0125	12.5	64QAM	3.0	39.2	-23.0	62.2	53.0	9.17			
757.9875	12.5	QPSK	3.0	40.1	-20.5	60.6	53.0	7.61			
757.9875	12.5	16QAM	3.0	39.3	-23.6	62.9	53.0	9.90			
757.9875	12.5	64QAM	3.0	39.7	-23.2	62.9	53.0	9.90			
787.0125	12.5	QPSK	3.0	40.1	-18.6	58.7	53.0	5.71			
787.0125	12.5	16QAM	3.0	39.3	-22.1	61.4	53.0	8.40			
787.0125	12.5	64QAM	3.0	39.0	-22.7	61.7	53.0	8.70			
787.9875	12.5	QPSK	3.0	40.1	-19.8	59.9	53.0	6.92			
787.9875	12.5	16QAM	3.0	39.6	-24.6	64.2	53.0	11.20			
787.9875	12.5	64QAM	3.0	38.9	-24.4	63.3	53.0	10.30			



Test Report S/N: **45461350-R1.4**

				In	Band			
Freq	DUT	DUT	Instrument	Band	Edge	Attenuation	Limit	Ма
	BW	Modulation	RBW	[P _{Meas}]	[P _{BE}]			
(MHz)	(kHz)		(kHz)	(dBm)	(dBm)	[dB]	(W)	(0
757.01875	25	QPSK	1.0	39.2	-28.0	67.2	57.8	9
757.01875	25	16QAM	1.0	38.7	-31.1	69.8	57.8	12
757.01875	25	64QAM	1.0	38.4	-30.9	69.3	57.8	11
757.98125	25	QPSK	1.0	39.1	-28.5	67.6	57.8	9
757.98125	25	16QAM	1.0	38.6	-30.5	69.1	57.8	11
757.98125	25	64QAM	1.0	38.1	-30.9	69.0	57.8	11
787.01875	25	QPSK	1.0	39.1	-29.9	69.0	57.8	11
787.01875	25	16QAM	1.0	38.7	-30.5	69.2	57.8	11
787.01875	25	64QAM	1.0	38.0	-33.5	71.5	57.8	13
787.98125	25	QPSK	1.0	39.1	-29.8	68.9	57.8	11
787.98125	25	16QAM	1.0	38.7	-33.5	72.2	57.8	14
787.98125	25	64QAM	1.0	38.3	-34.1	72.4	57.8	14
757.0375	50	QPSK	1.0	37.9	-28.6	66.5	57.8	8
757.0375	50	16QAM	1.0	37.6	-31.5	69.1	57.8	11
757.0375	50	64QAM	1.0	37.0	-35.1	72.1	57.8	14
757.9625	50	QPSK	1.0	37.9	-29.8	67.7	57.8	9
757.9625	50	16QAM	1.0	37.5	-32.1	69.6	57.8	11
757.9625	50	64QAM	1.0	37.1	-36.1	73.2	57.8	15
787.0375	50	QPSK	1.0	38.0	-28.5	66.5	57.8	8
787.0375	50	16QAM	1.0	37.6	-32.0	69.6	57.8	11
787.0375	50	64QAM	1.0	37.4	-30.5	67.9	57.8	10
787.9625	50	QPSK	1.0	38.2	-29.7	67.9	57.8	10
787.9625	50	16QAM	1.0	37.7	-35.1	72.8	57.8	15
787.9625	50	64QAM	1.0	37.8	-34.5	72.3	57.8	14



Double Ridged Guide Horn

Test Report S/N: 45461350-R1.4

APPENDIX D - Emissions in 1559 - 1610MHz Band

Test Conditions								
Normati	Normative Reference FCC 47 CFR §27.53(c)							
	Procedure Reference ANSI/TIA/EIA-603-D, ANSI C63.4							
ANOI/ HA/EIA-003-D, ANOI 005.4								
Limits								
FCC	For operations in the 746–763 MHz, 775–793 MHz, and 805–806 MHz bands, emissions in the FCC §27.53(c) band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals							
Environ	mental Conditi	ons (Typical)						
Tempera	ature	25°C						
Humidit	у	<60%						
Barome	Barometric Pressure 101 +/- 3kPa							
Equipme	ent List							
Asset Number	Manufacturer	Model Description						
00051	HP	8566B	Spectrum Analyzer					
00049								
000.0	HP	85650A	Quasi-peak Adapter					
00047	HP HP	85650A 85685A	Quasi-peak Adapter RF Preselector					
00047	HP	85685A	RF Preselector					
00047 00072	HP EMCO	85685A 2075	RF Preselector Mini-mast					
00047 00072 00073	HP EMCO EMCO	85685A 2075 2080	RF Preselector Mini-mast Turn Table					
00047 00072 00073 00071	HP EMCO EMCO EMCO	85685A 2075 2080 2090	RF Preselector Mini-mast Turn Table Multi-Device Controller					
00047 00072 00073 00071 00265	HP EMCO EMCO EMCO Miteq	85685A 2075 2080 2090 JS32-00104000-58-5P	RF Preselector Mini-mast Turn Table Multi-Device Controller Microwave L/N Amplifier					
00047 00072 00073 00071 00265 00241	HP EMCO EMCO EMCO Miteq R&S	85685A 2075 2080 2090 JS32-00104000-58-5P FSU40	RF Preselector Mini-mast Turn Table Multi-Device Controller Microwave L/N Amplifier Spectrum Analyzer					
00047 00072 00073 00071 00265 00241 00050	HP EMCO EMCO EMCO Miteq R&S Chase	85685A 2075 2080 2090 JS32-00104000-58-5P FSU40 CBL-6111A	RF Preselector Mini-mast Turn Table Multi-Device Controller Microwave L/N Amplifier Spectrum Analyzer Bilog Antenna					

CNR: Calibration Not Required COU: Calibrate On Use


00034

ETS

3115




Test Report S/N: 45461350-R1.4

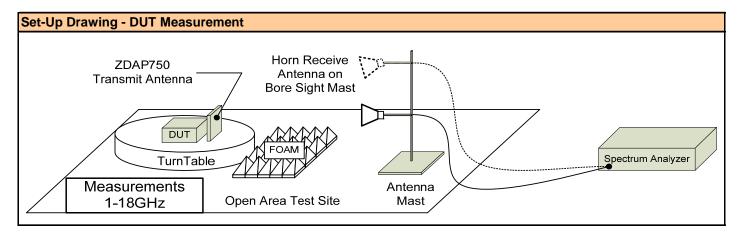



Test Report S/N: 45461350-R1.4

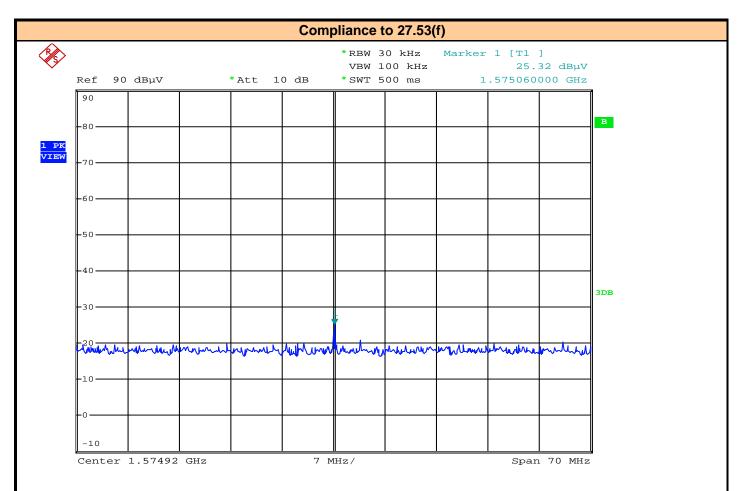

Date: 14.JUL.2016 14:44:14

Transmit Frequency:	787.5MHz
Modulation:	CW
Transmit Antenna:	ZDAFP750-10-60D
Transmit Antenna Polarization:	Vertical
Receive Antenna Polarization:	Vertical




Test Report S/N: 45461350-R1.4 Test Report Issue Date: 19 August 2016

Compliance to 27.53(f)



2 PK VIEW



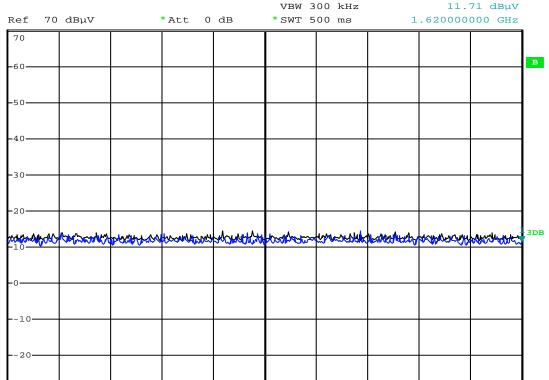

Start 1.55 GHz

7 MHz/

Stop 1.62 GHz

Date: 14.JUL.2016 14:19:07

Transmit Frequency:	787.5MHz
Modulation:	CW
Transmit Antenna:	ZDAFP750-10-60D
Transmit Antenna Polarization:	Vertical
Receive Antenna Polarization:	Horizontal



Test Report S/N: **45461350-R1.4**

§27.53(§27.53(f) Emissions within 1559 to 1610MHz Band												
				Transmit	Receive	Measured	Measured	Receive**	Cable	Transmit			
Freq	DUT	DUT	Transmit	Antenna	Antenna	Emission	Distance	Antenna	Loss	Antenna	EIRP	Limit	Margin
	Freq	Modulation	Antenna	Polarization	Polarization	[E _{Meas}]	[D]	Factor [AF]	[L _C]	Gain [G _T]			
(MHz)	(MHz)					(dBuV)	(m)	(dB)	(dB)	(dBi)	(dBW/MHz)	(dBW/MHz)	(dB)
1575	787.5	CW	ZDAFP750-10-60D	Vertical	Vertical	25.3	3.0	25.5	4.1	10.0	-89.88	-75.00	14.88
1373	101.5	CW	ZDAFF130-10-00D	vertical	Horizontal*	11.7	3.0	25.5	4.1	10.0	-103.49	-75.00	28.49

^{*} Essentially no Emission Detected

 $\mathsf{E}(\mathsf{dBuV/m}) \ = \mathsf{E}_{\mathsf{Meas}} + \mathsf{L}_{\mathsf{C}} + \mathsf{AF} - \mathsf{G}_{\mathsf{T}}$

EIRP(dBm) = E(dBu)/m) +20Log(D)*** -104.8 EIRP(dBW) = EIRP(dBm) - 30 *** This term = 0, receive antenna calibrated at 3m

Result:

Complies

^{*} Calibrated at 3m



Test Report S/N: **45461350-R1.4**

APPENDIX E - Conducted Spurious Emissions at the Antenna Terminal


	Test Conditions							
Normati	ve Reference	FCC 47 CFR §27.53(c), I	KDB 971168 D01v02r01					
Limits	Limits							
47 CFI	R §27.53(c)	emission outside the licentransmitter power (P) with with the following: (1) On any frequency outsattenuated outside the ba	46–758 MHz band and the 776–788 MHz band, the power of any asee's frequency band(s) of operation shall be attenuated below the hin the licensed band(s) of operation, measured in watts, in accordance side the 746–758 MHz band, the power of any emission shall be and below the transmitter power (P) by at least 43 + 10 log (P) dB; side the 776–788 MHz band, the power of any emission shall be					
		attenuated outside the ba	nd below the transmitter power (P) by at least 43 + 10 log (P) dB;					
	mental Condition	1						
Tempera		25°C						
Humidity	у	<60%						
Baromet	tric Pressure	101 +/- 3kPa						
Equipme	ent List							
Asset Number	Manufacturer	Model Number	Description					
00241	R&S	FSU40	Spectrum Analyzer					
Set-Up D	rawing							
	DUT R&S FSP40 Spectrum Analyzer							





1 PK VIEW

Test Report S/N: 45461350-R1.4 Test Report Issue Date: 19 August 2016

-24.95 dBm





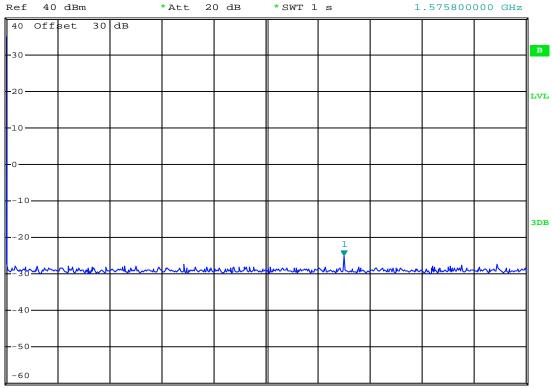


Start 788 MHz 121.2 MHz/ Stop 2 GHz

Date: 15.JUL.2016 14:44:58

Channel Frequency:	787.5000
Modulation:	CW
Frequency Range:	788MHz - 2GHz




Test Report S/N: 45461350-R1.4







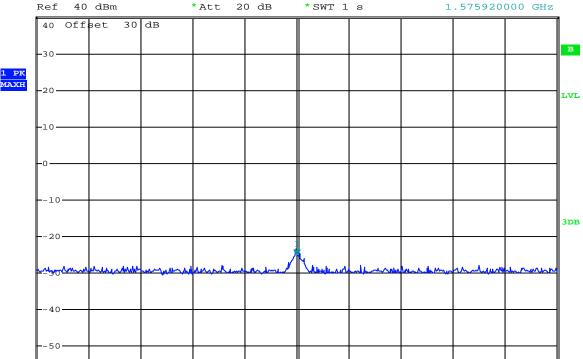

Center 1.57592 GHz 500 kHz/ Span 5 MHz


Date: 15.JUL.2016 14:46:28

-60

Channel Frequency:	787.5000
Modulation:	CW
Frequency Range:	2nd Harmonic



Test Report S/N: **45461350-R1.4**












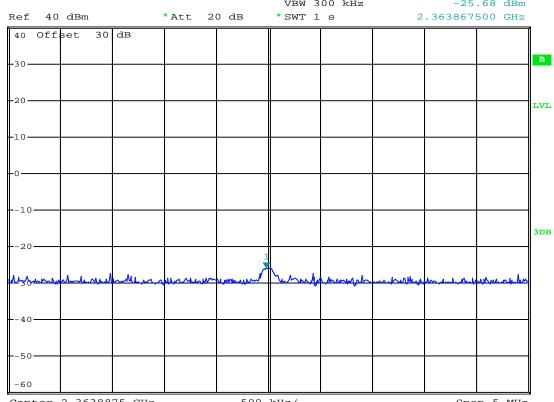

Center 2.3638875 GHz

500 kHz/


Span 5 MHz


Date: 15.JUL.2016 14:48:14

Channel Frequency:	787.5000
Modulation:	CW
Frequency Range:	3rd Harmonic



Test Report S/N: 45461350-R1.4



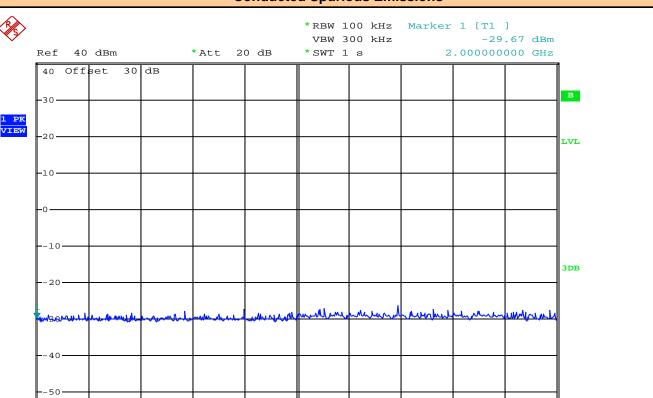

200 MHz/ Start 2 GHz Stop 4 GHz

Date: 15.JUL.2016 14:50:40

-60


Channel Frequency:	787.5000
Modulation:	CW
Frequency Range:	2-4GHz



Stop 4 GHz

Test Report S/N: 45461350-R1.4

Conducted Spurious Emissions

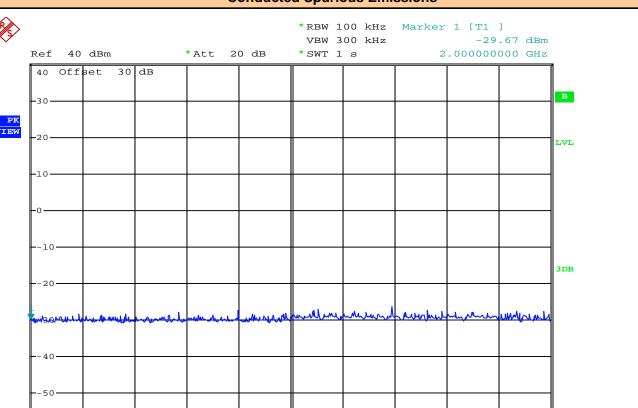

Date: 15.JUL.2016 14:50:40

-60

Start 2 GHz

Plot for Reference Only

200 MHz/

Channel Frequency:	787.5000
Modulation:	CW
Frequency Range:	2-4GHz



Test Report S/N: **45461350-R1.4**


Conducted Spurious Emissions





VBW 300 kHz



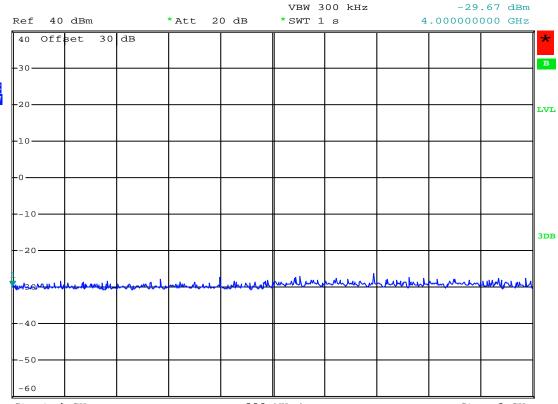

200 MHz/ Start 4 GHz Stop 6 GHz

Date: 15.JUL.2016 14:51:18

Channel Frequency:	787.5000
Modulation:	CW
Frequency Range:	4-6GHz



Test Report S/N: **45461350-R1.4** Test Report Issue Date: 19 August 2016


Stop 8 GHz

Conducted Spurious Emissions



1 PK VIEW



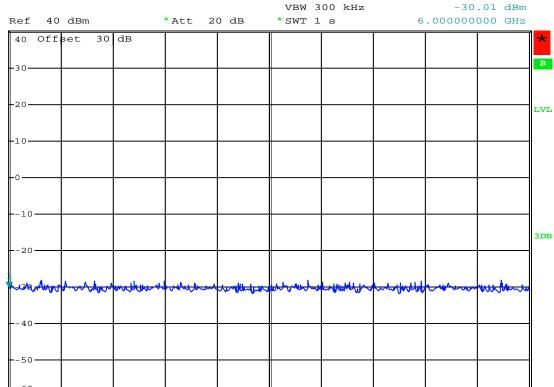

200 MHz/

Date: 15.JUL.2016 14:51:51

Start 6 GHz

Channel Frequency:	787.5000
Modulation:	CW
Frequency Range:	4-6GHz



Test Report S/N: **45461350-R1.4**

Complies

§27.53(c) Conducted Spurious Emissions						
		Fundemental	Out of Band			
Freq	DUT	Power	Emission	Attenuation	Limit	Margin
	Modulation	[P]	[P _E]			
(MHz)		(dBm)	(dBm)	[dB]	(W)	(dB)
1576	CW	36.7	-24.8	61.5	43.0	18.52
2364	CW	36.7	-25.7	62.4	43.0	19.36
Margin = Limit - Attenuation						

All Spurious Emissions were evaluated to the 10th harmonic (7.88GHz). No other emissions were observed.

Result:



Double Ridged Guide Horn

Test Report S/N: **45461350-R1.4**

APPENDIX F - Radiated Tx Spurious Emissions

			Test Conditions	
Normati	ve Reference	FCC 47 CFR §27.53(c)		
Procedure Reference ANSI/TIA/EIA-603-D, ANSI C63.4			SI C63.4	
Limits				
FCC §27.53(c) On all emission outside the block: 43 + 10Log(P)				
Environ	mental Conditi	ons (Typical)		
Tempera	ature	25°C		
Humidit	у	<60%		
Barome	tric Pressure	101 +/- 3kPa		
Equipment List				
Asset Number	Manufacturer	Model Number	Description	
00051	HP	8566B	Spectrum Analyzer	
00049	HP	85650A	Quasi-peak Adapter	
00047	HP	85685A	RF Preselector	
00072	EMCO	2075	Mini-mast	
00073	EMCO	2080	Turn Table	
00071	EMCO	2090	Multi-Device Controller	
00265	Miteq	JS32-00104000-58-5P	Microwave L/N Amplifier	
00241	R&S	FSU40	Spectrum Analyzer	
00050	Chase	CBL-6111A Bilog Antenna		
00275	Coaxis	LMR400 25m Cable		
00276	Coaxis	LMR400	4m Cable	
00278	TILE	34G3	TILE Test Software	

CNR: Calibration Not Required COU: Calibrate On Use


ETS

3115

00034



Test Report S/N: 45461350-R1.4

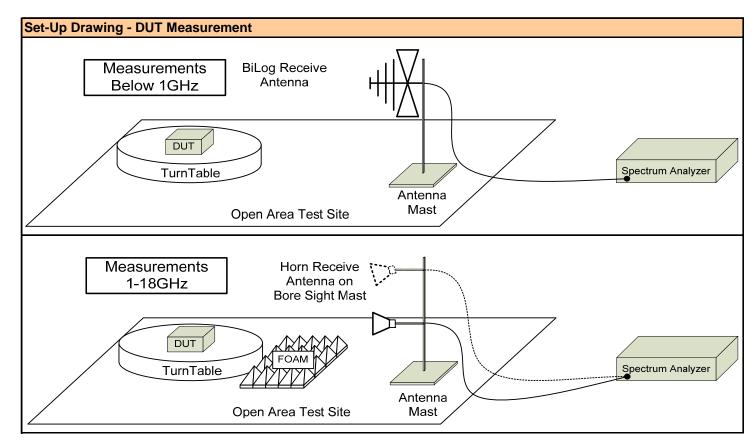

Notes:


The spectrum was searched from the lowest frequency generated in the device to the 10th harmonic of the fundamental. All detected emissions have been reported.

The DUT was searched on all axis for worst case performance.

Worst case emissions are reported.



Test Report S/N: 45461350-R1.4

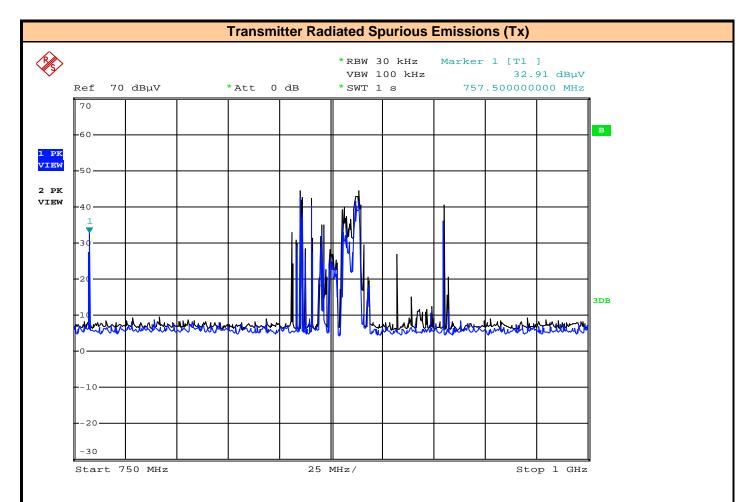


Date: 14.JUL.2016 13:44:31

Plot for Reference Only

Transmit Frequency:	757.5MHz
Modulation:	CW
Frequency Span:	750-1000MHz
Polarization:	Horizontal



Test Report S/N: 45461350-R1.4

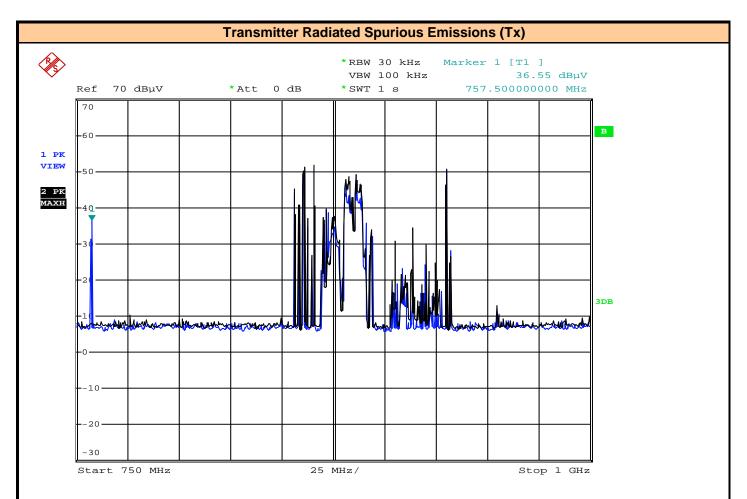

Date: 14.JUL.2016 13:41:50


Plot for Reference Only

Transmit Frequency:	757.5MHz
Modulation:	CW
Frequency Span:	750-1000MHz
Polarization:	Vertical



Test Report S/N: 45461350-R1.4



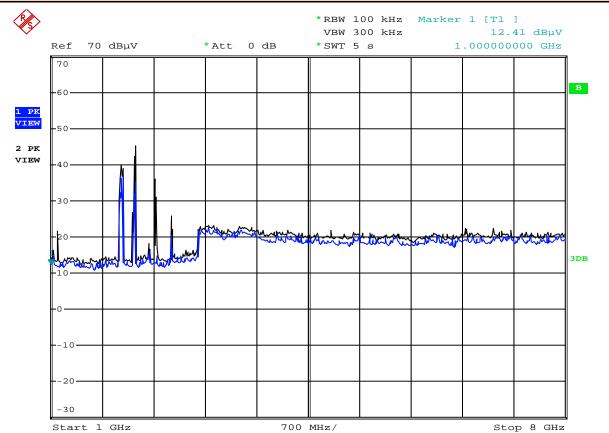

Date: 14.JUL.2016 14:03:06


Plot for Reference Only

Transmit Frequency:	757.5MHz
Modulation:	CW
Frequency Span:	1-8GHz
Polarization:	Horizontal



Test Report S/N: 45461350-R1.4

Test Report Issue Date: 19 August 2016

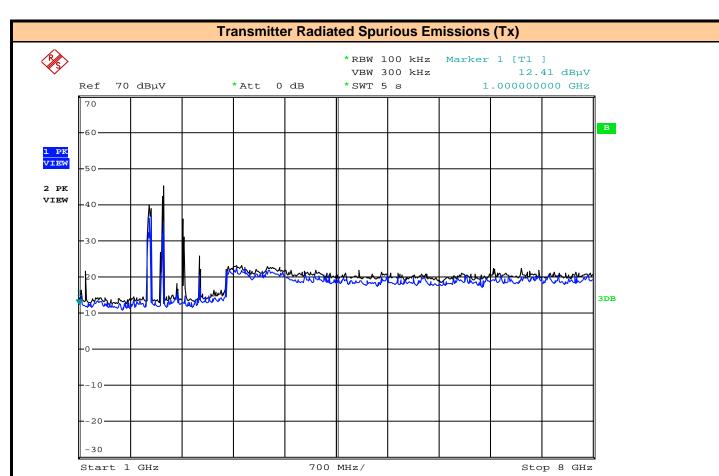

Date: 14.JUL.2016 14:03:06

Plot for Reference Only

Transmit Frequency:	757.5MHz
Modulation:	CW
Frequency Span:	1-8GHz
Polarization:	Vertical



Test Report S/N: **45461350-R1.4** Test Report Issue Date: 19 August 2016

Result:

Complies

*No emissions were detected. Ambient noise emissions shown.

Notes

Data presented may use a peak detector and compared to quasi-peak limit

All detected emissions have been reported



Test Report S/N: **45461350-R1.4**

APPENDIX G - Receiver Radiated Emissions

	Test Conditions		
Normative Reference	FCC 47 CFR §2.1053, §15.109		
Procedure Reference	ANSI/TIA/EIA-603-D, ANSI C63.4		
Limits			
FCC §15.109	30-88MHz: 90uV/m 88-216MHz: 150uV/m 216-960MHz: 210uV/m >960MHz: 300uV/m Measurement Distance = 10m		
Environmental Condition	ons (Typical)		
Temperature	25°C		
Humidity	<60%		
Barometric Pressure	101 +/- 3kPa		


Equipment List					
Asset Number	Manufacturer	Model Number	Description		
00051	HP	8566B	Spectrum Analyzer		
00049	HP	85650A	Quasi-peak Adapter		
00047	HP	85685A	RF Preselector		
00072	EMCO	2075	Mini-mast		
00073	EMCO	2080	Turn Table		
00071	EMCO	2090	Multi-Device Controller		
00265	Miteq	JS32-00104000-58-5P	Microwave L/N Amplifier		
00241	R&S	FSU40	Spectrum Analyzer		
00050	Chase	CBL-6111A	Bilog Antenna		
00275	Coaxis	LMR400	25m Cable		
00276	Coaxis	LMR400	4m Cable		
00278	TILE	34G3	TILE Test Software		
00034	ETS	3115	Double Ridged Guide Horn		

CNR: Calibration Not Required

COU: Calibrate On Use



Test Report S/N: 45461350-R1.4

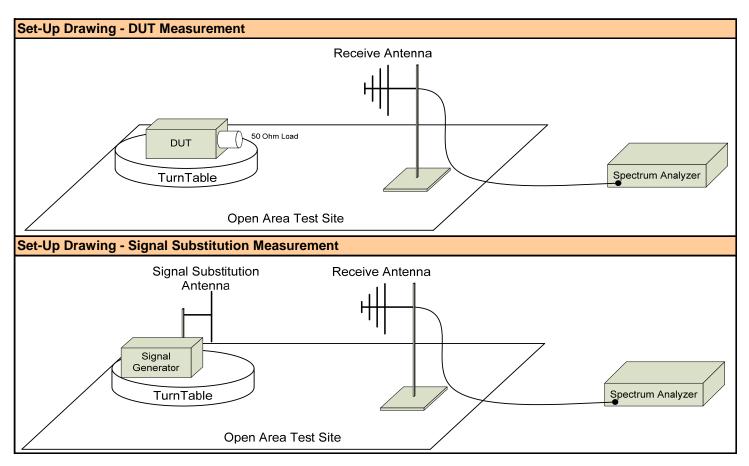





Test Report S/N: 45461350-R1.4 Test Report Issue Date: 19 August 2016

Result:

Complies

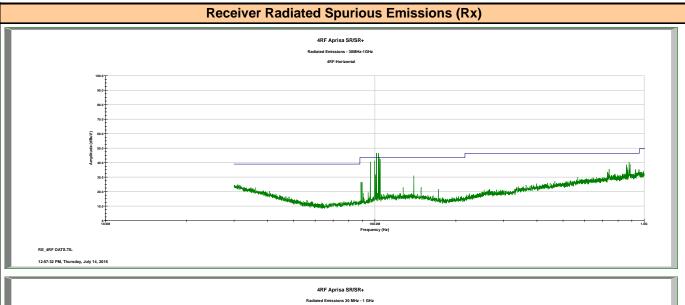

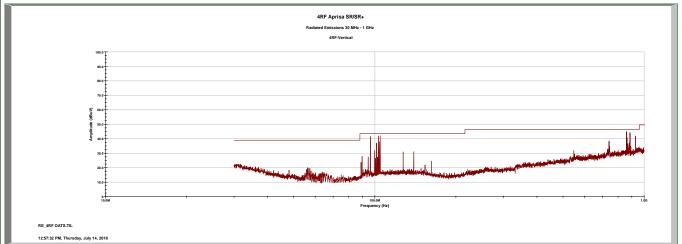

Plot for Reference Only

*No emissions were detected. Ambient noise emissions shown.

Notes

Data presented may use a peak detector and compared to quasi-peak limit

All detected emissions have been reported




Test Report S/N: | 45461350-R1.4

APPENDIX H - Frequency Stability

Test Conditions						
Normative Reference FCC 47 CFR §2.1055, §27.54						
Limits	Limits					
FCC §27.54	The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.					
Test Conditions						
-30°C to +50°C at 10°C Increments						
Humidity <100% Non Condensating						
Voltage (VDC) 9.8VDC(*) - 20VDC - 34.5VDC(115%)						

Equipment List						
Asset Number	Manufacturer	Model Number	Description			
n/a	ESPEC	ECT-2	Environmental Chamber			
00003	HP	53181A	Frequency Counter			
n/a	HP	E3611A	Power Supply			
00234	VWR	61161-378	Temp/Humidity Meter			

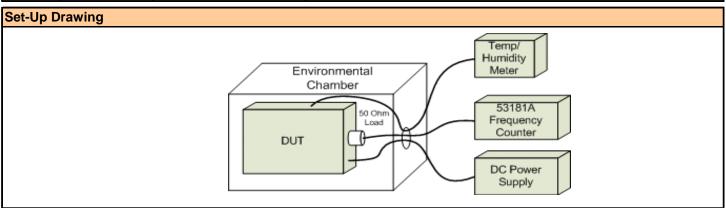


^{*} The Aprisa SR, SR+ does not operate below 9.8VDC.

Note: The instrument setup was similar to that used for the Band Edge measurements, using 1kHz and 3kHz RBW, and applying RBW scaling (see Appendix C). The DUT was set to QPSK Modulation and the 757-758MHz frequency band as this produced the worst case configuration. The 787-788MHz band as well as the 16QAM and 64QAM modulation configurations were verified at select temperatures. The term "Deviation" and "Delta F" in the following evaluation is the difference between the measured 53 + 10Log(P) or 57.8 + 10Log(P) values and the band's edge. The 12.5kHz Band Width configuration produced emissions closest to the band's edge and this bandwidth was used for the Voltage, 16QAM and 64QAM frequency stability measurements.



Test Report S/N: 45461350-R1.4

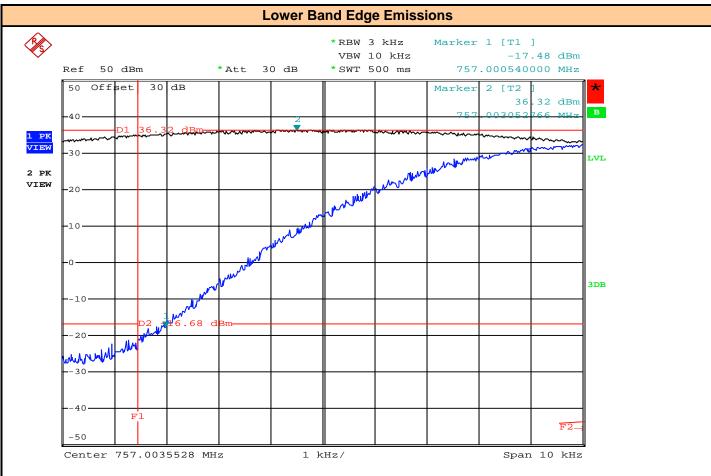

Date: 5.AUG.2016 12:02:22


Plot for Reference Only

Trace 1 RBW: 3kHz Trace 2 RBW: 30kHz

Channel Frequency:	757.0125
Bandwidth:	12.5kHz
Delta F (Hz):	540
Temp (^o C):	-40



Test Report S/N: 45461350-R1.4

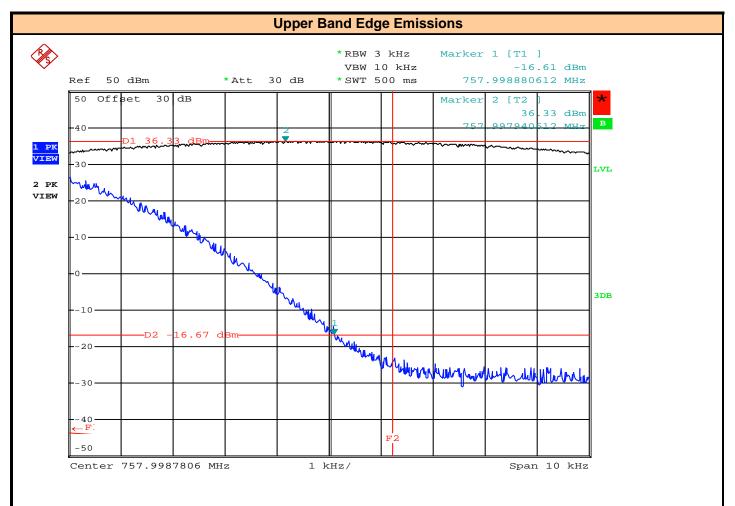

Date: 5.AUG.2016 11:58:56


Plot for Reference Only


Trace 1 RBW: 3kHz Trace 2 RBW: 30kHz

Channel Frequency:	757.9875
Bandwidth:	12.5kHz
Delta F (Hz):	1119
Temp (°C):	-40



Test Report S/N: 45461350-R1.4

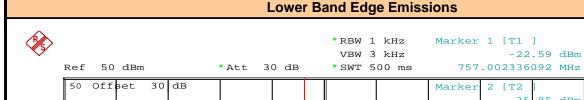

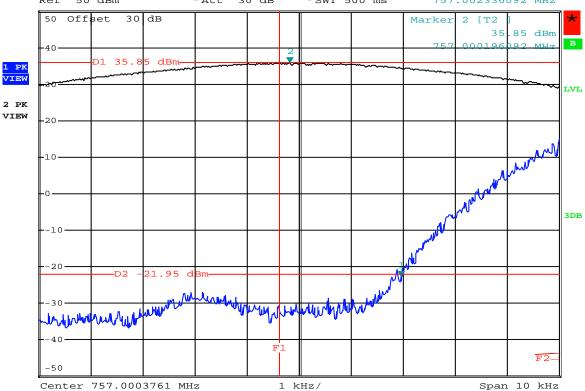

Date: 5.AUG.2016 12:09:04


Plot for Reference Only

Trace 1 RBW: 1kHz Trace 2 RBW: 30kHz

Channel Frequency:	757.01875
Bandwidth:	25kHz
Delta F (Hz):	2336
Temp (°C):	-40



Test Report S/N: 45461350-R1.4

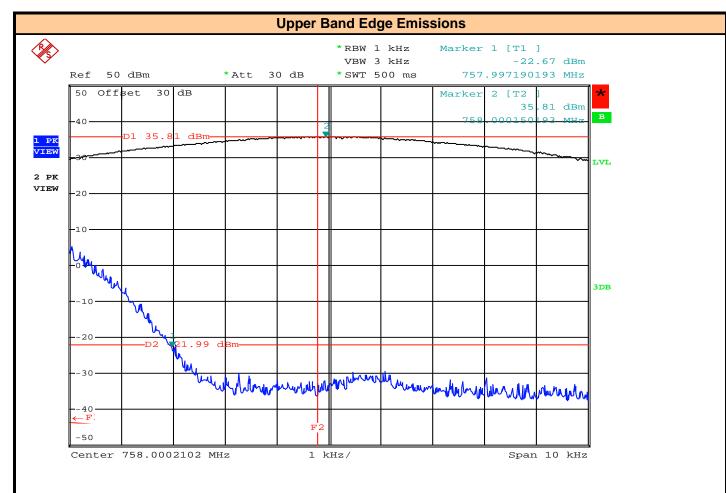


Date: 5.AUG.2016 12:12:17

Plot for Reference Only

Channel Frequency:	757.98125
Bandwidth:	25kHz
Delta F (Hz):	2810
Temp (°C):	-40




Test Report S/N: 45461350-R1.4

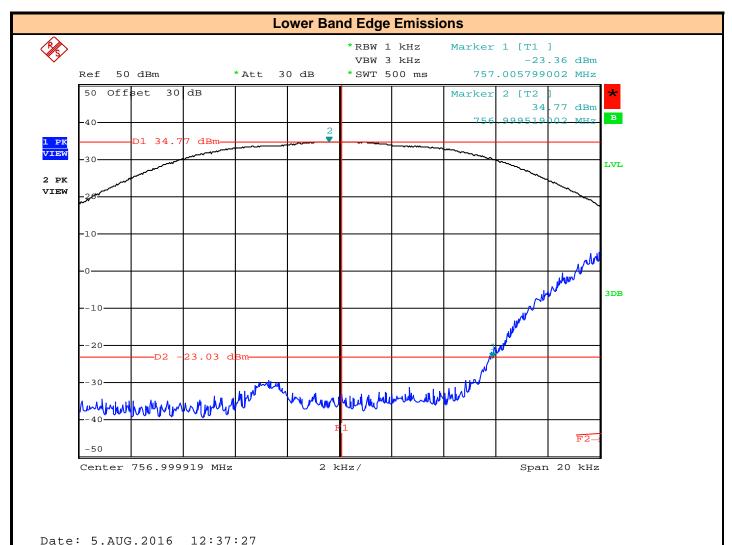

Plot for Reference Only

Channel Frequency:	757.03750
Bandwidth:	50kHz
Delta F (Hz):	5790
Temp (°C):	-40



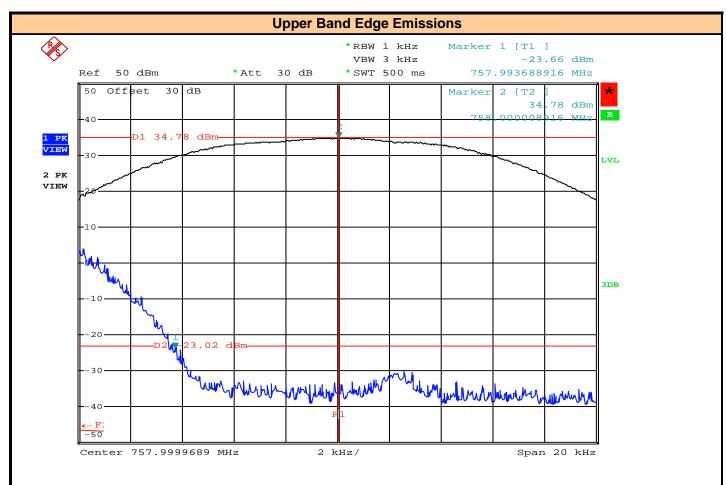


Date: 5.AUG.2016 12:34:08

Plot for Reference Only

Channel Frequency:	757.96250
Bandwidth:	50kHz
Delta F (Hz):	6311
Temp (°C):	-40



Test Report S/N: 45461350-R1.4

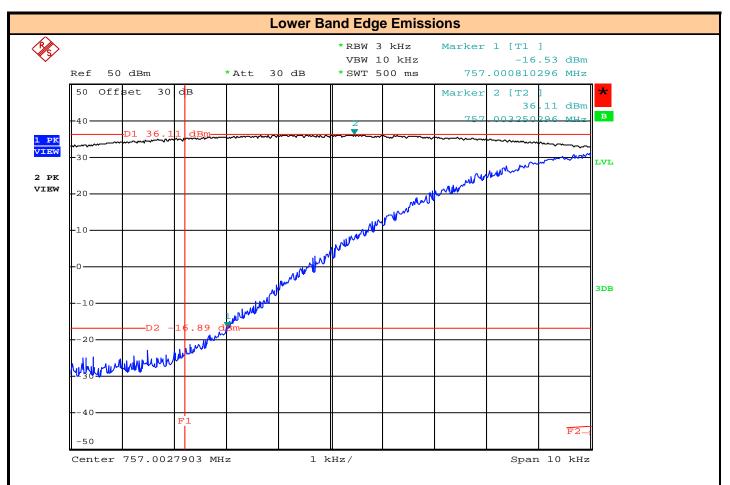


Date: 5.AUG.2016 13:33:27

Plot for Reference Only

Channel Frequency:	757.0125
Bandwidth:	12.5kHz
Delta F (Hz):	810
Temp (°C):	-30



Test Report S/N: 45461350-R1.4

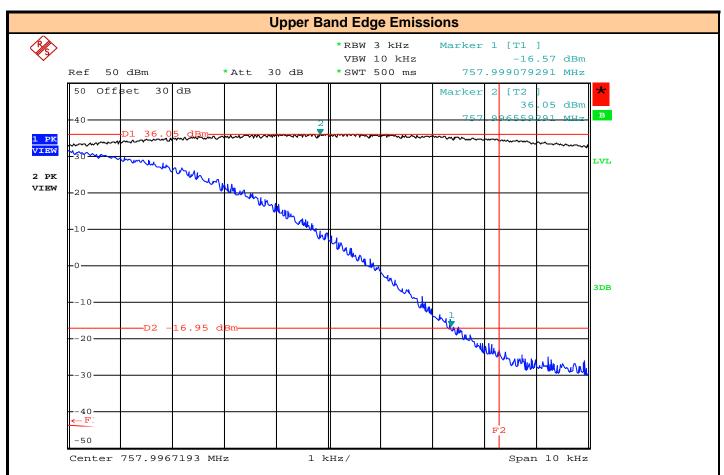


Date: 5.AUG.2016 13:36:04

Plot for Reference Only

Channel Frequency:	757.9875
Bandwidth:	12.5kHz
Delta F (Hz):	921
Temp (°C):	-30



Test Report S/N: 45461350-R1.4

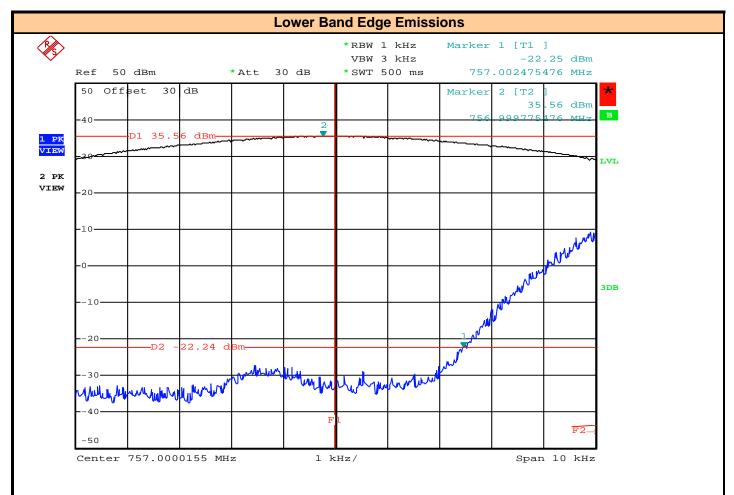


Date: 5.AUG.2016 13:29:00

Plot for Reference Only

Channel Frequency:	757.01875
Bandwidth:	25kHz
Delta F (Hz):	2475
Temp (°C):	-30



Test Report S/N: 45461350-R1.4

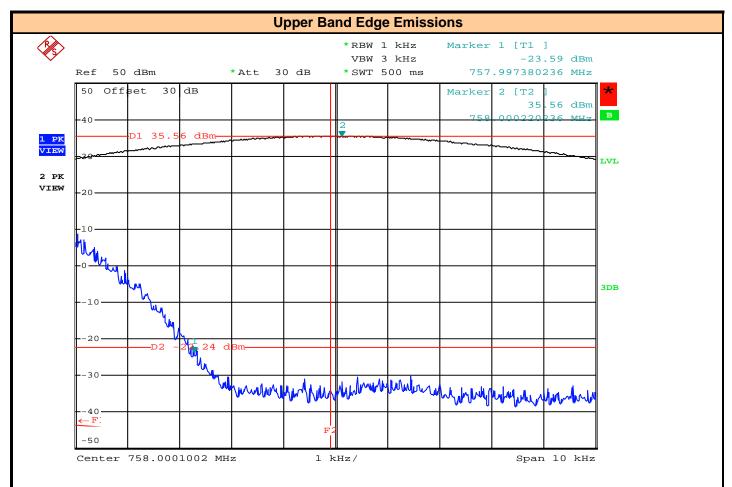


Date: 5.AUG.2016 13:25:28

Plot for Reference Only

Channel Frequency:	757.98125
Bandwidth:	25kHz
Delta F (Hz):	2620
Temp (°C):	-30



Test Report S/N: 45461350-R1.4

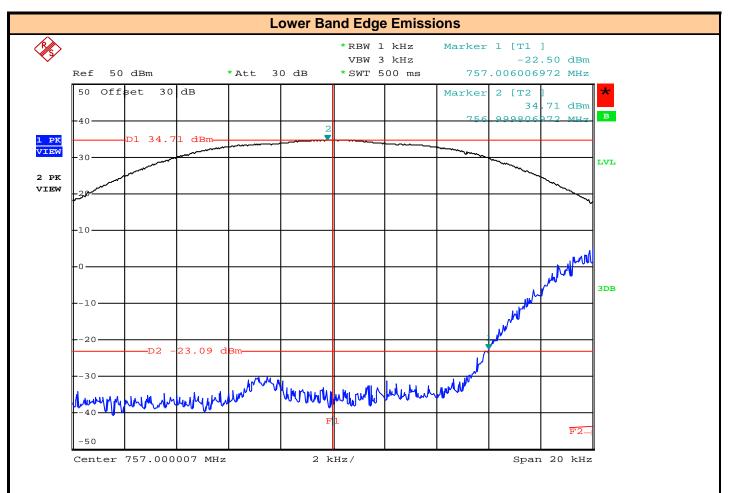


Date: 5.AUG.2016 13:17:20

Plot for Reference Only

Channel Frequency:	757.03750
Bandwidth:	50kHz
Delta F (Hz):	6007
Temp (°C):	-30



Test Report S/N: 45461350-R1.4

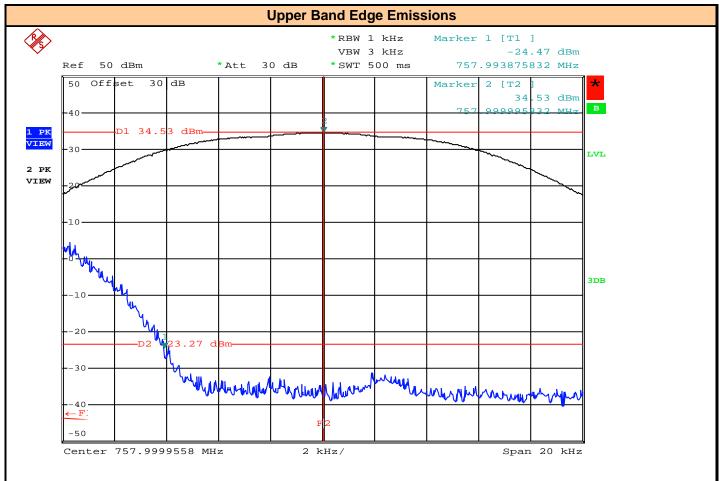


Date: 5.AUG.2016 13:20:43

Plot for Reference Only

Channel Frequency:	757.96250
Bandwidth:	50kHz
Delta F (Hz):	6125
Temp (°C):	-30



Test Report S/N: 45461350-R1.4

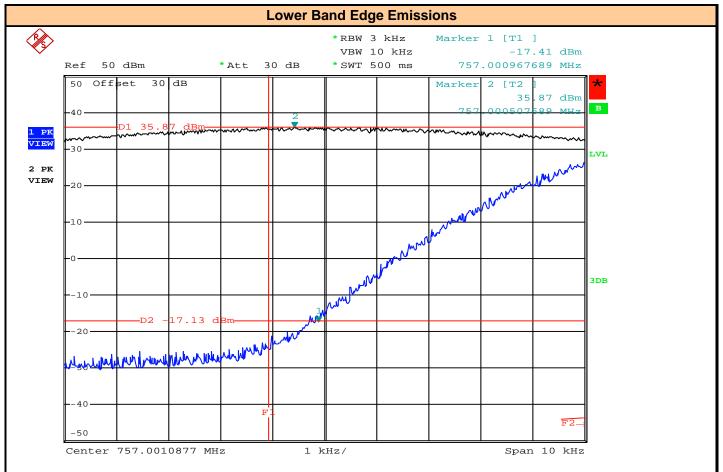


Date: 5.AUG.2016 14:11:56

Plot for Reference Only

Channel Frequency:	757.0125
Bandwidth:	12.5kHz
Delta F (Hz):	967
Temp (°C):	-20



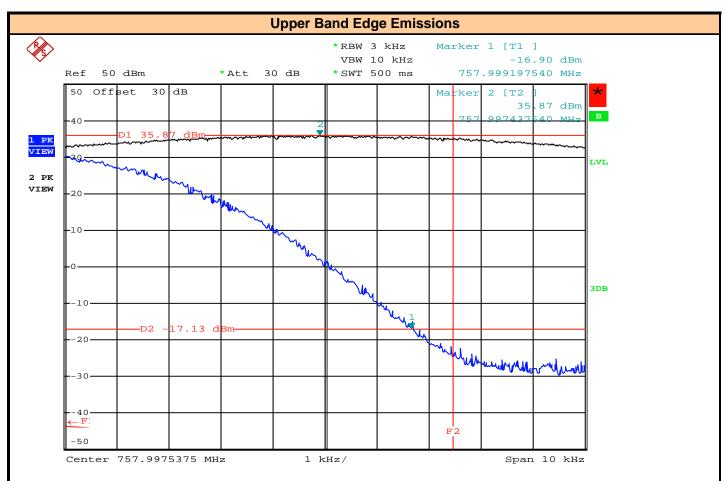


Date: 5.AUG.2016 14:09:06

Plot for Reference Only

Channel Frequency:	757.9875
Bandwidth:	12.5kHz
Delta F (Hz):	803
Temp (°C):	-20



Test Report S/N: 45461350-R1.4

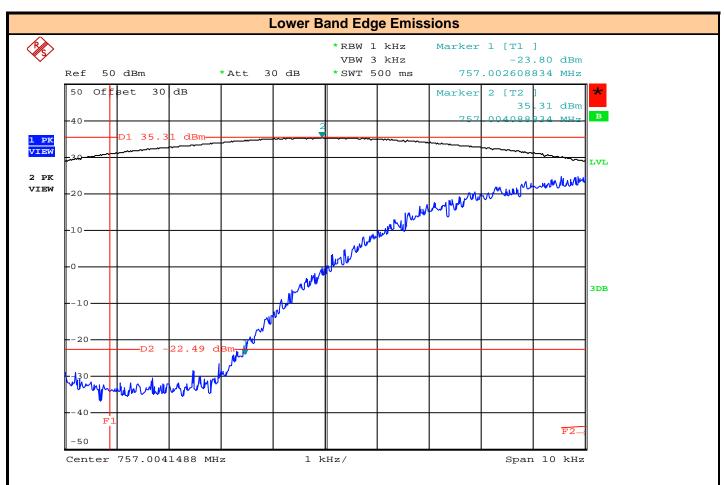


Date: 5.AUG.2016 14:19:54

Plot for Reference Only

Channel Frequency:	757.01875
Bandwidth:	25kHz
Delta F (Hz):	2609
Temp (°C):	-20



Span 10 kHz

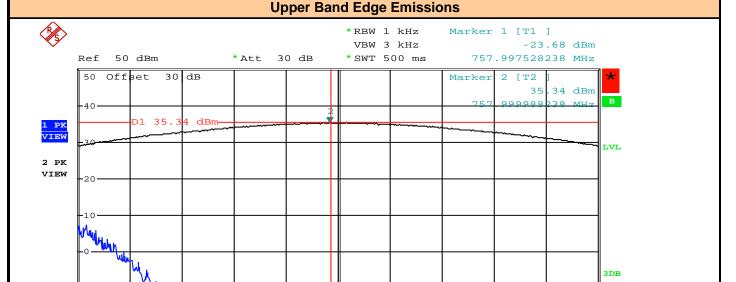

Date: 5.AUG.2016 14:25:02

Center 758.0001482 MHz

-30


Plot for Reference Only

1 kHz/

Channel Frequency:	757.98125
Bandwidth:	25kHz
Delta F (Hz):	2472
Temp (°C):	-20



Test Report S/N: 45461350-R1.4

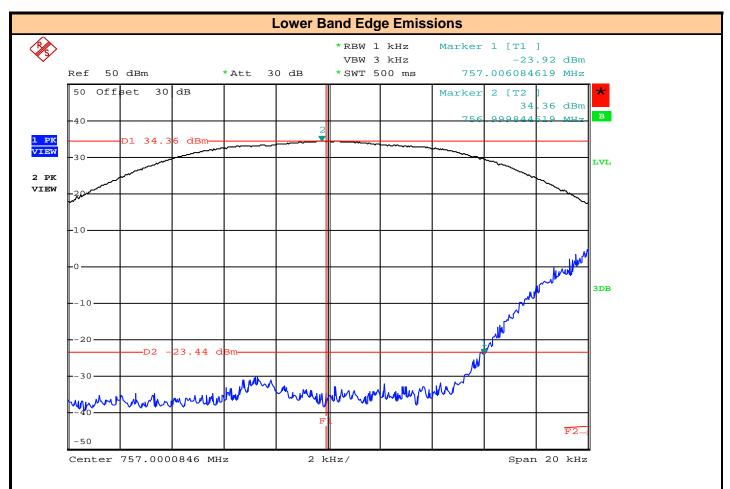


Date: 5.AUG.2016 14:32:49

Plot for Reference Only

Channel Frequency:	757.03750
Bandwidth:	50kHz
Delta F (Hz):	6085
Temp (°C):	-20



Test Report S/N: 45461350-R1.4

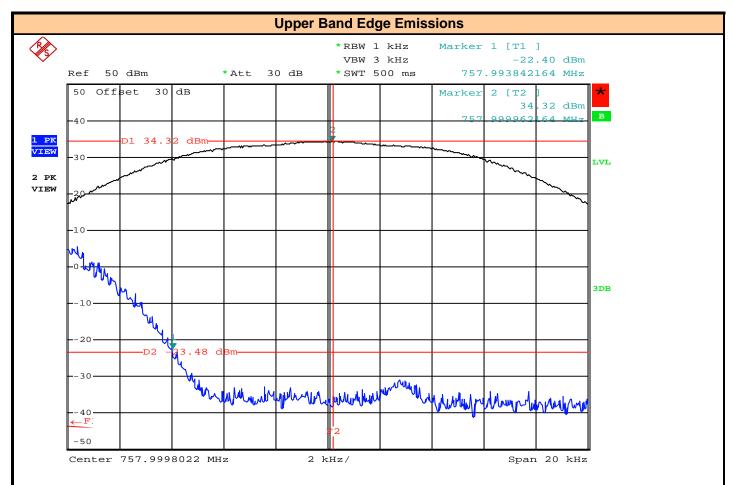


Date: 5.AUG.2016 14:29:28

Plot for Reference Only

Channel Frequency:	757.96250
Bandwidth:	50kHz
Delta F (Hz):	6579
Temp (°C):	-20



Test Report S/N: 45461350-R1.4

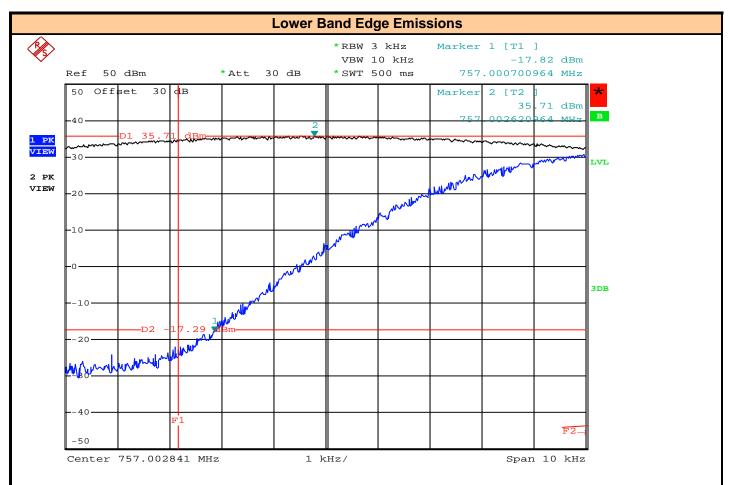


Date: 5.AUG.2016 15:17:28

Plot for Reference Only

Channel Frequency:	757.0125
Bandwidth:	12.5kHz
Delta F (Hz):	701
Temp (°C):	-10



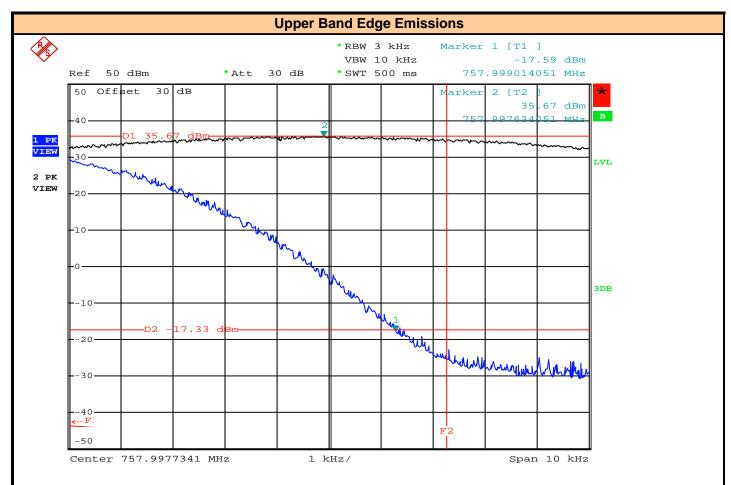


Date: 5.AUG.2016 15:20:04

Plot for Reference Only

Channel Frequency:	757.9875
Bandwidth:	12.5kHz
Delta F (Hz):	986
Temp (°C):	-10



Test Report S/N: 45461350-R1.4

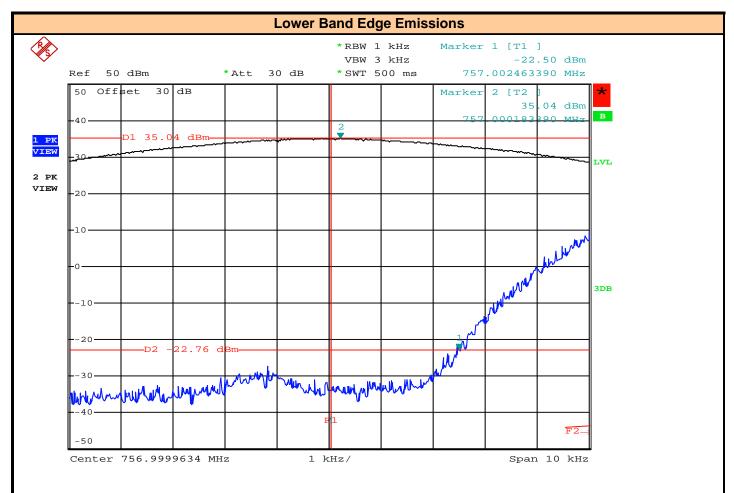


Date: 5.AUG.2016 15:13:08

Plot for Reference Only

Channel Frequency:	757.01875
Bandwidth:	25kHz
Delta F (Hz):	2463
Temp (^o C):	-10



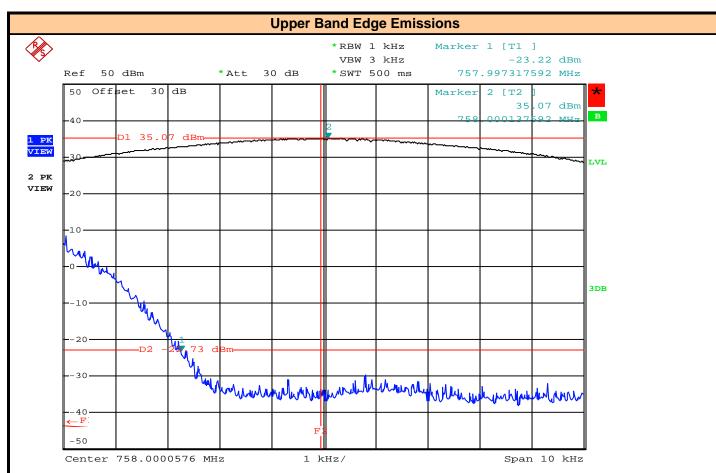


Date: 5.AUG.2016 15:10:21

Plot for Reference Only

Channel Frequency:	757.98125
Bandwidth:	25kHz
Delta F (Hz):	2683
Temp (°C):	-10



Test Report S/N: 45461350-R1.4

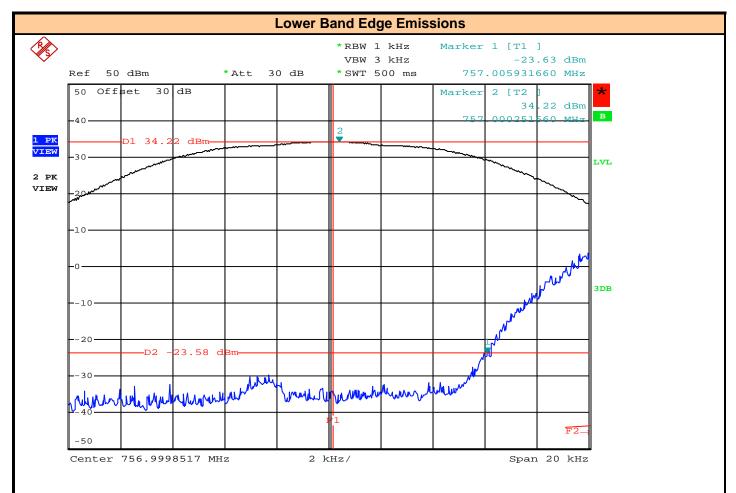


Date: 5.AUG.2016 15:03:32

Plot for Reference Only

Channel Frequency:	757.03750
Bandwidth:	50kHz
Delta F (Hz):	5932
Temp (°C):	-10



Test Report S/N: 45461350-R1.4

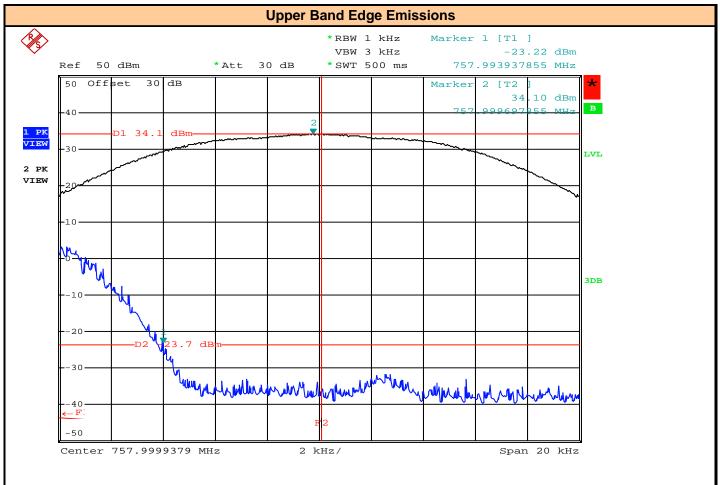


Date: 5.AUG.2016 15:06:25

Plot for Reference Only

Channel Frequency:	757.96250
Bandwidth:	50kHz
Delta F (Hz):	6063
Temp (°C):	-10



Test Report S/N: 45461350-R1.4

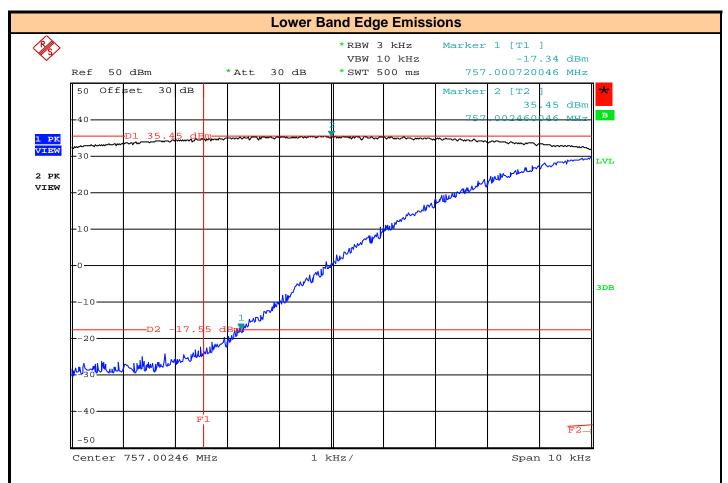


Date: 5.AUG.2016 15:44:42

Plot for Reference Only

Channel Frequency:	757.0125
Bandwidth:	12.5kHz
Delta F (Hz):	720
Temp (°C):	0



Test Report S/N: 45461350-R1.4

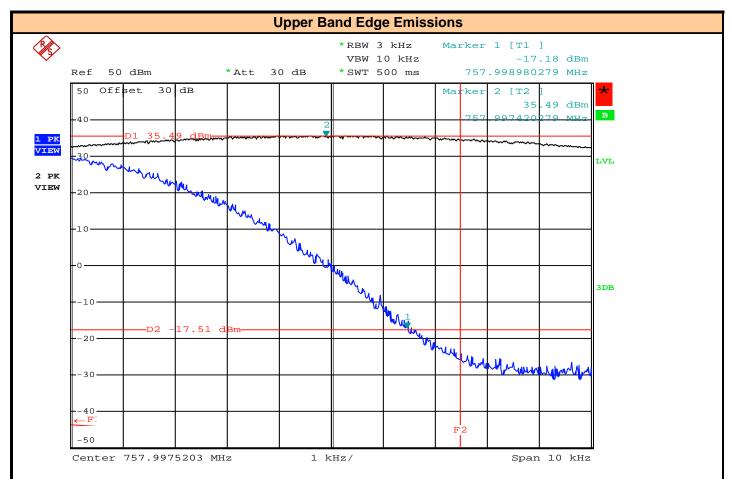


Date: 5.AUG.2016 15:42:16

Plot for Reference Only

Channel Frequency:	757.9875
Bandwidth:	12.5kHz
Delta F (Hz):	1018
Temp (°C):	0



Test Report S/N: 45461350-R1.4

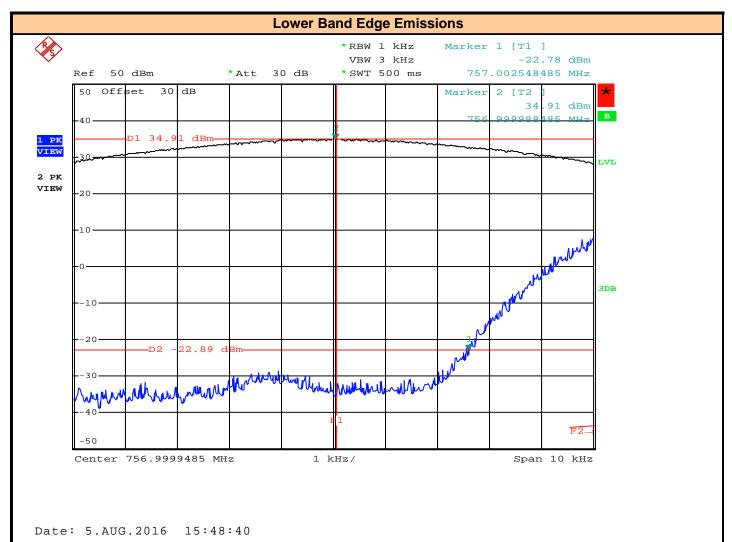


Plot for Reference Only

Channel Frequency:	757.01875
Bandwidth:	25kHz
Delta F (Hz):	2548
Temp (°C):	0



Test Report S/N: 45461350-R1.4

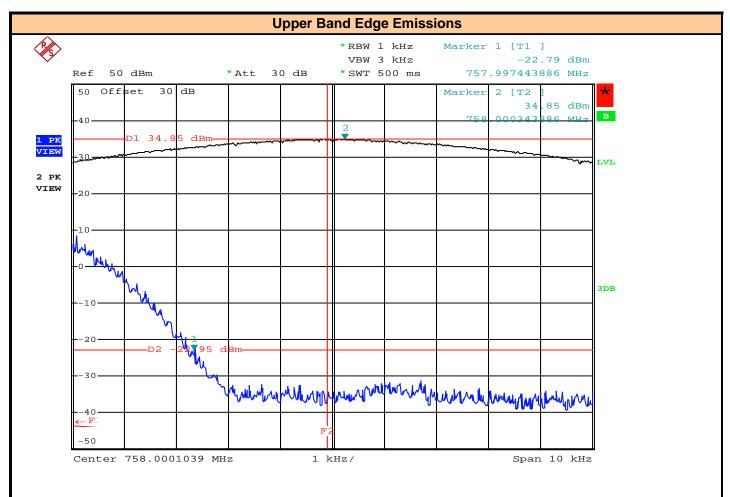


Date: 5.AUG.2016 15:51:16

Plot for Reference Only

Channel Frequency:	757.98125
Bandwidth:	25kHz
Delta F (Hz):	2557
Temp (°C):	0



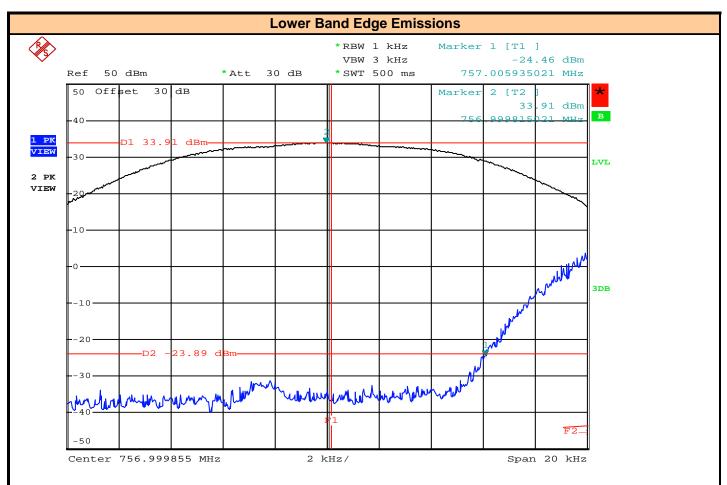


Date: 5.AUG.2016 15:57:56

Plot for Reference Only

Channel Frequency:	757.03750
Bandwidth:	50kHz
Delta F (Hz):	5930
Temp (°C):	0



Test Report S/N: 45461350-R1.4

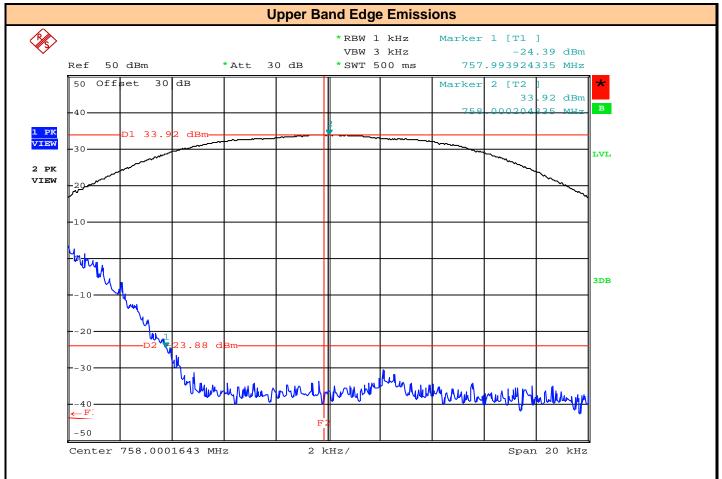


Date: 5.AUG.2016 15:55:11

Plot for Reference Only

Channel Frequency:	757.96250
Bandwidth:	50kHz
Delta F (Hz):	6076
Temp (^o C):	0



Test Report S/N: 45461350-R1.4

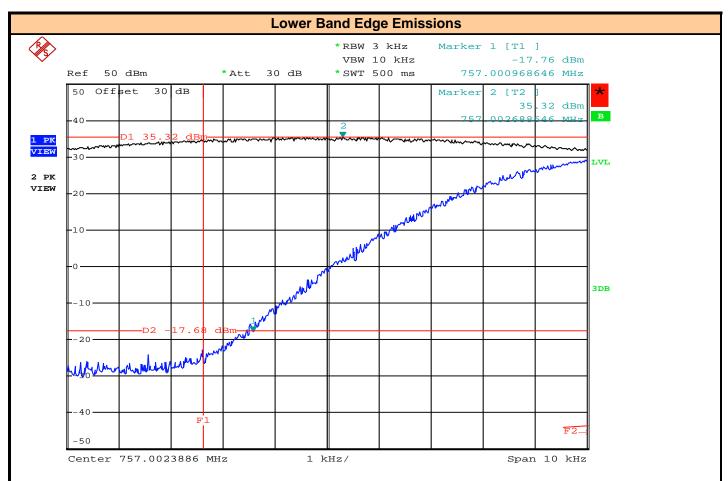


Date: 5.AUG.2016 16:26:28

Plot for Reference Only

Channel Frequency:	757.0125
Bandwidth:	12.5kHz
Delta F (Hz):	968
Temp (°C):	10



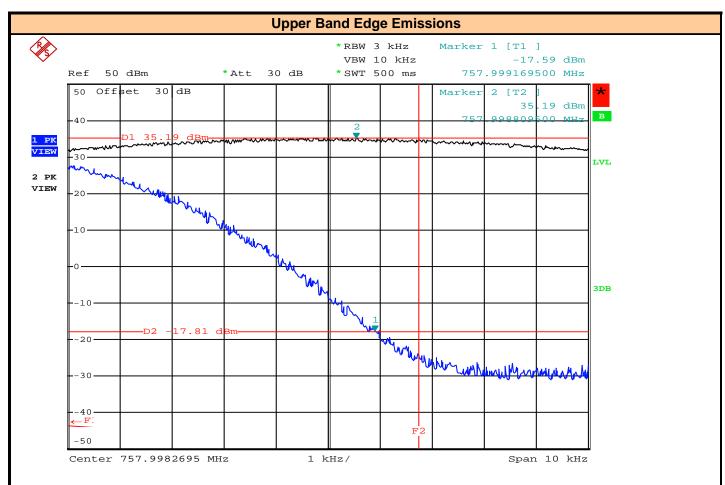


Date: 5.AUG.2016 16:28:49

Plot for Reference Only

Channel Frequency:	757.9875
Bandwidth:	12.5kHz
Delta F (Hz):	831
Temp (°C):	10



Test Report S/N: 45461350-R1.4

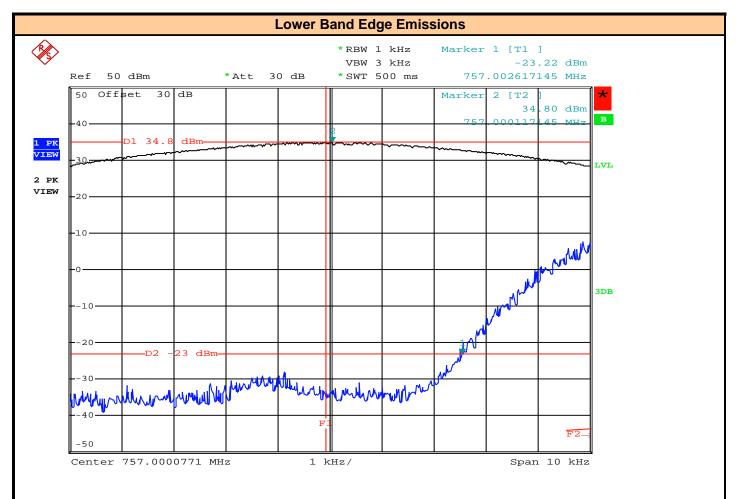


Date: 5.AUG.2016 16:20:49

Plot for Reference Only

Channel Frequency:	757.01875
Bandwidth:	25kHz
Delta F (Hz):	2617
Temp (°C):	10



Test Report S/N: 45461350-R1.4

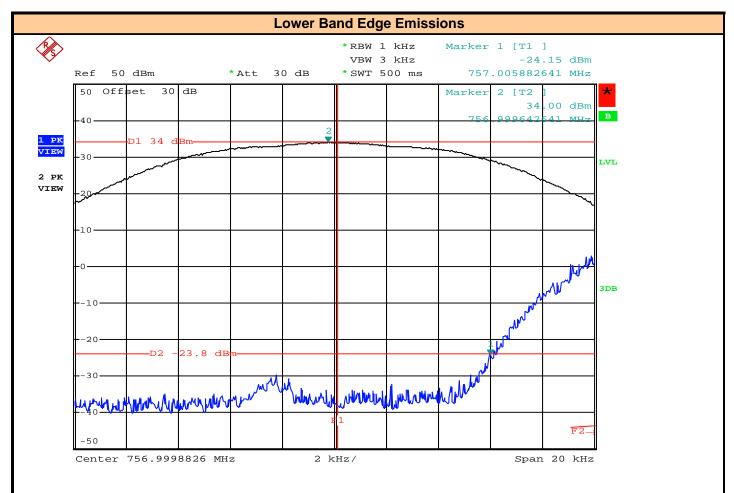


Date: 5.AUG.2016 16:11:46

Plot for Reference Only

Channel Frequency:	757.03750
Bandwidth:	50kHz
Delta F (Hz):	5883
Temp (^o C):	10



Test Report S/N: 45461350-R1.4

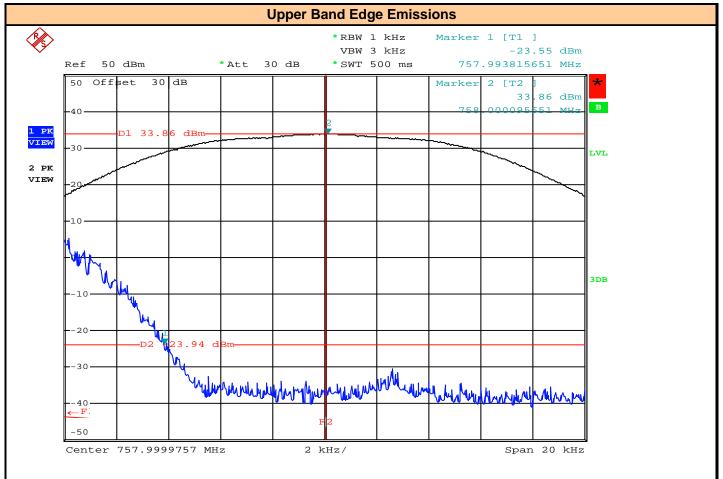

Date: 5.AUG.2016 16:14:06

Plot for Reference Only

Channel Frequency:	757.96250
Bandwidth:	50kHz
Delta F (Hz):	6185
Temp (^o C):	10



Test Report S/N: 45461350-R1.4




Date: 7.AUG.2016 17:53:37

Plot for Reference Only

Channel Frequency:	757.0125
Bandwidth:	12.5kHz
Delta F (Hz):	739
Temp (°C):	20



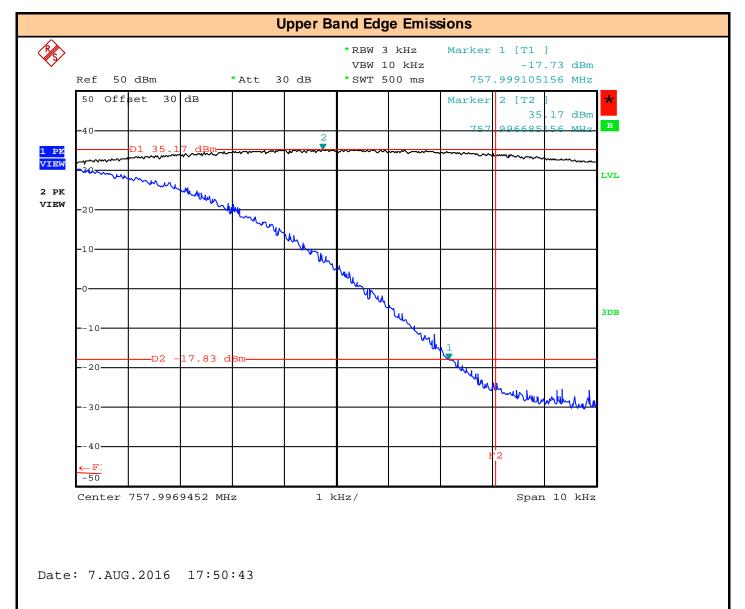

Channel Frequency:	757.9875
Bandwidth:	12.5kHz
Delta F (Hz):	895
Temp (°C):	20

Plot for Reference Only


Trace 1 RBW:

Trace 2 RBW:

3kHz

30kHz



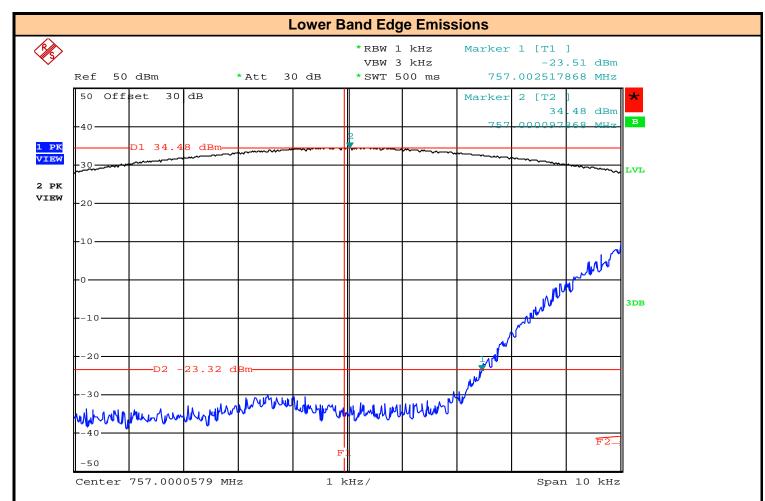


Date: 7.AUG.2016 18:22:26

Plot for Reference Only

Channel Frequency:	757.01875
Bandwidth:	25kHz
Delta F (Hz):	2518
Temp (^o C):	20



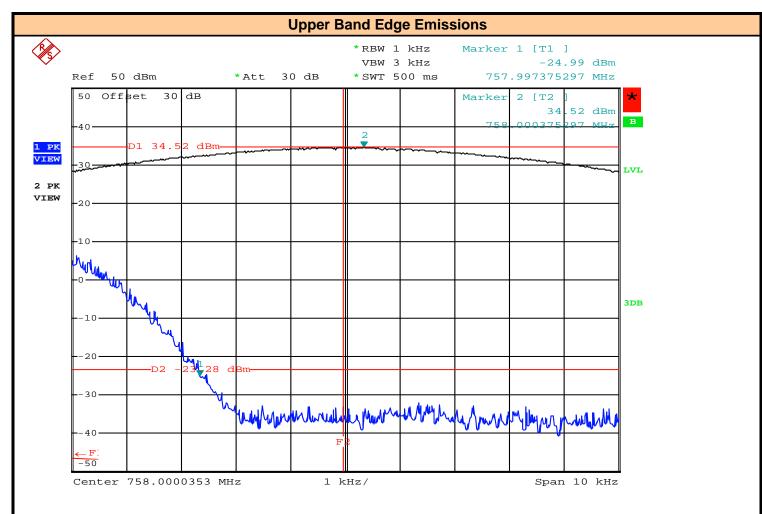


Date: 7.AUG.2016 18:25:11

Plot for Reference Only

Channel Frequency:	757.98125
Bandwidth:	25kHz
Delta F (Hz):	2625
Temp (^o C):	20



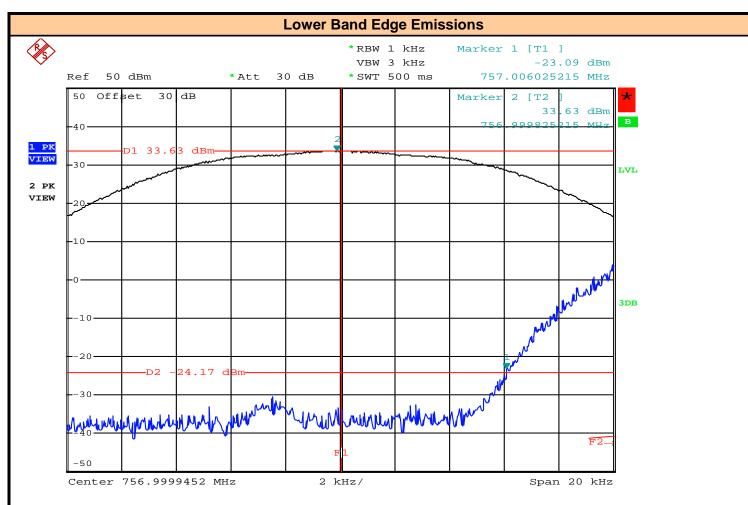


Date: 7.AUG.2016 18:30:56

Plot for Reference Only

Channel Frequency:	757.03750
Bandwidth:	50kHz
Delta F (Hz):	6025
Temp (^o C):	20



Test Report S/N: 45461350-R1.4

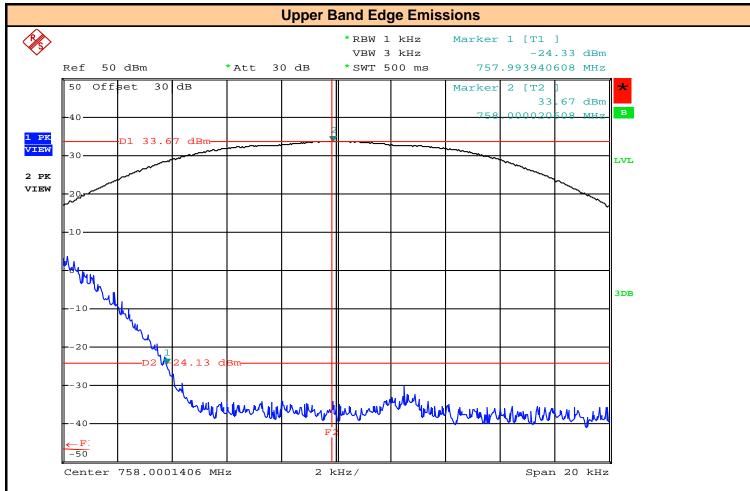


Date: 7.AUG.2016 18:28:26

Plot for Reference Only

Channel Frequency:	757.96250
Bandwidth:	50kHz
Delta F (Hz):	6060
Temp (°C):	20



Test Report S/N: 45461350-R1.4

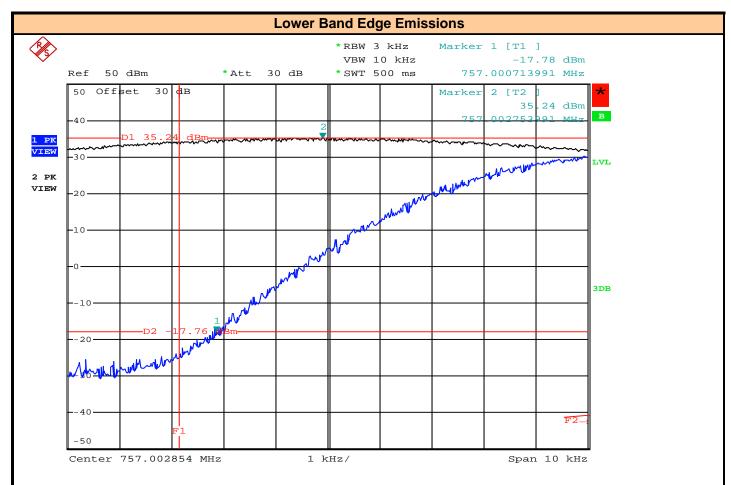


Date: 8.AUG.2016 09:34:57

Plot for Reference Only

Channel Frequency:	757.0125
Bandwidth:	12.5kHz
Delta F (Hz):	714
Temp (°C):	30



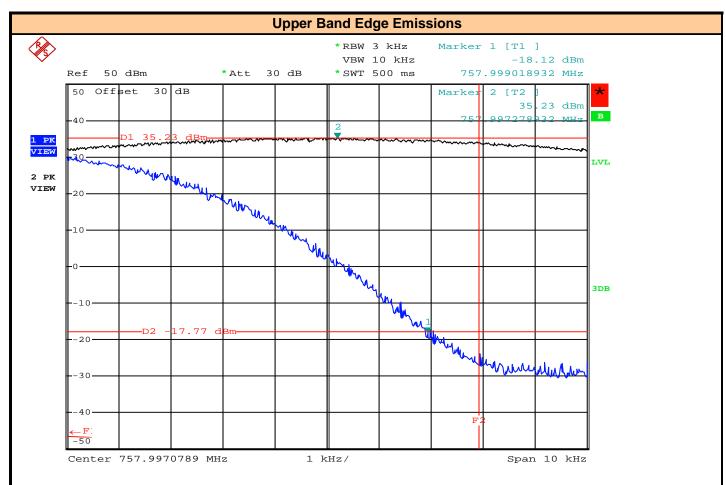


Date: 8.AUG.2016 09:40:10

Plot for Reference Only

Channel Frequency:	757.9875
Bandwidth:	12.5kHz
Delta F (Hz):	981
Temp (°C):	30



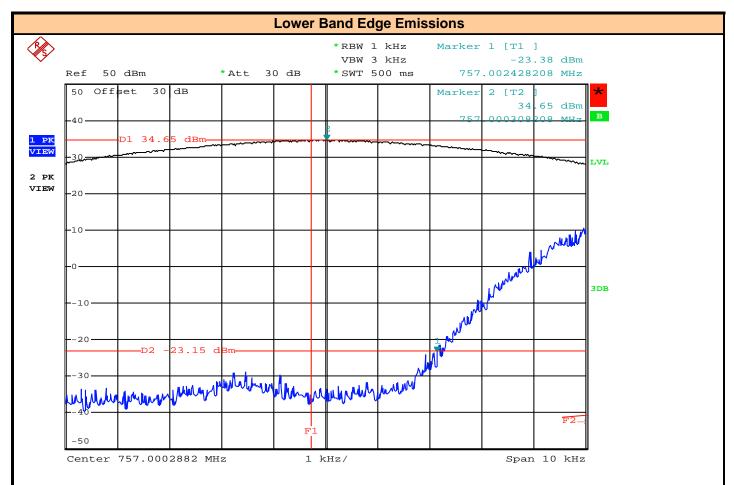


Date: 8.AUG.2016 09:31:15

Plot for Reference Only

Channel Frequency:	757.01875
Bandwidth:	25kHz
Delta F (Hz):	2428
Temp (°C):	30



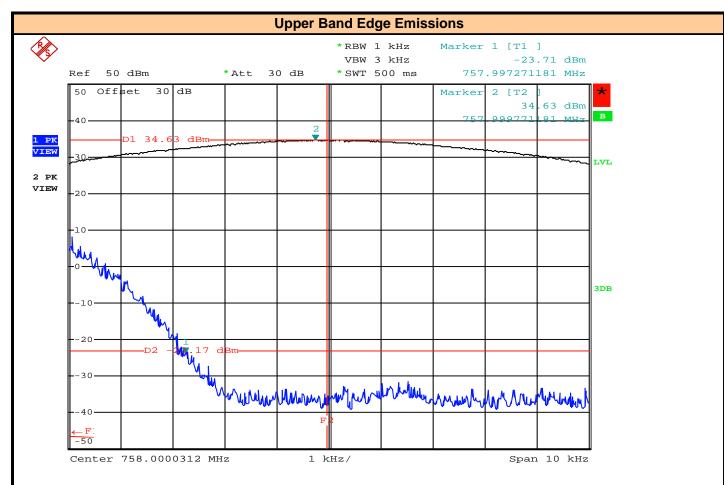


Date: 8.AUG.2016 09:28:32

Plot for Reference Only

Channel Frequency:	757.98125
Bandwidth:	25kHz
Delta F (Hz):	2729
Temp (^o C):	30



Test Report S/N: 45461350-R1.4

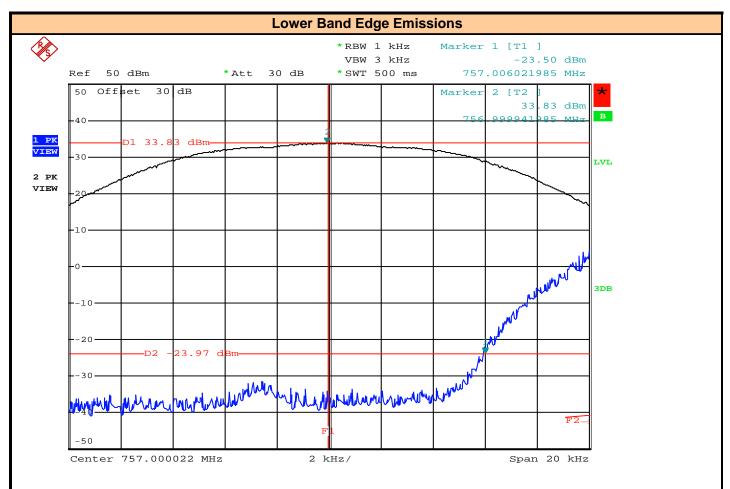


Date: 8.AUG.2016 09:21:37

Plot for Reference Only

Channel Frequency:	757.03750
Bandwidth:	50kHz
Delta F (Hz):	6022
Temp (°C):	30



Test Report S/N: 45461350-R1.4

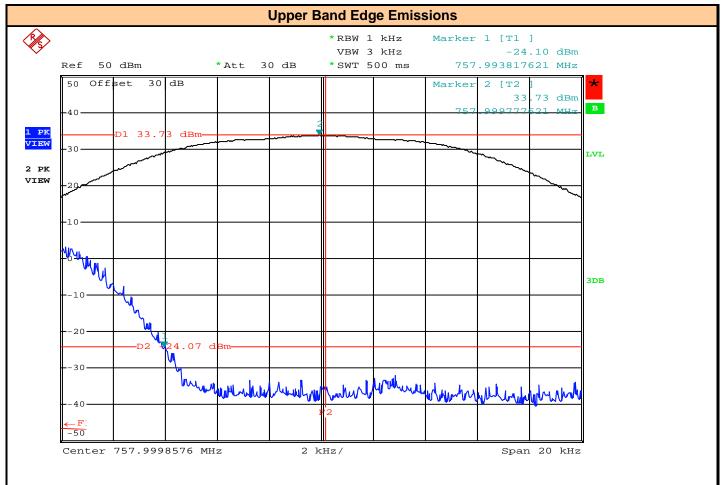


Date: 8.AUG.2016 09:24:29

Plot for Reference Only

Channel Frequency:	757.96250
Bandwidth:	50kHz
Delta F (Hz):	6182
Temp (°C):	30



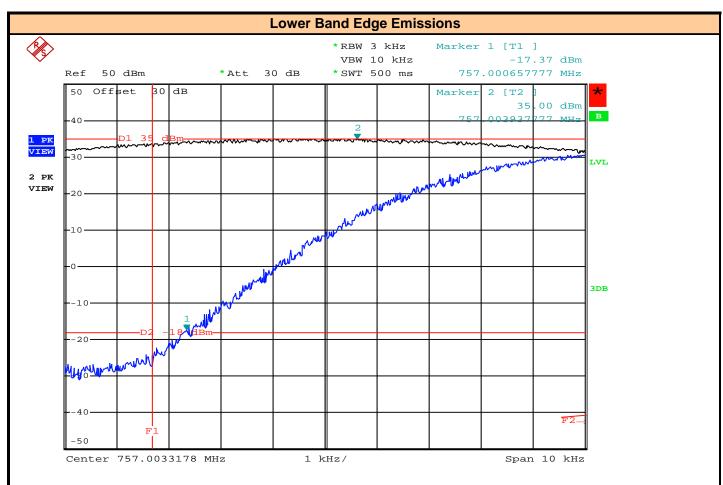


Date: 8.AUG.2016 10:28:32

Plot for Reference Only

Channel Frequency:	757.0125
Bandwidth:	12.5kHz
Delta F (Hz):	657
Temp (°C):	40



Test Report S/N: 45461350-R1.4

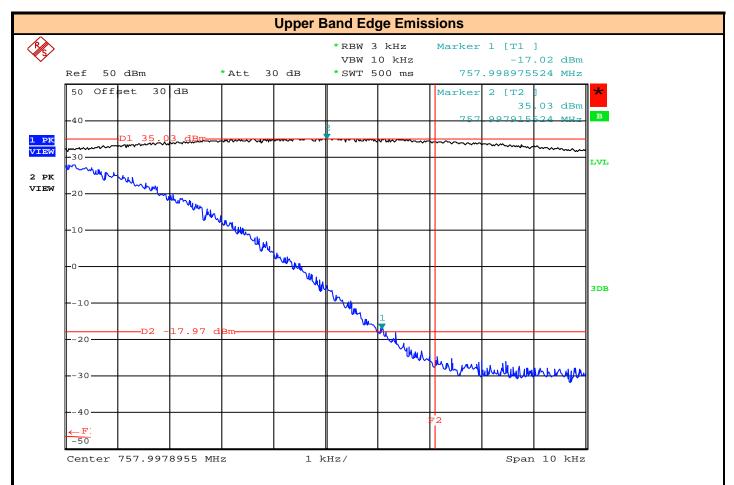


Date: 8.AUG.2016 10:26:19

Plot for Reference Only

Channel Frequency:	757.9875
Bandwidth:	12.5kHz
Delta F (Hz):	1024
Temp (°C):	40



Test Report S/N: 45461350-R1.4

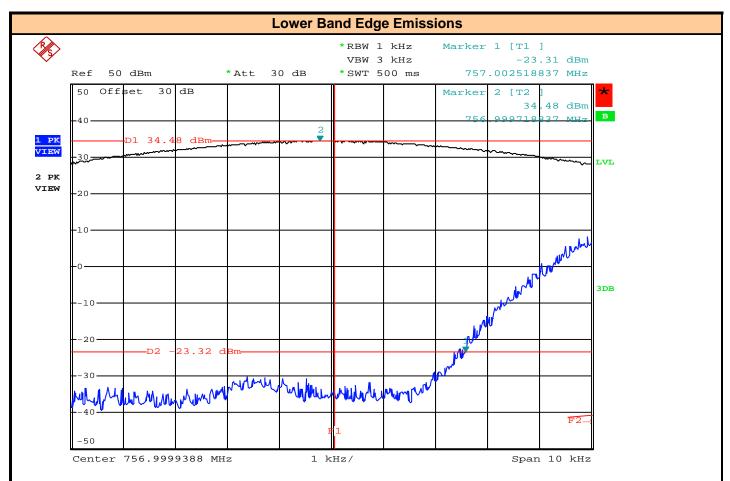


Date: 8.AUG.2016 10:32:45

Plot for Reference Only

Channel Frequency:	757.01875
Bandwidth:	25kHz
Delta F (Hz):	2519
Temp (^o C):	40



Test Report S/N: 45461350-R1.4

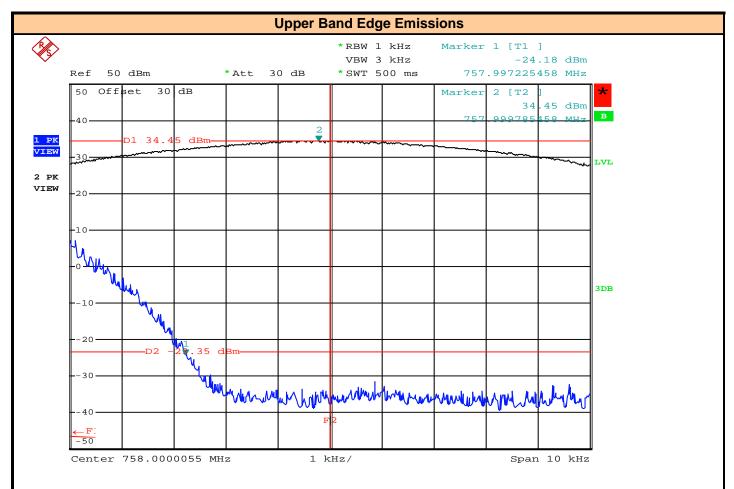


Date: 8.AUG.2016 10:35:11

Plot for Reference Only

Channel Frequency:	757.98125
Bandwidth:	25kHz
Delta F (Hz):	2775
Temp (^o C):	40



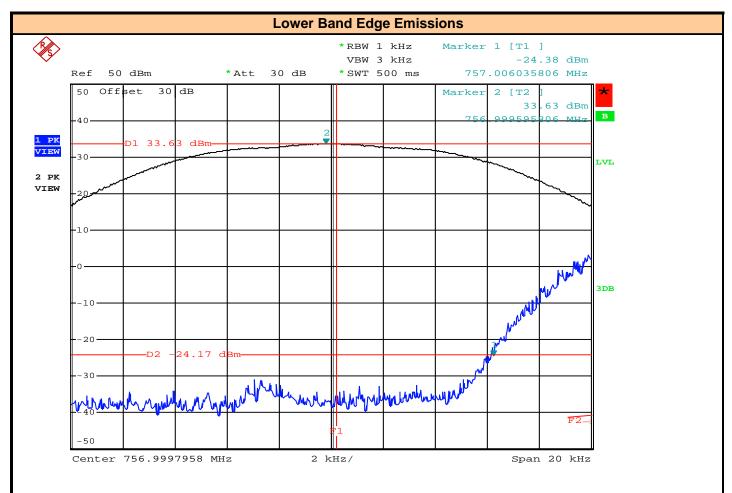


Date: 8.AUG.2016 10:41:42

Plot for Reference Only

Channel Frequency:	757.03750
Bandwidth:	50kHz
Delta F (Hz):	6036
Temp (°C):	40



Test Report S/N: 45461350-R1.4

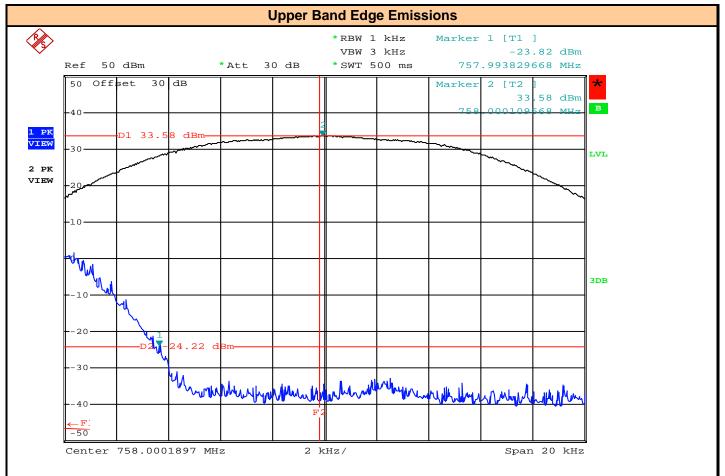


Date: 8.AUG.2016 10:39:16

Plot for Reference Only

Channel Frequency:	757.96250
Bandwidth:	50kHz
Delta F (Hz):	6171
Temp (°C):	40



Test Report S/N: 45461350-R1.4

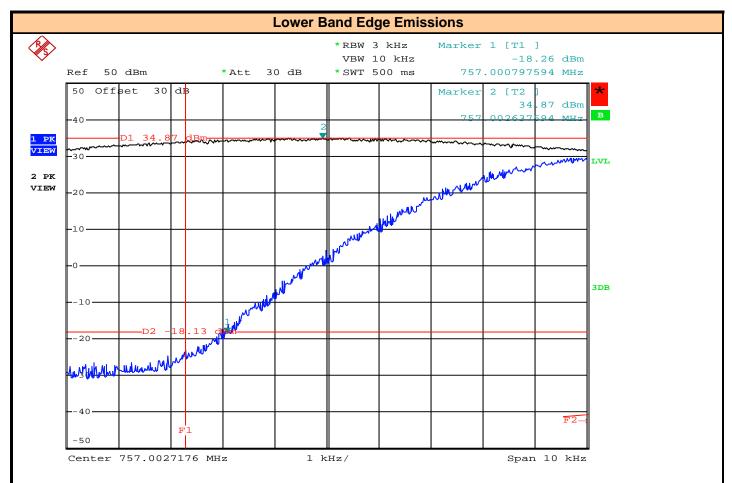


Date: 8.AUG.2016 13:14:12

Plot for Reference Only

Channel Frequency:	757.0125
Bandwidth:	12.5kHz
Delta F (Hz):	797
Temp (°C):	50



Test Report S/N: 45461350-R1.4

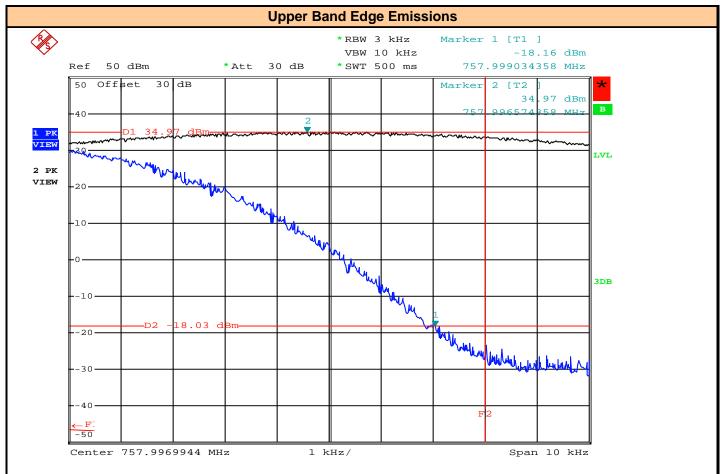


Date: 8.AUG.2016 13:07:21

Plot for Reference Only

Channel Frequency:	757.9875
Bandwidth:	12.5kHz
Delta F (Hz):	966
Temp (°C):	50



Test Report S/N: 45461350-R1.4

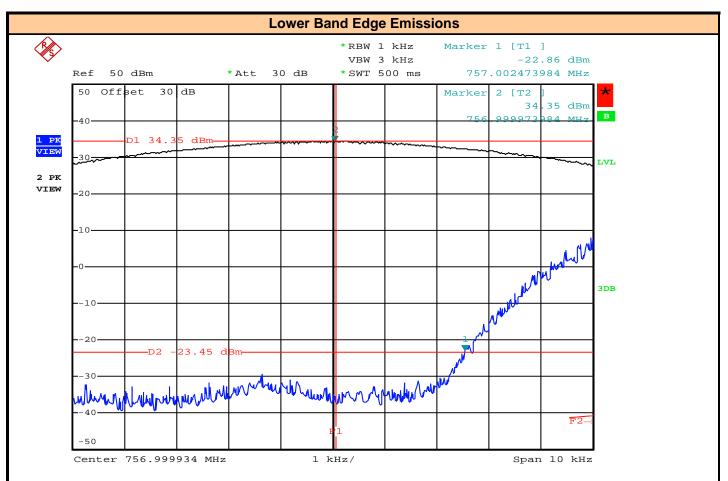


Date: 8.AUG.2016 11:46:51

Plot for Reference Only

Channel Frequency:	757.01875
Bandwidth:	25kHz
Delta F (Hz):	2474
Temp (°C):	50



Test Report S/N: 45461350-R1.4

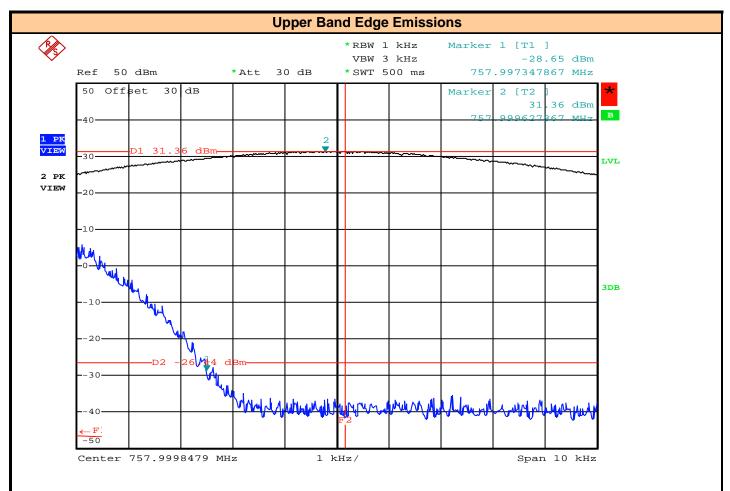


Date: 8.AUG.2016 12:12:06

Plot for Reference Only

Channel Frequency:	757.98125
Bandwidth:	25kHz
Delta F (Hz):	2653
Temp (°C):	50



Test Report S/N: 45461350-R1.4

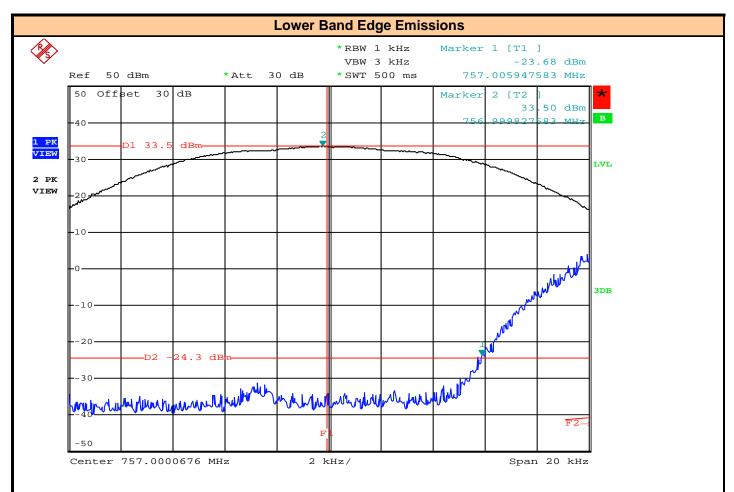


Date: 8.AUG.2016 11:14:07

Plot for Reference Only

Channel Frequency:	757.03750
Bandwidth:	50kHz
Delta F (Hz):	5947
Temp (°C):	50



Test Report S/N: 45461350-R1.4

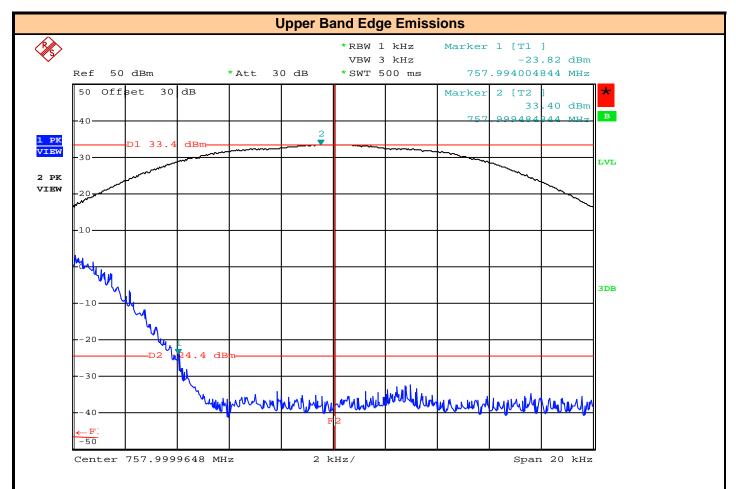


Date: 8.AUG.2016 11:17:42

Plot for Reference Only

Channel Frequency:	757.96250
Bandwidth:	50kHz
Delta F (Hz):	5996
Temp (°C):	50



Test Report S/N: 45461350-R1.4

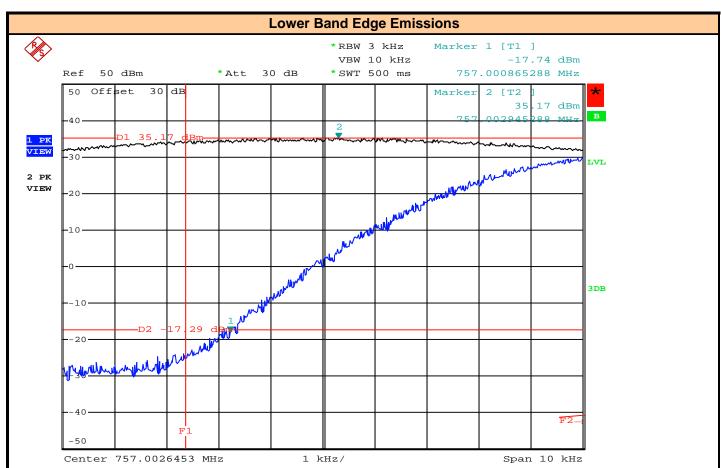


Date: 7.AUG.2016 18:03:19

Plot for Reference Only

Channel Frequency:	757.0125
Bandwidth:	12.5kHz
Delta F (Hz):	865
Temp (°C):	20
Supply Voltage 10VDC:	10



Test Report S/N: 45461350-R1.4

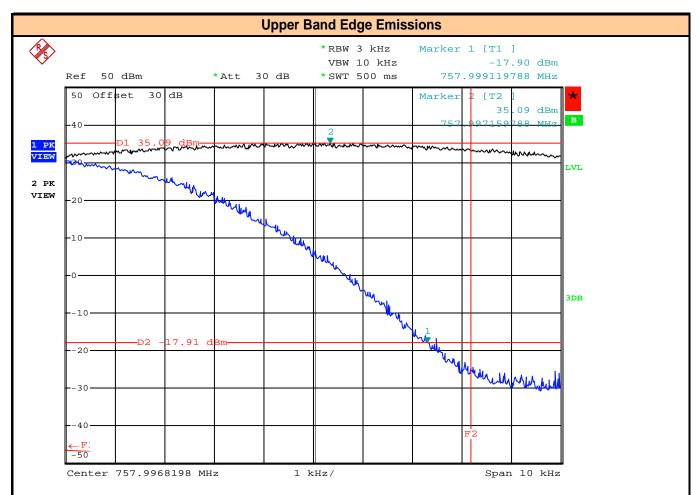


Date: 7.AUG.2016 18:05:59

Plot for Reference Only

Channel Frequency:	757.9875
Bandwidth:	12.5kHz
Delta F (Hz):	881
Temp (^o C):	20
Supply Voltage 10VDC:	10

Test Report S/N: 45461350-R1.4

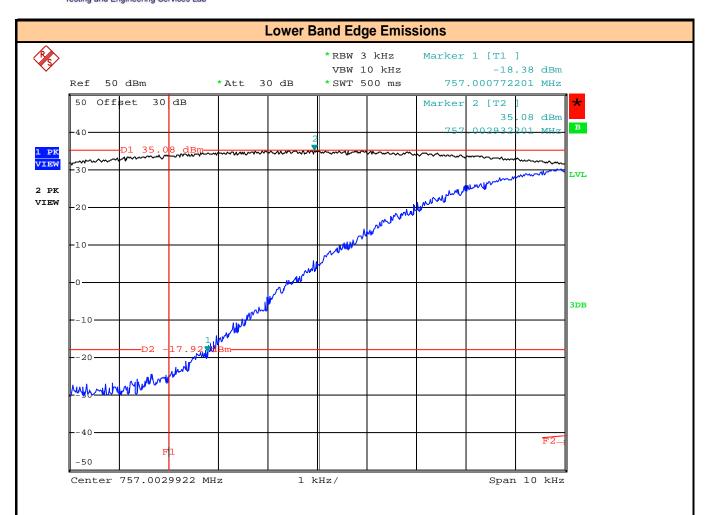


Date: 7.AUG.2016 18:15:11

Plot for Reference Only

Channel Frequency:	757.01875
Bandwidth:	25kHz
Delta F (Hz):	772
Temp (^o C):	20
Supply Voltage (VDC):	34.5



Test Report S/N: 45461350-R1.4

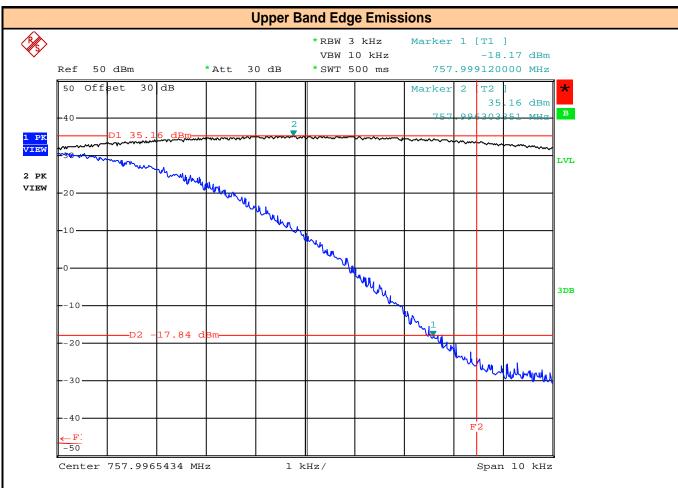


Date: 7.AUG.2016 18:10:04

Plot for Reference Only

Channel Frequency:	757.98125
Bandwidth:	25kHz
Delta F (Hz):	880
Temp (^o C):	20
Supply Voltage (VDC):	34.5



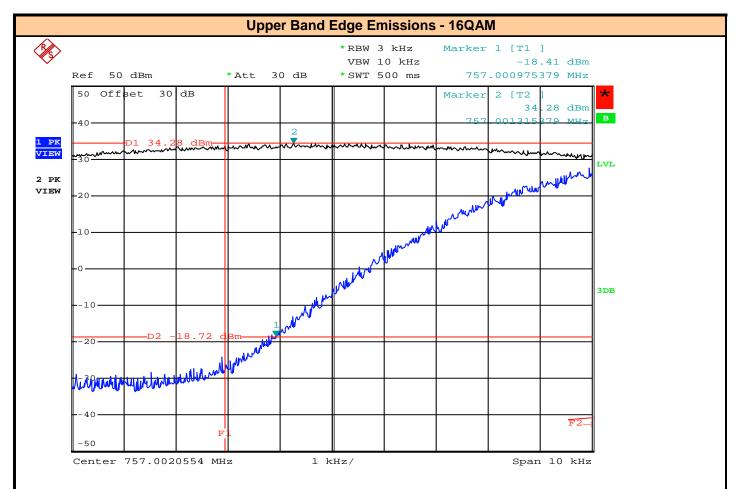


Date: 8.AUG.2016 13:16:25

Plot for Reference Only

Channel Frequency:	757.0125
Bandwidth:	12.5kHz
Delta F (Hz):	975
Temp (°C):	50



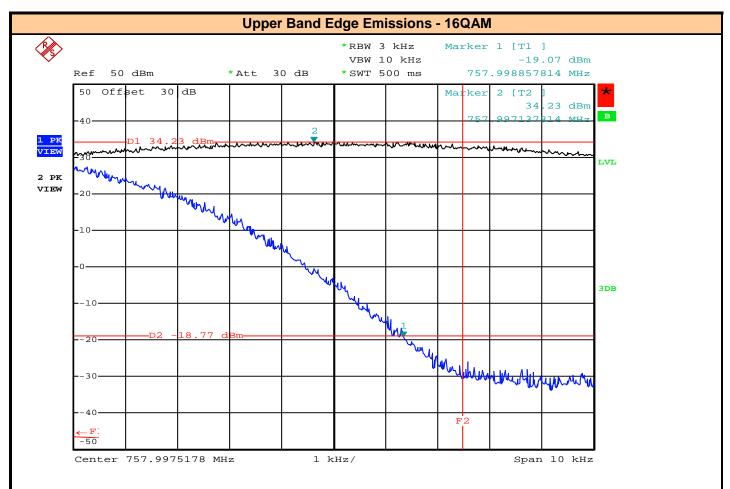


Date: 8.AUG.2016 13:09:28

Plot for Reference Only

Channel Frequency:	757.9875
Bandwidth:	12.5kHz
Delta F (Hz):	1142
Temp (°C):	50



Test Report S/N: 45461350-R1.4

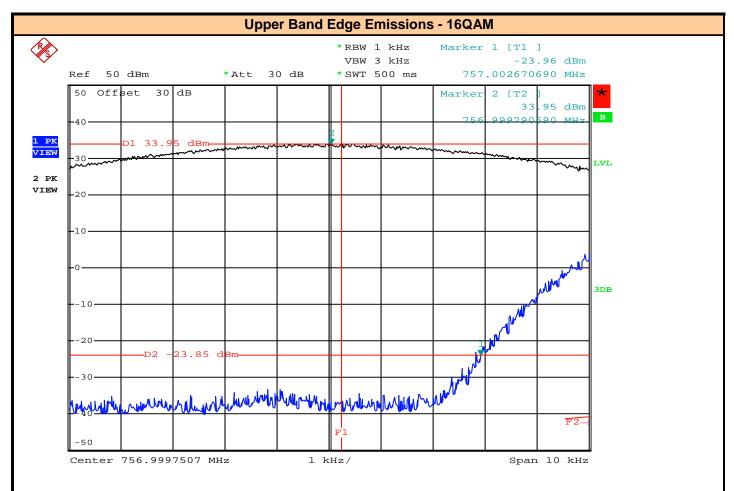


Date: 8.AUG.2016 11:42:56

Plot for Reference Only

Channel Frequency:	757.01875
Bandwidth:	25kHz
Delta F (Hz):	2671
Temp (°C):	50



Test Report S/N: 45461350-R1.4

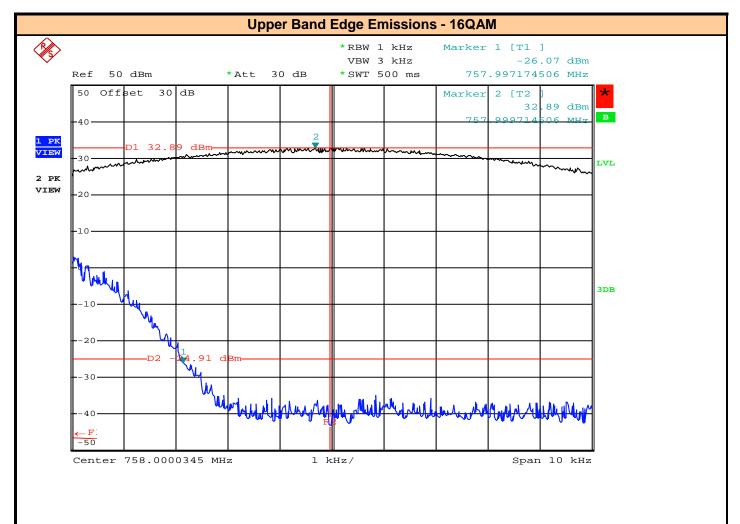


Date: 8.AUG.2016 12:08:28

Plot for Reference Only

Channel Frequency:	757.98125
Bandwidth:	25kHz
Delta F (Hz):	2826
Temp (°C):	50

Test Report S/N: 45461350-R1.4

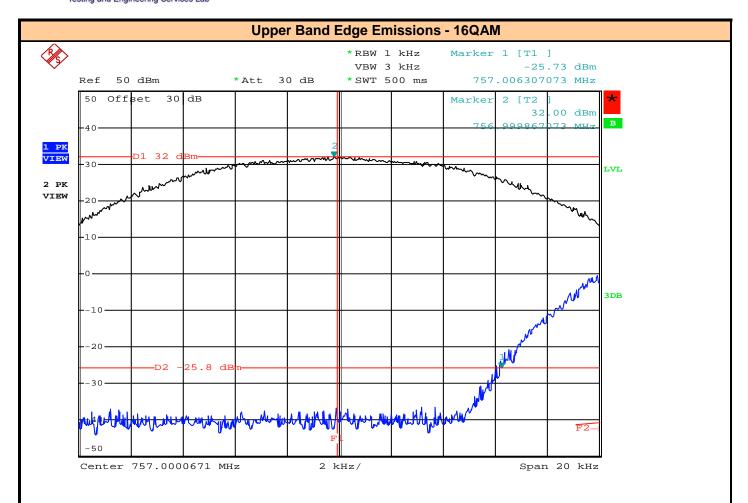


Date: 8.AUG.2016 11:27:18

Plot for Reference Only

Channel Frequency:	757.03750
Bandwidth:	50kHz
Delta F (Hz):	6307
Temp (°C):	50



Test Report S/N: 45461350-R1.4

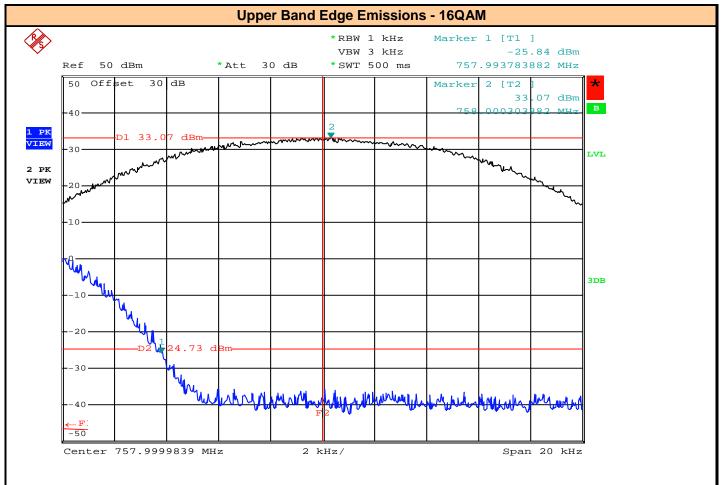


Date: 8.AUG.2016 11:24:10

Plot for Reference Only

Channel Frequency:	757.96250
Bandwidth:	50kHz
Delta F (Hz):	6216
Temp (°C):	50



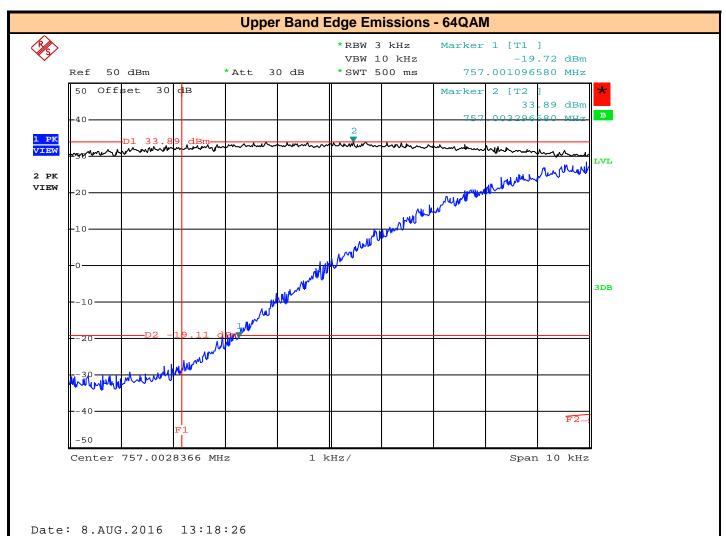

Plot for Reference Only

Channel Frequency:	757.0125
Bandwidth:	12.5kHz
Delta F (Hz):	1097
Temp (°C):	50



Test Report S/N: 45461350-R1.4




Plot for Reference Only

Channel Frequency:	757.9875
Bandwidth:	12.5kHz
Delta F (Hz):	1232
Temp (^o C):	50



Test Report S/N: 45461350-R1.4

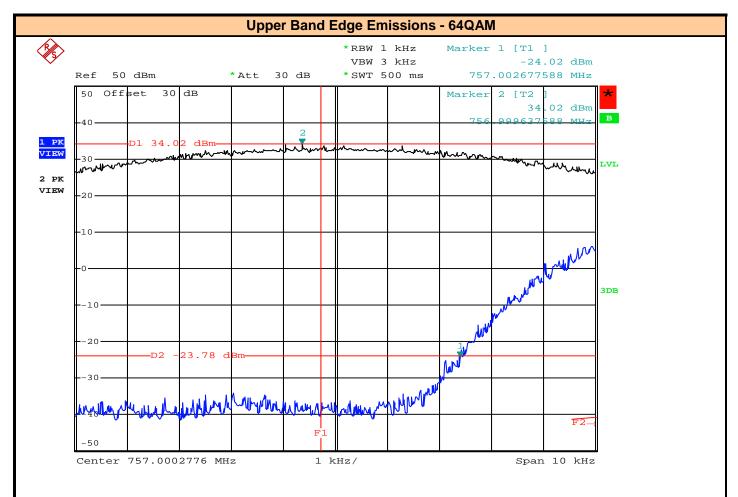


Date: 8.AUG.2016 12:05:38

Plot for Reference Only

Channel Frequency:	757.01875
Bandwidth:	25kHz
Delta F (Hz):	2677
Temp (^o C):	50



Test Report S/N: 45461350-R1.4

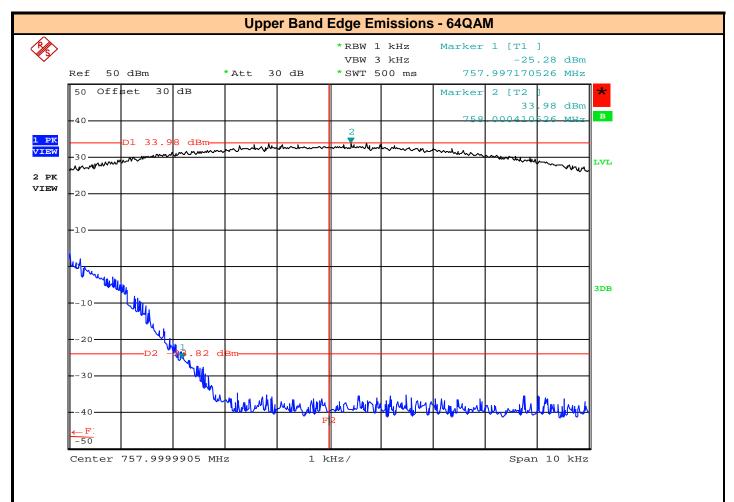


Date: 8.AUG.2016 11:36:49

Plot for Reference Only

Channel Frequency:	757.98125
Bandwidth:	25kHz
Delta F (Hz):	2830
Temp (^o C):	50



Test Report S/N: 45461350-R1.4

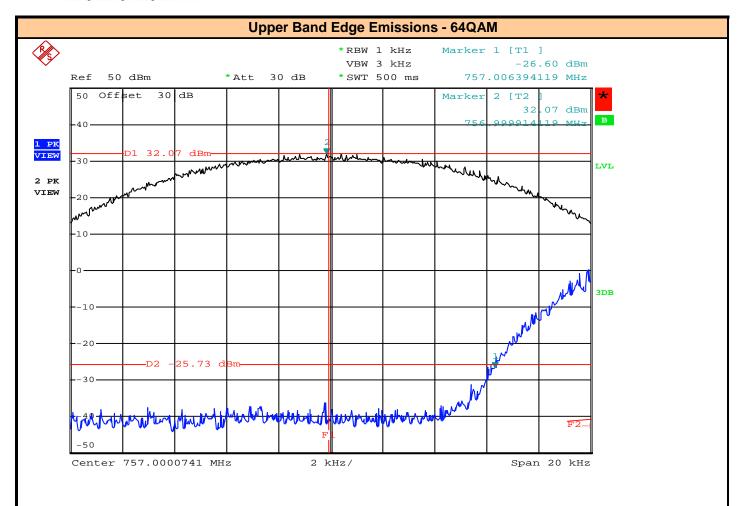


Date: 8.AUG.2016 11:29:56

Plot for Reference Only

Channel Frequency:	757.03750
Bandwidth:	50kHz
Delta F (Hz):	6394
Temp (°C):	50



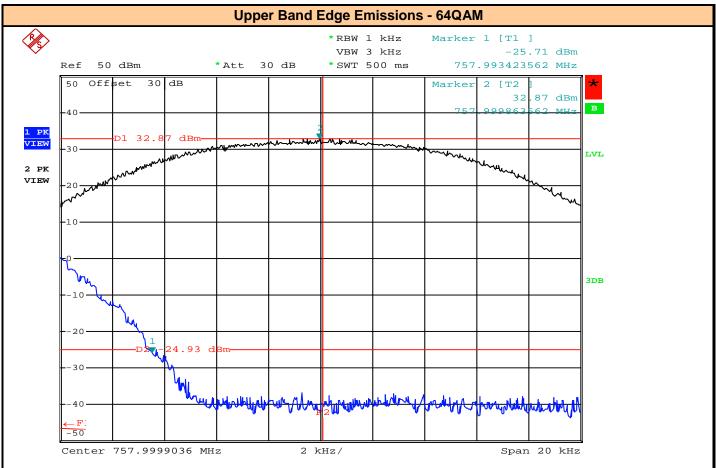



Date: 8.AUG.2016 11:32:21

Plot for Reference Only

Channel Frequency:	757.96250
Bandwidth:	50kHz
Delta F (Hz):	6577
Temp (^o C):	50





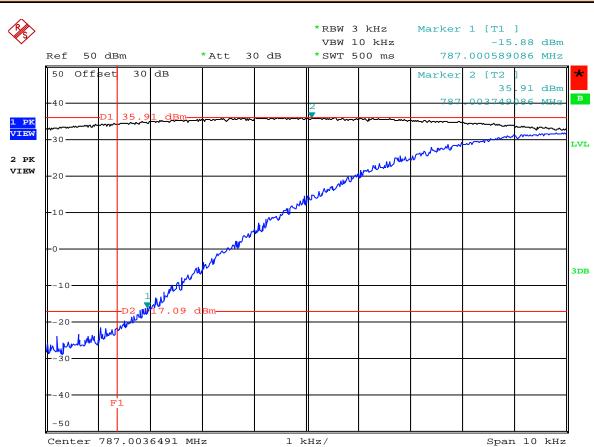

Date: 5.AUG.2016 11:45:22


Plot for Reference Only

Channel Frequency:	787.0125
Bandwidth:	12.5kHz
Delta F (Hz):	589
Temp (°C):	-40



Test Report S/N: 45461350-R1.4

Upper Band Edge Emissions

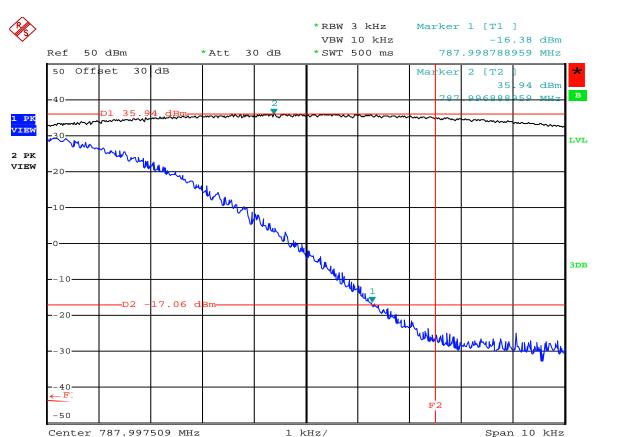


Date: 5.AUG.2016 11:52:53

Plot for Reference Only

Channel Frequency:	787.9875
Bandwidth:	12.5kHz
Delta F (Hz):	1211
Temp (°C):	-40



Test Report S/N: 45461350-R1.4

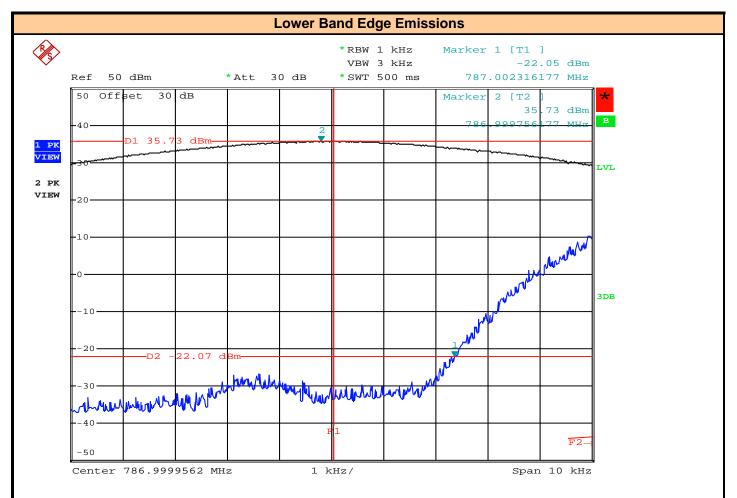


Date: 5.AUG.2016 12:20:15

Plot for Reference Only

Channel Frequency:	787.01875
Bandwidth:	25kHz
Delta F (Hz):	2316
Temp (°C):	-40



Test Report S/N: 45461350-R1.4

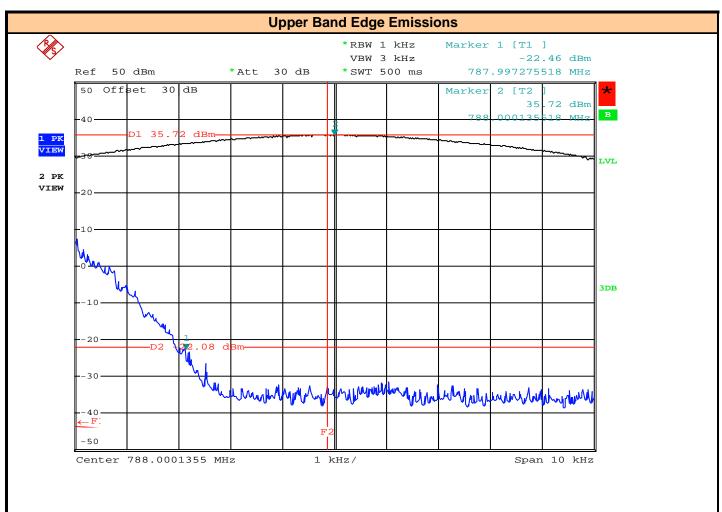


Date: 5.AUG.2016 12:16:38

Plot for Reference Only

Channel Frequency:	787.98125
Bandwidth:	25kHz
Delta F (Hz):	2725
Temp (°C):	-40



Test Report S/N: 45461350-R1.4

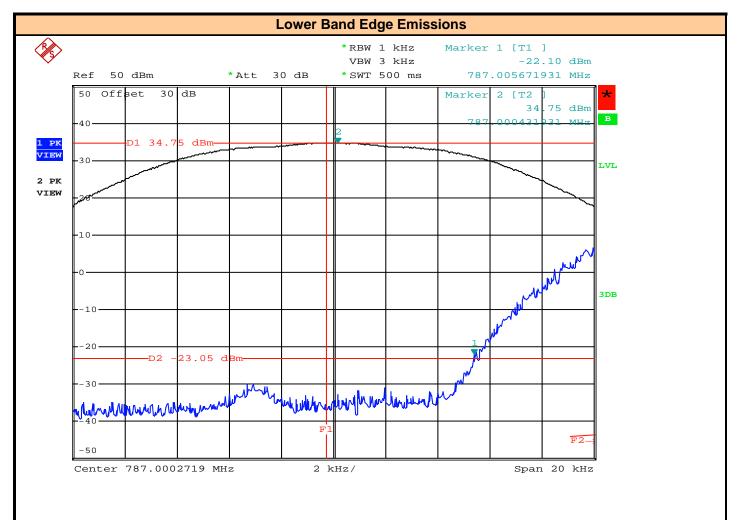


Date: 5.AUG.2016 12:25:56

Plot for Reference Only

Channel Frequency:	787.03750
Bandwidth:	50kHz
Delta F (Hz):	5672
Temp (°C):	-40




Test Report S/N: 45461350-R1.4

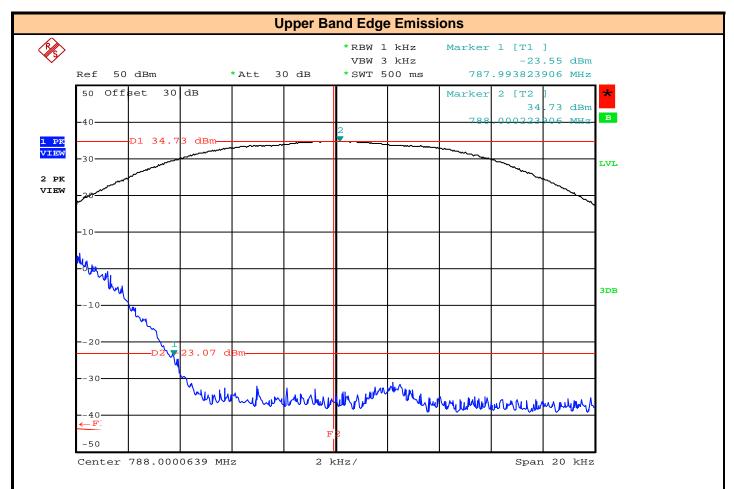

Date: 5.AUG.2016 12:29:26

Plot for Reference Only

Channel Frequency:	787.96250
Bandwidth:	50kHz
Delta F (Hz):	6177
Temp (°C):	-40





		Erogueres	Frequency		omneret		
			tability weas	urements (T			
		gned	Assigned		isplacement	Devi	ation*
Temp	Lower	Frequency		from Band			l
	Band Edge	Upper Band Edge	Bandwidth	Lower Band Edge	Upper	Lower	Upper
(°C)	(MHz)	(MHz)	(kHz)	(Hz)	Band Edge (Hz)	(Hz)	(Hz)
-40	757.01250	757.98750	12.5	540	1119	199	-224
-30	757.01250	757.98750	12.5	810	921	-71	-224
-20	757.01250	757.98750	12.5	967	803	-228	92
-10	757.01250	757.98750	12.5	701	986	38	-91
0	757.01250	757.98750	12.5	701	1018	19	-123
10		757.98750	12.5	968	831	-229	64
	757.01250					0	0
20	757.01250	757.98750	12.5	739	895 981	25	-86
30	757.01250	757.98750	12.5	714			
40	757.01250	757.98750	12.5	657	1024	-58	-129 -71
50	757.01250	757.98750	12.5	797	966	-00	-/ 1
		*Maximum D	eviation of d _{BE} l	Referenced to d	_{BE} @ 20 ⁰ C (Hz):	199	92
					Limit (Hz):	739	895
					Result:	Com	plies
-40	757.01875	757.98125	25.0	2336	2810	182	-185
-30	757.01875	757.98125	25.0	2475	2620	43	5
-20	757.01875	757.98125	25.0	2609	2472	-91	153
-10	757.01875	757.98125	25.0	2463	2683	55	-58
0	757.01875	757.98125	25.0	2548	2557	-30	68
10	757.01875	757.98125	25.0	2617	2579	-99	46
20	757.01875	757.98125	25.0	2518	2625	0	0
30	757.01875	757.98125	25.0	2428	2729	90	-104
40	757.01875	757.98125	25.0	2519	2775	-1	-150
50	757.01875	757.98125	25.0	2474	2653	44	-28
		*Maximum D	eviation of dee l	Referenced to d	n∈ @ 20 ⁰ C (Hz):	182	153
		maximam 5	oriation of age	10.0.0.0.000	Limit (Hz):	2518	2625
					Result:	Com	plies
-40	757.03750	757.96250	50.0	5790	6311	235	-251
-30	757.03750	757.96250	50.0	6007	6125	18	-65
-20	757.03750	757.96250	50.0	6085	6157	-60	-97
-10	757.03750	757.96250	50.0	5932	6063	93	-3
0	757.03750	757.96250	50.0	5930	6076	95	-16
10	757.03750	757.96250	50.0	5883	6185	142	-125
20	757.03750	757.96250	50.0	6025	6060	0	0
30	757.03750	757.96250	50.0	6022	6182	3	-122
40	757.03750	757.96250	50.0	6036	6171	-11	-111
50	757.03750	757.96250	50.0	5947	5996	78	64
		*Maximum D	eviation of d _{BE} l	Referenced to d	_{BE} @ 20°C (Hz): Limit (Hz):	235 6025	64 6060
					1 1m1+ (H71-	(L'11') [



Test Report S/N: **45461350-R1.4**

		Fred	uency Stabil	ity Measure	ments (Volta	ge)		
		Assigned Frequency		Assigned	Absolute Displacement from Band Edge [d _{BE}]		Deviation*	
Voltage	Temp	Lower Band Edge	Upper Band Edge	Bandwidth	Lower Band Edge	Upper Band Edge	Lower	Upper
(VDC)	(°C)	(MHz)	(MHz)	(kHz)	(Hz)	(Hz)	(Hz)	(Hz)
34.5(115%)	20	757.01250	757.98750	12.5	772	880	-33	15
20(100%)	20	757.01250	757.98750	12.5	739	895	0	0
10(-)	20	757.01250	757.98750	12.5	865	881	-126	14
			*Maximum De	viation of d _{BE} R	eferenced to de	_{BE} @ 200C (Hz):	0	15
						Limit (Hz):	739	895
						Result:	Com	plies

	Frequency Stability Measurements (Verification)							
Band	David Town		Assigned Frequency		Absolute Displacement from Band Edge [d _{BE}]		Deviation*	
Danu	Temp	Lower Band Edge	Upper Band Edge	Bandwidth	Lower Band Edge	Upper Band Edge	Lower	Upper
(MHz)	(°C)	(MHz)	(MHz)	(kHz)	(Hz)	(Hz)	(Hz)	(Hz)
787	-40	787.01250	787.98750	12.5	589	1211	150	-316
787	-40	787.01875	787.98125	25.0	2316	2725	202	-100
787	-40	787.03750	787.96250	50.0	5672	6177	353	-117
*Maximum Deviation of d _{BE} Referenced to d _{BE} @ 20OC (Hz):					353	-100		

						Result:	Com	olies
	Frequency Stability Measurements (Modulation)							
_		Assigned Frequency		Assigned	Absolute Displacement from Band Edge [d _{BE}]		Deviation*	
Modulation	Temp	Lower Band Edge	Upper Band Edge	Bandwidth	Lower Band Edge	Upper Band Edge	Lower	Upper
	(°C)	(MHz)	(MHz)	(kHz)	(Hz)	(Hz)	(Hz)	(Hz)
16QAM	50	757.01250	757.98750	12.5	975	1142	-236	-247
16QAM	50	757.01875	757.98125	25.0	2671	2826	-153	-201
16QAM	50	757.03750	757.96250	50.0	6307	6216	-282	-156
64QAM	50	757.01250	757.98750	12.5	1097	1232	-358	-337
64QAM	50	757.01875	757.98125	25.0	2677	2830	-159	-205
64QAM	50	757.03750	757.96250	50.0	6394	6577	-369	-517
	*Maximum Deviation of d _{BE} Referenced to d _{BE} @ 20OC (Hz):						-159	-205
						Result:	Com	olies



Test Report S/N: **45461350-R1.4**

APPENDIX I - Equipment List and Calibration

Equipme	ent List					
Asset Number	Manufacturer	Model Number	Serial Number	Description	Last Calibrated	Calibration Interval
00003	HP	53181A	3736A05175	Frequency Counter	28 Apr 2014	Triennial
00034	ETS	3115	6267	Double Ridged Guide Horn	02 Dec 2015	Triennial
00047	HP	85685A	2837A00826	RF Preselector	30 Apr 2014	Triennial
00049	HP	85650A	2043A00162	Quasi-peak Adapter	30 Apr 2014	Triennial
00050	Chase	CBL-6111A	1607	Bilog Antenna	25 Apr 2014	Triennial
00051	HP	8566B	2747A05510	Spectrum Analyzer	30 Apr 2014	Triennial
00071	EMCO	2090	9912-1484	Multi-Device Controller	n/a	n/a
00072	EMCO	2075	0001-2277	Mini-mast	n/a	n/a
00073	EMCO	2080	0002-1002	Turn Table	n/a	n/a
00121	HP	E3611A	KR83015294	Power Supply	COU	n/a
00129	ESPEC	ECT-2	0510154-B	Environmental Chamber	CNR	n/a
00234	VWR	61161-378	140320430	Temp/Humidity Meter	New	Triennial
00241	R&S	FSU40	100500	Spectrum Analyzer	23 Apr 2015	Triennial
00265	Miteq	JS32-00104000-58-5P	1939850	Microwave L/N Amplifier	COU	n/a
00275	Coaxis	LMR400	n/a	25m Cable	COU	n/a
00276	Coaxis	LMR400	n/a	4m Cable	COU	n/a
00278	TILE	34G3	n/a	TILE Test Software	NCR	n/a

CNR: Calibration Not Required COU: Calibrate On Use



APPENDIX J - Measurement Uncertainty

	CISPR 16-4 Measurement Uncertainty (U _{LAB})						
	This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence interval using a coverage factor of k=2						
	30MHz - 200MHz						
	$U_{LAB} = 5.14dB$ $U_{CISPR} = 6.3dB$						
	200MHz - 1000MHz						
	$U_{LAB} = 5.90 dB$ $U_{CISPR} = 6.3 dB$						
	1GHz - 6GHz						
	$U_{LAB} = 4.80 dB$ $U_{CISPR} = 5.2 dB$						
	6GHz - 18GHz						
	$U_{LAB} = 5.1 dB$ $U_{CISPR} = 5.5 dB$						
	If the calculated uncertainty \mathbf{U}_{lab} is $less$ than \mathbf{U}_{CISPR} then:						
1	Compliance is deemed to occur if NO measured disturbance exceeds the disturbance limit						
2	Non-Compliance is deemed to occur if ANY measured disturbance EXCEEDS the disturbance limit						
	If the calculated uncertainty \mathbf{U}_{lab} is $greater$ than \mathbf{U}_{CISPR} then:						
3	Compliance is deemed to occur if NO measured disturbance, increased by (U _{lab} - U _{CISPR}), exceeds the disturbance limit						
4	Non-Compliance is deemed to occur if ANY measured disturbance, increased by (U _{lab} - U _{CISPR}), EXCEEDS the disturbance limit						