

Test Laboratory: Compliance Certification Services Inc.

## **D835V2-SN 4d015-Head**

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d015**

Communication System: CW 835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 835 \text{ MHz}$ ;  $\sigma = 0.923 \text{ mho/m}$ ;  $\epsilon_r = 42.2$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(10.57, 10.57, 10.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**d=10mm, Pin=250mW/Area Scan (7x7x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.84 mW/g

**d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 52.8 V/m; Power Drift = -0.034 dB



Peak SAR (extrapolated) = 3.64 W/kg

**SAR(1 g) = 2.37 mW/g; SAR(10 g) = 1.53 mW/g**

Maximum value of SAR (measured) = 2.91 mW/g

**d=10mm, Pin=250mW/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 1.99 mW/g

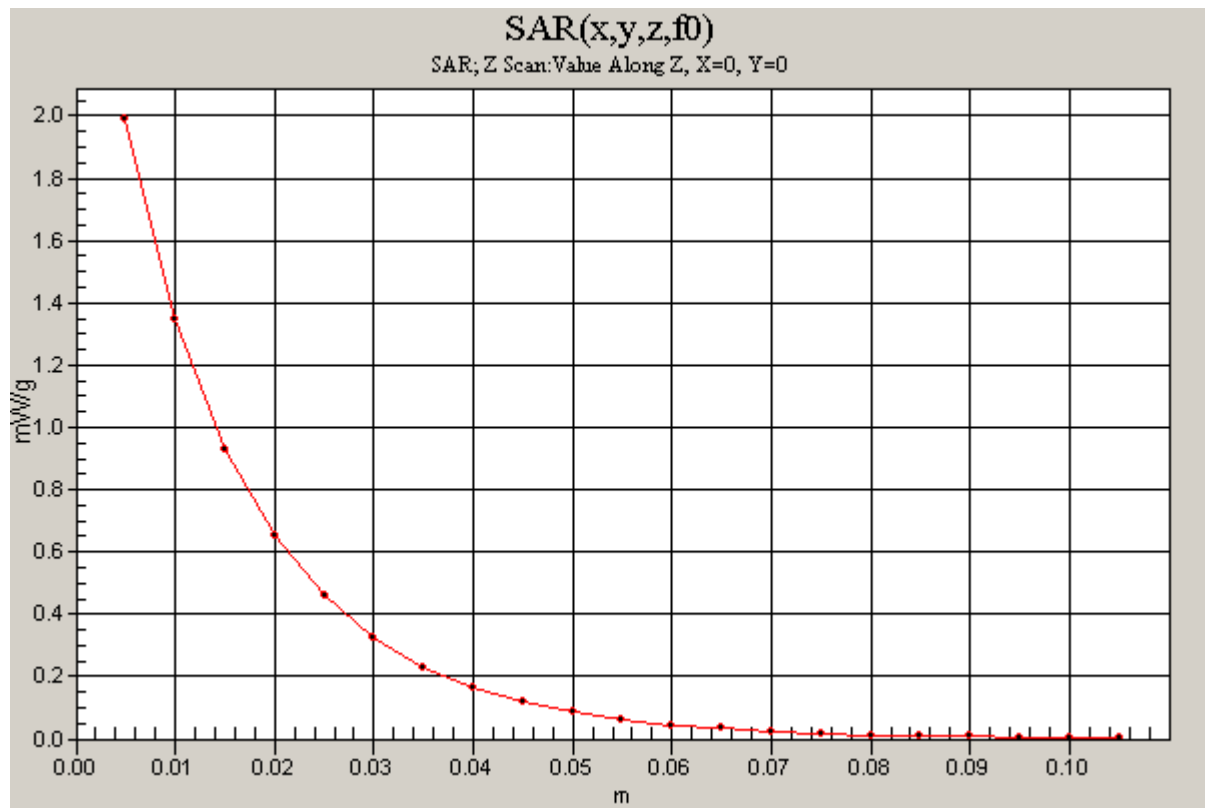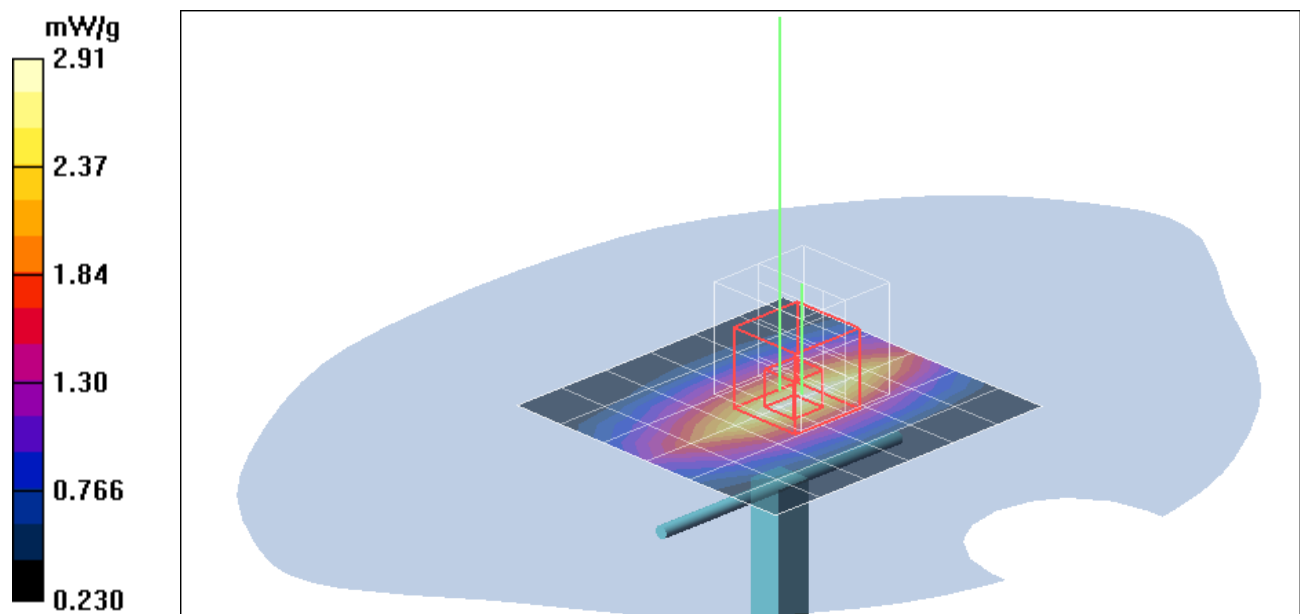

Test Laboratory: Compliance Certification Services Inc.

## **D835V2-SN 4d015-Body**

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d015**

Communication System: CW 835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 835 \text{ MHz}$ ;  $\sigma = 0.939 \text{ mho/m}$ ;  $\epsilon_r = 54.1$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012 W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(10.96, 10.96, 10.96);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**d=10mm, Pin=250mW/Area Scan (7x7x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 3.11 mW/g

**d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 54.3 V/m; Power Drift = -0.016 dB



Peak SAR (extrapolated) = 3.97 W/kg

**SAR(1 g) = 2.55 mW/g; SAR(10 g) = 1.66 mW/g**

Maximum value of SAR (measured) = 3.18 mW/g

**d=10mm, Pin=250mW/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 2.17 mW/g

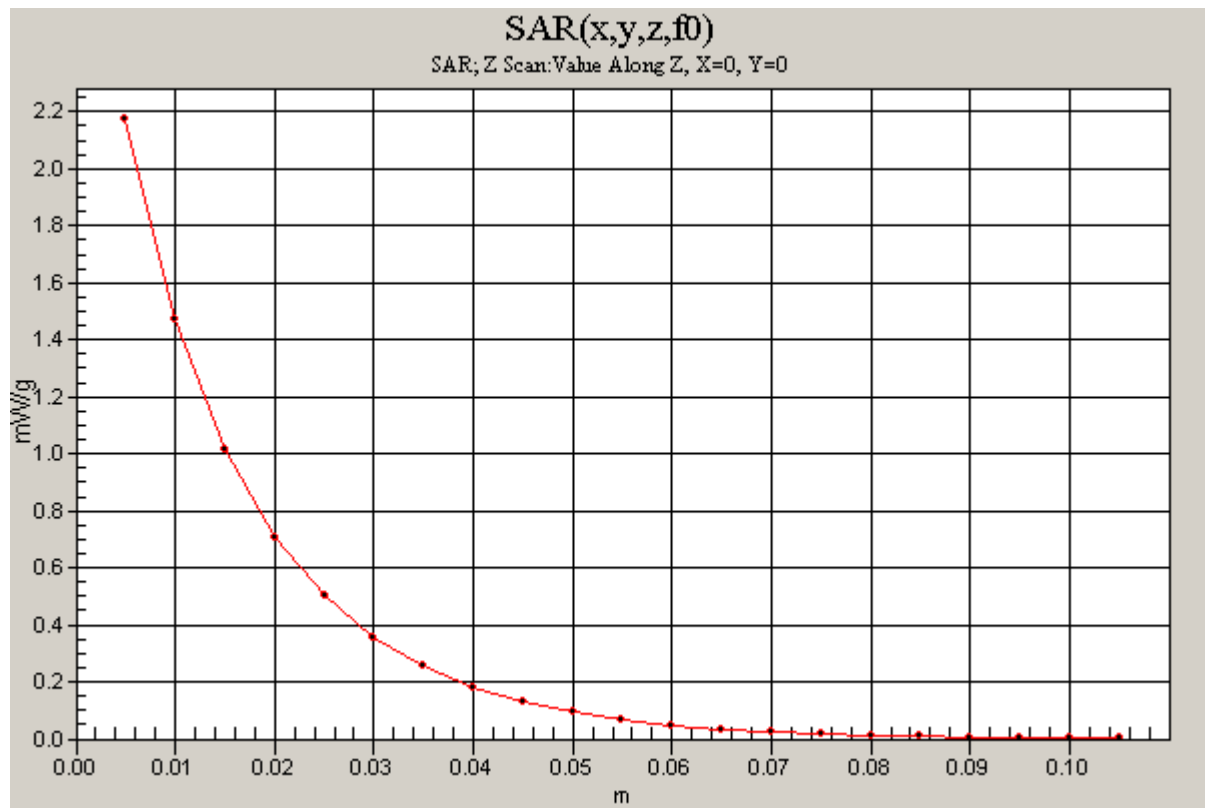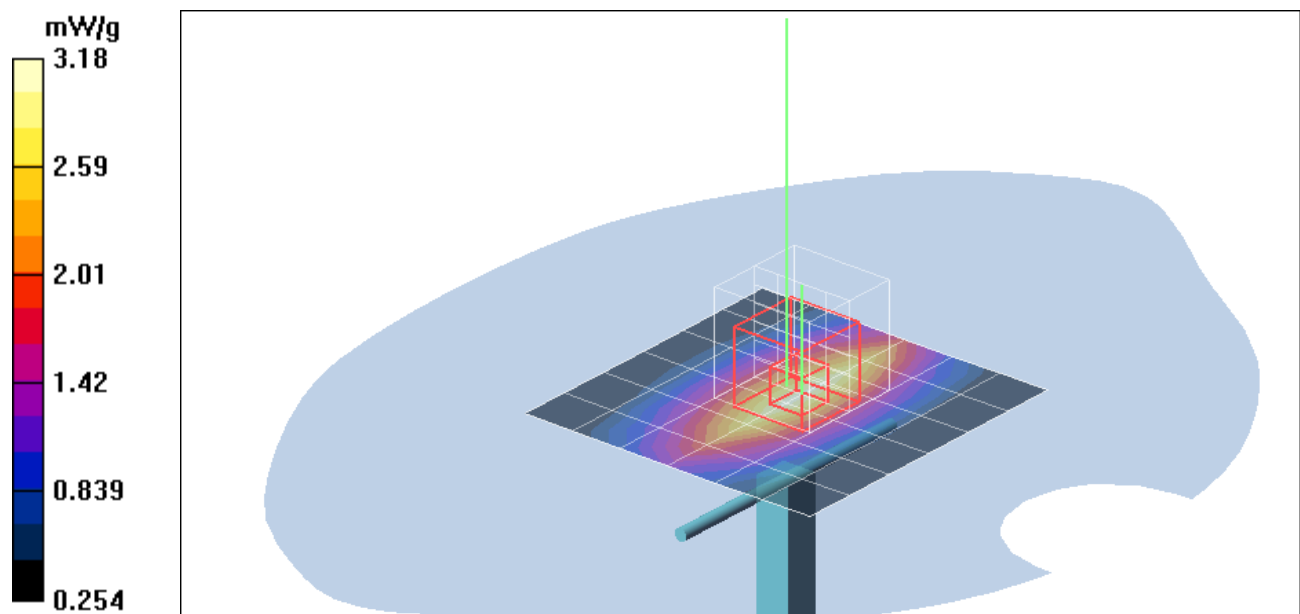

Test Laboratory: Compliance Certification Services Inc.

## **D1900V2 SN-5d056 Head**

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d056**

Communication System: CW1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1900$  MHz;  $\sigma = 1.45$  mho/m;  $\epsilon_r = 39.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Air Temperature: 24.5 deg C; Liquid Temperature: 23.5 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(8.52, 8.52, 8.52);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Pin=250mW,d=10mm/Area Scan (6x6x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 9.03 mW/g

**Pin=250mW,d=10mm/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 94.8 V/m; Power Drift = -0.052 dB



Peak SAR (extrapolated) = 17.9 W/kg

**SAR(1 g) = 9.52 mW/g; SAR(10 g) = 4.95 mW/g**

Maximum value of SAR (measured) = 13.1 mW/g

**Pin=250mW,d=10mm/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 13.6 mW/g

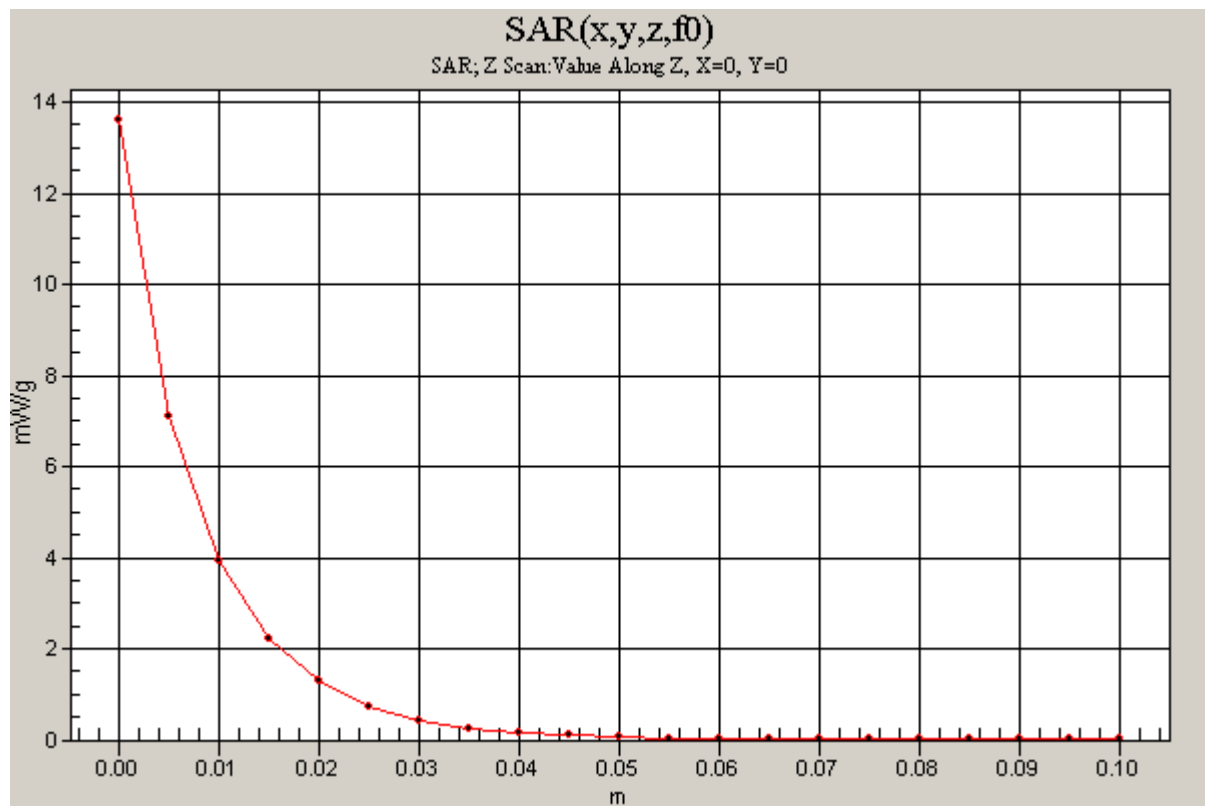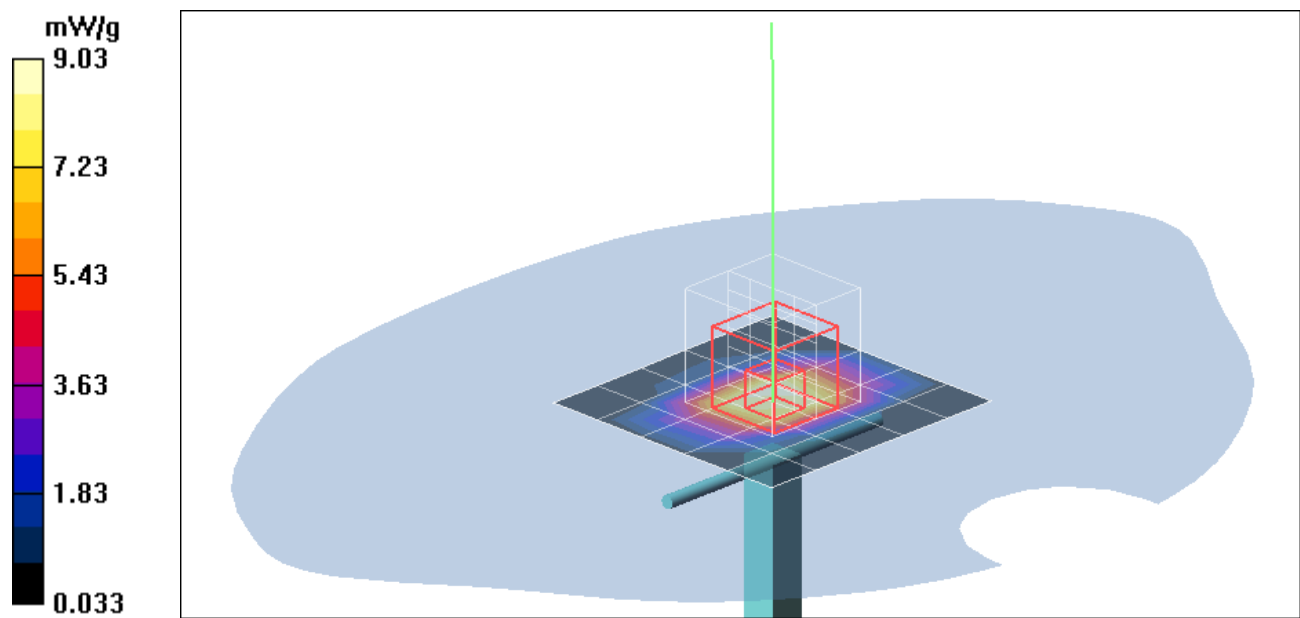

Test Laboratory: Compliance Certification Services Inc.

## **D1900V2 SN-5d056 Body**

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d056**

Communication System: CW1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.50 \text{ mho/m}$ ;  $\epsilon_r = 51.4$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Air Temperature: 24.4 deg C; Liquid Temperature: 23.4 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(8.43, 8.43, 8.43);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Pin=250mW,d=10mm/Area Scan (6x6x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 8.29 mW/g

**Pin=250mW,d=10mm/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 93.1 V/m; Power Drift = -0.082 dB

Peak SAR (extrapolated) = 16.2 W/kg

**SAR(1 g) = 9.32 mW/g; SAR(10 g) = 4.82 mW/g**

Maximum value of SAR (measured) = 12.6 mW/g

**Pin=250mW,d=10mm/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 13.6 mW/g

