



MATERIAL: Topcoated silver gloss polyester thermal transfer label stock

FINISH: Coated, gloss, 1-color pre-print, black reverse imaging

ADHESIVE: High-strength permanent acrylic

GRAPHICS: Use graphic file 150-00100-DWG Label Certification, ER-SF1, LTE, Cellular.eps

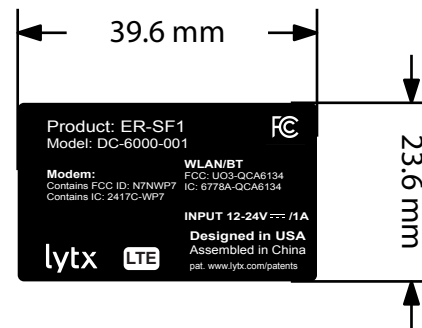

ITEM NO.	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION	QTY REQD
		PARTS LIST	 Label Certification, ER-SF1, LTE, Cellular	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM		CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE		
TOLERANCES ARE:		APPROVALS	DATE	
DECIMALS		DRAWN	SRS	01/06/17
>0.5 TO <=40 ±0.1MM		CHECKED		
>40 TO <=80 ±0.2MM		RESP ENG		01/06/17
>80 TO <=120 ±0.3MM		MFG ENG		
ANGLES ±0.5 °		QUAL ENG		
MATERIAL		SIZE		
FINISH		DWG. NO.		A
DO NOT SCALE DRAWING		150-00100-DWG		REV.
		SCALE 1:1		
		CAD FILE: Draw1.SLDRW		
		SHEET 1 OF 1		