

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW POWER, NON-LICENSED TRANSMITTER

Test Report No. : E09OR-008

AGR No. : A099A-129

Applicant : Gaon-Int Co., LTD.

Address : Daelim Bldg., Suite 1501, 592-5, Dohwa1-dong, Nam-gu, Incheon, Korea

Manufacturer : RUIHUA ELECTRONICS FACTORY

Address : Xianxi Industrial Zone, Shatou Village, Changan Town, Dongguan City,
Guangdong Province, China

Type of Equipment : FM Transmitter

FCC ID. : UP4-PG463

Model Name : GWT-150

Multiple Model Name : PG463

Serial number : N/A

Total page of Report : 23 pages (including this page)

Date of Incoming : September 23, 2009


Date of Issuing : October 08, 2009

SUMMARY

The equipment complies with the regulation of *FCC CRF 47 PART 15, SUBPART C, SECTION 15.239*.

This test report contains only the results of a single test of the sample supplied for the examination. It is not a general valid assessment of the features of the respective products of the mass-production.

Prepared by: 
Young-Min, Choi / Asst. Chief Engineer
EMC/RF Center
ONETECH Corp.

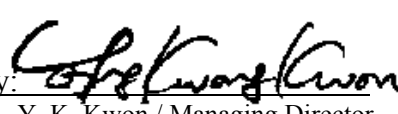Reviewed by: 
Y. K. Kwon / Managing Director
EMC/RF Center
ONETECH Corp.

CONTENTS

Page

1. VERIFICATION OF COMPLIANCE.....	4
2. GENERAL INFORMATION.....	5
2.1 PRODUCT DESCRIPTION.....	5
2.2 MODEL DIFFERENCES.....	5
2.3 RELATED SUBMITTAL(S) / GRANT(S)	5
2.4 TEST SYSTEM DETAILS.....	5
2.5 TEST METHODOLOGY.....	6
2.6 TEST FACILITY.....	6
3. SYSTEM TEST CONFIGURATION.....	6
3.1 JUSTIFICATION.....	6
3.2 EUT EXERCISE SOFTWARE.....	6
3.3 CABLE DESCRIPTION	6
3.4 EQUIPMENT MODIFICATIONS	6
3.5 CONFIGURATION OF TEST SYSTEM.....	7
3.6 ANTENNA REQUIREMENT	7
4. PRELIMINARY TEST.....	7
4.1 AC POWER LINE CONDUCTED EMISSION TEST	7
4.2 RADIATED EMISSION TEST	7
5. FINAL RESULT OF MEASUREMENT.....	8
5.1 RADIATED EMISSION TEST (WITHIN THE PERMITTED 200 KHZ BAND).....	8
5.1.1 Operating Condition: DC 12 V.....	8
5.1.2 Operating Condition: DC 1.5 V.....	9
5.2 RADIATED EMISSION TEST (OUTSIDE OF THE SPECIFIED 200 KHZ BAND).....	10
5.2.1 Operating Condition: DC 12 V.....	10
5.2.2 Operating Condition: DC 1.5 V.....	11
5.3 BANDWIDTH OF THE OPERATING FREQUENCY	12
5.3.1 Operating Condition: DC 12 V.....	12
5.3.2 Operating Condition: DC 1.5 V.....	15
5.4 TUNING RANGE OF THE OPERATING FREQUENCY.....	18
5.4.1 Operating Condition: DC 12 V.....	18
5.4.2 Operating Condition: DC 1.5 V.....	20

6. FIELD STRENGTH CALCULATION	22
7. LIST OF TEST EQUIPMENT	23

Revision History

Issue Report No.	Issued Date	Revisions	Effect Section
E09OR-008	October 08, 2009	Initial Release	All

1. VERIFICATION OF COMPLIANCE

-. APPLICANT : Gaon-Int Co., LTD.
-. ADDRESS : Daelim Bldg., Suite 1501, 592-5, Dohwal-dong, Nam-gu, Incheon, Korea
-. CONTACT PERSON : Mr. Taejun, Kim / Director
-. TELEPHONE NO : +82-32-246-1800
-. BRAND NAME : SOUND-ON / AirZone FM Transmitter
-. FCC ID : UP4-PG463
-. MODEL NAME : GWT-150
-. SERIAL NUMBER : N/A
-. DATE : October 08, 2009

DEVICE TYPE	DDX – Part 15 Low Power Communication Device Transmitter
E.U.T. DESCRIPTION	FM Transmitter
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	Charter 7 and 13 of ANSI C63.4: 2003
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SECTION 15.239
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 METER OPEN AREA TEST SITE

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. GENERAL INFORMATION

2.1 Product Description

The Gaon-Int Co., LTD., Model GWT-150 (referred to as the EUT in this report) is a FM Transmitter which threads sound sources such as MP3P, CDP, MDP, PMP, and PDA into radio frequency, allowing the enjoyment of portable audio device music via car audio system or home audio equipment without the need for earphones or headsets. Product specification described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	Plastic
LIST OF EACH OSC. OR CRY. FREQ.(FREQ.>=1 MHz)	7.6 MHz
FREQUENCY RANGE	88.1 MHz ~ 107.9 MHz (range into 100 kHz Step)
USED ANTENNA	Integral Antenna (No Antenna Socket)
NUMBER OF LAYER	2 Layers: Main Board
EXTERNAL CONNECTOR	Audio Input

2.2 Model Differences

-. The following lists consist of the added model and their differences.

Model Name	Differences	Tested
GWT-150	Basic Model	<input checked="" type="checkbox"/>
PG463	This model is identical to basic model except for buyer's request.	<input type="checkbox"/>

Note: 1. Applicant consigns only basic model to test, therefore this test report just guarantees the units, which have been tested.

2. The Applicant/manufacture is responsible for the compliance of all variants.

2.3 Related Submittal(s) / Grant(s)

-. Original submittal only

2.4 Test System Details

The model numbers for all the equipments which were used in the tested system is:

Model	Manufacturer	FCC ID	Description	Connected to
GWT-150	Gaon-Int Co., LTD.	UP4-PG463	FM Transmitter (EUT)	-
ORC-200(B)	ORACOM	DoC	MP3 Player	EUT
N/A	Dyno	N/A	Battery	EUT

2.5 Test Methodology

The radiated testing was performed according to the procedures in chapter 7, 13 of ANSI C63.4: 2003 and performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The open area test site and conducted measurement facilities are located on at 307-51 Daessangryung-ri, Chowol-eup, Gwangju-si, Gyeonggi-do, 464-862, Korea. Description details of test facilities were submitted to the Commission on August 21, 2008. (Registration Number: 340658)

3. SYSTEM TEST CONFIGURATION

3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	N/A	GWT-150_A	N/A

3.2 EUT exercise Software

-. The Model, GWT-150 is included a FM transmitter designed to operate on function in the 88.1 MHz ~ 107.9 MHz. The EUT has an audio input port, so the input ports were connected to MP3 player and than the EUT was transmitted MP3 music files which was saved in MP3 player with maximum audio output level during the test.

3.3 Cable Description

Ports Name	Shielded	Ferrite Bead	Metal Hood	Length (m)	Connected to
Audio In	N	EUT END	BOTH END	0.24	MP3 Player

3.4 Equipment Modifications

-. None

3.5 Configuration of Test System

- Line Conducted Test:** It is not need to test this requirement, because the EUT shall be operated by car battery.
- Radiated Emission Test:** Preliminary radiated emissions test were conducted using the procedure in ANSI C63.4: 2003 8.3.1.1 and 13.1.4.1 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter open area test site.

Occupied Bandwidth Measurement:

This measurement is performed with the antenna located close enough to give a full-scale deflection of the modulated carrier on the spectrum analyzer. The EUT has an audio input port, so the input ports were connected to MP3 player and than the EUT was transmitted MP3 music files which was saved in MP3 player with maximum audio output level during the test.

3.6 Antenna Requirement

According to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

FM transmitter antenna of the EUT is included in a ground of earphone line, no consideration of replacement by the user.

4. PRELIMINARY TEST

4.1 AC Power line Conducted Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
It is not need to test this requirement, because the EUT shall be operated by car battery.	

4.2 Radiated Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	Supplied Voltage	The Worse operating condition (Please check one only)
Transmit the RF Signal continuously	DC 12 V	X
	DC 1.5 V	X

5. FINAL RESULT OF MEASUREMENT

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level

5.1 Radiated Emission Test (Within the permitted 200 kHz band)

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

5.1.1 Operating Condition: DC 12 V

Humidity Level : 45 %R.H.

Temperature: 24 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.239 (b)

Type of Test : Low Power Communication Device Transmitter

Result : PASSED BY -8.68 dB at 107.90 MHz under average mode

EUT : FM Transmitter

Date: September 30, 2009

Distance : 3 Meter

Radiated Emission			Ant		Angle (°)	Correction Factors		Total	Limit (dBμV/m)	Margin (dB)
Freq. (MHz)	Amp. (dBμV)	Detect Mode	Pol.	Height (m)		Ant. (dBμV/m)	Cable (dB)	Amp. (dBμV/m)		
88.10	30.20	Quasi-Peak	H	3.20	65.0	8.14	2.06	40.40	68.00	-27.60
	28.80	Quasi-Peak	V	1.00	170.0	8.14	2.06	39.00	68.00	-29.00
	29.10	Average	H	3.20	65.0	8.14	2.06	39.30	48.00	-8.70
	27.90	Average	V	1.00	170.0	8.14	2.06	38.10	48.00	-9.90
97.90	26.70	Quasi-Peak	H	3.05	240.0	10.00	2.10	38.80	68.00	-29.20
	25.30	Quasi-Peak	V	1.00	180.0	10.00	2.10	37.40	68.00	-30.60
	22.70	Average	H	3.05	240.0	10.00	2.10	34.80	48.00	-13.20
	21.60	Average	V	1.00	180.0	10.00	2.10	33.70	48.00	-14.30
107.90	28.10	Quasi-Peak	H	2.90	70.0	11.46	2.26	41.82	68.00	-26.18
	17.20	Quasi-Peak	V	1.00	175.0	11.46	2.26	30.92	68.00	-37.08
	25.60	Average	H	2.90	70.0	11.46	2.26	39.32	48.00	-8.68
	24.50	Average	V	1.00	175.0	11.46	2.26	38.22	48.00	-9.78

Radiated Emission Tabulated Data

Tested by: In-Sub, Youn / Project Engineer

5.1.2 Operating Condition: DC 1.5 V

Humidity Level : 45 %R.H. Temperature: 24 °C
Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.239 (b)
Type of Test : Low Power Communication Device Transmitter
Result : PASSED BY -8.80 dB at 88.1 MHz under average mode

EUT : FM Transmitter Date: September 30, 2009
Distance : 3 Meter

Radiated Emission			Ant		Angle (°)	Correction Factors		Total	Limit (dBµV/m)	Margin (dB)
Freq. (MHz)	Amp. (dBµV)	Detect Mode	Pol.	Height (m)		Ant. (dBµV/m)	Cable (dB)	Amp. (dBµV/m)		
88.10	30.00	Quasi-Peak	H	3.10	70.0	8.14	2.06	40.20	68.00	-27.80
	28.70	Quasi-Peak	V	1.00	180.0	8.14	2.06	38.90	68.00	-29.10
	29.00	Average	H	3.10	70.0	8.14	2.06	39.20	48.00	-8.80
	27.40	Average	V	1.00	180.0	8.14	2.06	37.60	48.00	-10.40
97.90	26.10	Quasi-Peak	H	3.00	250.0	10.00	2.10	38.20	68.00	-29.80
	25.00	Quasi-Peak	V	1.00	175.0	10.00	2.10	37.10	68.00	-30.90
	22.40	Average	H	3.00	250.0	10.00	2.10	34.50	48.00	-13.50
	21.40	Average	V	1.00	175.0	10.00	2.10	33.50	48.00	-14.50
107.90	27.90	Quasi-Peak	H	3.00	70.0	11.46	2.26	41.62	68.00	-26.38
	26.80	Quasi-Peak	V	1.00	180.0	11.46	2.26	40.52	68.00	-27.48
	25.40	Average	H	3.00	70.0	11.46	2.26	39.12	48.00	-8.88
	24.20	Average	V	1.00	180.0	11.46	2.26	37.92	48.00	-10.08

Radiated Emission Tabulated Data



Tested by: In-Sub, Youn / Project Engineer

5.2 Radiated Emission Test (Outside of the specified 200 kHz band)

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

5.2.1 Operating Condition: DC 12 V

Humidity Level : 45 %R.H. Temperature: 24 °C
Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.239 (a)
Type of Test : Low Power Communication Device Transmitter
Result : PASSED BY -9.48 dB at 904.72 MHz

EUT : FM Transmitter Date: September 30, 2009
Frequency range : 30 MHz ~ 1 000 MHz
Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)
Distance : 3 Meter
Remark : Other emissions

Radiated Emission		Ant		Angle (°)	Correction Factors		Total Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Freq. (MHz)	Amp. (dBμV)	Pol.	Height (m)		Ant. (dBμV/m)	Cable (dB)			
435.83	6.20	H	3.20	120.00	18.26	4.21	28.67	46.02	-17.35
505.27	7.40	H	3.00	150.00	19.40	4.67	31.47	46.02	-14.55
628.37	6.10	H	1.80	290.00	20.40	5.24	31.74	46.02	-14.28
751.94	5.90	H	2.40	300.00	20.67	5.82	32.39	46.02	-13.63
845.46	6.90	H	2.60	170.00	22.66	6.75	36.31	46.02	-9.71
904.72	7.10	H	2.90	360.00	22.49	6.95	36.54	46.02	-9.48


Tested by: In-Sub, Youn / Project Engineer

5.2.2 Operating Condition: DC 1.5 V

Humidity Level : 45 %R.H. Temperature: 24 °C
Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.239 (a)
Type of Test : Low Power Communication Device Transmitter
Result : PASSED BY -9.58 dB at 904.72 MHz

EUT : FM Transmitter Date: September 30, 2009
Frequency range : 30 MHz ~ 1 000 MHz
Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)
Distance : 3 Meter
Remark : Other emissions

Radiated Emission		Ant		Angle (°)	Correction Factors		Total	Limit (dBμV/m)	Margin (dB)
Freq. (MHz)	Amp. (dBμV)	Pol.	Height (m)		Ant. (dBμV/m)	Cable (dB)	Amp. (dBμV/m)		
435.83	6.10	H	3.00	115.00	18.26	4.21	28.57	46.02	-17.45
505.27	7.10	H	3.00	160.00	19.40	4.67	31.17	46.02	-14.85
628.37	6.20	H	2.00	270.00	20.40	5.24	31.84	46.02	-14.18
751.94	6.00	H	2.20	310.00	20.67	5.82	32.49	46.02	-13.53
845.46	6.70	H	2.40	160.00	22.66	6.75	36.11	46.02	-9.91
904.72	7.00	H	3.00	360.00	22.49	6.95	36.44	46.02	-9.58


Tested by: In-Sub, Youn / Project Engineer

5.3 Bandwidth of the operating frequency

5.3.1 Operating Condition: DC 12 V


Humidity Level : 45 %R.H. Temperature: 24 °C
Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.239 (a)
Result : PASSED

EUT : FM Transmitter Date: September 30, 2009
Operating Condition : Transmit the RF signal.
Minimum Resolution
Bandwidth : 10 kHz
Remark : Refer to test data in next page.


Frequency (MHz)	Measured Value (kHz)	Limit (kHz)	Margin (kHz)
88.10	165.0	200	-35.0
97.70	160.6		-39.4
107.90	163.2		-36.8




Tested by: In-Sub, Youn / Project Engineer

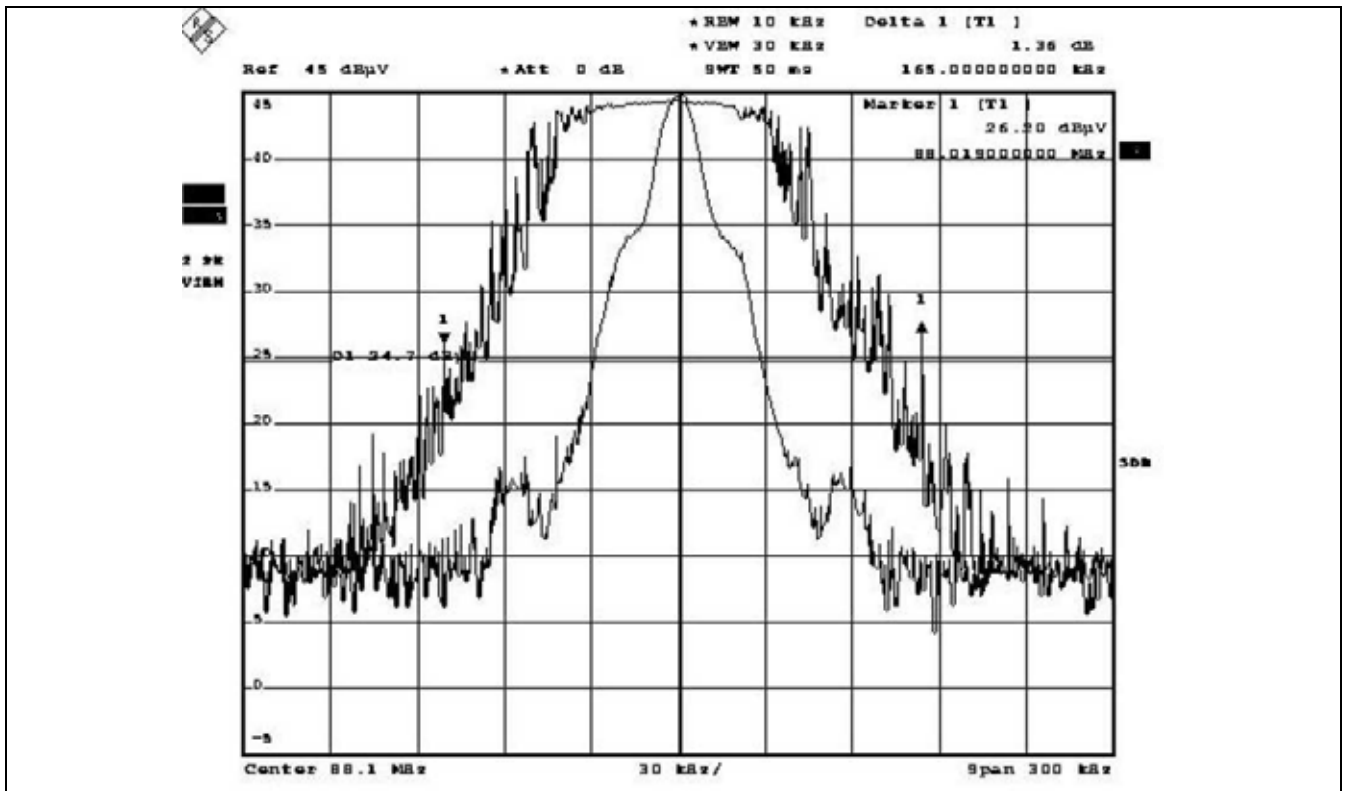

Bottom Frequency (88.10 MHz)

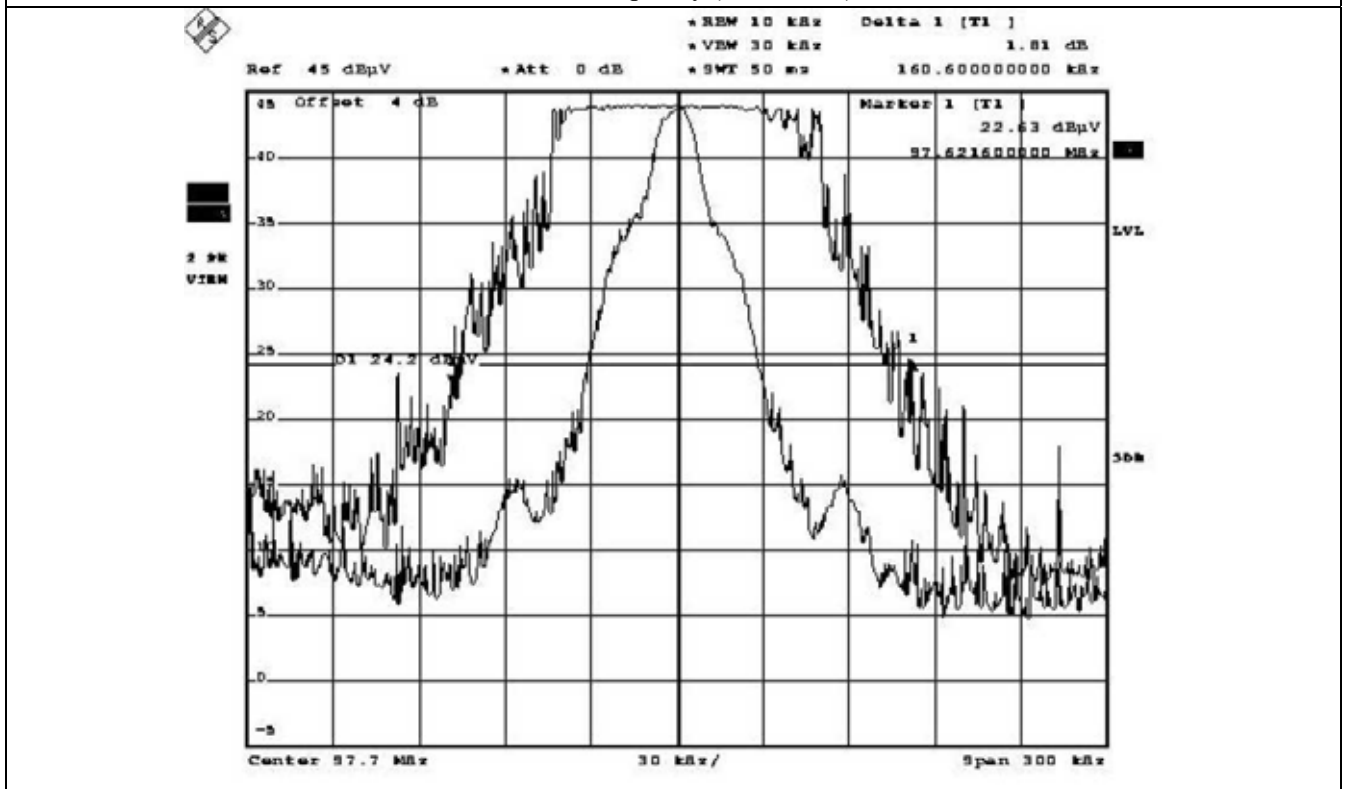

Middle Frequency (97.90 MHz)

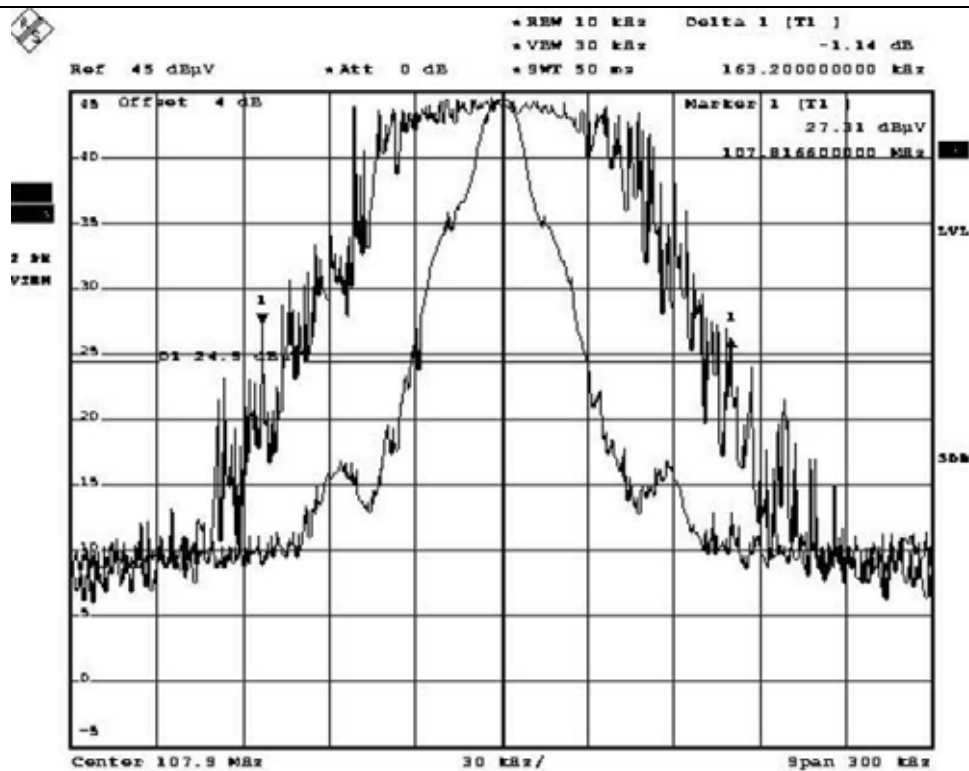

Top Frequency(107.90 MHz)


5.3.2 Operating Condition: DC 1.5 V

Humidity Level : 45 %R.H. Temperature: 24 °C
Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.239 (a)
Result : PASSED


EUT : FM Transmitter Date: September 30, 2009
Operating Condition : Transmit the RF signal.
Minimum Resolution
Bandwidth : 10 kHz
Remark : Refer to test data in next page.

Frequency (MHz)	Measured Value (kHz)	Limit (kHz)	Margin (kHz)
88.10	163.8	200	-36.2
97.70	160.2		-39.8
107.90	164.4		-35.6


Tested by: In-Sub, Youn / Project Engineer

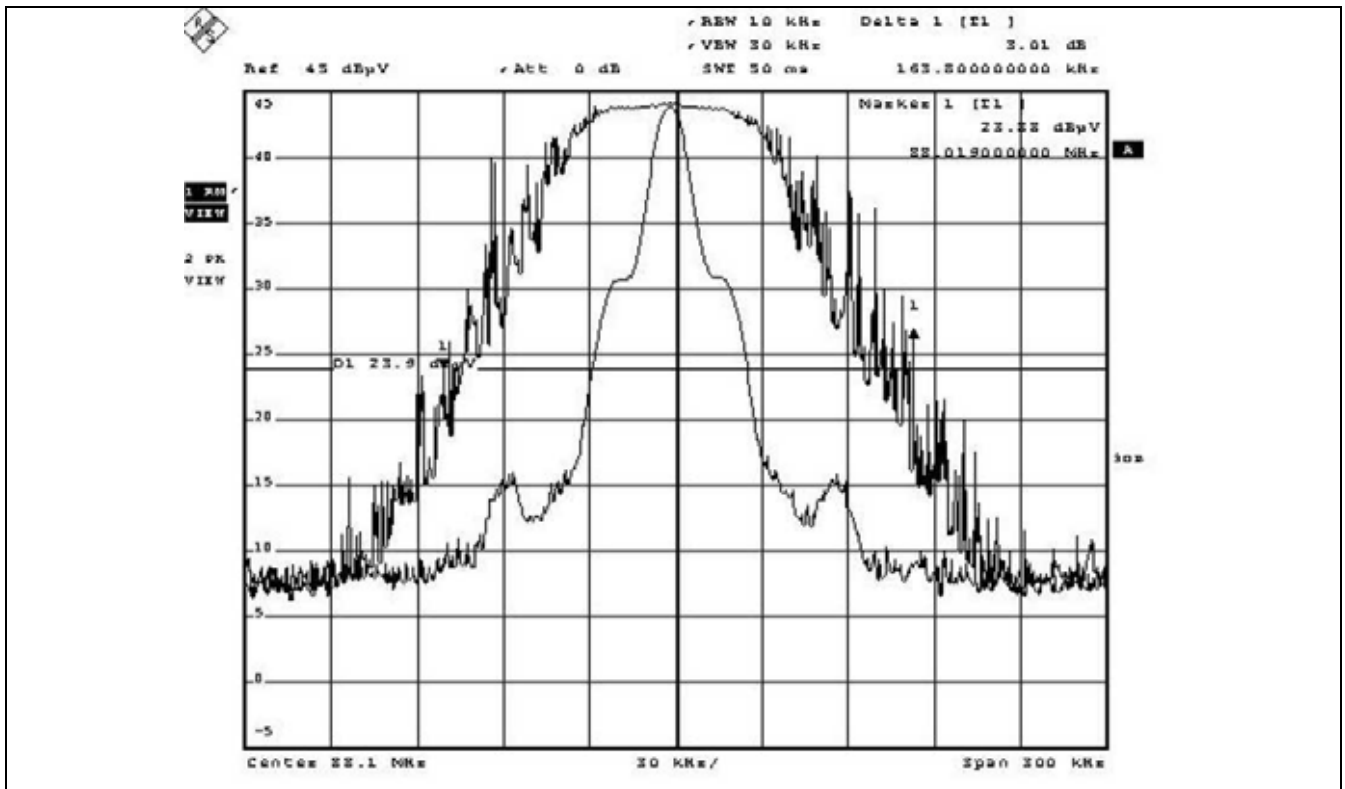

Bottom Frequency (88.10 MHz)

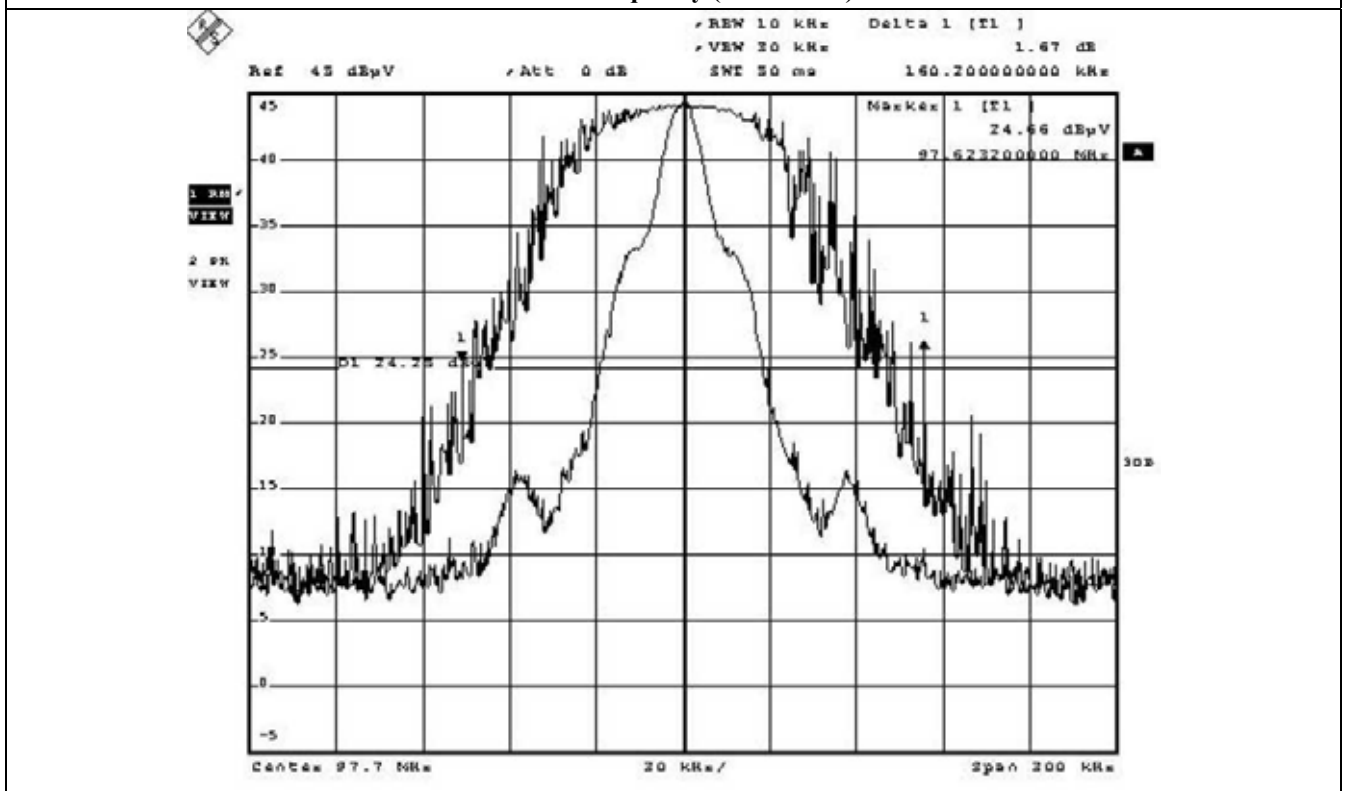


Middle Frequency (97.90 MHz)

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-003 (Rev.1)

HEAD OFFICE : #505 SK Apt. Factory 223-28, Sangdaewon1-dong, Jungwon-gu, Seongnam-si, Gyeonggi-do 462-705 Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 307-51 Daessangnyeong-ri, Chowol-eup, Gwangju-si, Gyeonggi-do 464-862 Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)

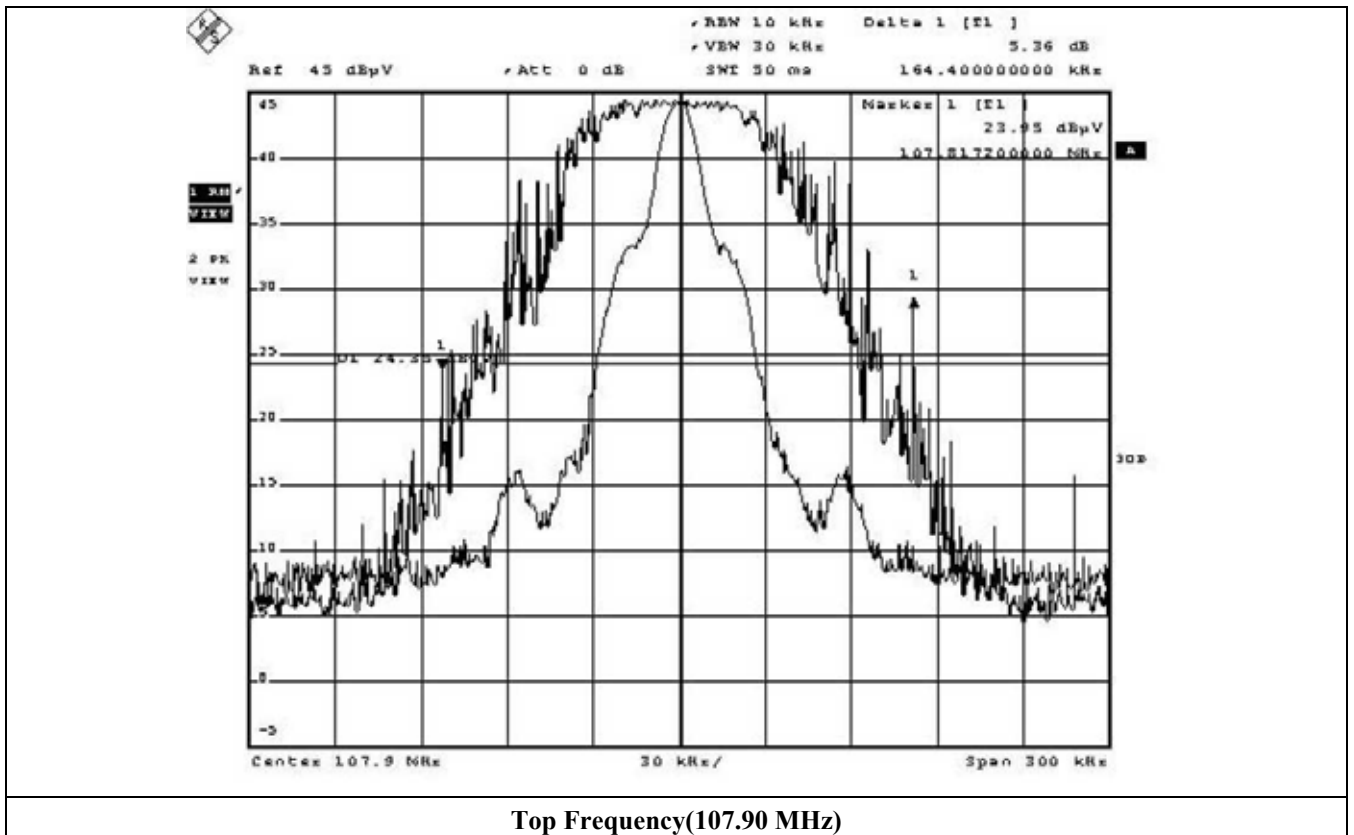

5.4 Tuning Range of the operating frequency


5.4.1 Operating Condition: DC 12 V

Humidity Level : 45 %R.H. Temperature: 24 °C
Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.239 (a)
Result : PASSED

EUT : FM Transmitter Date: September 30, 2009
Operating Condition : The lowest and highest frequency was adjusted by manual using up/down button on the EUT and the spectrum was in max hold mode for capturing the spectrum.
Test Result : Met the requirement. Refer to test data in next page.



Tested by: In-Sub, Youn / Project Engineer

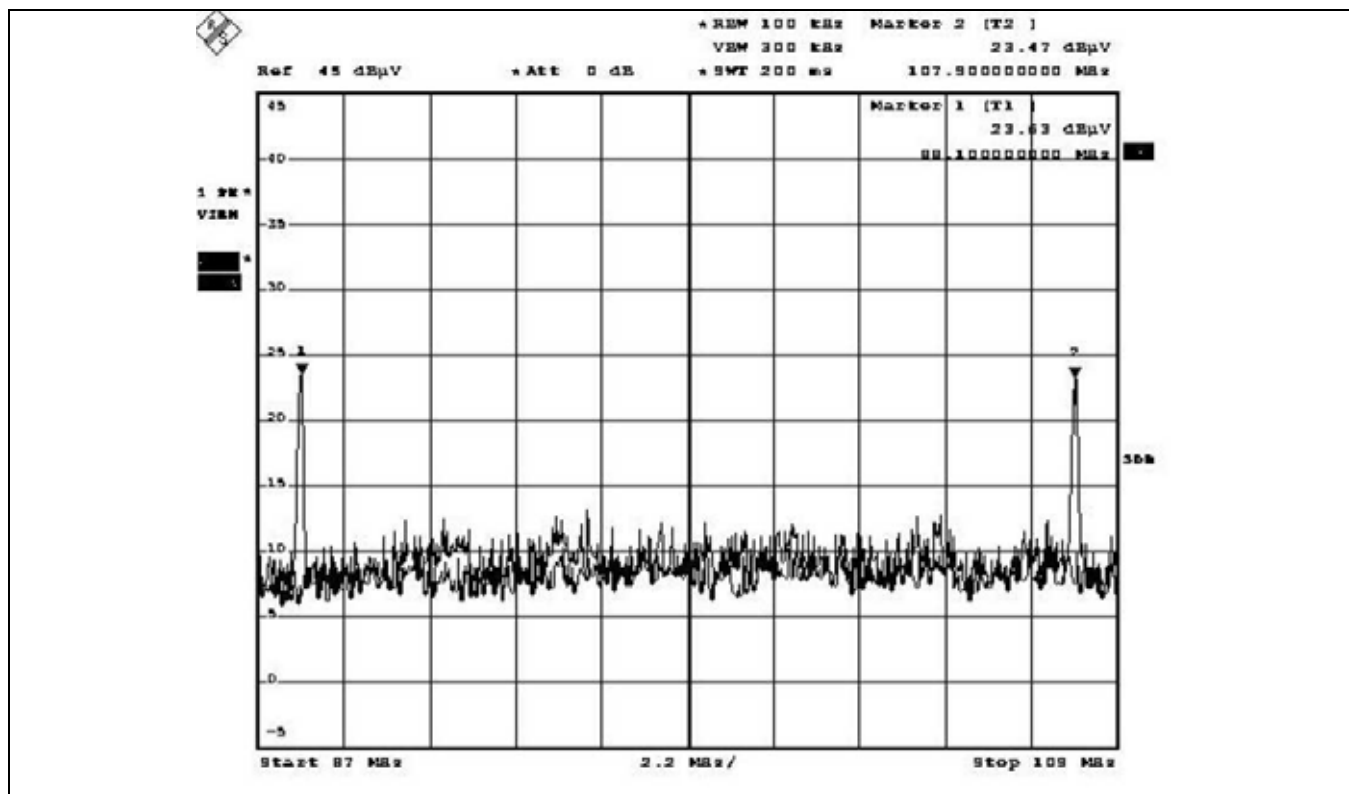

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-003 (Rev.1)

HEAD OFFICE : #505 SK Apt. Factory 223-28, Sangdaewon1-dong, Jungwon-gu, Seongnam-si, Gyeonggi-do 462-705 Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 307-51 Daessangnyeong-ri, Chowol-eup, Gwangju-si, Gyeonggi-do 464-862 Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)


5.4.2 Operating Condition: DC 1.5 V

Humidity Level : 45 %R.H. Temperature: 24 °C
Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.239 (a)
Result : PASSED

EUT : FM Transmitter Date: September 30, 2009
Operating Condition : The lowest and highest frequency was adjusted by manual using up/down button on the EUT and the spectrum was in max hold mode for capturing the spectrum.
Test Result : Met the requirement. Refer to test data in next page.



Tested by: In-Sub, Youn / Project Engineer

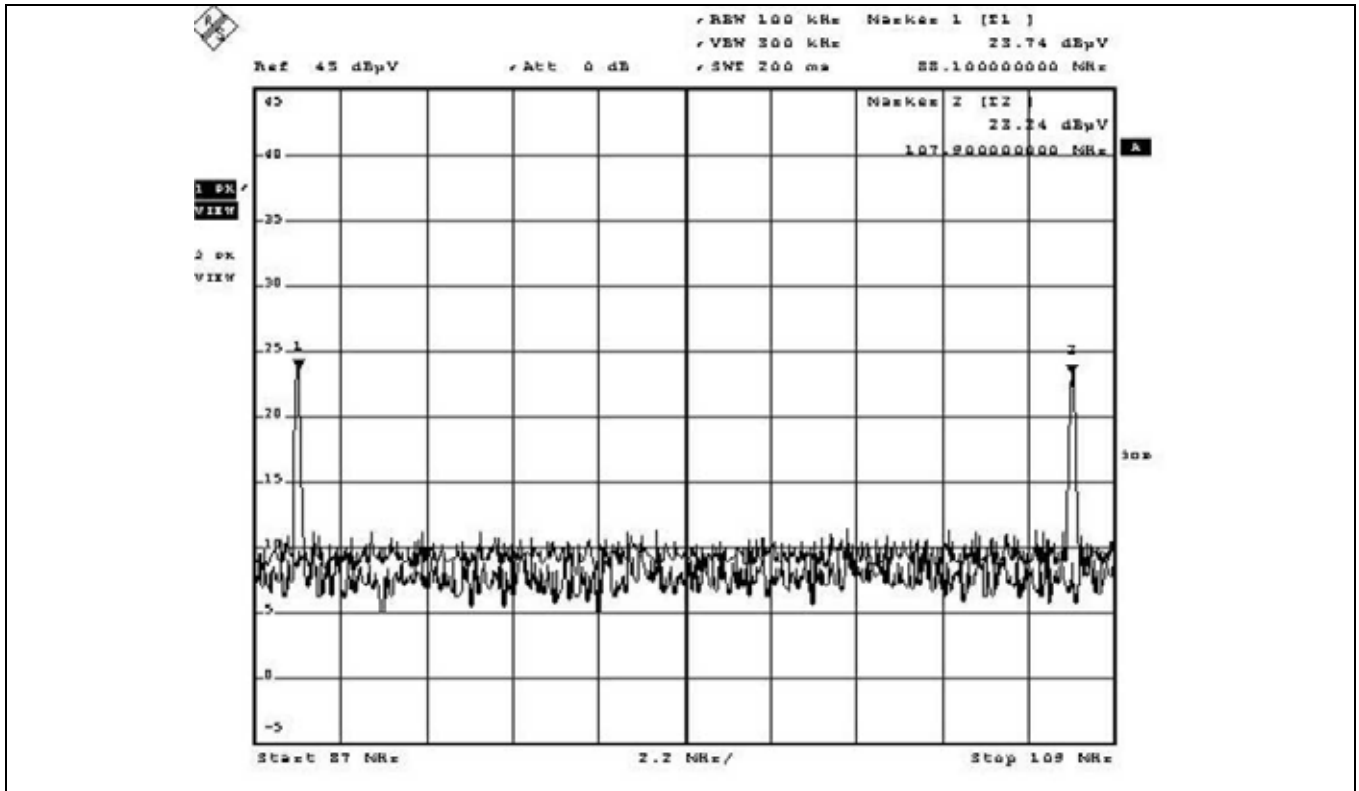

6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBμV)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/meter)

= Corrected Reading (dBμV/meter)

- Specification Limit (dBμV/meter)

= dB Relative to Spec (+/- dB)

7. LIST OF TEST EQUIPMENT

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUE CAL	USE
1.	Test receiver	R/S	ESVD	838453/018	NOV/08	12MONTH	■
2.	Test receiver	R/S	ESHS 10	834467/007	MAY/09	12MONTH	
3.	Spectrum analyzer	HP	8566B	2516A01677	JUN/09	12MONTH	■
4.	TRILOG Broadband Antenna	Schwarzbeck	VULB9163	VULB9163 202	APR/08	24MONTH	■
5.	Biconical antenna	EMCO	3110	9003-1121	JAN/08	24MONTH	
		Schwarzbeck	VHA9103	91031852	FEB/08		■
6.	Log Periodic antenna	EMCO	3146	9001-2614	JAN/08	24MONTH	
		Schwarzbeck	9108-A(494)	62281001	FEB/08		■
7.	LISN	EMCO	3825/2	9109-1867	JUN/09	12MONTH	
				9109-1869	JUN/09		
		Schwarzbeck	NSLK 8126	8126-404	JUN/09		
8.	Position Controller	HD GmbH	HD100	N/A	N/A	N/A	■
9.	Turn Table	HD GmbH	DS420S	N/A	N/A	N/A	■
10.	Antenna Master	HD GmbH	MA240	N/A	N/A	N/A	■