



TEST REPORT FROM RFI GLOBAL SERVICES LTD

Test of: 3000 DAS

To: FCC Part 27: 2009 Subpart C

Test Report Serial No:
RFI/RPT1/RP77098JD03A

This Test Report Is Issued Under The Authority of Brian Watson, COO Payments and Consultancy:	pp 
Checked By: R. Graham	
Date of Issue:	24 February 2010

This report is issued in Adobe Acrobat portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed: Changing the document, Selecting text and graphics, Adding or changing notes and form fields.

This report may not be reproduced other than in full, except with the prior written approval of RFI Global Services Ltd. The results in this report apply only to the sample(s) tested.

RFI Global Services Ltd

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire RG23 8BG
Telephone: +44 (0)1256 312000 Facsimile: +44 (0)1256 312001
Email: info@rfi-global.com Website: www.rfi-global.com

Registered in England and Wales. Company number: 2117901

This page has been left intentionally blank.

Table of Contents

1. Customer Information 4

2. Summary of Testing 5

3. Equipment Under Test (EUT) 6

4. Operation and Monitoring of the EUT during Testing 8

5. Measurements, Examinations and Derived Results 9

6. Measurement Uncertainty 23

Appendix 1. Test Equipment Used 24

1. Customer Information







Company Name:	Zinwave Ltd
Address:	Harston Mill Harston Cambridge CB22 7GG

2. Summary of Testing

2.1. General Information

Specification Reference:	47CFR27
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications) 2009: Part 27 Subpart H (Miscellaneous Wireless Communication Services)
Site Registration:	209735
Location of Testing:	RFI Global Services Ltd, Wade Road, Basingstoke, Hampshire, RG24 8AH.
Test Dates:	05 February 2010 to 09 February 2010

2.2. Summary of Test Results

FCC Reference (47CFR)	Measurement	Port Type	Result
FCC 27.50(c)(1)	Transmitter Effective Radiated Power (ERP)	Antenna Terminals	
FCC 2.1049	Transmitter Occupied Bandwidth	Antenna Terminals	
FCC 2.1051/27.53(g)	Transmitter Conducted Emissions (Out of Band)	Antenna Terminals	
FCC 2.1053/27.53(g)	Transmitter Radiated Emissions (Out of Band)	Enclosure	
Key to Results  = Complied  = Did not comply			

2.3. Methods and Procedures

Reference:	ANSI/TIA-603-C-2004
Title:	Land Mobile Communications Equipment, Measurements and performance Standards
Reference:	ANSI C63.4 (2003)
Title:	American National Standard Methods of Measurement of Electromagnetic Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

2.4. Deviations from the Test Specification

The testing has been performed in accordance with the following test plan produced by DheaniSulis for Zinwave for the Part 27, 728 MHz – 763 MHz band only:

3000 DAS: FCC test plan to parts 22H and 27

Document Number: DS09_ZIN_TP02_A; Issue Date: 25 January 2010

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT)

Description:	Distributed Antenna System – Primary Hub
Brand Name:	Zinwave
Model Name or Number:	3000 DAS
Part Number:	302-0001
Serial Number:	000006
Hardware Version Number:	3.13
FCC ID Number:	UPO302-0007 or UPO302-0006*

Description:	Distributed Antenna System – Remote Unit - Fibre
Brand Name:	Zinwave
Model Name or Number:	Fibre RU
Part Number:	302-0007
Serial Number:	310230001218
FCC ID Number:	UPO302-0007

Description:	Remote Unit – Fibre, Power Supply Unit
Brand Name:	Ideal Power
Model Name or Number:	HK-HP-A12
Serial Number:	None stated

Description:	Distributed Antenna System – Remote Unit - Coaxial
Brand Name:	Zinwave
Model Name or Number:	Coaxial RU
Part Number:	302-0006
Serial Number:	140130000126
FCC ID Number:	UPO302-0006

**The FCC ID for the Primary Hub when matched with the Fibre Remote Unit as a system is UPO302-0007 and when matched as a system with the Coaxial Remote Unit the FCC ID is UPO302-0006.*

3.2. Description of EUT

The 3000 Hub and wideband remote unit is a bi-directional wide-band repeater station with a pass band of 136 MHz to 2700 MHz. Signals are transferred between the hub and remote unit via coaxial cable.

3.3. Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.4. Additional Information Related to Testing

Power Supply Requirement:	120 V AC, 60 Hz		
Equipment Category:	Control Station		
Type of Unit:	DAS (Distributed Antenna System)		
Transmit Frequency Range:	728 MHz to 763 MHz		
Transmit Channels Tested:	Modulation	Bandwidth (MHz)	Channel Frequency (MHz)
	OFDM 64QAM	5	728.0
	OFDM 64QAM	10	728.0
Maximum Power Output (ERP)	30 W ERP (44.8 dBm)		

4. Operation and Monitoring of the EUT during Testing

4.1. Operating Modes

The EUT was tested in the following operating mode(s):

- . Transmit mode, (maximum output power/gain).

4.2. Configuration and Peripherals

The EUT was tested in the following configuration(s):

- The EUT comprises of three separate units. One Primary Hub and two Remote Units [1x Fibre Optic, 1x Coaxial Unit]. The primary hub was connected to the remote unit via fibre optic cables and coaxial cables depending on the unit connected. An input signal was fed into the primary hub and was measured from the output of the remote unit. The remote unit was operating at maximum output power with the maximum gain settings allowed.
- For radiated emissions testing, the EUT was connected to an input signal. The input level was adjusted to give a signal output level of +20.0 dBm. Testing was performed on both the fibre unit and coaxial units with the antenna ports on the remote units terminated.
- For conducted testing, the EUT was connected with one input signal which was fed into the unit with the antenna port on the remote unit used as the measurement point. Measurements were performed on the coaxial unit only. The fibre unit remained terminated throughout the testing.

5. Measurements, Examinations and Derived Results

5.1. General Comments

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to *Section 6. Measurement Uncertainty* for details.

5.2. Test Results

5.2.1. Transmitter Effective Radiated Power (ERP)

Test Summary:

FCC Part:	27.50 (c) (9)
Test Method Used:	ANSI TIA-603-C-2004 Section 2

Environmental Conditions:

Temperature (°C):	21
Relative Humidity Variation (%):	34

Results: 5 MHz Bandwidth

Frequency (MHz)	Conducted RF O/P Power (dBm)	Declared Antenna Gain (dB)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
728	19.9	8.0	27.9	44.8	16.9	Complied

Results: 10 MHz Bandwidth

Frequency (MHz)	Conducted RF O/P Power (dBm)	Declared Antenna Gain (dB)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
728	20.0	8.0	28.0	44.8	16.8	Complied

5.2.2. Transmitter Occupied Bandwidth**Test Summary:**

FCC Part:	2.1049
Test Method Used:	As detailed in ANSI C63.4 Section 13.1.7 and relevant annexes

Environmental Conditions:

Temperature Variation (°C):	21
Relative Humidity Variation (%):	34

Results: Input Signal 5 MHz Bandwidth

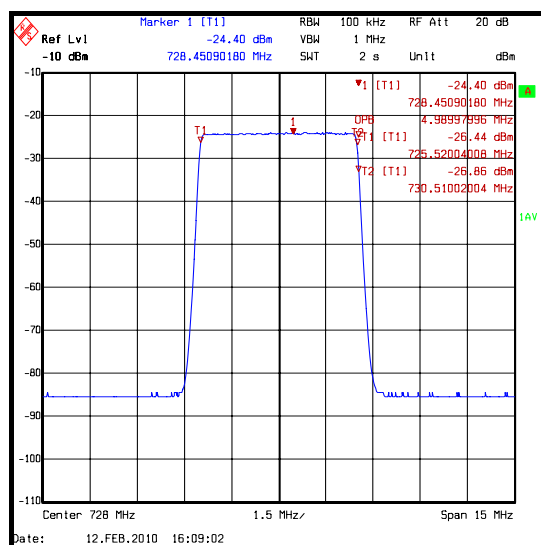
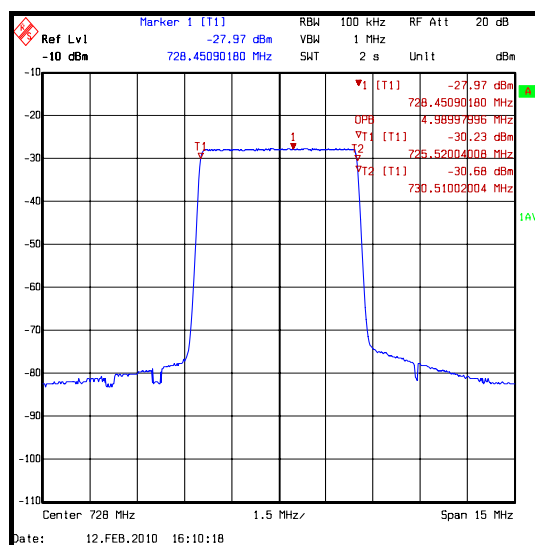
Frequency (MHz)	Occupied Bandwidth (kHz)
728.000	4989.980

Results: Output Signal 5 MHz Bandwidth

Frequency (MHz)	Occupied Bandwidth (kHz)
728.000	4989.980

Note(s):

- In lieu of the test method detailed in ANSI C63.4 Section 13.1.7 the occupied bandwidth was measured using the Occupied Bandwidth function of the spectrum analyser.

**Input Signal****Output Signal**

5.2.3. Transmitter Occupied Bandwidth (Bandwidth Limitations)**Test Summary:**

FCC Part:	2.1049
Test Method:	As detailed in ANSI C63.4 Section 13.1.7 and relevant annexes

Environmental Conditions:

Temperature (°C):	21
Relative Humidity (%):	34

Results: Input Signal 10 MHz Bandwidth

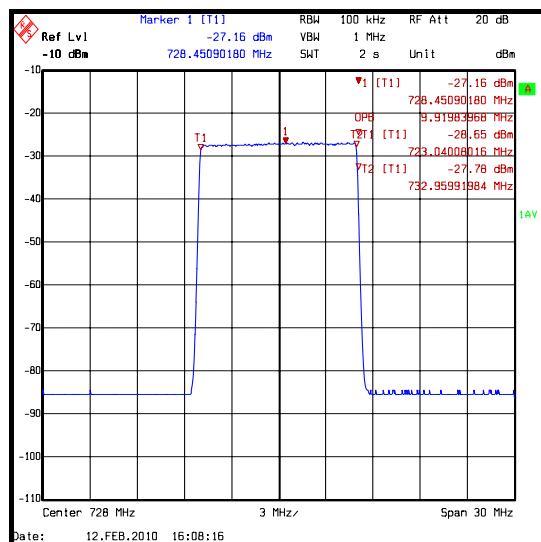
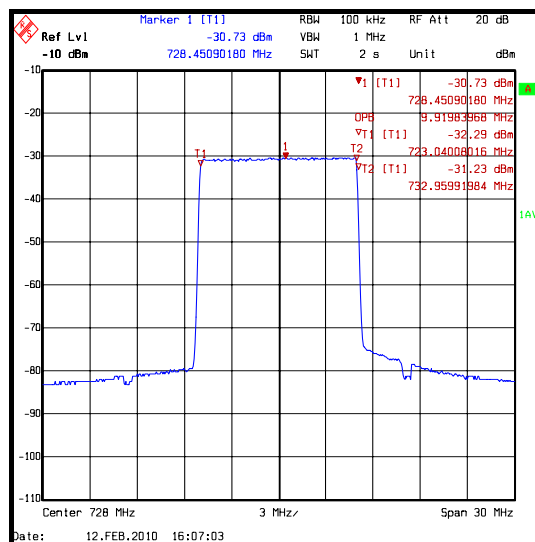
Frequency (MHz)	Occupied Bandwidth (kHz)
728.000	9919.840

Results: Output Signal 10 MHz Bandwidth

Frequency (MHz)	Occupied Bandwidth (kHz)
728.000	9919.840

Note(s):

- In lieu of the test method detailed in ANSI C63.4 Section 13.1.7 the occupied bandwidth was measured using the Occupied Bandwidth function of the spectrum analyser.

**Input Signal****Output Signal**

5.2.4. Transmitter Conducted Emissions (Out of Band)**Test Summary:**

FCC Part:	2.1051 & 27.53 (g)
Test Method:	As detailed in ANSI C63.4 Section 8 and relevant annexes

Environmental Conditions:

Temperature (°C):	21
Relative Humidity (%):	34

Results: 5 MHz Bandwidth

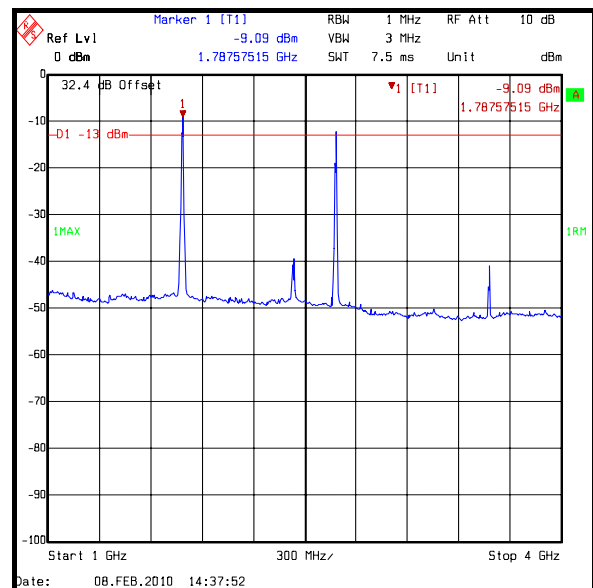
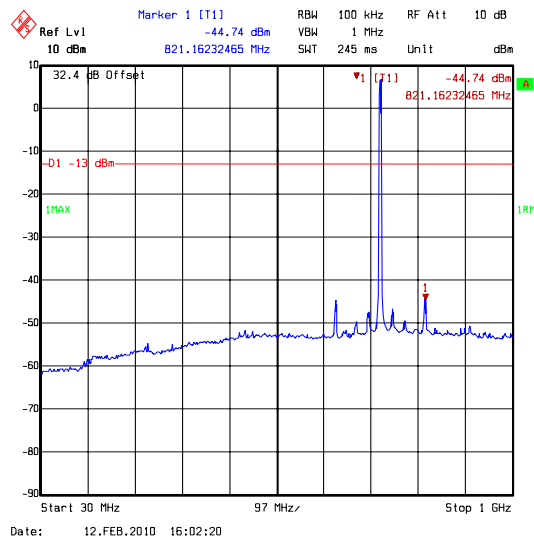
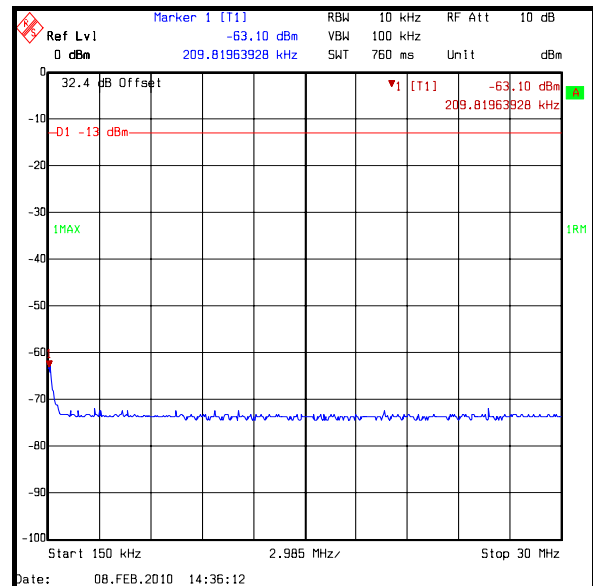
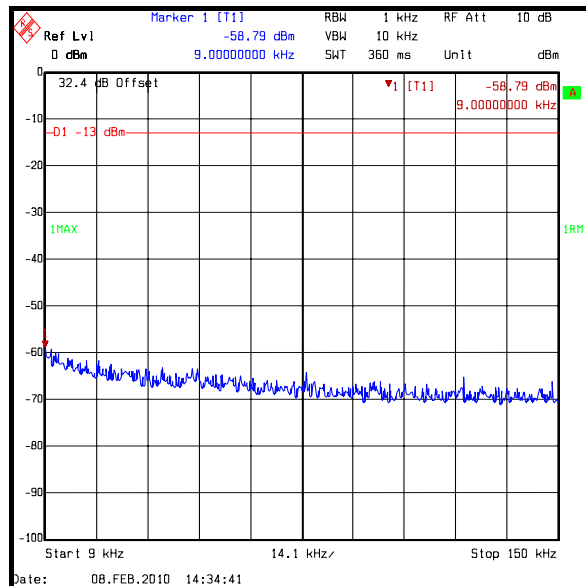
Frequency (MHz)	Peak Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
1787	-15.3	-13.0	2.3	Complied
2683	-21.3	-13.0	8.3	Complied

Results: 10 MHz Bandwidth

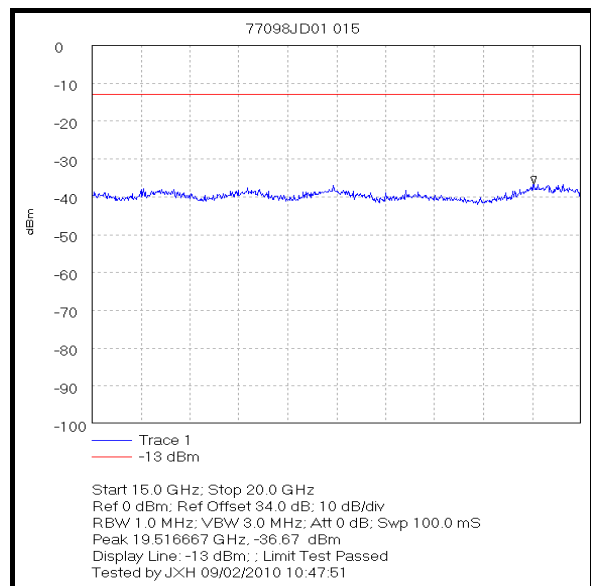
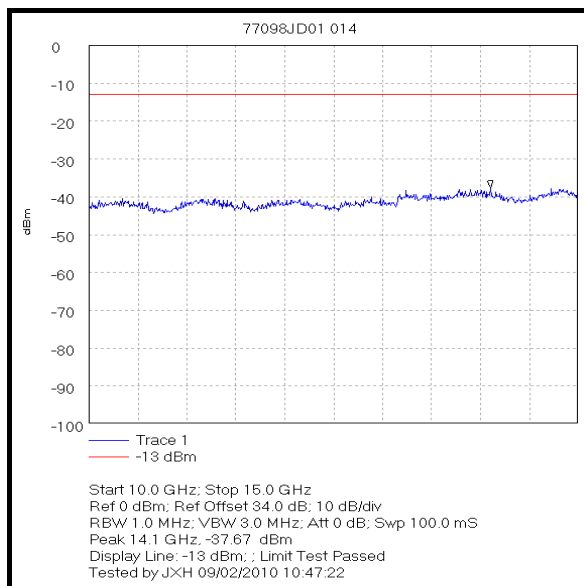
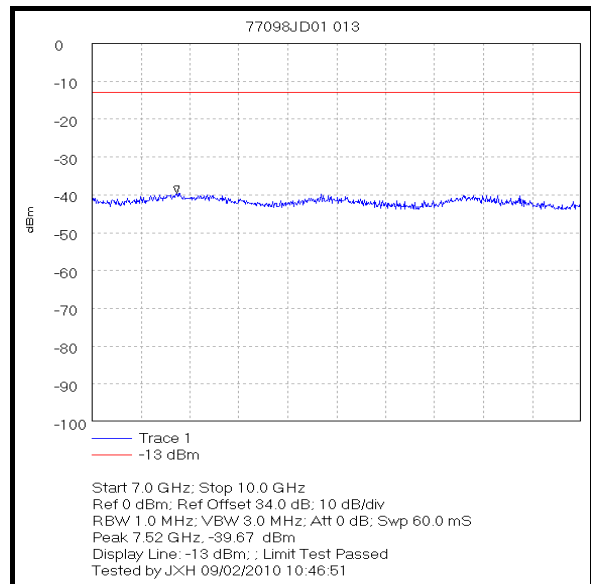
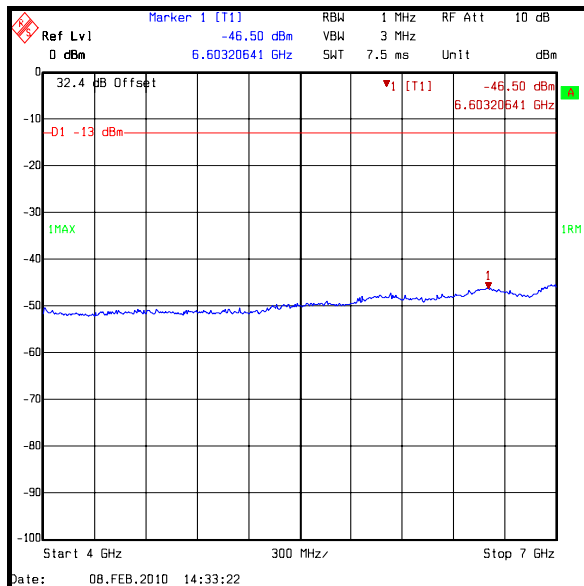
Frequency (MHz)	Peak Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
1791.227	-17.7	-13.0	4.7	Complied
2681.215	-24.8	-13.0	11.8	Complied

Note(s):

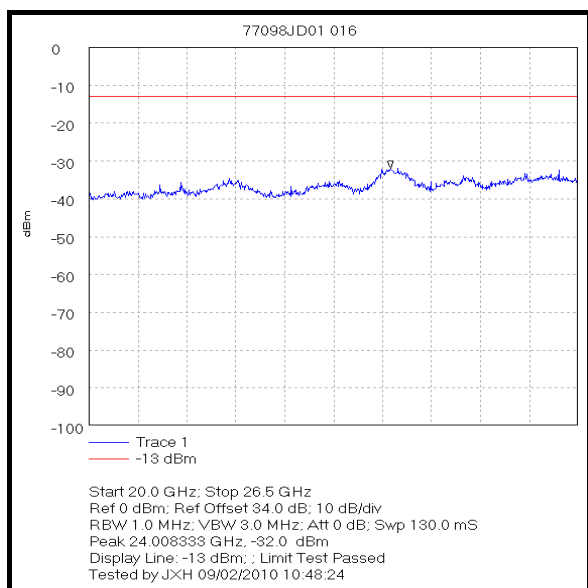
1. All other emissions were at least 20 dB below the limit.
2. The emission shown exceeding the limit in the 30 MHz to 1 GHz plot is the 728 MHz fundamental.

Transmitter Conducted Emissions (Out of Band) (continued)**5 MHz Bandwidth**

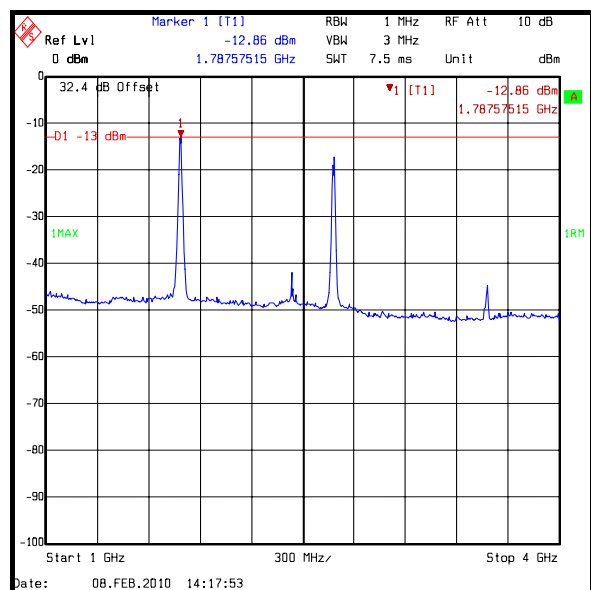
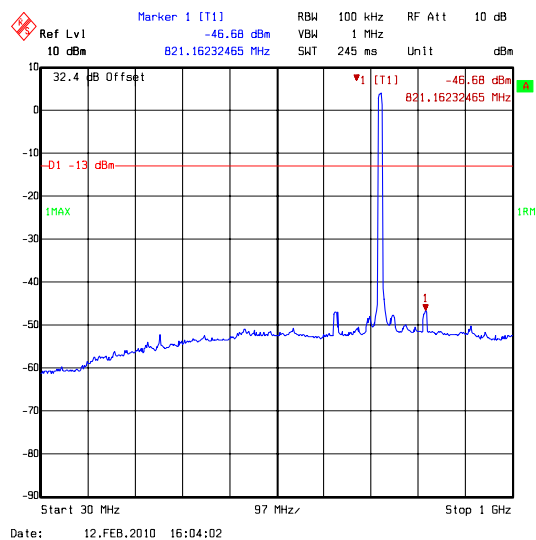
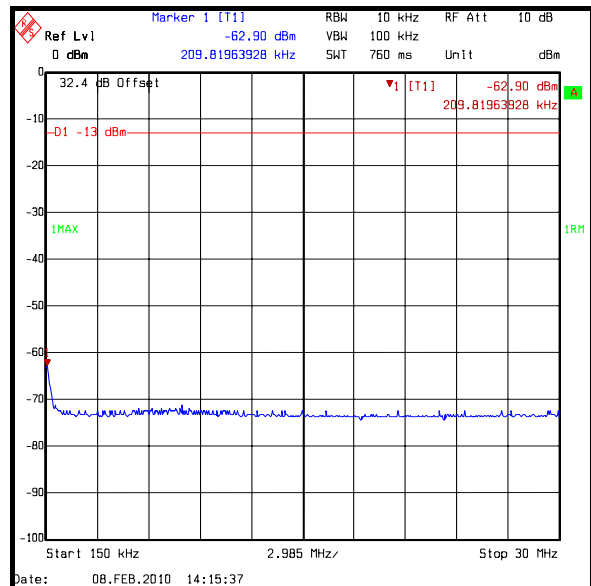
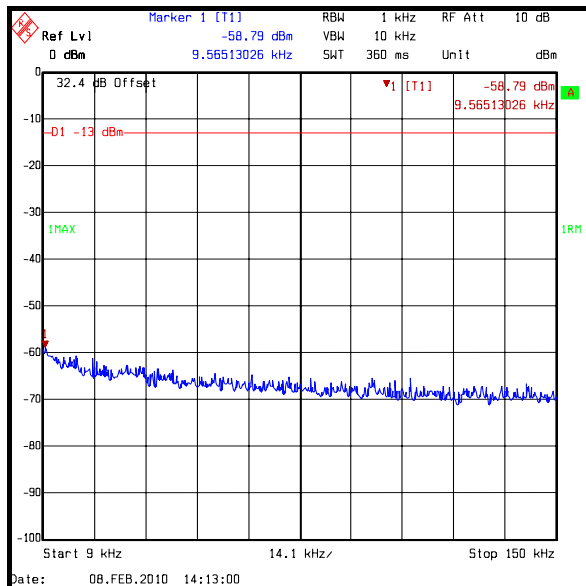
Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Transmitter Conducted Emissions (Out of Band) (continued)**5 MHz Bandwidth**

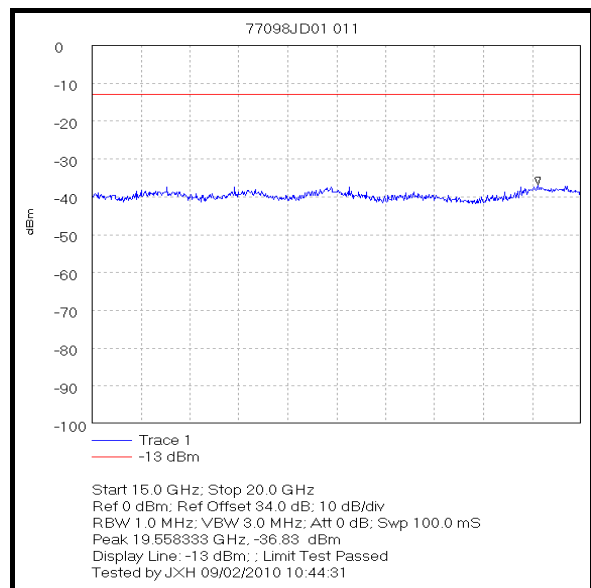
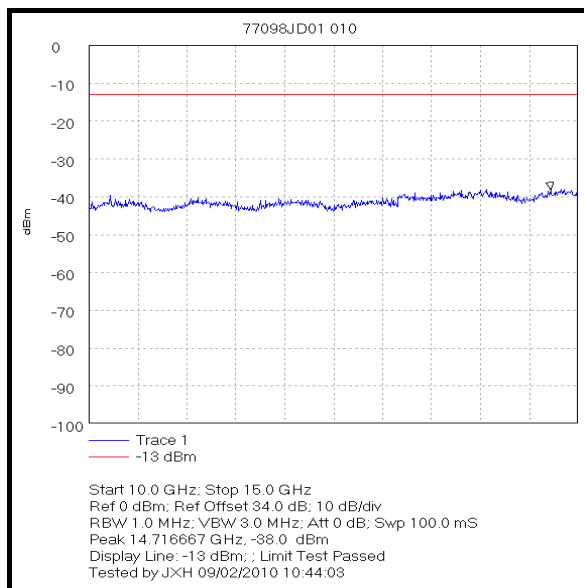
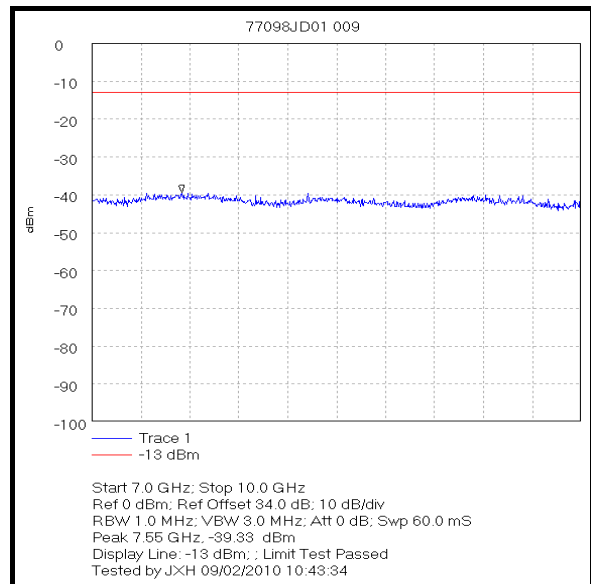
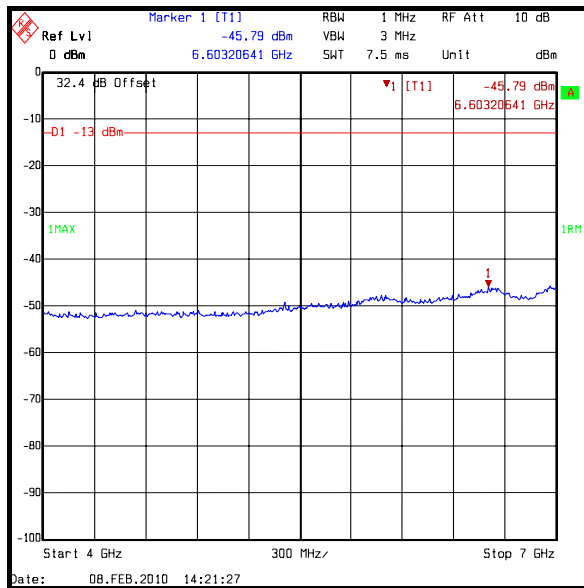
Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Transmitter Conducted Emissions (Out of Band) (continued)**5 MHz Bandwidth**

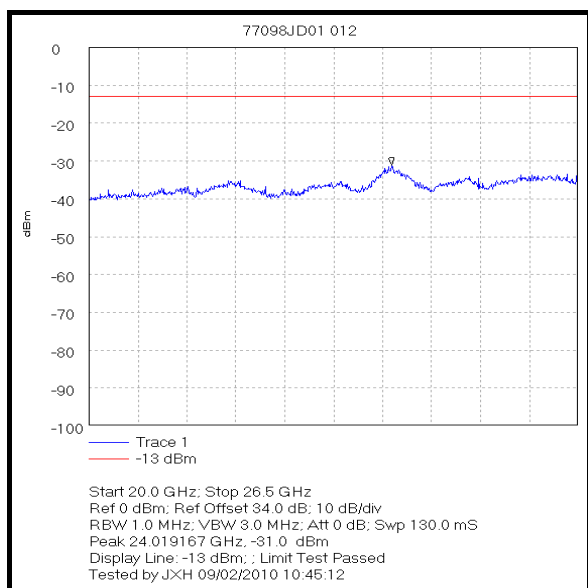
Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Transmitter Conducted Emissions (Out of Band) (continued)**10 MHz Bandwidth**

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Transmitter Conducted Emissions (Out of Band) (continued)**10 MHz Bandwidth**

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables

Transmitter Conducted Emissions (Out of Band) (continued)**10 MHz Bandwidth**

Note: This plot is for pre-scans and for indication purposes only. For final measurements, see accompanying tables.

5.2.5. Transmitter Radiated Emissions (Out of Band)**Test Summary:**

FCC Part:	2.1053 & 27.53 (g)
Test Method:	As detailed in ANSI C63.4 Section 8 and relevant annexes

Environmental Conditions:

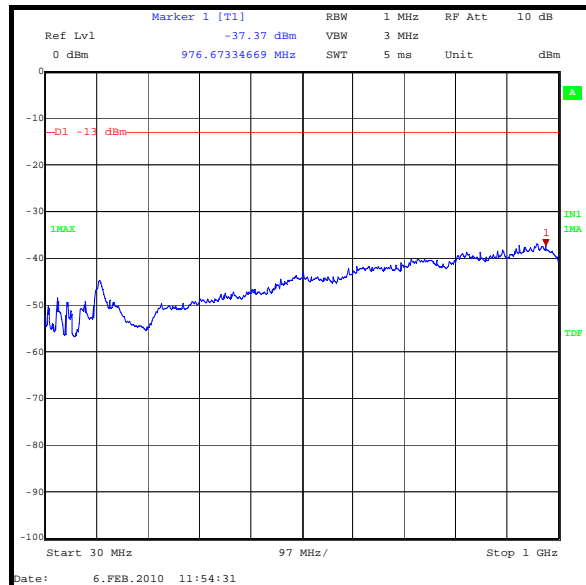
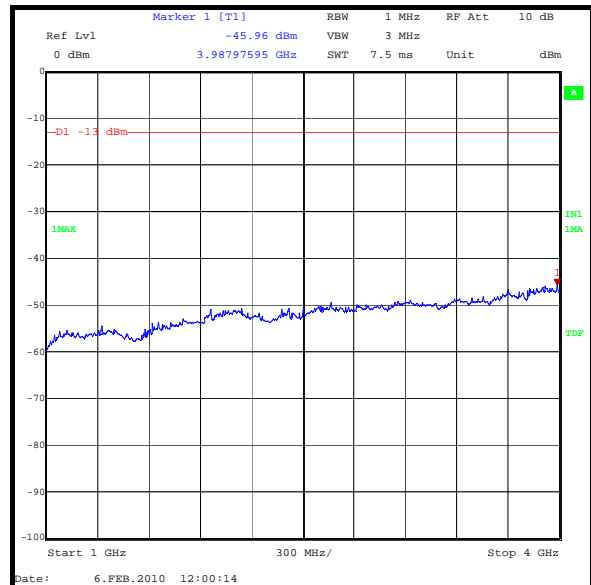
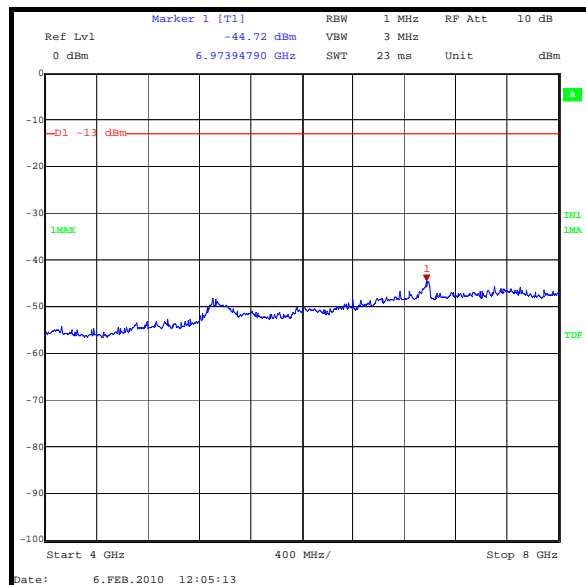
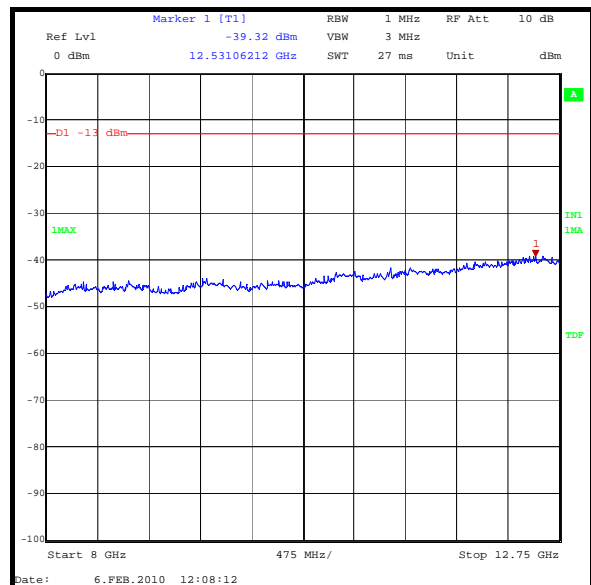
Temperature (°C):	21
Relative Humidity (%):	31

Results:

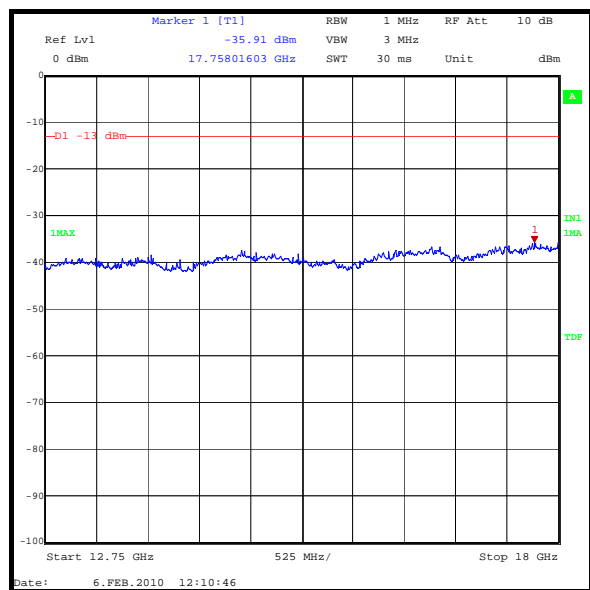
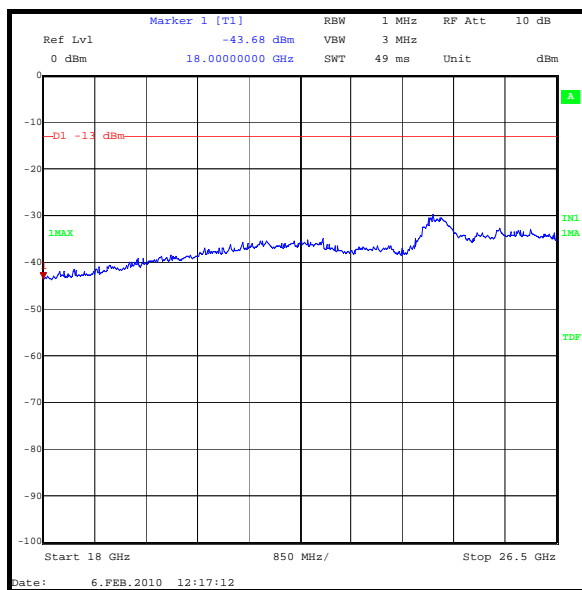
Frequency (MHz)	Peak Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
Refer to note 1				

Note(s):

1. All emissions were greater than 20 dB below the limit.

Transmitter Radiated Emissions (Out of Band) (continued)**30 MHz to 1 GHz****1 GHz to 4 GHz****4 GHz to 8 GHz****8 GHz to 12.75 GHz**

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Transmitter Radiated Emissions (Out of Band) (continued)**12.75 GHz to 18 GHz****18 GHz to 26.5 GHz**

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables

6. Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document “approximately” is interpreted as meaning “effectively” or “for most practical purposes”.

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
Effective Radiated Power (ERP)	728 - 763 MHz	95%	±2.94 dB
Occupied Bandwidth	728 - 763 MHz	95%	±0.92ppm
Conducted Spurious Emissions	9 kHz to 26.5 GHz	95%	± 2.62 dB
Radiated Spurious Emissions	30 MHz to 1000 MHz	95%	±3.53 dB
Radiated Spurious Emissions	30 MHz to 26.5 GHz	95%	±2.94 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

Appendix 1. Test Equipment Used

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Last Calibrated	Cal. Interval (Months)
A1418	Attenuator	HP	N/A	CSC21296	Calibrated before use	-
C1263	Cable	Rosenberger	FA210A1020005050	49316-01	29 Mar 2009	12
C151	Cable	Rosenberger	UFA210A-1-1181-70x70	None	20 Apr 2009	12
L1000	R&S SFU	Rhode and Schwarz	2110.250K02	100865	Calibrated before use	-
M127	Spectrum Analyser	Rohde & Schwarz	FSEB 30	842 659/016	10 Jul 2009	12
M166	Thermometer/ Barometer/ Hygrometer	EuroCom	None	None	30 Apr 2009	12

NB In accordance with UKAS requirements all the measurement equipment is on a calibration schedule.