



FCC Part 1 Subpart I
FCC Part 2 Subpart J

CERTIFICATION TEST REPORT

FOR

WIRELESS TRAVEL CASE CHARGER

MODEL NO: 3759

FCC ID: USQ3759

REPORT NUMBER: 12751212-E5V1

ISSUE DATE: 10/15/2019

Prepared for

**BRAUN GMBH
T-QTA FRANKFURTER STRASSE 145
KRONBERG TS, D-61476 DE**

Prepared by

**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888**



Revision History

| Rev. | Issue Date | Revisions | Revised By |
|------|------------|--|------------|
| V1 | 10/14/2019 | Initial Issue | -- |
| V2 | 10/15/2019 | Updated KDB, duty cycle, dates, measurements | Tri Pham |

TABLE OF CONTENTS

| | |
|---|-----------|
| 1. ATTESTATION OF TEST RESULTS | 4 |
| 2. TEST METHODOLOGY | 5 |
| 3. FACILITIES AND ACCREDITATION | 5 |
| 4. EQUIPMENT UNDER TEST | 6 |
| 4.1. DESCRIPTION OF EUT | 6 |
| 4.2. DESCRIPTION OF TEST SETUP..... | 6 |
| 5. TEST AND MEASUREMENT EQUIPMENT | 9 |
| 6. DUTY CYCLE..... | 10 |
| 7. MAXIMUM PERMISSIBLE RF EXPOSURE TEST RESULTS..... | 12 |
| 7.1. FCC LIMITS..... | 12 |
| 7.2. SUMMARY OF TEST RESULTS | 13 |
| 7.3. DETAILED TEST RESULTS..... | 14 |
| 8. SETUP PHOTO | 15 |
| 8.1. CONFIGURATION 1: STANDBY MODE..... | 15 |
| 8.2. CONFIGURATION 2: WITH TOOTHBRUSH | 18 |

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: BRAUN GMBH
T-QTA FRANKFURTER STRASSE 145
KRONBERG TS, D-61476 DE

EUT DESCRIPTION: WIRELESS TRAVEL CASE CHARGER

MODEL NUMBER: 3759

SERIAL NUMBER: D80192102474

DATE TESTED: 5-6-2019

| APPLICABLE STANDARDS | |
|---|--------------|
| STANDARD | TEST RESULTS |
| FCC PART 1 SUBPART I & PART 2 SUBPART J | Complies |

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For
UL Verification Services Inc. By:



Frank Ibrahim
Operations Leader
UL Verification Service Inc.

Prepared By:



Tri Pham
Project Engineer
UL Verification Services Inc.

2. TEST METHODOLOGY

All calculations were made in accordance with FCC KDB 447498 D01, KDB 447498 D03, and KDB 680106 D01 v03.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA.

The test sites and facilities are covered under FCC Test Firm Registration # 208313.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0

4. EQUIPMENT UNDER TEST

4.1. DESCRIPTION OF EUT

The EUT is wireless charging base capable of up to 1.2 Watt power transfer at 88 kHz fundamental frequency.

4.2. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

| SUPPORT EQUIPMENT & PERIPHERALS LIST | | | |
|--------------------------------------|--------------|----------|---------------|
| Description | Manufacturer | Model | Serial Number |
| AC Adapter | Braun GMBH | 492-5217 | N/A |
| Toothbrush | Braun GMBH | 3758 | W477 |

I/O CABLES

N/A

TEST SETUP

The following three configurations are tested:


| Configuration | Mode | Descriptions |
|---------------|---|---|
| 1 | Standby (< 10% Power Detecting) | EUT Alone powered by AC/DC adapter |
| 2 | Operating (With toothbrush charging) Note: Measurements were made when the battery level of the toothbrush was at a state of <10%, 50%, and 100%. | EUT and toothbrush powered by AC/DC adapter |

MEASUREMENT SETUP


The measurement was taken using a probe placed 15cm surrounding the device and 20cm above the top surface of the EUT.

Measurements were taken from the top and all sides of the EUT per KDB 680106 D01 v03.

CONFIGURATION 1

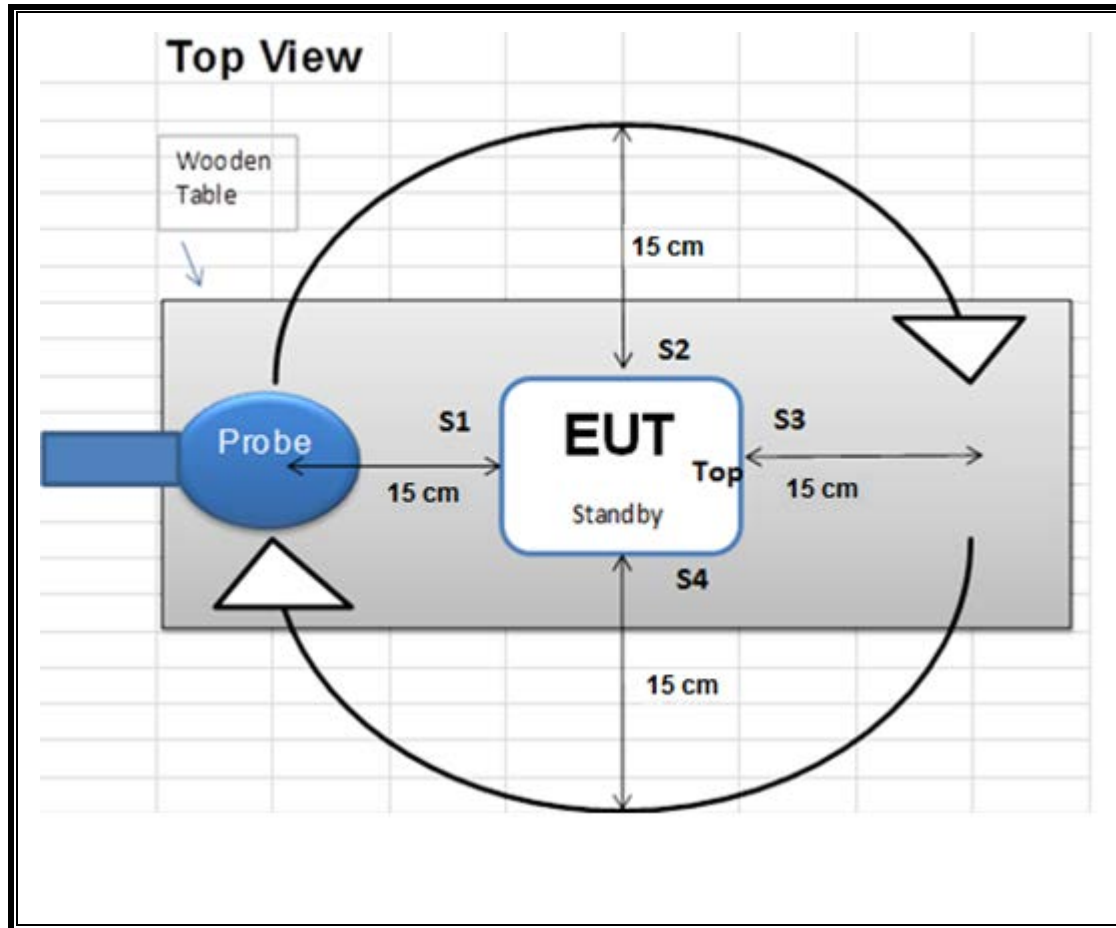

CONFIGURATIONS 2

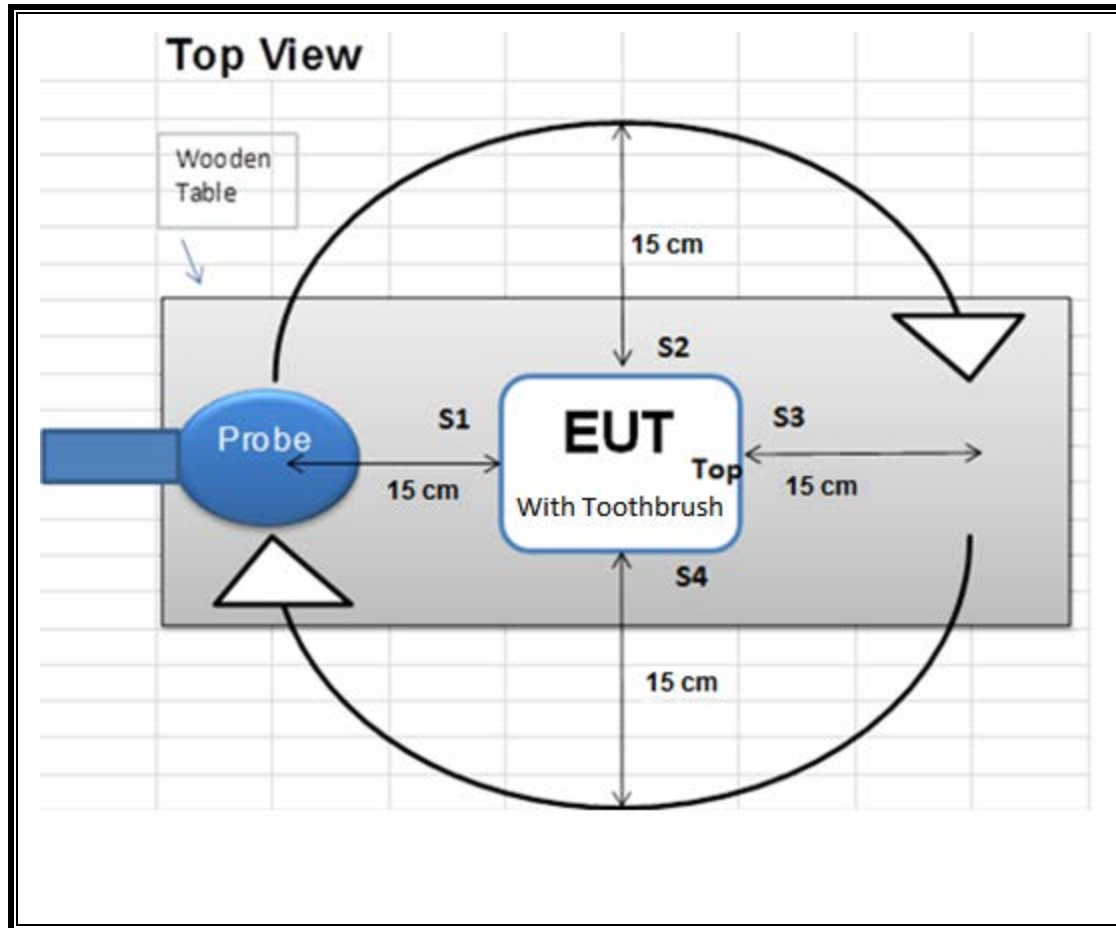

5. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment were used for the tests documented in this report:

| Test Equipment List | | | | | |
|-----------------------------------|--------------|----------|------------|------------|------------|
| Description | Manufacturer | Model | S/N | Cal Date | Cal Due |
| Electric and Magnetic Field Probe | Narda | EHP-200A | 170WX80318 | 10/24/2018 | 10/24/2019 |
| Spectrum Analyzer | Agilent | E4446A | MY43360112 | 01/28/2019 | 01/28/2020 |

6. DUTY CYCLE

LIMITS



None; for reporting purposes only.

PROCEDURE

Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

| Mode | ON Time B (msec) | Period (msec) | Duty Cycle x (linear) | Duty Cycle (%) |
|---------------------|------------------------|------------------|-----------------------------|----------------------|
| Standby (Config 1) | 1.28 | 604.20 | 0.0021 | 0.21% |
| Operating(Config 2) | 100.00 | 100.00 | 1.00 | 100.00% |

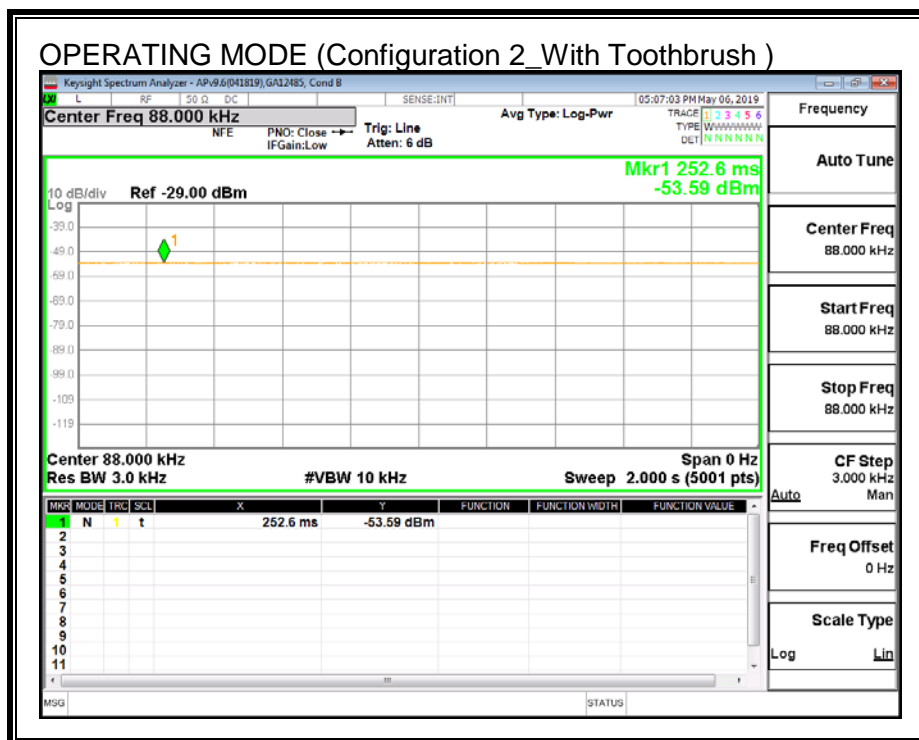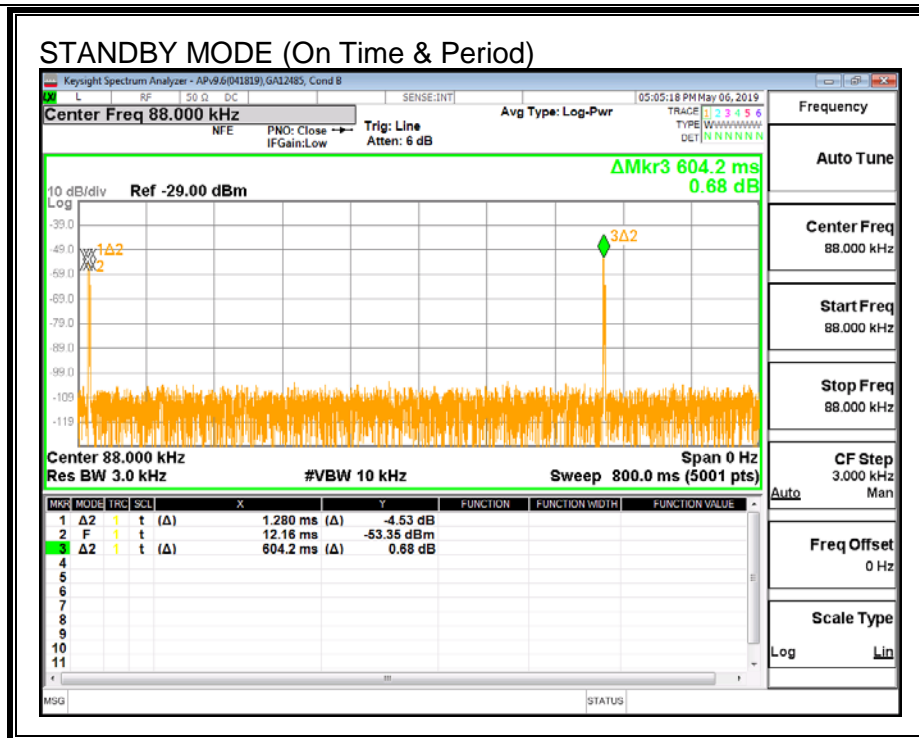

7. MAXIMUM PERMISSIBLE RF EXPOSURE TEST RESULTS

7.1. FCC LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

| Frequency range (MHz) | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm ²) | Averaging time (minutes) |
|---|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| (A) Limits for Occupational/Controlled Exposures | | | | |
| 0.3–3.0 | 614 | 1.63 | *(100) | 6 |
| 3.0–30 | 1842/f | 4.89/f | *(900/f ²) | 6 |
| 30–300 | 61.4 | 0.163 | 1.0 | 6 |
| 300–1500 | | | f/300 | 6 |
| 1500–100,000 | | | 5 | 6 |
| (B) Limits for General Population/Uncontrolled Exposure | | | | |
| 0.3–1.34 | 614 | 1.63 | *(100) | 30 |
| 1.34–30 | 824/f | 2.19/f | *(180/f ²) | 30 |

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

| Frequency range (MHz) | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm ²) | Averaging time (minutes) |
|-----------------------|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| 30–300 | 27.5 | 0.073 | 0.2 | 30 |
| 300–1500 | | | f/1500 | 30 |
| 1500–100,000 | | | 1.0 | 30 |

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

Note: The limit at 300 kHz was used for this device based on KDB enquiry

7.2. SUMMARY OF TEST RESULTS

RESULTS

| | | | |
|------------|-------|--------------|----------|
| ID: | 29435 | Date: | 5/6/2019 |
|------------|-------|--------------|----------|

Note: Both magnetic and electric field strengths have been investigated from 9 kHz to 30 MHz at 15cm surrounding the device and 20cm above the top surface of the EUT operation frequency is at 88 kHz.

The inductive wireless power transfer device meets all of the following requirements:

- ☒ Power transfer frequency is less than 1 MHz
- ☒ Output power from each primary coil is less than or equal to 15 watts.
- ☒ The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.
- ☒ Client device is placed directly in contact with the transmitter.
- ☒ Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).
- ☒ The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

FCC RF Exposure Summary of Results

| Electric Field | | | Magnetic Field | | |
|-----------------|-------------------------------|----------------|-----------------|-------------------------------|----------------|
| FCC Limit (V/m) | Maximum Average Reading (V/m) | Percentage (%) | FCC Limit (A/m) | Maximum Average Reading (A/m) | Percentage (%) |
| 614 | 4.129 | 0.67% | 1.63 | 0.808 | 49.57% |

Note: since the E and H field are lower than the limit by more than 50% of the limit then a PAG is not required.

7.3. DETAILED TEST RESULTS

E- FIELD AND H- FIELD MEASUREMENTS

Note: Peak measurements were performed. RMS values were calculated from the peak measurement. Please refer to the formula for calculating the RMS values: [Field Strength x $\sqrt{\text{Duty Cycle}}$].

| Configuration | Test Mode | Measuring Distance (cm) | Electric Field Limit | Electric Field Reading | | | | Magnetic Field Limit | Magnetic Field Reading | | | |
|---------------|---------------------------------|---|----------------------|------------------------|-------|--------------|-------------|----------------------|------------------------|-------|--------------|-------------|
| | | | (V/m) | (V/m) | | | | (A/m) | (A/m) | | | |
| | | | FCC | Location | Peak | Duty Cycle % | FCC Average | FCC | Location | Peak | Duty Cycle % | FCC Average |
| 1 | Standby | 15 cm surrounding the device (S1-S4) and 20 cm above the top surface of the EUT | 614 | S1 | 0.352 | 0.21 | 0.016 | 1.63 | S1 | 0.053 | 0.21 | 0.002 |
| | | | | S2 | 0.485 | | 0.022 | | S2 | 0.562 | | 0.026 |
| | | | | S3 | 0.406 | | 0.019 | | S3 | 0.057 | | 0.003 |
| | | | | S4 | 0.398 | | 0.018 | | S4 | 0.053 | | 0.002 |
| | | | | Top | 0.362 | | 0.017 | | Top | 0.054 | | 0.002 |
| | | | | Max | 0.485 | | 0.022 | | Max | 0.562 | | 0.026 |
| | | | | S1 | 2.940 | | 2.940 | | S1 | 0.274 | | 0.274 |
| 2 | Operating Power ~ 0% Charging | | | S2 | 2.171 | 2.171 | S2 | | 0.104 | 0.104 | | |
| | | | | S3 | 3.125 | 3.125 | S3 | | 0.309 | 0.309 | | |
| | | | | S4 | 1.981 | 1.981 | S4 | | 0.808 | 0.808 | | |
| | | | | Top | 2.458 | 2.458 | Top | | 0.172 | 0.172 | | |
| | | | | Max | 3.125 | 3.125 | Max | | 0.808 | 0.808 | | |
| | Operating Power 20-50% Charging | | | S1 | 2.790 | 2.790 | S1 | | 0.245 | 0.245 | | |
| | | | | S2 | 1.883 | 1.883 | S2 | | 0.082 | 0.082 | | |
| | | | | S3 | 3.258 | 3.258 | S3 | | 0.341 | 0.341 | | |
| | | | | S4 | 1.577 | 1.577 | S4 | | 0.766 | 0.766 | | |
| | | | | Top | 2.570 | 2.570 | Top | | 0.182 | 0.182 | | |
| | | | | Max | 3.258 | 3.258 | Max | | 0.766 | 0.766 | | |
| | Operating Power 100 % Charged | | | S1 | 2.812 | 2.812 | S1 | | 0.259 | 0.259 | | |
| | | | | S2 | 1.982 | 1.982 | S2 | | 0.093 | 0.093 | | |
| | | | | S3 | 4.129 | 4.129 | S3 | | 0.475 | 0.475 | | |
| | | | | S4 | 1.595 | 1.595 | S4 | | 0.800 | 0.800 | | |
| | | | | Top | 2.547 | 2.547 | Top | | 0.170 | 0.170 | | |
| | | | | Max | 4.129 | 4.129 | Max | | 0.800 | 0.800 | | |