



Engineering and Testing for EMC and Safety Compliance

FCC Certification Report

Airorlite Communications, Inc.

17-01 Pollitt Drive

Fair Lawn, NJ 07410

Contact: Lee Masoian

Phone: 201-301-6970

E-Mail: masoian@airorlite.com

**Model: 50289 Bi-Directional Booster (Downlink)
(470 – 480 MHz)**

FCC ID: UT650289BA8470DL

June 27, 2007

Standards Referenced for this Report	
Part 2: 2006	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
Part 90: 2006	Private Land Mobile Radio Services
ANSI/TIA-603-C-2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards

Frequency Range (MHz)	Measured Transmit Power (dBm) Conducted	Frequency Tolerance (ppm)	Emission Designator
470 - 480	26.2*	Amp	F8E

* Power listed is conducted per carrier

Report Prepared by Test Engineer: Daniel Biggs

Document Number: 2007151A

*This report may not be reproduced, except in full, without the written approval of Rhein Tech Laboratories, Inc.
Test results relate only to the product tested.*

360 Herndon Parkway
Suite 1400
Herndon, VA 20170
Ph: 703-689-0368 Fax: 703-689-2056

Table of Contents

1	General Information.....	5
1.1	Test Facility	5
1.2	Related Submittal(s)/Grant(s).....	5
2	Tested System Details	6
3	FCC Rules and Regulations Part 2 §2.1033(c)(8) Voltages and Currents Through The Final Amplifying Stage.....	8
4	FCC Rules and Regulations Part 90 §90.1215(a) and Part 2 §2.1046(a): Peak Output Power.....	9
4.1	Test Procedure.....	9
4.2	Test Data.....	9
5	FCC Rules and Regulations Part 90 §90.210(b) and Part 2 §2.1049(c): Occupied Bandwidth (Emissions Masks)	10
5.1	Test Procedure.....	10
5.2	Test Data.....	10
6	Bandwidth Rejection.....	17
6.1	Test Procedure.....	17
6.2	Test Data.....	17
7	FCC Rules and Regulations Part 2 §2.1051: Spurious Emissions at Antenna Terminals; Part 90 §90.210: Emissions Masks	21
7.1	Test Procedure.....	21
7.2	Test Data.....	21
8	Intermodulated Spurious Emissions.....	31
8.1	Test Procedure.....	31
8.2	Test Data.....	31
9	FCC Rules and Regulations Part 90 §90.210 and Part 2 §2.1053(a): Field Strength of Spurious Radiation	46
9.1	Test Procedure.....	46
9.2	Test Data.....	46
9.2.1	CFR 47 Part 90.210 Requirements.....	46
10	FCC Rules and Regulations Part 90 §90.213 and Part 2 §2.1055: Frequency Stability	49
11	Conclusion.....	49

Table of Tables

Table 2-1:	Test System Details	7
Table 2-2:	Equipment Under Test (EUT).....	7
Table 2-3:	Ports and Cabling (EUT)	7
Table 2-4:	Support Equipment.....	7
Table 4-1:	RF Power Output: Carrier Output Power	9
Table 4-2:	RF Power Output: Composite Output Power	9
Table 4-2:	Test Equipment for Testing RF Power Output - Conducted	9
Table 5-1:	Test Equipment for Testing Occupied Bandwidth	16
Table 6-1:	Test Equipment for Testing Bandwidth Rejection	20
Table 7-1:	Test Equipment for Testing Conducted Spurious Emissions.....	30
Table 8-1:	Test Equipment for Testing Intermodulated Spurious Emissions	45
Table 9-1:	Field Strength of Spurious Radiation: 470.0125 MHz	46
Table 9-2:	Field Strength of Spurious Radiation: 474.9375 MHz	47
Table 9-3:	Field Strength of Spurious Radiation: 479.95 MHz	47
Table 9-4:	Test Equipment for Testing Field Strength of Spurious Radiation	48

Table of Plots

Plot 5-1:	Occupied Bandwidth: Input to Booster; 20 dB bandwidth - 470.0125 MHz	10
Plot 5-2:	Occupied Bandwidth: Booster Output; 20 dB bandwidth - 470.0125 MHz	11
Plot 5-3:	Occupied Bandwidth: Input to Booster; 20 dB bandwidth - 474.9375 MHz	12
Plot 5-4:	Occupied Bandwidth: Booster Output; 20 dB bandwidth - 474.9375 MHz	13
Plot 5-5:	Occupied Bandwidth: Input to Booster; 20 dB bandwidth - 479.95 MHz	14
Plot 5-6:	Occupied Bandwidth: Booster Output; 20 dB bandwidth - 479.95 MHz	15
Plot 6-1:	Bandwidth Rejection - 470.0125 MHz.....	17
Plot 6-2:	Bandwidth Rejection - 474.9375 MHz.....	18
Plot 6-3:	Bandwidth Rejection - 479.95 MHz	19
Plot 7-1:	Conducted Spurious Emissions: 30 MHz - 1,000 MHz – 470.0125 MHz.....	21
Plot 7-2:	Conducted Spurious Emissions: 1, 000 MHz - 4,000 MHz – 470.0125 MHz	22
Plot 7-3:	Conducted Spurious Emissions: 4,000 MHz - 9,000 MHz – 470.0125 MHz	23
Plot 7-4:	Conducted Spurious Emissions: 30 MHz - 1,000 MHz – 474.9375 MHz.....	24
Plot 7-5:	Conducted Spurious Emissions: 1,000 MHz - 4,000 MHz – 474.9375 MHz	25
Plot 7-6:	Conducted Spurious Emissions: 4,000 MHz - 9,000 MHz – 474.9375 MHz	26
Plot 7-7:	Conducted Spurious Emissions: 30 MHz – 1,000 MHz – 479.95 MHz.....	27
Plot 7-8:	Conducted Spurious Emissions: 1,000 MHz – 4,000 MHz – 479.9500 MHz.....	28
Plot 7-9:	Conducted Spurious Emissions: 4,000 MHz – 9,000 MHz – 479.9500 MHz.....	29
Plot 8-1:	Intermodulated Spurious Emissions: In-Band Input Signals to Booster.....	31
Plot 8-2:	Intermodulated Spurious Emissions: In-Band Input Signals through Booster	32
Plot 8-3:	Intermodulated Spurious Emissions: 30 – 460 MHz	33
Plot 8-4:	Intermodulated Spurious Emissions: 460 – 480 MHz	34
Plot 8-5:	Intermodulated Spurious Emissions: 480 - 1000 MHz.....	35
Plot 8-6:	Intermodulated Spurious Emissions: 1000 - 4000 MHz.....	36
Plot 8-7:	Intermodulated Spurious Emissions: 4000 – 9000 MHz	37
Plot 8-8:	Intermodulated Spurious Emissions: In-Band Input Signals to Booster.....	38
Plot 8-9:	Intermodulated Spurious Emissions: In-Band Input Signals through Booster	39
Plot 8-10:	Intermodulated Spurious Emissions: 30 – 470 MHz	40
Plot 8-11:	Intermodulated Spurious Emissions: 470 – 490 MHz	41
Plot 8-12:	Intermodulated Spurious Emissions: 490 - 1000 MHz.....	42
Plot 8-13:	Intermodulated Spurious Emissions: 1000 - 4000 MHz.....	43
Plot 8-14:	Intermodulated Spurious Emissions: 4000 – 9000 MHz	44

Table of Figures

Figure 2-1:	Configuration of Tested System.....	8
-------------	-------------------------------------	---

Table of Appendixes

Appendix A:	RF Exposure Compliance	50
Appendix B:	Agency Authorization Letter.....	51
Appendix C:	Confidentiality Request Letter.....	52
Appendix D:	Label Information	53
Appendix E:	Operational Description	54
Appendix F:	Parts List	55
Appendix G:	Tune Up/Alignment Procedure.....	56
Appendix H:	Schematics.....	57
Appendix I:	Block Diagram	58
Appendix J:	Manual	59
Appendix K:	Test Configuration Photographs	60
Appendix L:	External Photographs.....	62
Appendix M:	Internal Photographs.....	65

Table of Photographs

Photograph 1:	Radiated Emissions (Front View)	60
Photograph 2:	Radiated Emissions (Rear View).....	61

1 General Information

The following Certification Report is prepared on behalf of **Aiorlite Communications, Inc.** in accordance with the Federal Communications Commission Part 90 Rules and Regulations. The Equipment Under Test (EUT) was the **Model 50289 Bi-directional Booster (Downlink), FCC ID: UT650289BA8470DL**. The test results reported in this document relate only to the item that was tested.

All measurements contained in this application were conducted in accordance with the applicable FCC Rules and Regulations in CFR 47. Calibration checks are performed regularly on the instruments, and all accessories including high pass filter, coaxial attenuator, preamplifier and cables.

1.1 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the parking lot of Rhein Tech Laboratories, Inc., 360 Herndon Parkway, Suite 1400, Herndon, Virginia, 20170. This site has been fully described in a report submitted to and approved by the Federal Communications Commission to perform AC line conducted and radiated emissions testing.

1.2 Related Submittal(s)/Grant(s)

This is an original application report.

2 Tested System Details

The test sample was received on April 3, 2007. Listed below are the identifiers and descriptions of all equipment, cables, and internal devices used with the EUT for this test, as applicable.

The Aiorlite Communications, Inc. Model 50289 Bi-Directional Booster (Downlink) is an eight channel bi-directional amplifier utilizing 16 channels of synchronized down-up conversions.

The multi-channel booster is divided into two independent 8 channel systems (8 high channels and 8 low channels) for full duplex operations. Downlink signals are received at the roof antenna, 8 selected frequencies are processed (filtering and amplification), and rebroadcast on a radiating cable. Conversely, uplink signals induced onto radiating cable are similarly processed and rebroadcast on the roof antenna (reference FCC ID: UT650289BA8480UL). The uplink channels are the high band channels (480 - 490 MHz), and the 8 downlink channels are the low band (470 - 480 MHz). Note that the system as a whole is a "bi-directional booster"; this application is only for the downlink channels (the uplink channels are certified under FCC ID: UT650289BA8480UL). We request that the grant notes reflect: "Part of booster system used with FCC ID: UT650289BA8480UL."

Each system consists of a LNA/8-way splitter, 8 channel modules (down-up converters with synthesized LO), 8-way combiner, and RF power amplifiers with an 8-way power combiner. In addition, a duplexer combines the uplink RF output and downlink RF input to a common "Off the Air" antenna.

The RF signal flow of the two systems is identical. RF band pass filters internal to the system modules determine high band or low band operations.

Note that the device does not translate frequencies, and therefore, the RF output will not change with temperature or voltage variation. Additionally, the device is designed to be used with FM input/output signals.

An AGC limits the maximum composite out to 31 dBm.

The EUT is a Class A signal booster which has narrowband filtering via crystal filters.

The input drive level was set at the maximum input rating of -50 dBm for all tests. The gain of the amplifier was set to maximum gain by the manufacturer before testing began.

The device cannot operate in saturation. The channel card is band limited by crystal filters which prevent spectral regrowth. The channel cards are limited to a max output of -20 dBm and the power amplifier is level controlled via an AGC loop. All of these prevent saturation in the power amp and also prevent over modulation.

Table 2-1: Test System Details

Model Tested	Model 50289 Bi-Directional Booster (Downlink)
Frequency Band	470 - 480 MHz
Maximum Output Power	26.2 dBm/carrier
Number of Channels	8
Channel Bandwidth	25 kHz nominal
Channel Spacing	25 kHz
Primary Power	95 - 132 VAC, 45-64 Hz
Duty Cycle	Continuous

Table 2-2: Equipment Under Test (EUT)

Part	Manufacturer	Model	PN/SN	FCC ID	RTL Bar Code
Bi-Directional Booster	Aiorlite Communications, Inc.	50289	52100-02-06	UT650289BA8470DL	17856


Table 2-3: Ports and Cabling (EUT)

Port	Cable Type	Quantity	Length (feet)	Shield
RF In	N type	1	N/A	N/A
RF Out	N type	1	N/A	N/A

Table 2-4: Support Equipment

Part	Manufacturer	Model	PN/SN	FCC ID	RTL Bar Code
Notebook Computer	Panasonic	Toughbook	N/A	N/A	13954
Serial Interface Cable	N/A	DB-9	N/A	N/A	N/A

Figure 2-1: Configuration of Tested System

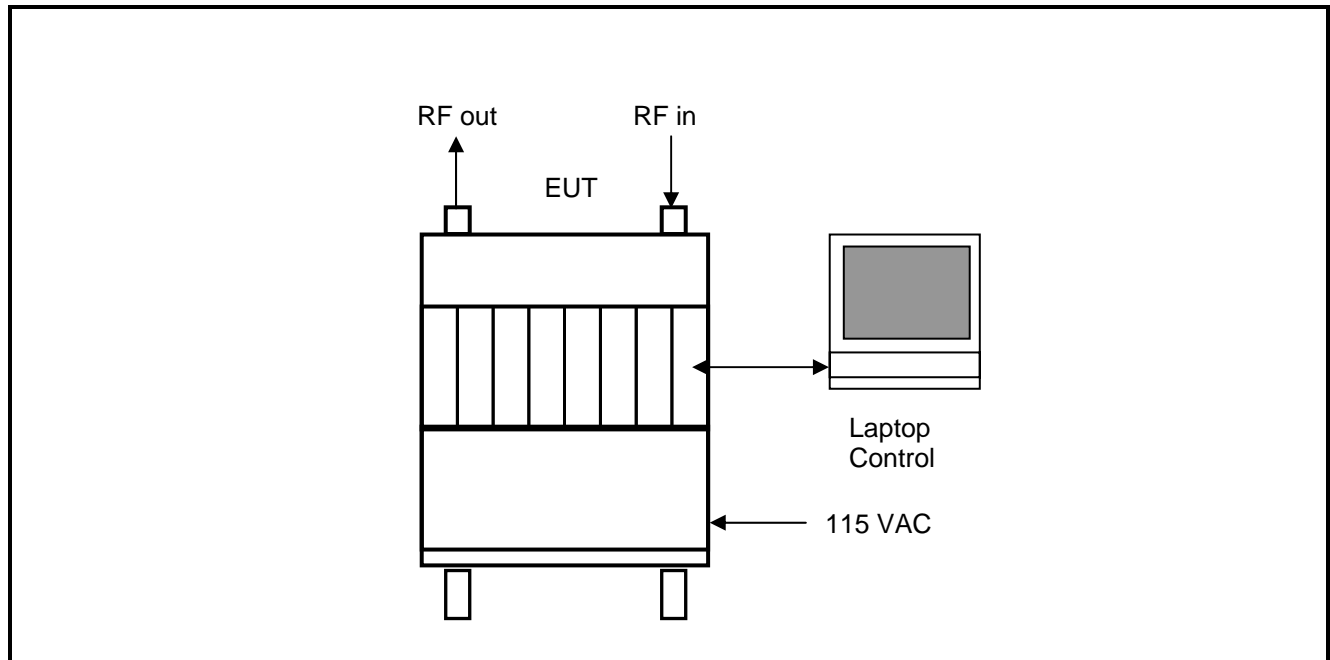

3 FCC Rules and Regulations Part 2 §2.1033(c)(8) Voltages and Currents Through The Final Amplifying Stage

Nominal DC Voltage: 12 VDC
Current: 1.3 A

4 FCC Rules and Regulations Part 90 §90.1215(a) and Part 2 §2.1046(a): Peak Output Power

4.1 Test Procedure

ANSI TIA-603-2004, section 2.2.1.

The EUT was connected to a coaxial attenuator having a 50 Ω load impedance. Any cable losses were accounted for. The downlink antenna is a leaky coax with 60 dB coupling. -20 dBi is representative of the leaky coax gain (-20 dBi = -22.14 dBd).

4.2 Test Data

Table 4-1: RF Power Output: Carrier Output Power

Frequency MHz	Power Level Measured (dBm/carrier)	Antenna Gain (dBd)	ERP (W)	Limit §90.219 (W)
470.0125	26.2	-22.14	0.003	5
474.9375	24.6	-22.14	0.002	5
479.95	24.7	-22.14	0.002	5

*Measurement accuracy: +/- 0.3 dB

Table 4-2: RF Power Output: Composite Output Power


Frequency MHz	Composite Output Power (dBm)	Antenna Gain (dBd)	ERP (W)	Limit §90.219 (W)
470 – 480	31	-22.14	0.008	5

*Measurement accuracy: +/- 0.3 dB

Table 4-3: Test Equipment for Testing RF Power Output - Conducted

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due
901184	Agilent Technologies	E4416A	Power Meter	GB41050573	10/3/07
901356	Agilent Technologies	E9323A	Power Sensor	31764-264	10/3/07
901396	MCE Weinschel	48-40-34	Attenuator, 40 dB, DC-18 GHz, 100 W	93453	12/02/08

Test Personnel:

Daniel Biggs		April 20, 2007
Test Engineer	Signature	Date Of Tests

5 FCC Rules and Regulations Part 90 §90.210(b) and Part 2 §2.1049(c): Occupied Bandwidth (Emissions Masks)

5.1 Test Procedure

ANSI TIA-603-C-2004, Section 2.2.11.


The transmitter is terminated with a 50 Ω load and interfaced with a spectrum analyzer. Cable losses were accounted for in measurement.

Full modulation was applied with 5 kHz deviation and a 2500 Hz tone. Signal input level was set to -75 dBm.


5.2 Test Data

Bandwidth Limit: 1 MHz


Plot 5-1: Occupied Bandwidth: Input to Booster; 20 dB bandwidth - 470.0125 MHz

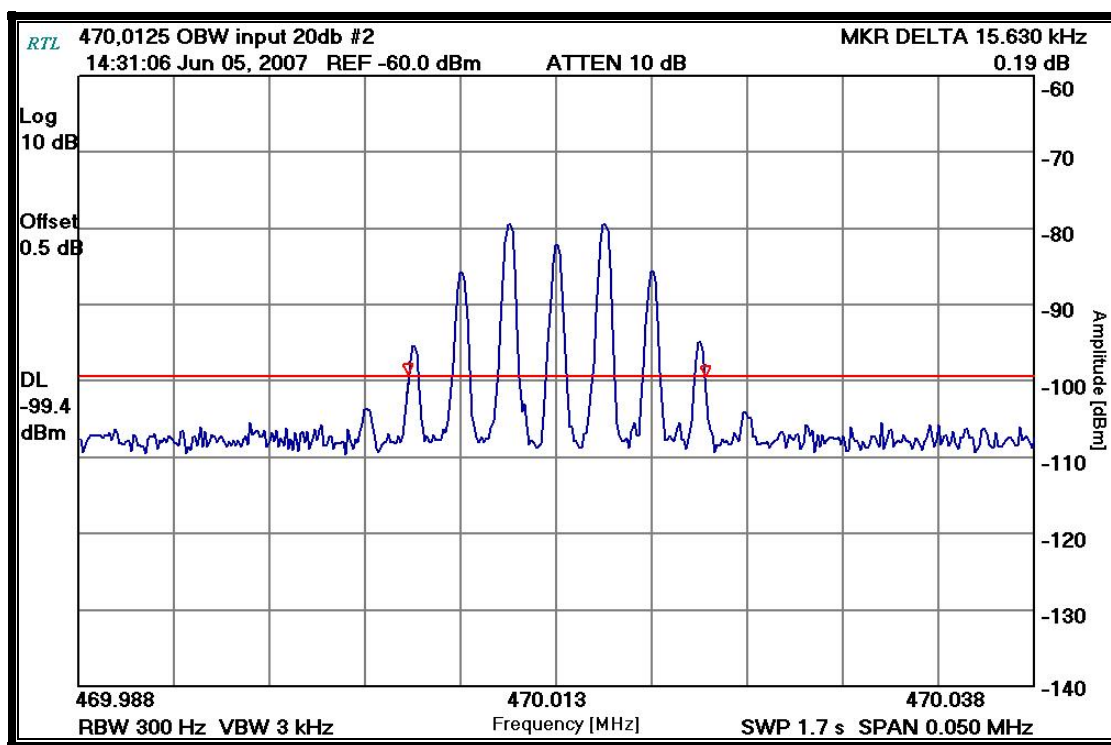


Plot 5-2: Occupied Bandwidth: Booster Output; 20 dB bandwidth - 470.0125 MHz

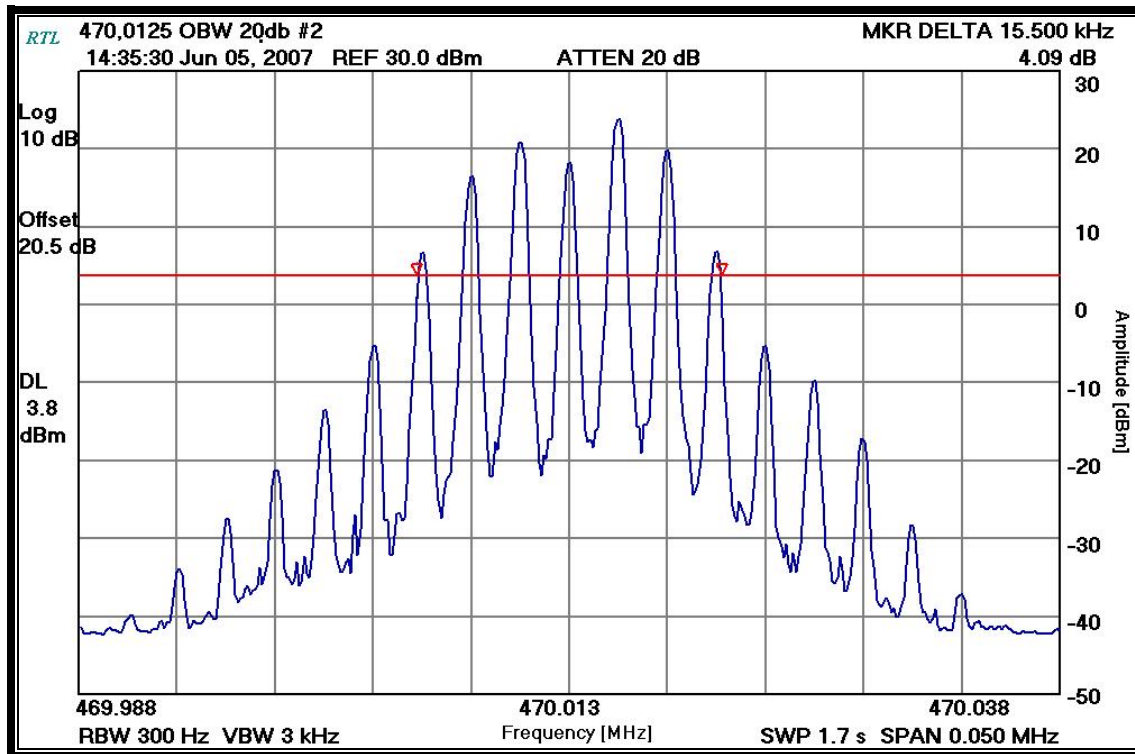


Plot 5-3: Occupied Bandwidth: Input to Booster; 20 dB bandwidth - 474.9375 MHz

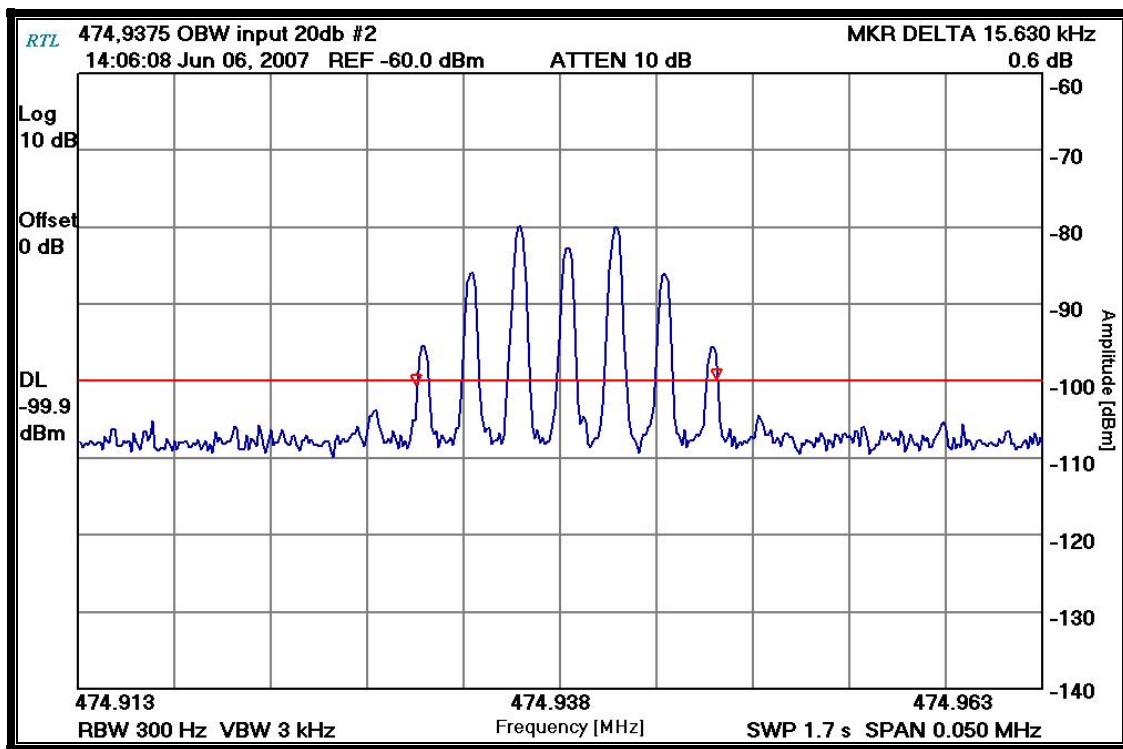

Plot 5-4: Occupied Bandwidth: Booster Output; 20 dB bandwidth - 474.9375 MHz

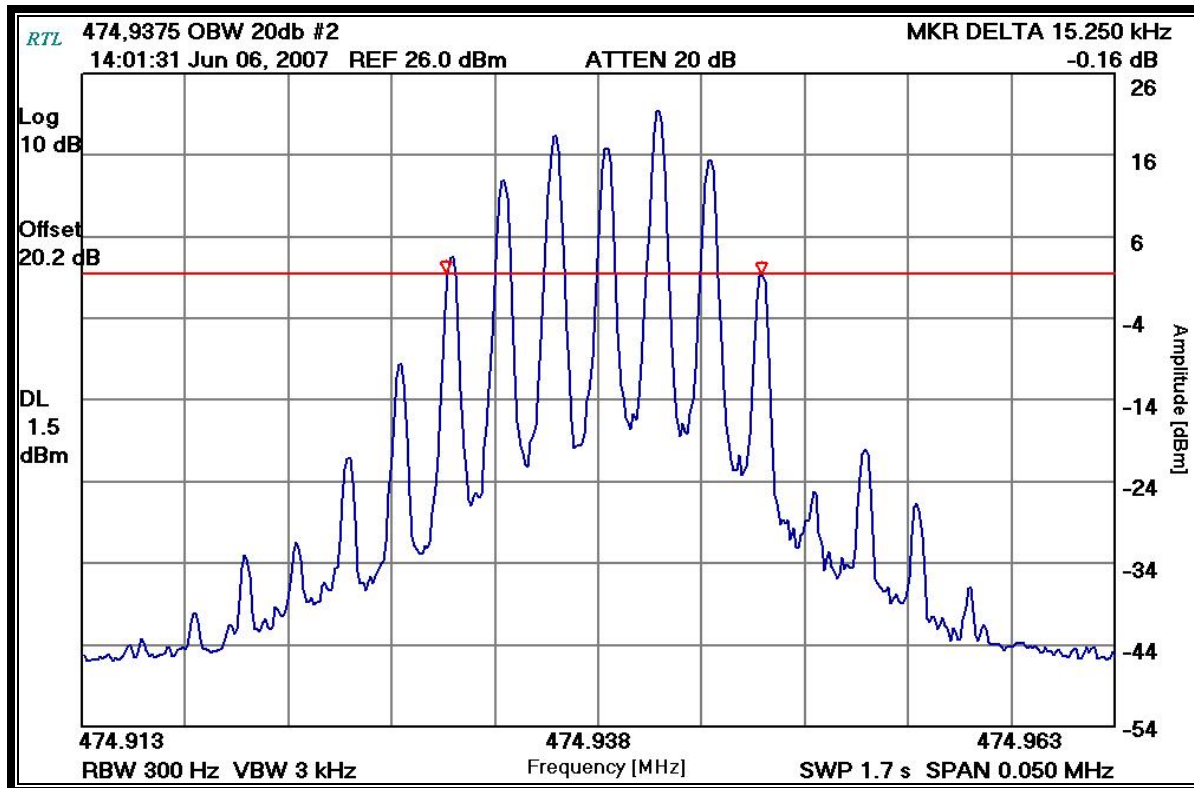

Plot 5-5: Occupied Bandwidth: Input to Booster; 20 dB bandwidth - 479.95 MHz

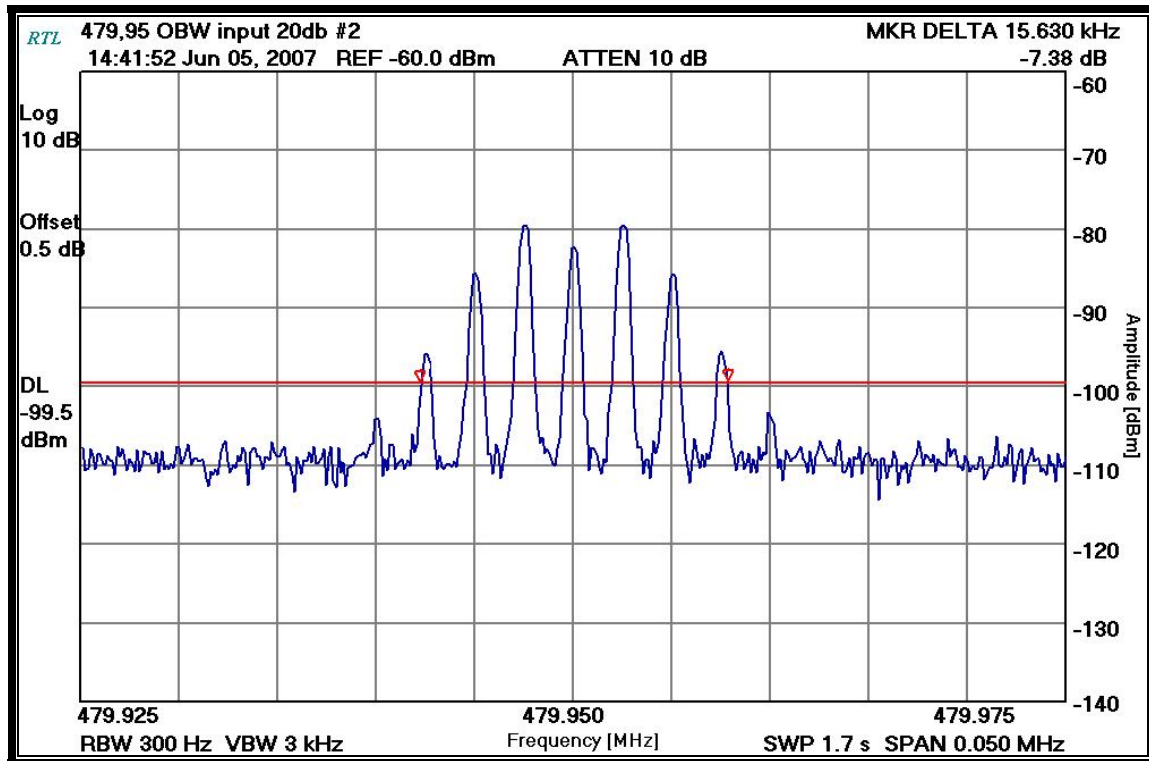

Plot 5-6: Occupied Bandwidth: Booster Output; 20 dB bandwidth - 479.95 MHz

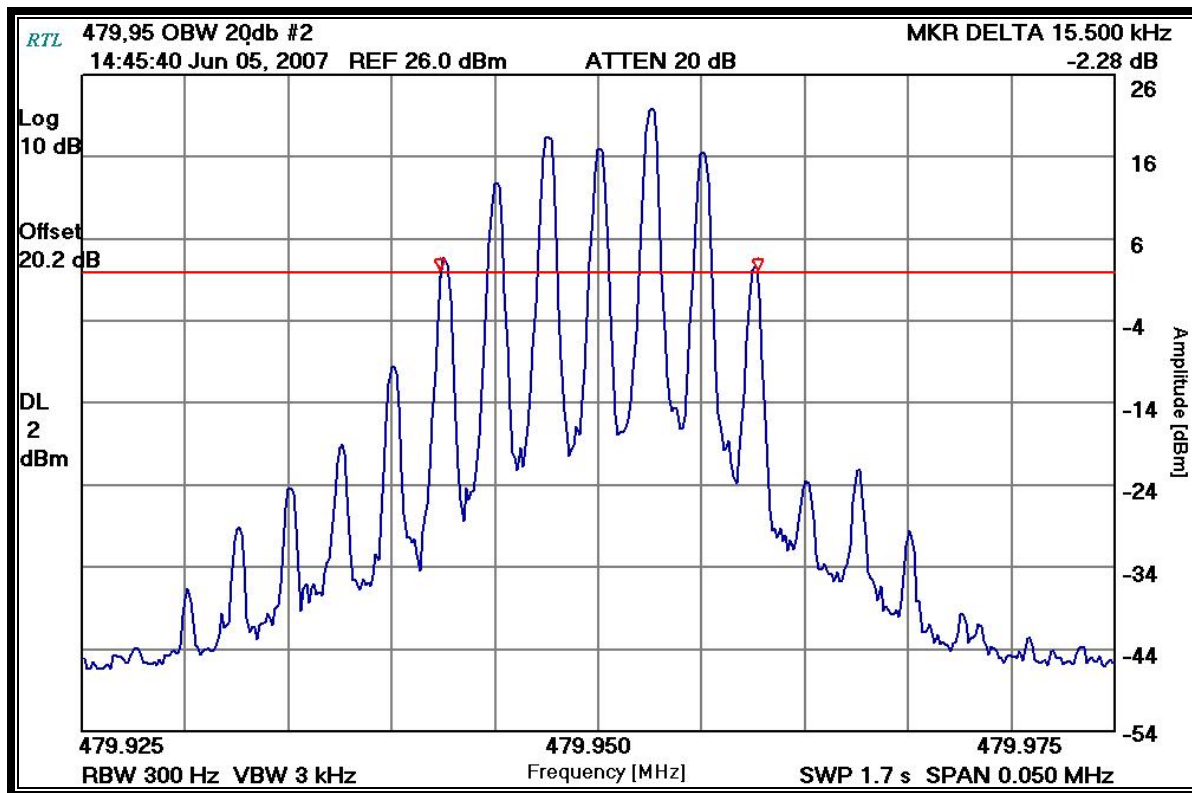



Table 5-1: Test Equipment for Testing Occupied Bandwidth

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due
901215	Hewlett Packard	8596EM	EMC Analyzer (9 kHz – 12.8 GHz)	3826A00144	10/16/07
901057	Hewlett Packard	3336B	Synthesizer/Level Generator (100Hz-20 MHz)	2514A02585	12/19/07
901118	Hewlett Packard	HP8901B	Modulation Analyzer 150kHz-1300MHz	2406A00178	07/24/07
901396	MCE Weinschel	48-40-34	Attenuator, 40 dB, DC-18 GHz, 100 W	93453	12/02/08

Test Personnel:

Daniel Biggs		June 5 & 6, 2007
Test Technician/Engineer	Signature	Dates of Tests

6 Bandwidth Rejection

6.1 Test Procedure


ANSI TIA-603-C-2004, Section 2.2.11.

Bandwidth rejection was performed by sweeping below and through the channel band with the spectrum analyzer on max hold. The transmitter is terminated with a $50\ \Omega$ load and interfaced with a spectrum analyzer. Cable losses were accounted for in measurement.


Full modulation was applied with 5 kHz deviation and a 2500 Hz tone.

6.2 Test Data

Plot 6-1: Bandwidth Rejection - 470.0125 MHz

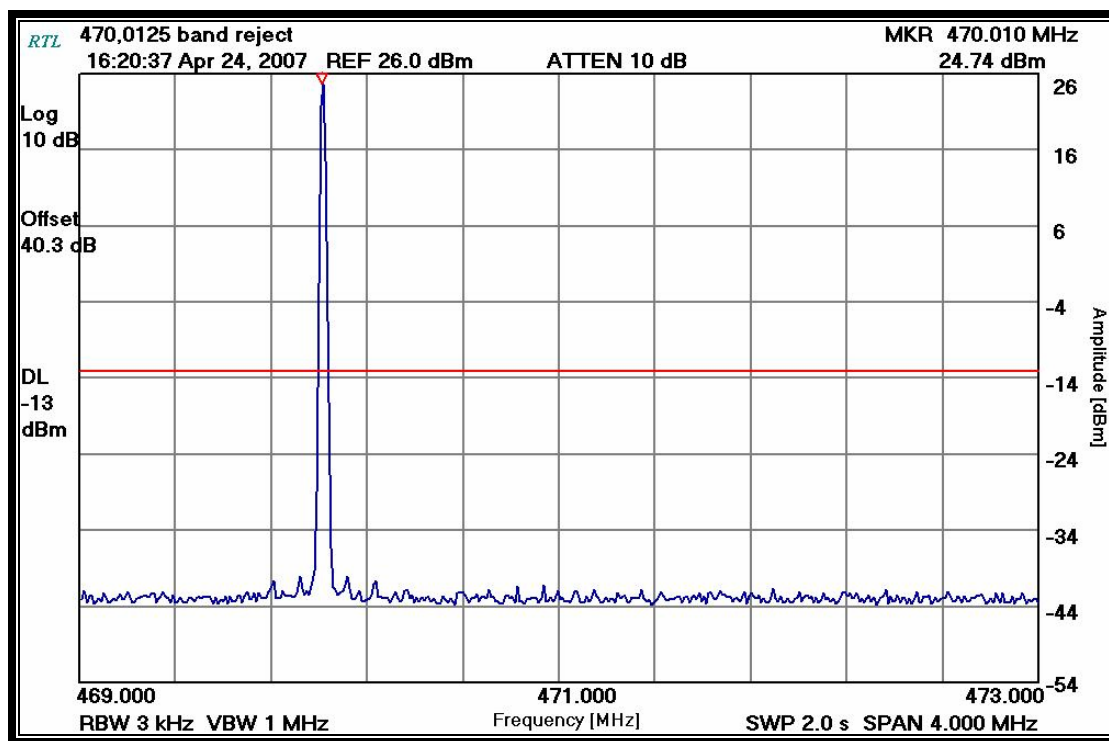

Plot 6-2: Bandwidth Rejection - 474.9375 MHz

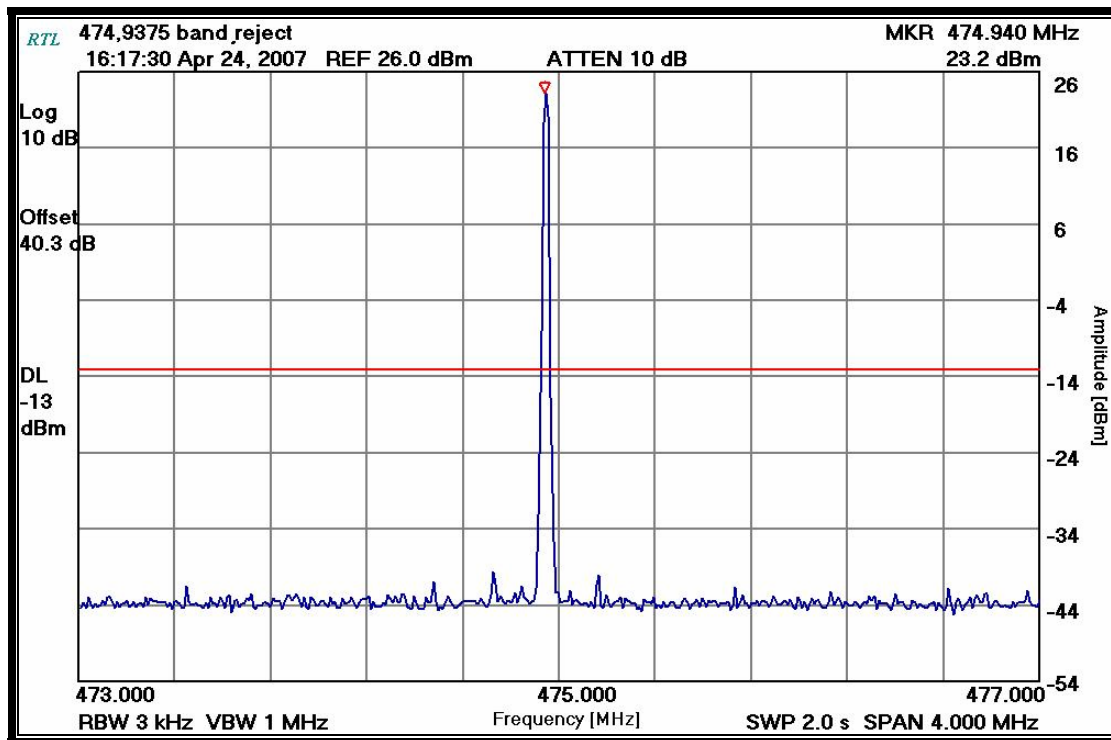

Plot 6-3: Bandwidth Rejection - 479.95 MHz

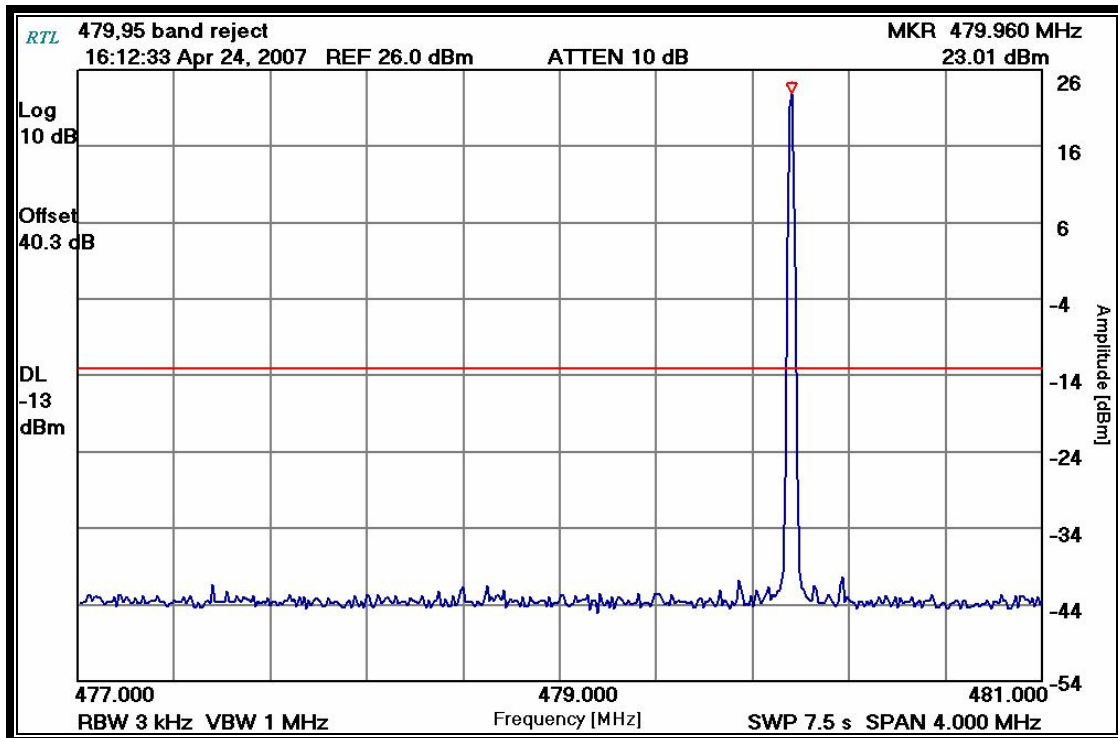



Table 6-1: Test Equipment for Testing Bandwidth Rejection

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due
901215	Hewlett Packard	8596EM	EMC Analyzer (9 kHz – 12.8 GHz)	3826A00144	10/16/07
901057	Hewlett Packard	3336B	Synthesizer/Level Generator (100 Hz - 20 MHz)	2514A02585	12/19/07
901118	Hewlett Packard	HP8901B	Modulation Analyzer (150 kHz – 1300 MHz)	2406A00178	07/24/07
901396	MCE Weinschel	48-40-34	Attenuator, 40 dB, DC-18 GHz, 100 W	93453	12/02/08
901424	Insulated Wire Inc.	KPS-1503- 360-KPS	RF cable 36"	NA	12/12/07

Test Personnel:

Daniel Biggs		April 24, 2007
Test Engineer	Signature	Date Of Tests

7 FCC Rules and Regulations Part 2 §2.1051: Spurious Emissions at Antenna Terminals; Part 90 §90.210: Emissions Masks

7.1 Test Procedure

ANSI TIA-603-C-2004, Section 2.2.13.


The transmitter is terminated with a 50 Ω load and interfaced with a spectrum analyzer. Cable losses were accounted for in measurement.

7.2 Test Data


Frequency range of measurement per Part 2.1057: 9 kHz to 10xFc.

The worst case (unwanted emissions) channels are shown. The magnitude of emissions attenuated more than 20 dB below the FCC limit need not be recorded.


Plot 7-1: Conducted Spurious Emissions: 30 MHz - 1,000 MHz – 470.0125 MHz

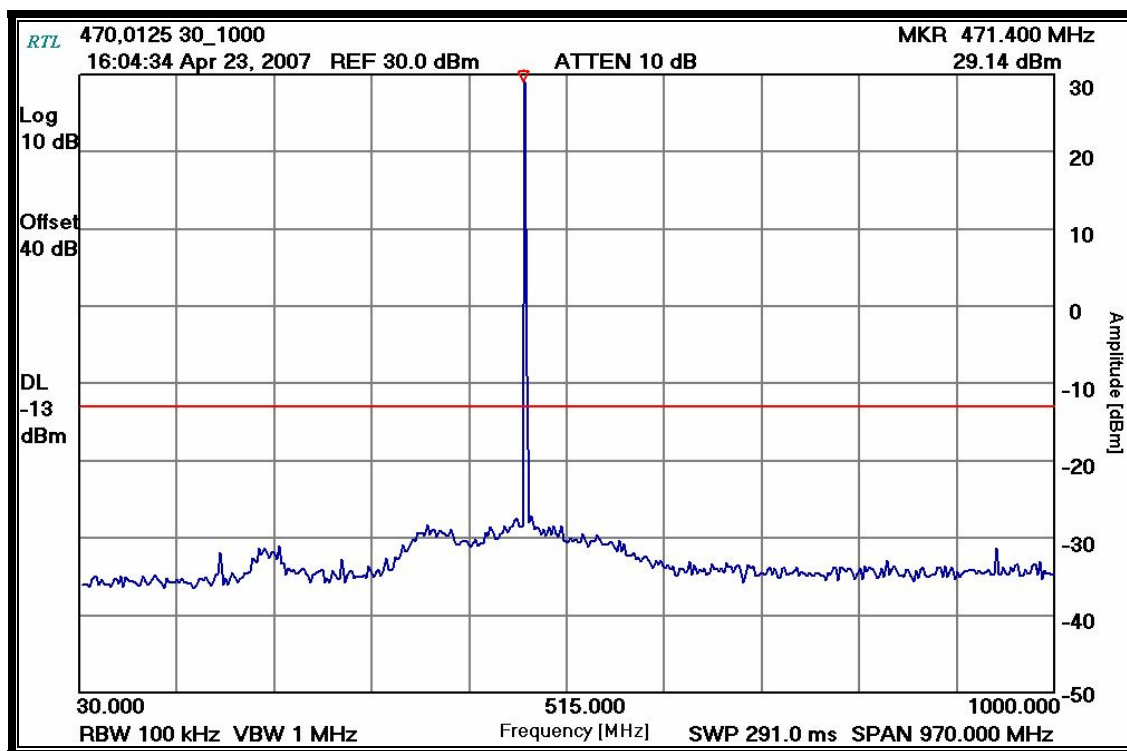


Plot 7-2: Conducted Spurious Emissions: 1,000 MHz - 4,000 MHz – 470.0125 MHz

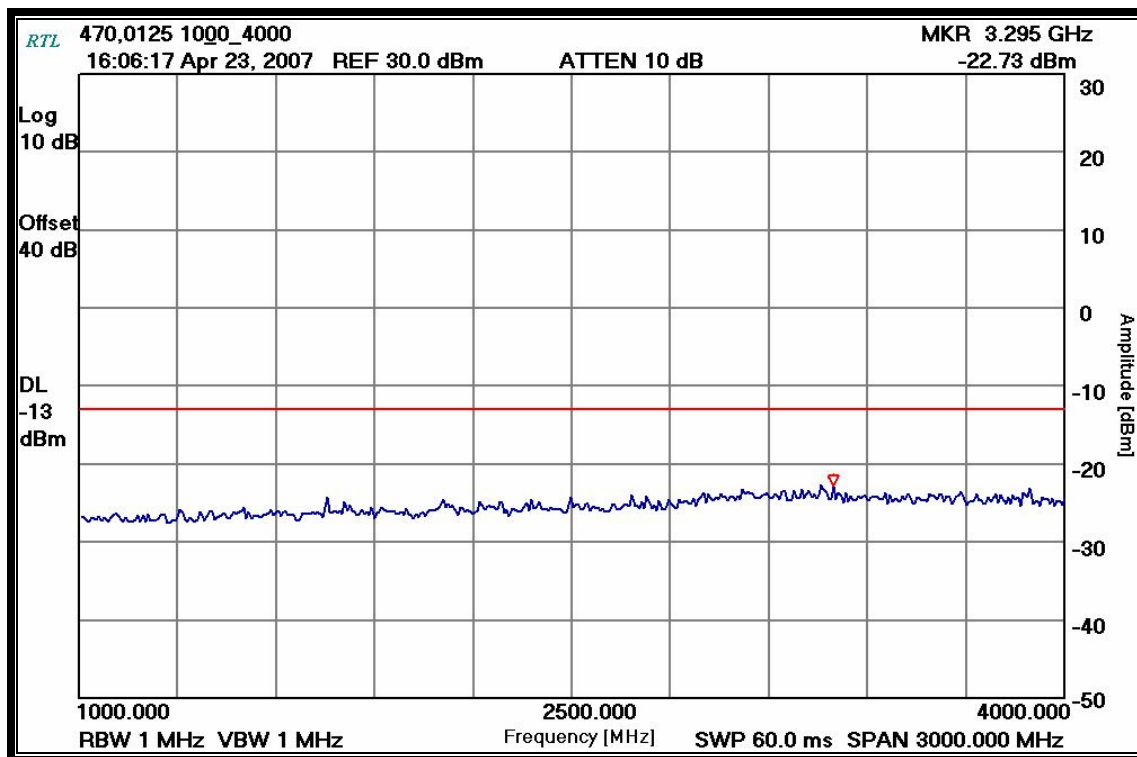


Plot 7-3: Conducted Spurious Emissions: 4,000 MHz - 9,000 MHz – 470.0125 MHz

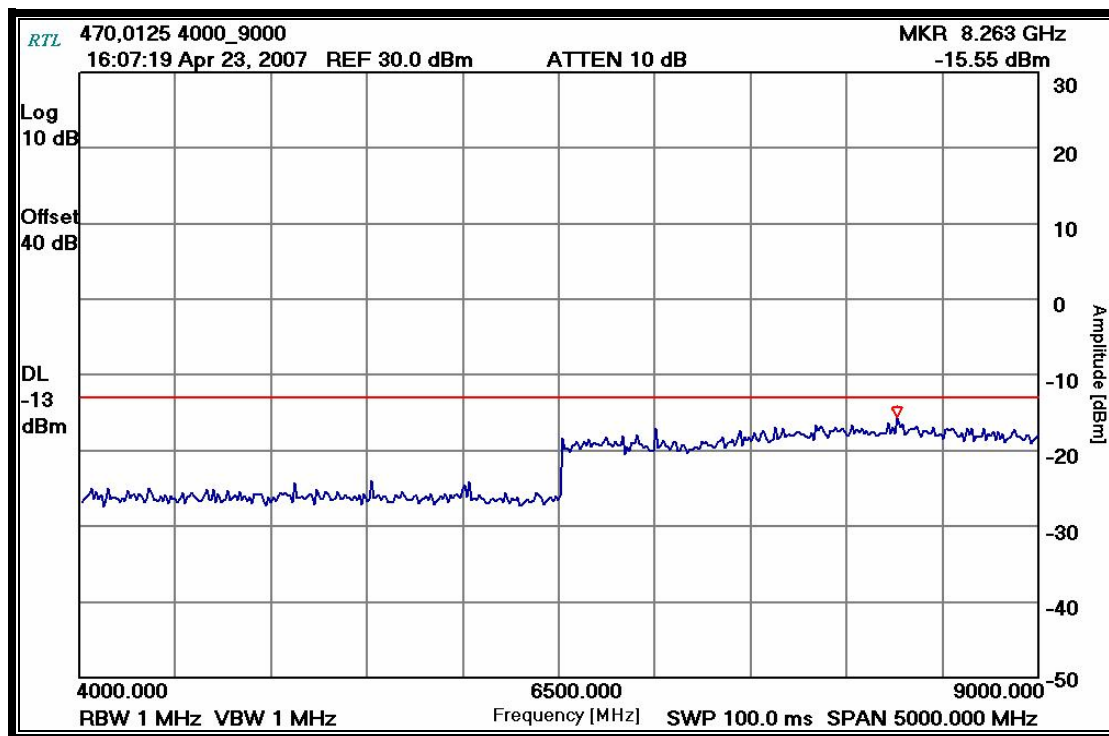


Plot 7-4: Conducted Spurious Emissions: 30 MHz - 1,000 MHz – 474.9375 MHz

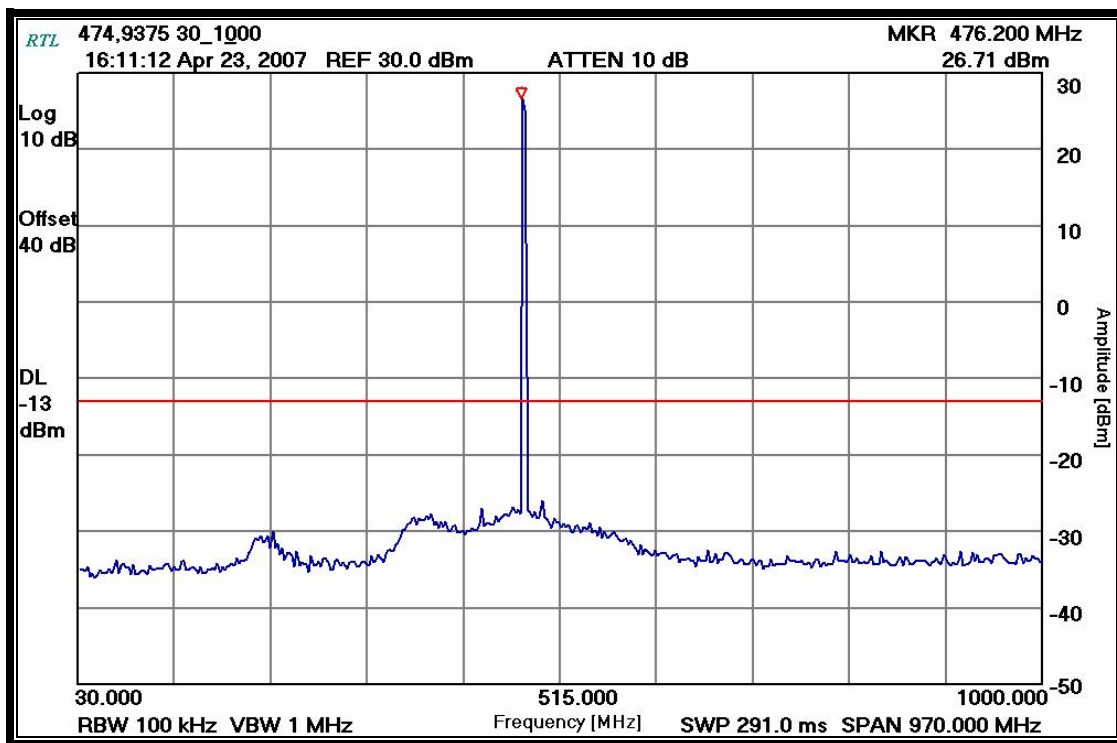


Plot 7-5: Conducted Spurious Emissions: 1,000 MHz - 4,000 MHz – 474.9375 MHz

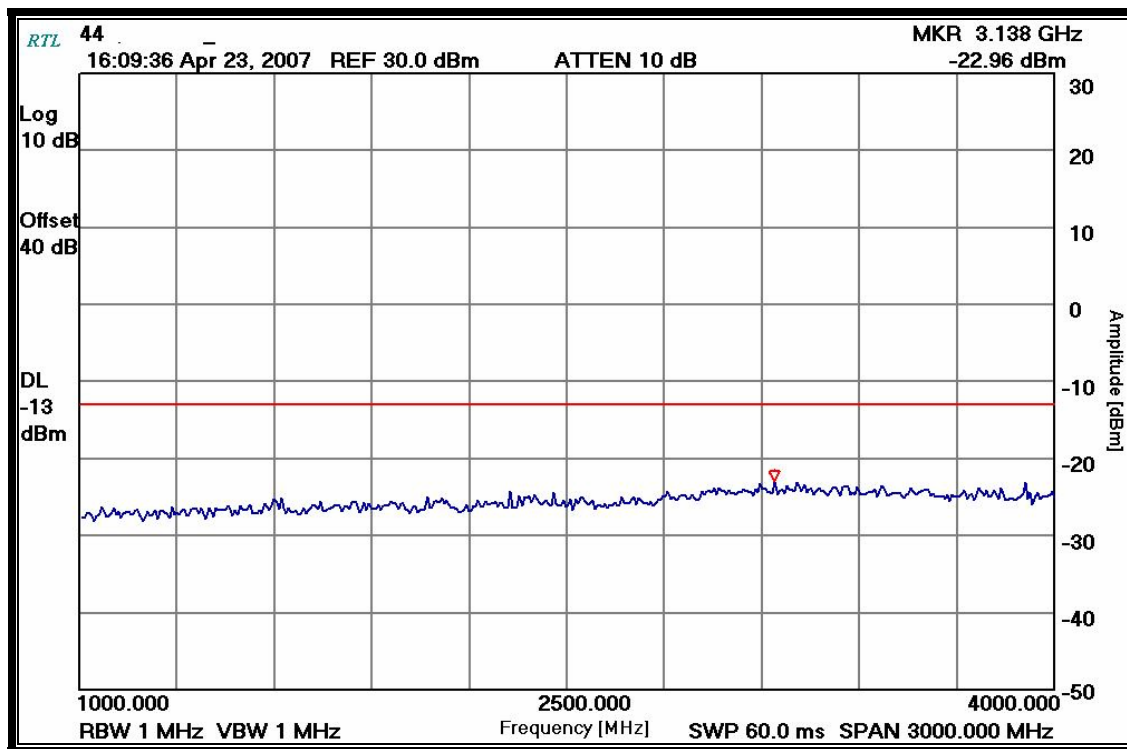


Plot 7-6: Conducted Spurious Emissions: 4,000 MHz - 9,000 MHz – 474.9375 MHz

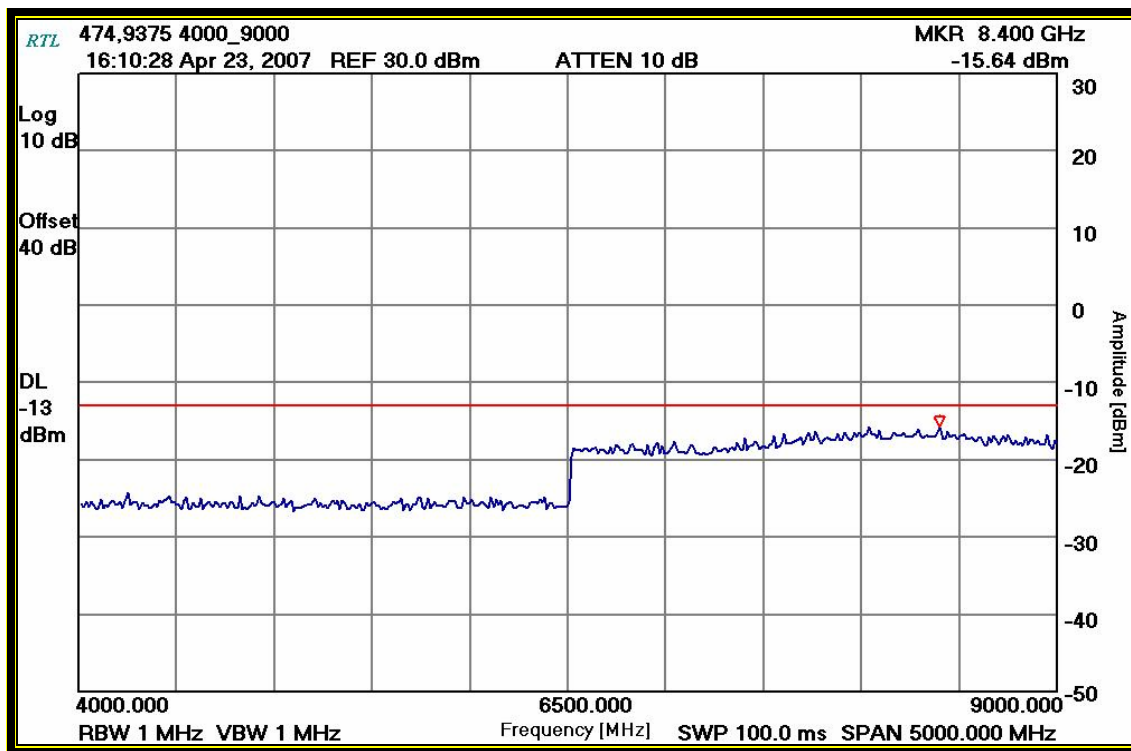

Plot 7-7: Conducted Spurious Emissions: 30 MHz – 1,000 MHz – 479.95 MHz

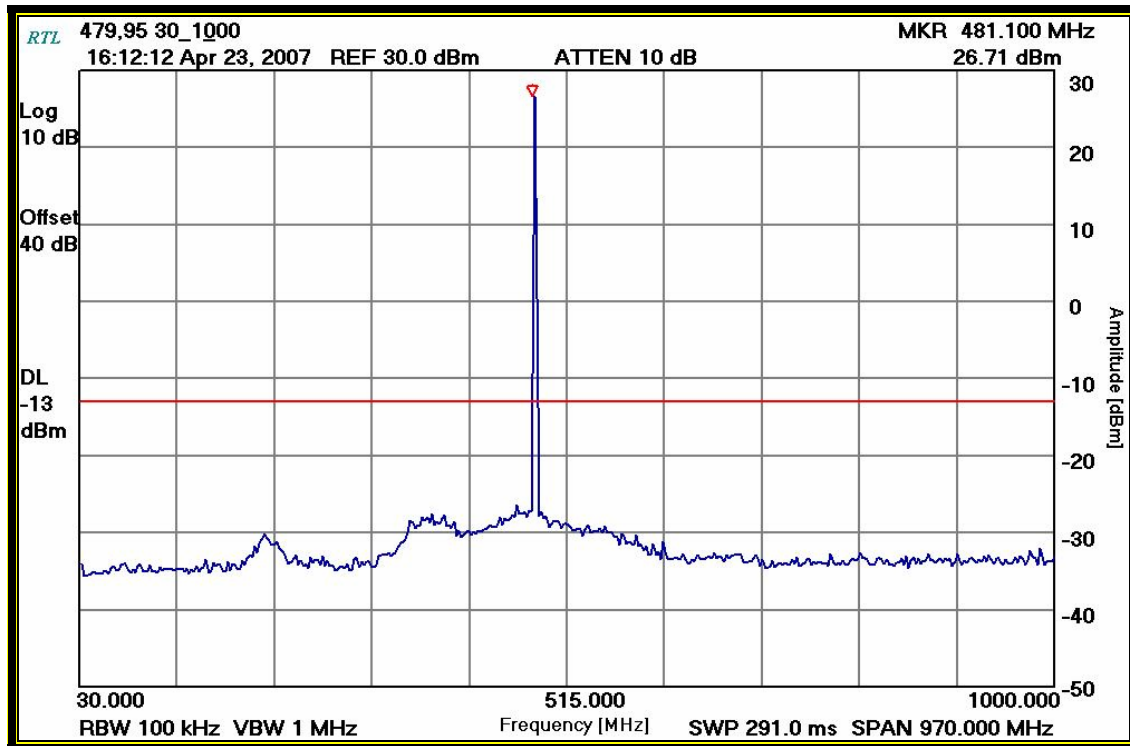

Plot 7-8: Conducted Spurious Emissions: 1,000 MHz – 4,000 MHz – 479.9500 MHz

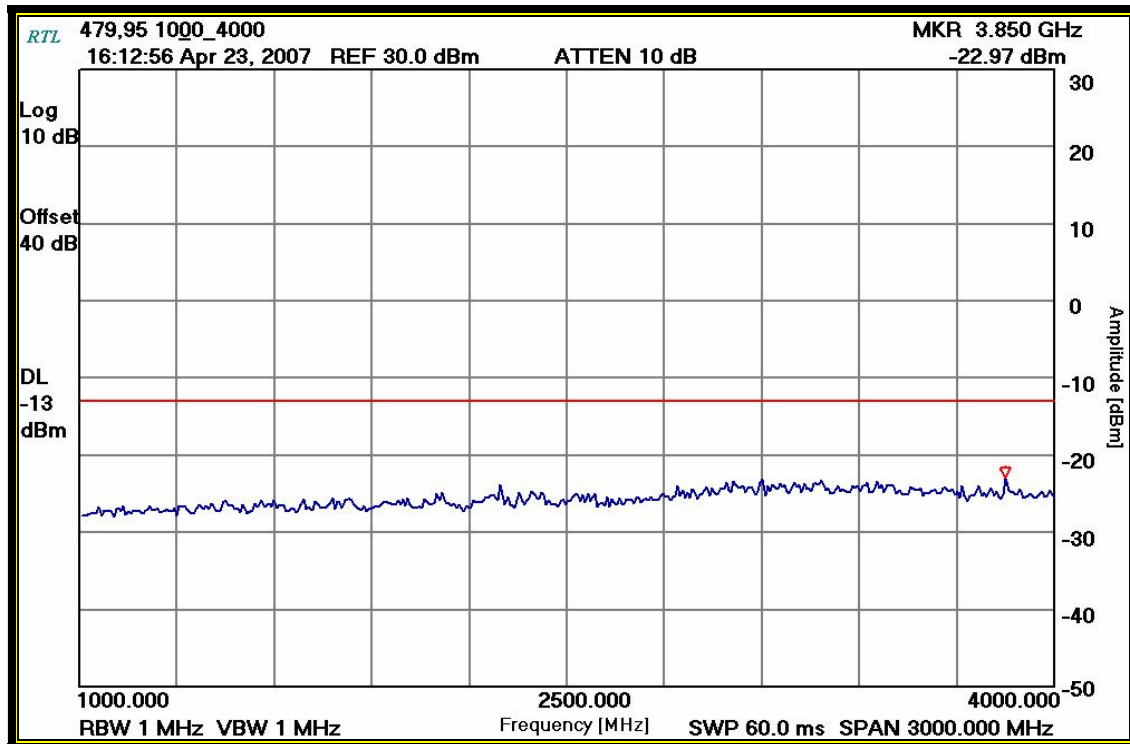

Plot 7-9: Conducted Spurious Emissions: 4,000 MHz – 9,000 MHz – 479.9500 MHz

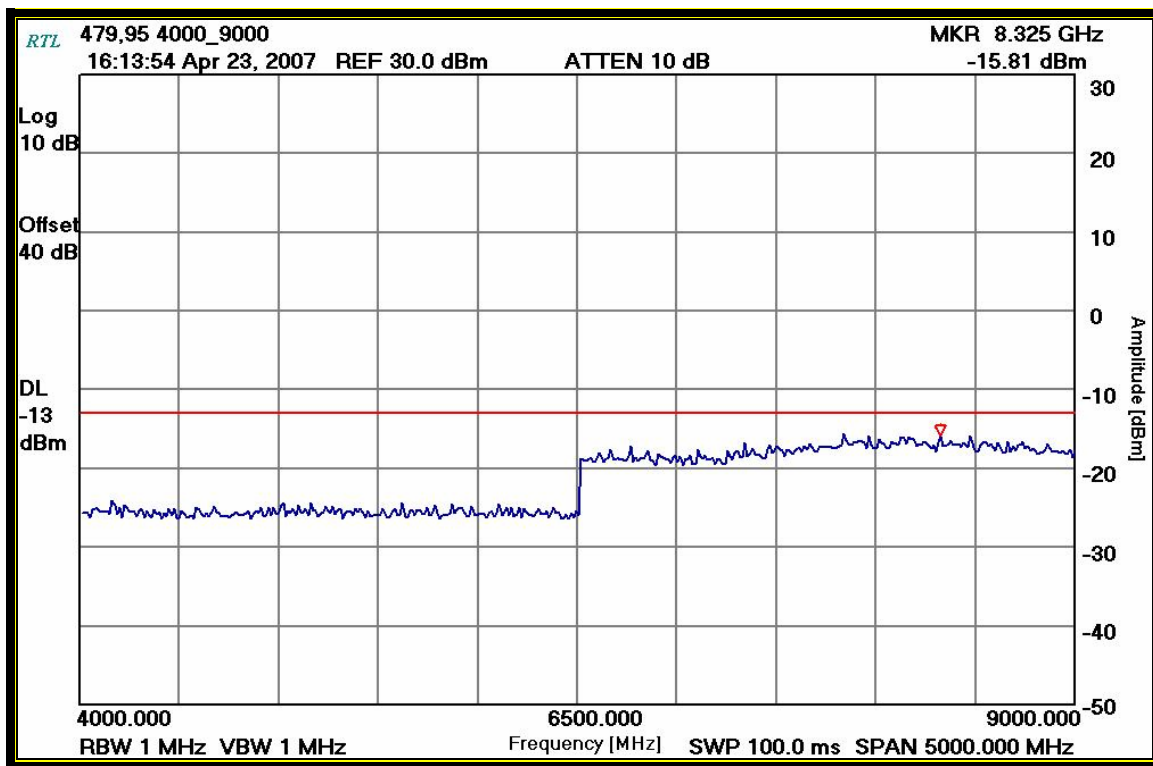



Table 7-1: Test Equipment for Testing Conducted Spurious Emissions

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due
901215	Hewlett Packard	8596EM	EMC Analyzer (9 kHz – 12.8 GHz)	3826A00144	10/16/07
901057	Hewlett Packard	3336B	Synthesizer/Level Generator (100Hz-20 MHz)	2514A02585	12/19/07
901118	Hewlett Packard	HP8901B	Modulation Analyzer 150kHz-1300MHz	2406A00178	07/24/07
901396	MCE Weinschel	48-40-34	Attenuator, 40 dB, DC-18 GHz, 100 W	93453	12/02/08
901424	Insulated Wire Inc.	KPS-1503- 360-KPS	RF cable 36"	NA	12/12/07

Test Personnel:

Daniel Biggs		April 23, 2007
Test Engineer	Signature	Date Of Tests

8 Intermodulated Spurious Emissions

8.1 Test Procedure

The transmitter is terminated with a $50\ \Omega$ load and interfaced with a spectrum analyzer. Cable losses were accounted for in measurement. Two signal generators were used to produce interference signals. Two signals were injected on the low end of the band and two signals were injected on the high end of the band. Testing was performed from 30 MHz – 9 GHz.

Low end: Plots 1-7

470.0125 MHz – 5 kHz deviation, 1 kHz tone at -50 dBm

472.5625 MHz - 5 kHz deviation, 2.5 kHz tone at -50 dBm


High end: Plots 8-14

477.9375 MHz – 5 kHz deviation, 1 kHz tone at -50 dBm


479.95 MHz - 5 kHz deviation, 2.5 kHz tone at -50 dBm

8.2 Test Data


Plot 8-1: Intermodulated Spurious Emissions: In-Band Input Signals to Booster

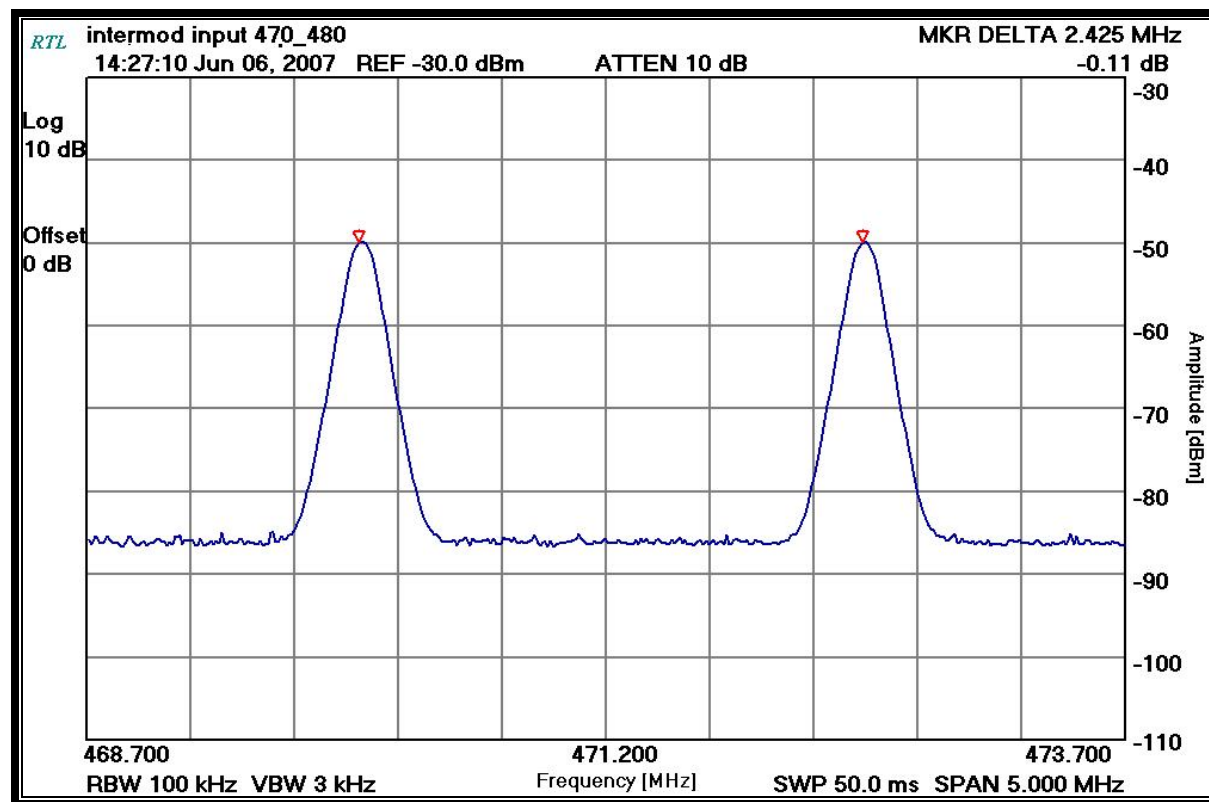


Plot 8-2: Intermodulated Spurious Emissions: In-Band Input Signals through Booster

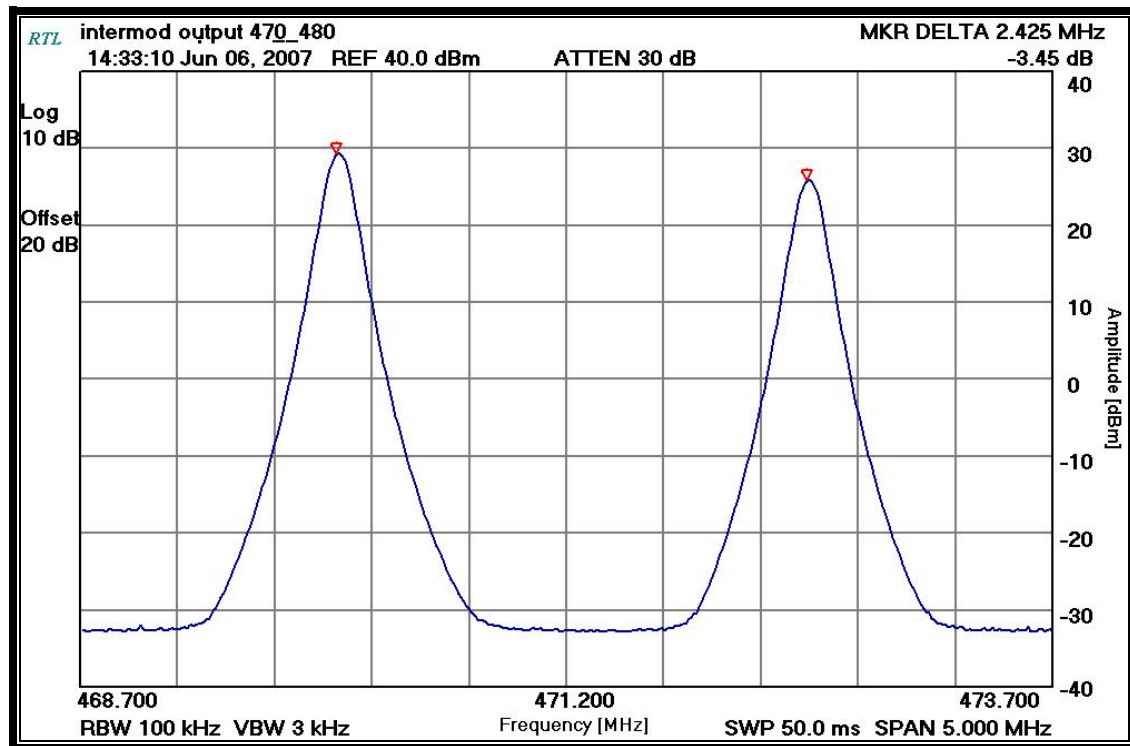


Plot 8-3: Intermodulated Spurious Emissions: 30 – 460 MHz

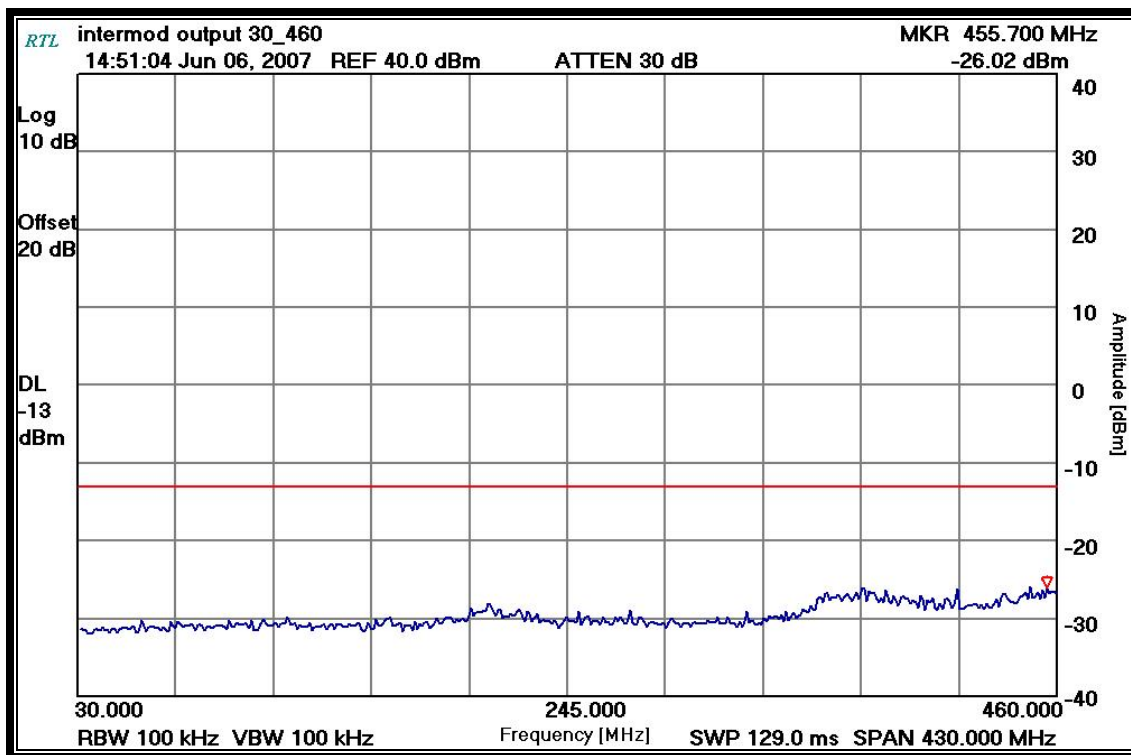


Plot 8-4: Intermodulated Spurious Emissions: 460 – 480 MHz

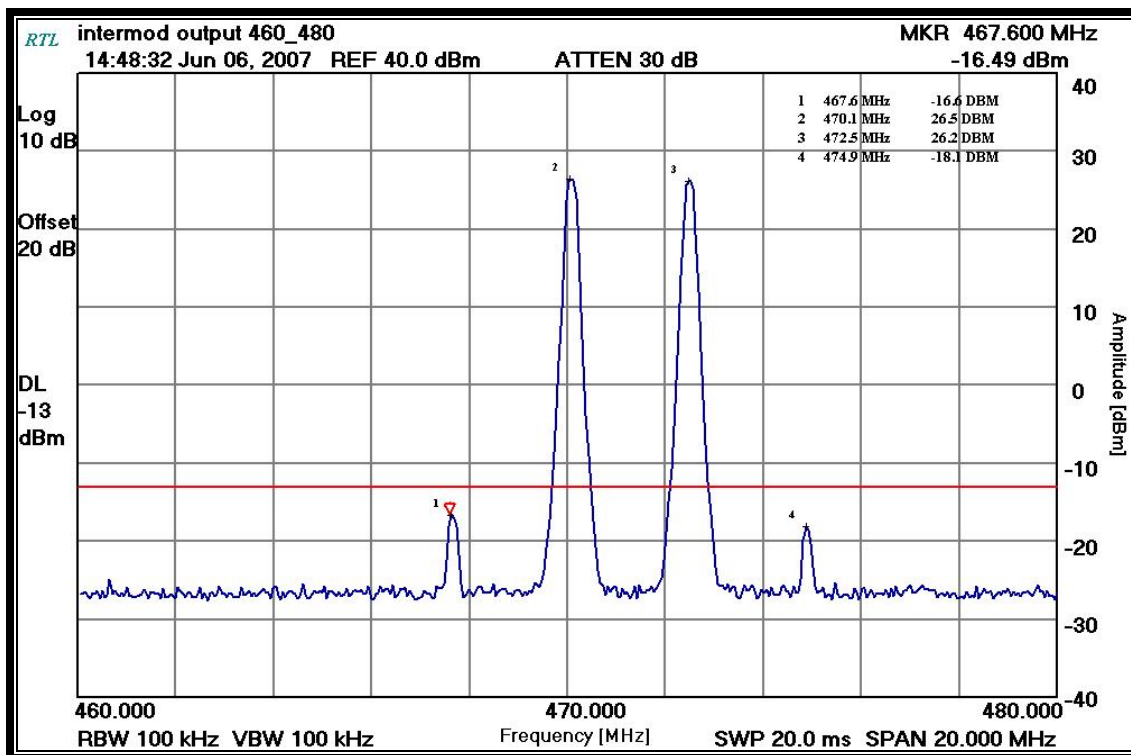


Plot 8-5: Intermodulated Spurious Emissions: 480 - 1000 MHz

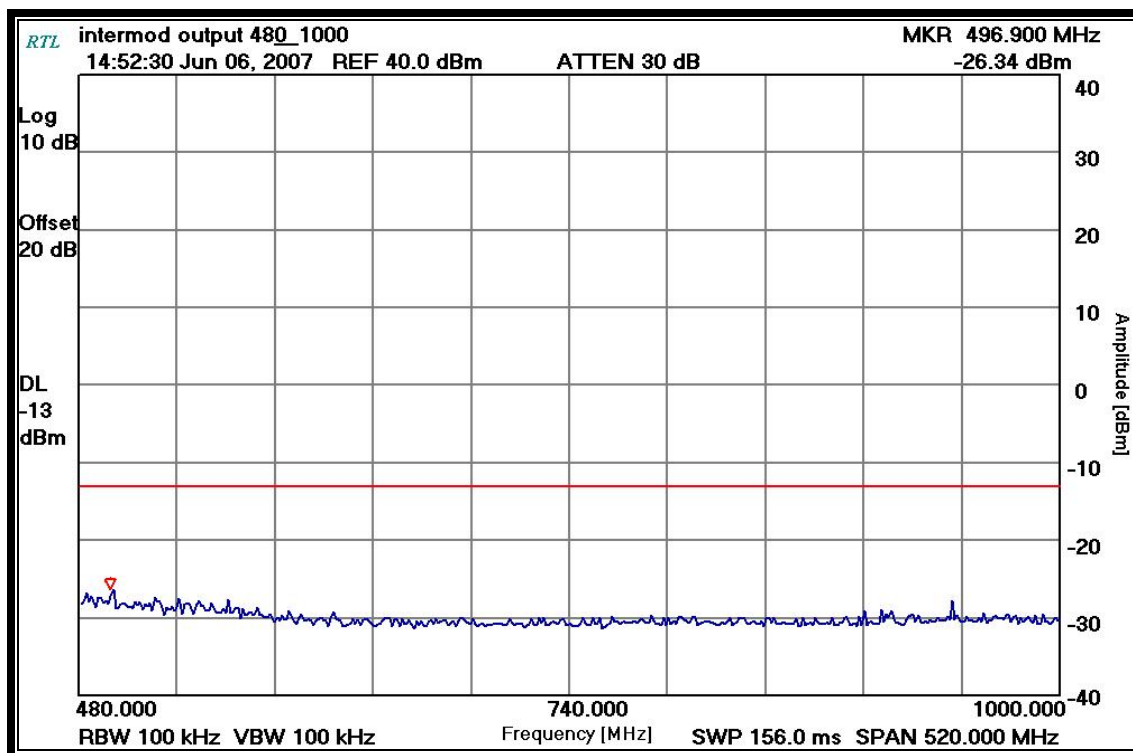


Plot 8-6: Intermodulated Spurious Emissions: 1000 - 4000 MHz

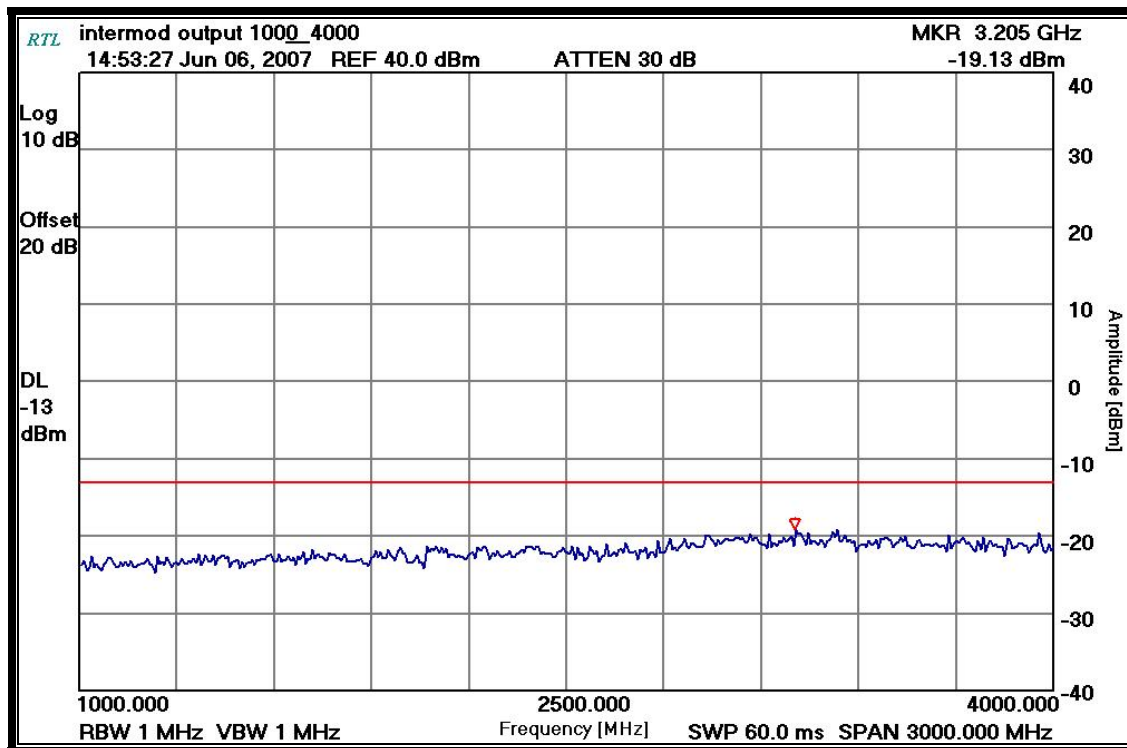


Plot 8-7: Intermodulated Spurious Emissions: 4000 – 9000 MHz

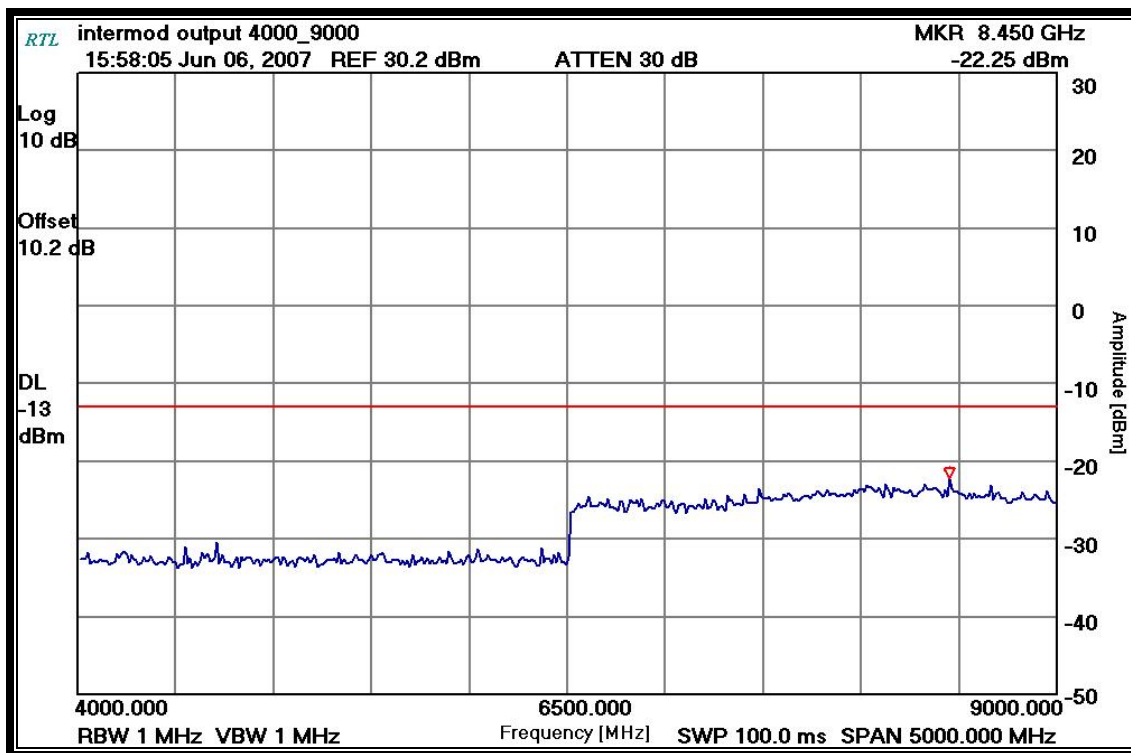


Plot 8-8: Intermodulated Spurious Emissions: In-Band Input Signals to Booster

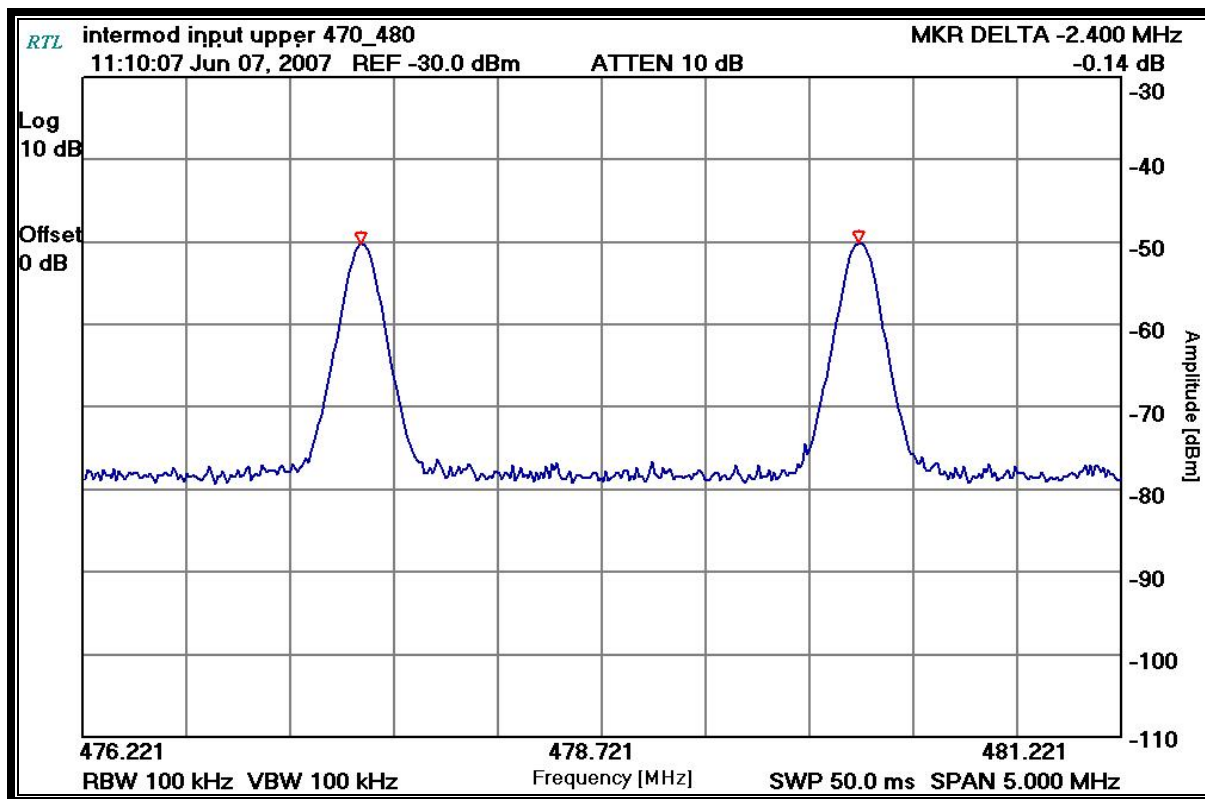


Plot 8-9: Intermodulated Spurious Emissions: In-Band Input Signals through Booster

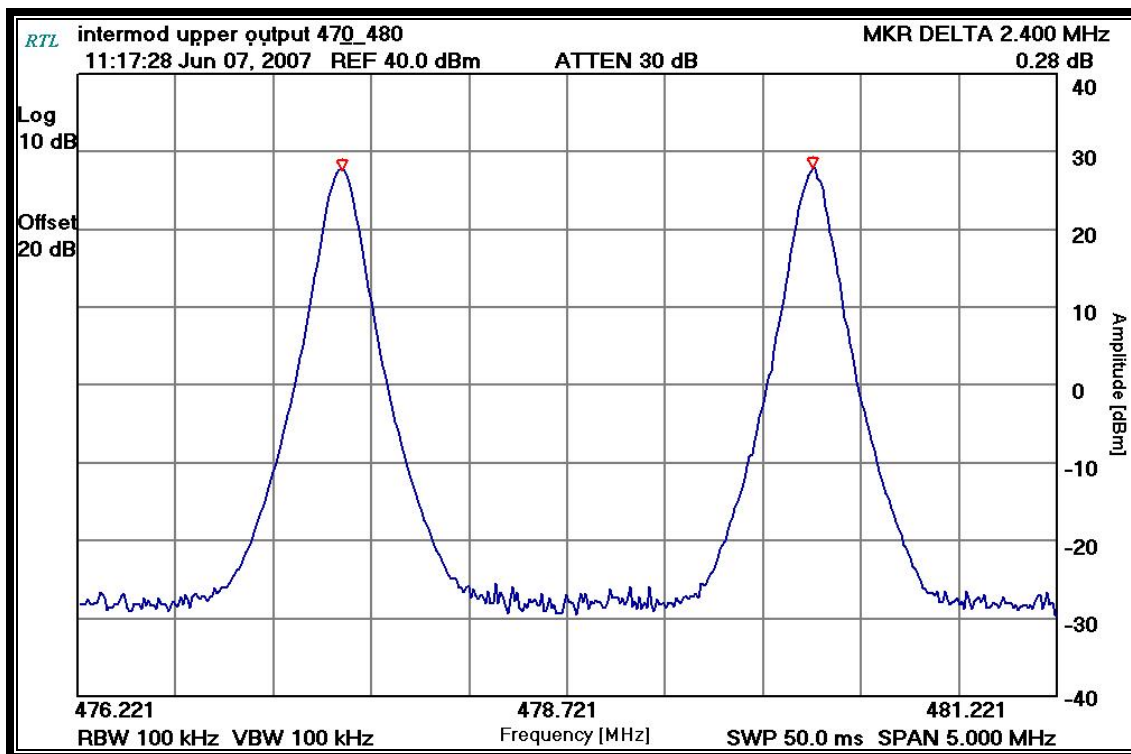


Plot 8-10: Intermodulated Spurious Emissions: 30 – 470 MHz

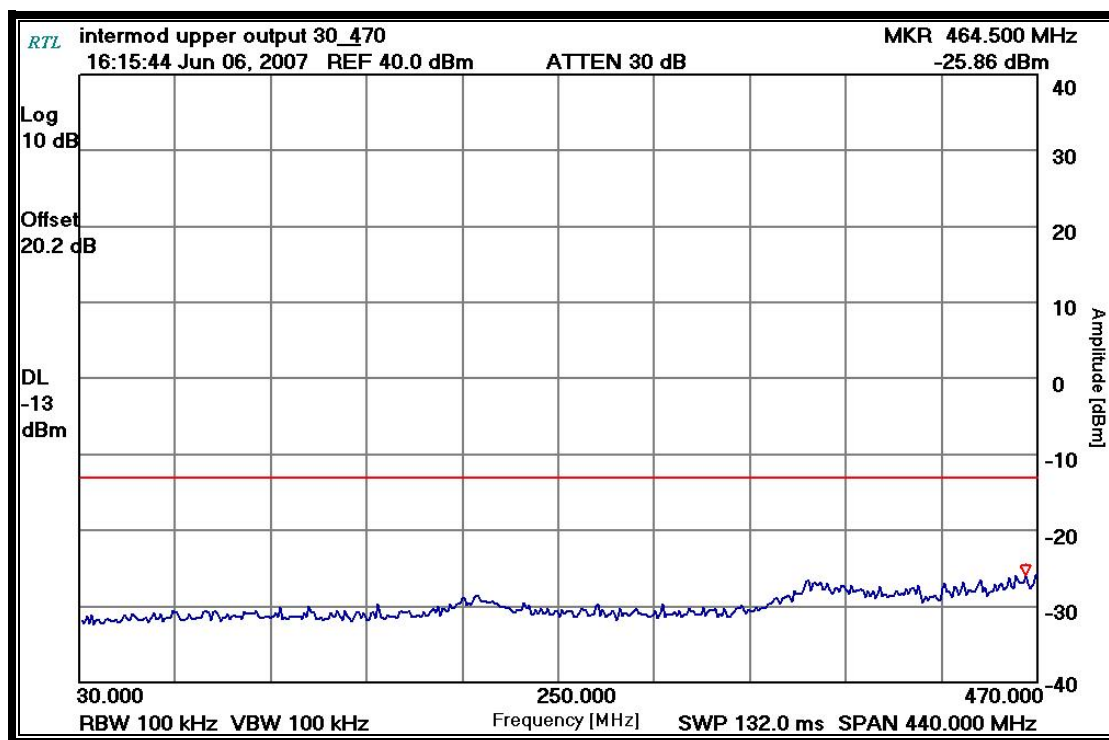


Plot 8-11: Intermodulated Spurious Emissions: 470 – 490 MHz

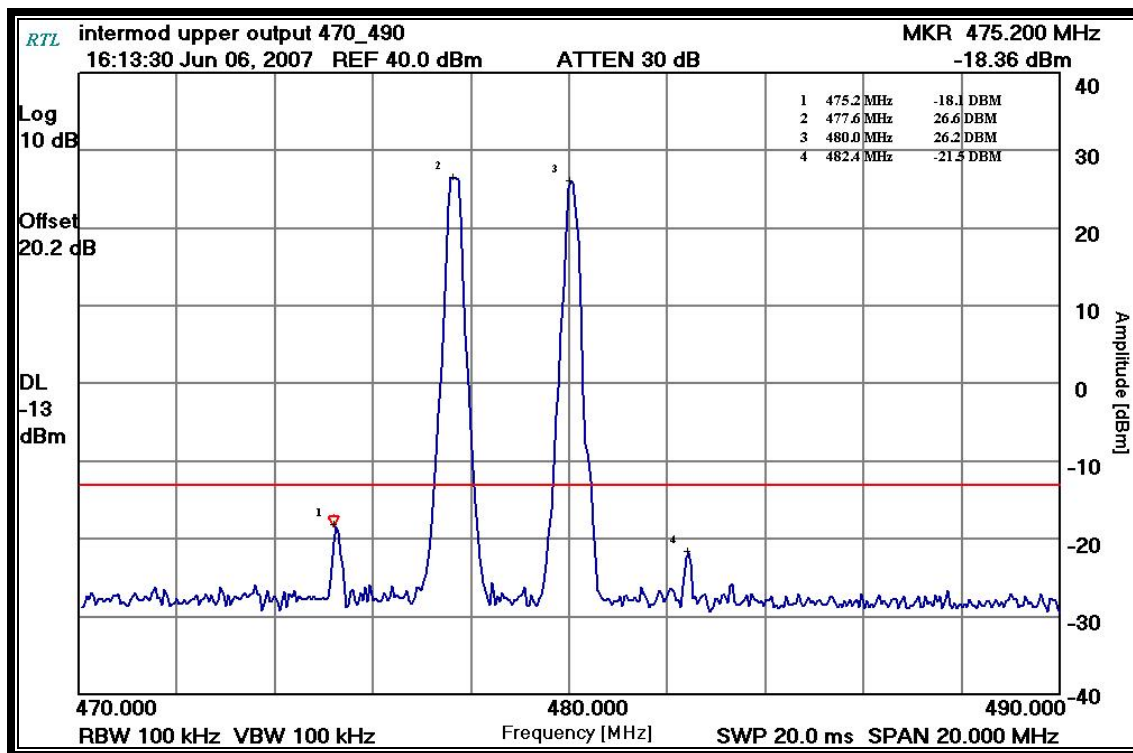

Plot 8-12: Intermodulated Spurious Emissions: 490 - 1000 MHz

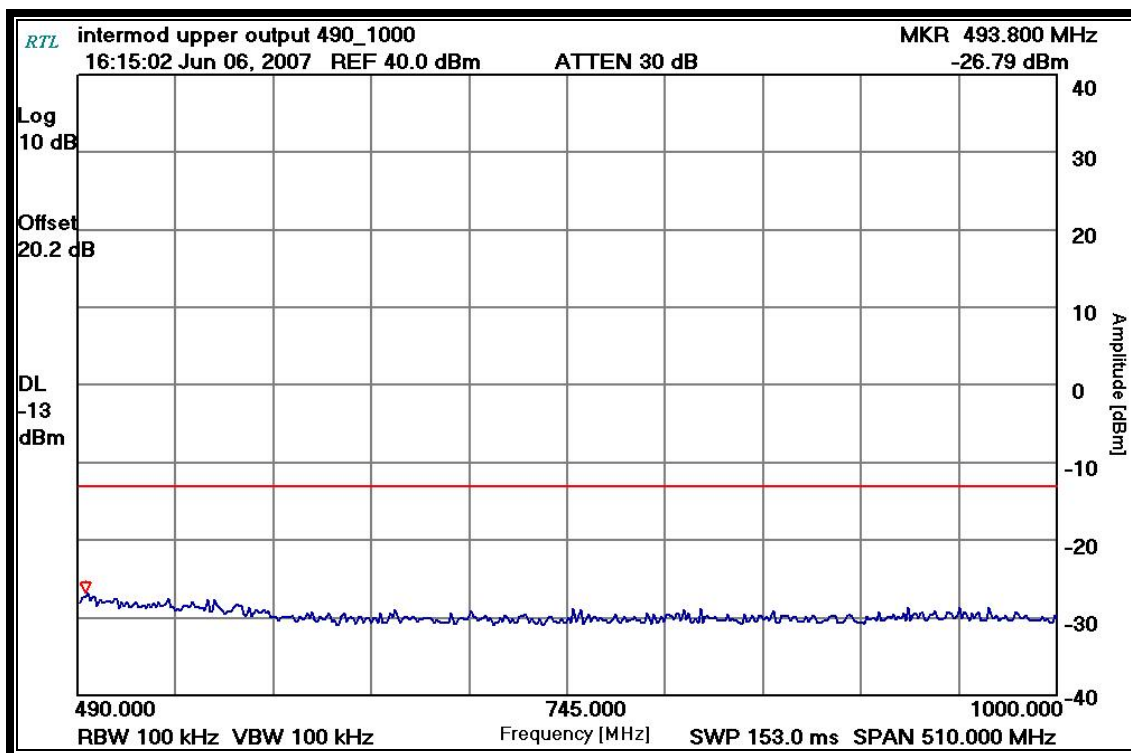

Plot 8-13: Intermodulated Spurious Emissions: 1000 - 4000 MHz

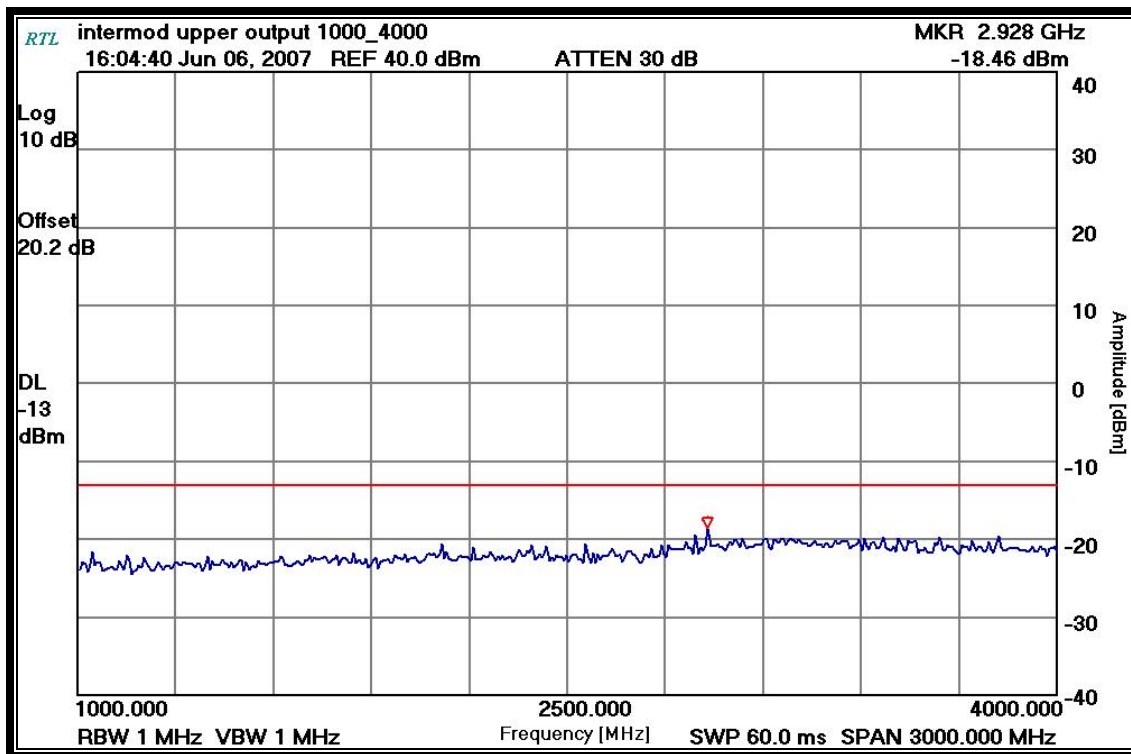

Plot 8-14: Intermodulated Spurious Emissions: 4000 – 9000 MHz

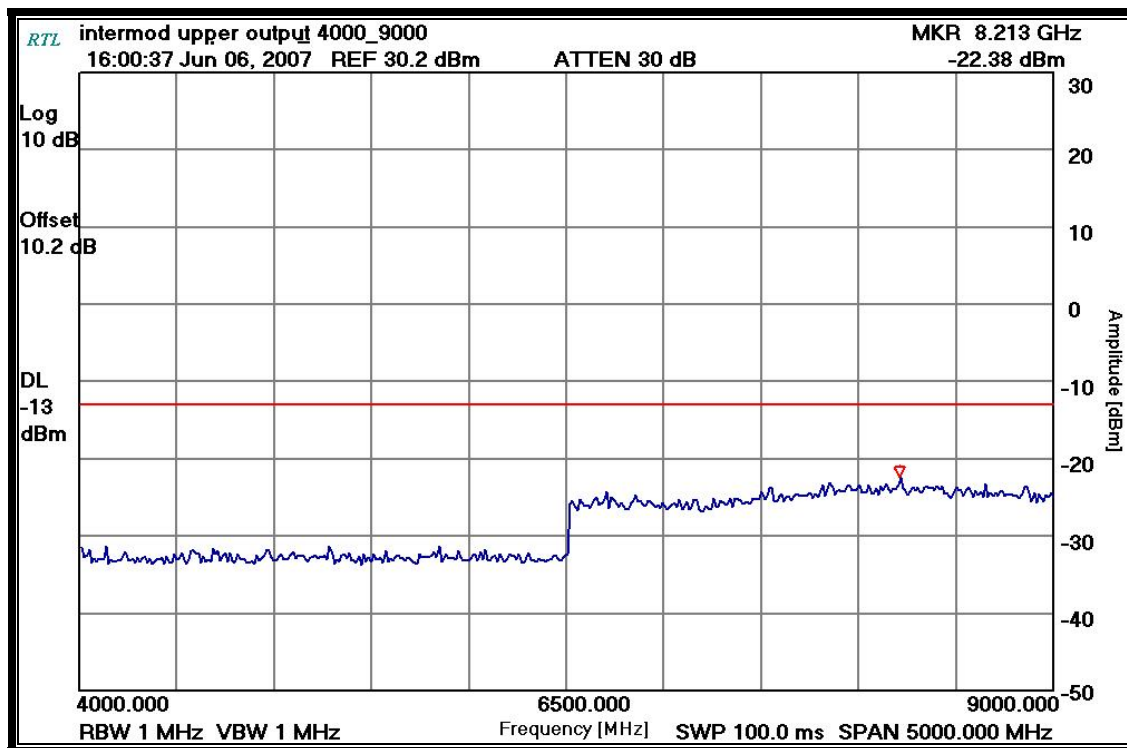



Table 8-1: Test Equipment for Testing Intermodulated Spurious Emissions

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due
901215	Hewlett Packard	8596EM	EMC Analyzer (9 kHz – 12.8 GHz)	3826A00144	10/16/07
900352	Werlatone	C1795	Directional Coupler	4989	06/06/08
901157	Marconi Instruments	2022D	Signal Generator	119161/056	N/A
900948	Weinschel Corp.	47-10-43	Attenuator DC-18 GHz 10 dB 50W	BH1487	12/05/08
900917	Hewlett Packard	8648C	Signal Generator	3537A01741	08/29/07
901396	MCE Weinschel	48-40-34	Attenuator, 40 dB, DC-18 GHz, 100 W	93453	12/02/08
901139	Weinschel Corp.	48-20-34	Attenuator, 100 W 20 dB, DC-18GHz	BK5859	01/13/09
901057	Hewlett Packard	3336B	Synthesizer/Level Generator (100 Hz - 20 MHz)	2514A02585	12/19/07
901118	Hewlett Packard	HP8901B	Modulation Analyzer (150 kHz – 1300 MHz)	2406A00178	07/24/07
901424	Insulated Wire Inc.	KPS-1503-360-KPS	RF cable 36"	NA	12/12/07

Test Personnel:

Daniel Biggs		June 6 & 7, 2007
Test Engineer	Signature	Dates Of Tests

9 FCC Rules and Regulations Part 90 §90.210 and Part 2 §2.1053(a): Field Strength of Spurious Radiation

9.1 Test Procedure

ANSI TIA-603-C-2004, section 2.2.12.

The EUT was placed on a floor-mounted turntable at a distance of 3 meters from the receiving antenna. The receiving antenna was varied between 1 – 4 meters to maximize emissions. The spurious emissions levels were measured and the device under test was replaced by a substitution antenna connected to a signal generator. This signal generator level was then corrected by subtracting the cable loss from the substitution antenna to the signal generator, and the gain of the antenna was further corrected to a half wave dipole.

The output was terminated with 50 ohm load.

9.2 Test Data

9.2.1 CFR 47 Part 90.210 Requirements

The worst-case emissions test data are shown.

The magnitude of emissions attenuated more than 20 dB below the FCC limit need not be recorded.

Limit: $P(\text{dBm}) - (43 + 10 \times \text{LOG } P(\text{W}))$

Table 9-1: Field Strength of Spurious Radiation: 470.0125 MHz

Frequency (MHz)	Measured Level (dBuv)		Signal Gen. Level (db)		Cable Loss (dB)	Antenna Gain (dBd)		ERP (dBm)		Limit (dBm)	Margin (dB)	
	H	V	H	V		H	V	H	V		H	V
940.0250	27.8	28.5	-83.5	-82.4	4.3	-1.0	-1.5	-88.8	-88.2	-13	-75.8	-75.2
1410.0375	30.7	29.4	-79.0	-79.6	5.0	3.9	4.4	-80.2	-80.3	-13	-67.2	-67.3
1880.0500	30.3	29.5	-76.2	-74.9	5.7	4.9	5.1	-77.1	-75.6	-13	-64.1	-62.6
2350.0625	31.2	31.6	-75.6	-75.9	6.2	5.9	6.7	-76.0	-75.5	-13	-63.0	-62.5
2820.0750	31.3	31.2	-74.8	-74.8	7.0	6.9	7.3	-75.0	-74.6	-13	-62.0	-61.6
3290.0875	32.3	31.4	-71.9	-72.9	7.7	7.4	7.6	-72.3	-73.1	-13	-59.3	-60.1
3760.1000	30.9	30.8	-70.5	-70.4	8.2	7.2	7.4	-71.6	-71.2	-13	-58.6	-58.2
4230.1125	31.2	29.8	-65.1	-66.5	8.8	7.5	7.8	-66.5	-67.6	-13	-53.5	-54.6
4700.1250	30.6	30.5	-66.4	-66.6	9.4	7.7	7.9	-68.2	-68.2	-13	-55.2	-55.2

*This insertion loss corresponds to the cable connecting the RF Signal Generator to the ½ wave dipole antenna.

Table 9-2: Field Strength of Spurious Radiation: 474.9375 MHz

Frequency (MHz)	Measured Level (dBuv)		Signal Gen. Level (db)		Cable Loss (dB)	Antenna Gain (dBd)		ERP (dBm)		Limit (dBm)	Margin (dB)	
	H	V	H	V		H	V	H	V		H	V
949.8750	33.3	37.1	-77.9	-73.0	4.3	-1.0	-1.5	-83.2	-78.8	-13	-70.2	-65.8
1424.8125	31.2	29.9	-78.4	-79.1	5.0	4.0	4.5	-79.4	-79.6	-13	-66.4	-66.6
1899.7500	29.4	30.5	-77.0	-73.8	5.6	4.9	5.1	-77.7	-74.4	-13	-64.7	-61.4
2374.6875	30.5	31.0	-77.2	-76.3	6.2	6.0	6.7	-77.4	-75.8	-13	-64.4	-62.8
2849.6250	31.8	33.3	-75.0	-73.4	6.9	7.1	7.3	-74.9	-73.0	-13	-61.9	-60.0
3324.5625	32.3	31.4	-71.3	-72.2	7.4	7.4	7.6	-71.4	-72.0	-13	-58.4	-59.0
3799.5000	30.6	33.0	-69.6	-67.2	8.3	7.3	7.4	-70.6	-68.1	-13	-57.6	-55.1
4274.4375	31.3	30.2	-67.3	-67.5	8.8	7.5	7.9	-68.6	-68.4	-13	-55.6	-55.4
4749.3750	30.4	30.2	-66.8	-66.7	9.6	7.6	7.9	-68.8	-68.4	-13	-55.8	-55.4

*This insertion loss corresponds to the cable connecting the RF Signal Generator to the ½ wave dipole antenna.

Table 9-3: Field Strength of Spurious Radiation: 479.95 MHz


Frequency (MHz)	Measured Level (dBuv)		Signal Gen. Level (db)		Cable Loss (dB)	Antenna Gain (dBd)		ERP (dBm)		Limit (dBm)	Margin (dB)	
	H	V	H	V		H	V	H	V		H	V
959.9000	30.7	33.5	-80.6	-76.5	4.3	-1.0	-1.5	-85.9	-82.3	-13	-72.9	-69.3
1439.8500	31.7	30.6	-78.0	-78.1	5.1	4.4	4.5	-78.8	-78.7	-13	-65.8	-65.7
1919.8000	31.8	33.2	-73.9	-70.7	5.6	5.0	5.1	-74.6	-71.2	-13	-61.6	-58.2
2399.7500	32.1	31.7	-75.4	-75.9	6.2	6.6	6.8	-75.1	-75.3	-13	-62.1	-62.3
2879.7000	33.7	32.8	-72.3	-73.9	7.0	7.1	7.3	-72.3	-73.7	-13	-59.3	-60.7
3359.6500	33.2	32.9	-70.6	-70.6	7.8	7.4	7.6	-71.0	-70.8	-13	-58.0	-57.8
3839.6000	31.3	33.3	-70.4	-66.8	8.3	7.3	7.4	-71.4	-67.7	-13	-58.4	-54.7
4319.5500	31.4	33.5	-65.5	-63.3	8.9	7.6	7.9	-66.8	-64.3	-13	-53.8	-51.3
4799.5000	30.6	32.1	-65.5	-63.9	9.6	7.5	7.9	-67.7	-65.6	-13	-54.7	-52.6

*This insertion loss corresponds to the cable connecting the RF Signal Generator to the ½ wave dipole antenna.

Table 9-4: Test Equipment for Testing Field Strength of Spurious Radiation

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due
901053	Schaffner-Chase	CBL6112	Antenna (25 MHz – 2 GHz)	2648	11/01/07
901364	MITEQ	JS4-01002600-36-5P	Preamplifier (1 - 26.5 GHz)	849863	N/A
901215	Hewlett Packard	8596EM	Portable Spectrum Analyzer (9 kHz – 12.8 GHz)	3826A00144	10/16/07
900928	Hewlett Packard	HP 83752A	Synthesized Sweeper (.01 – 20 GHz)	3610A00866	11/30/07
900772	EMCO	3161-02	Horn Antennas (2 – 4 GHz)	9504-1044	05/20/07
900321	EMCO	3161-03	Horn Antennas (4 – 8 GHz)	9508-1020	05/20/07
900814	Electrometrics	RGA-60	Double Ridge Horn Antenna (1 – 18 GHz)	2310	03/30/09
901423	Insulated Wire, Inc.	KPS-1503-2400-KPS	RF cable, 20'	NA	12/12/07
901424	Insulated Wire Inc.	KPS-1503-360-KPS	RF cable 36"	NA	12/12/07

Test Personnel:

Daniel Biggs		April 27, 2007
Test Engineer	Signature	Date Of Tests

10 FCC Rules and Regulations Part 90 §90.213 and Part 2 §2.1055: Frequency Stability

There are no frequency determining elements, hence the EUT is not subject to frequency stability requirements.

11 Conclusion

The data in this measurement report shows that the **Airlite Communications, Inc. Model 50289 Booster (Downlink), FCC ID: UT650289BA8470DL**, complies with all the applicable requirements of FCC Parts 90, 15 and 2.