

# TEST REPORT



**DT&C Co., Ltd.**

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042  
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC1905-0184

2. Customer

• Name (FCC) : Janam Technologies LLC / Name (IC) : JANAM TECHNOLOGIES LLC

• Address : 100 Crossways Park West Suite 105, Woodbury, New York, 11797, United States

3. Use of Report : FCC & IC Original Grant

4. Product Name / Model Name : Mobile Computer / XT2WE

FCC ID : UTWXT2WE / IC : 6914A-XT2WE

5. Test Method Used : ANSI C63.10-2013

Test Specification : FCC Part 15 Subpart C.247,

RSS-247 Issue 2, RSS-GEN Issue 5

6. Date of Test : 2017.03.20 ~ 2017.07.03(Original test), 2019.02.04 ~ 2019.02.07(Spot check test)

7. Testing Environment : See appended test report.

8. Test Result : Refer to the attached test result.

Affirmation	Tested by	Technical Manager
	Name : SunGeun Lee (Signature)	Name : GeunKi Son (Signature)

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DT&C Co., Ltd.

**2019 . 05 . 03 .**

**DT&C Co., Ltd.**

If this report is required to confirmation of authenticity, please contact to [report@dtnc.net](mailto:report@dtnc.net)

## Test Report Version

Test Report No.	Date	Description
DRTFCC1905-0184	May. 03, 2019	Initial issue

## Table of Contents

<b>1. General Information</b>	<b>4</b>
1.1 Testing Laboratory	4
1.2 Testing Environment	4
1.3 Measurement Uncertainty	4
1.4 Details of Applicant	5
1.5 Description of EUT	5
1.6 Declaration by the applicant / manufacturer	5
1.7 Information about the FHSS characteristics	6
1.8 Reference test data explanations	7
1.9 Test Equipment List	8
1.10 Summary of Test Results	10
1.11 Conclusion of worst-case and operation mode	11
<b>2. Maximum Peak Output Power Measurement</b>	<b>12</b>
2.1 Test Setup	12
2.2 Limit	12
2.3 Test Procedure	12
2.4 Test Results	13
<b>3. 20 dB BW</b>	<b>19</b>
3.1 Test Setup	19
3.2 Limit	19
3.3 Test Procedure	19
3.4 Test Results	19
<b>4. Carrier Frequency Separation</b>	<b>25</b>
4.1 Test Setup	25
4.2 Limit	25
4.3 Procedure	25
4.4 Test Results	25
<b>5. Number of Hopping Frequencies</b>	<b>30</b>
5.1 Test Setup	30
5.2 Limit	30
5.3 Procedure	30
5.4 Test Results	30
<b>6. Time of Occupancy (Dwell Time)</b>	<b>36</b>
6.1 Test Setup	36
6.2 Limit	36
6.3 Test Procedure	36
6.4 Test Results	36
<b>7. Transmitter Radiated Spurious Emissions and Conducted Spurious Emission</b>	<b>41</b>
7.1 Test Setup	41
7.2 Limit	41
7.3. Test Procedures	42
7.3.1. Test Procedures for Radiated Spurious Emissions	42
7.3.2. Test Procedures for Conducted Spurious Emissions	43
7.4. Test Results	44
7.4.1. Radiated Emissions	44
7.4.3. Conducted Spurious Emissions	47
<b>8. Transmitter AC Power Line Conducted Emission</b>	<b>71</b>
8.1 Test Setup	71
8.2 Limit	71
8.3 Test Procedures	71
8.4 Test Results	72
<b>9. Antenna Requirement</b>	<b>74</b>
<b>10. Occupied Bandwidth (99 %)</b>	<b>75</b>
10.1 Test Setup	75
10.2 Limit	75
10.3 Test Procedure	75
10.4 Test Results	75
<b>APPENDIX I</b>	<b>82</b>
<b>APPENDIX II</b>	<b>83</b>

## 1. General Information

### 1.1 Testing Laboratory

<b>DT&amp;C Co., Ltd.</b>		
The 3 m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042. The test site complies with the requirements of § 2.948 according to ANSI C63.4-2014.		
- FCC MRA Accredited Test Firm No. : KR0034		
- IC Test site No. : 5740A		
<a href="http://www.dtnet.net">www.dtnet.net</a>		
Telephone	:	+ 82-31-321-2664
FAX	:	+ 82-31-321-1664

### 1.2 Testing Environment

Ambient Condition	
▪ Temperature	+23 °C ~ +25 °C
▪ Relative Humidity	43 % ~ 46 %

### 1.3 Measurement Uncertainty

Test items	Measurement uncertainty
Transmitter Output Power	0.7 dB (The confidence level is about 95 %, k = 2)
Conducted spurious emission	1.0 dB (The confidence level is about 95 %, k = 2)
AC conducted emission	2.4 dB (The confidence level is about 95 %, k = 2)
Radiated spurious emission (1 GHz Below)	5.1 dB (The confidence level is about 95 %, k = 2)
Radiated spurious emission (1 GHz ~ 18 GHz)	5.4 dB (The confidence level is about 95 %, k = 2)
Radiated spurious emission (18 GHz Above)	5.3 dB (The confidence level is about 95 %, k = 2)

## 1.4 Details of Applicant

Applicant (FCC) : Janam Technologies LLC  
Applicant (IC) : JANAM TECHNOLOGIES LLC  
Address : 100 Crossways Park West Suite 105, Woodbury, New York, 11797, United States  
Contact person (FCC) : Harry Lerner  
Contact person (IC) : Scott Leung

## 1.5 Description of EUT

<b>EUT</b>	Mobile computer
<b>Model Name(FCC, IC)</b>	XT2WE
<b>Add Model Name(FCC, IC)</b>	NA
<b>Serial Number</b>	Identical prototype
<b>Hardware version</b>	MP
<b>Software version</b>	71.xx
<b>Power Supply</b>	DC 3.8 V
<b>Frequency Range</b>	2402 MHz ~ 2480 MHz
<b>Modulation Technique</b>	GFSK, $\pi/4$ -DQPSK, 8DPSK
<b>Number of Channels</b>	79
<b>Antenna Type</b>	Internal Antenna
<b>Antenna Gain</b>	PK : -0.37 dBi

## 1.6 Declaration by the applicant / manufacturer

- NA

## 1.7 Information about the FHSS characteristics

- This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following :
  - A) The hopping sequence is pseudorandom
  - B) All channels are used equally on average
  - C) The receiver input bandwidth equals the transmit bandwidth
  - D) The receiver hops in sequence with the transmit signal
- 15.247(g) : In accordance with the Bluetooth Industry Standard, the system is designed to comply with all of the regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.
- 15.247(h) : In accordance with the Bluetooth Industry Standard, the system does not coordinate its channels selection / hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.
- 15.247(h) : The EUT employs Adaptive Frequency Hopping (AFH) which identifies sources of interference namely devices operating in 802.11 WLAN and excludes them from the list of available channels. The process of re-mapping reduces the number of test channels from 79 channels to a minimum number of 20 channels.

## 1.8 Reference test data explanations

### ● Introduction

This report includes the test data of FCC ID: V2X-PM80W1 / IC: 10664A-PM80W1 with reference to KDB 484596 D01v01.

The applicant takes full responsibility that the test data as reference section below represents compliance for FCC ID: UTWX2WE / IC: 6914A-XT2WE.

Reference FCC ID/ IC	Exhibit type	Separated FCC ID/ IC
FCC ID: V2X-PM80W1 / IC: 10664A-PM80W1	Original Grant / Certification	NA
FCC ID: UTWXT2WD / IC: 6914A-XT2WD	Change in FCC ID / Multiple listing	FCC ID: UTWXT2WE / IC: 6914A-XT2WE

### ● Explain the differences

FCC ID: UTWXT2WE/ IC: 6914A-XT2WE is same the internal printed circuit board with FCC ID: UTWXT2WD / IC: 6914A-XT2WD. The only difference between the two products is that the NFC chipset was changed.

Where, FCC ID: UTWXT2WD/ IC: 6914A-XT2WD was performed the change-in-FCC ID application to FCC ID: V2X-PM80W1/ IC: 10664A-PM80W1.

### ● Spot check verification data

Equipment Class	FCC Part/ RSS Std.	Technology	Mode	Tx Freq. (MHz)	Test item	Detector Mode	Reference FCC ID: V2X-PM80W1 IC: 10664A-PM80W1		FCC ID: UTWXT2WE IC: 6914A-XT2WE		Limit (dBuV/m)	Deviation (dB)
							Frequency (MHz)	Result (dBuV/m)	Frequency (MHz)	Result (dBuV/m)		
DSS	15C/ RSS-247	Bluetooth	1Mbps	2480	Radiated Band edge	Peak	2483.61	52.86	2484.15	52.90	74.00	0.04
						Average	2483.61	28.07	2484.15	28.11	54.00	0.04
			3Mbps	2402	Radiated Spurious emission	Peak	4804.43	55.00	4803.56	53.23	74.00	-1.77
						Average	4804.43	30.21	4803.56	28.44	54.00	-1.77

Note1: The spot check were performed based on worst-case results reported in the original FCC/IC report.

The spot check test results are within 3dB and two products shows a good correlation. It also complies with the FCC/IC limit.

### ● Reference section

Reference FCC ID: V2X-PM80W1 / Reference IC: 10664A-PM80W1

Equipment Class	FCC Part/ RSS Std.	Technology	Frequency range(MHz)	Exhibit type	Report title	Reference Sections
DSS	15C/ RSS-247	Bluetooth	2402 ~ 2480	Original Grant	DSS	All
DTS	15C/ RSS-247	BLE	2402 ~ 2480	Original Grant	DTS LE	All
DTS	15C/ RSS-247	WLAN	2412 ~ 2462	Original Grant	DTS WLAN	All
NII	15E/ RSS-247	WLAN	5180 ~ 5240 5260 ~ 5320 5500 ~ 5700 5745 ~ 5825	Original Grant	NII, DFS	All
DXX	15C/ RSS-210	NFC	13.56	Original Grant	Not Applicable	Not Applicable

## 1.9 Test Equipment List

Original test(Date of Test : 2017.03.20 ~ 2017.07.03)

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	N9020A	16/08/18 17/07/12	17/08/18 18/07/12	MY46471601
Spectrum Analyzer	Agilent Technologies	N9020A	16/10/11	17/10/11	MY46471251
Multimeter	FLUKE	17B	17/04/12	18/04/12	26030065WS
DC Power Supply	Agilent	66332A	17/01/11	18/01/11	US37473831
Signal Generator	Rohde Schwarz	SMBV100A	17/01/04	18/01/04	255571
Signal Generator	Rohde Schwarz	SMF100A	16/06/23 17/04/21	17/06/23 18/04/21	102341
Thermohygrometer	HCT	HCT-1	16/09/09	17/09/09	NONE
Power Splitter	Anritsu	K241B	17/01/11	18/01/11	1301183
Bluetooth Tester	TESCOM	TC-3000B	17/01/04	18/01/04	3000B770243
Loop Antenna	Schwarzbeck	FMZB1513	16/04/22	18/04/22	1513-128
BILOG ANTENNA	Schwarzbeck	VULB 9160	16/05/13	18/05/13	3358
Horn Antenna	ETS-LINDGREN	3117	16/05/03	18/05/03	00140394
Horn Antenna	A.H.Systems Inc.	SAS-574	15/09/03	17/09/03	155
PreAmplifier	Agilent	8449B	17/01/11	18/01/11	3008A00370
PreAmplifier	TSJ	MLA-010K01- B01-27	17/03/06	18/03/06	1844539
EMI Test Receiver	Rohde Schwarz	ESR7	17/02/16	18/02/16	101061
High-pass filter	Wainwright	WHKX12- 2580-3000- 18000-80SS	16/09/09	17/09/09	3
High-pass filter	Wainwright	WHNX6-6320- 8000-26500- 40CC	16/09/13	17/09/13	1
Power Meter & Wide Bandwidth Sensor	Anritsu	ML2495A MA2490A	16/10/19	17/10/19	1308003 1249304
EMI TEST RECEIVER	R&S	ESCI	17/02/26	18/02/16	100364
PULSE LIMITER	Rohde Schwarz	ESH3-Z2	17/01/03	18/01/03	101334
SINGLE-PHASE MASTER	NF	4420	16/09/08	17/09/08	3049354420023
Artificial Mains Network	Narda S.T.S. / PMM	PMM L2-16B	17/06/07	18/06/07	000WX20305



**Spot check test(Date of Test: 2019.02.07 ~ 2019.02.10)**

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	N9020A	18/07/09	19/07/09	MY46471251
Thermohygrometer	BODYCOM	BJ5478	18/12/27	19/12/27	120612-2
BlueTooth Tester	TESCOM	TC-3000B	18/12/18	19/12/18	3000B770243
Signal Generator	Rohde Schwarz	SMBV100A	18/12/19	19/12/19	255571
Signal Generator	ANRITSU	SMF100A	18/06/07	19/06/07	102341
Loop Antenna	Schwarzbeck	FMZB1513	18/01/30	20/01/30	1513-128
Bilog Antenna	Schwarzbeck	VULB 9160	18/07/13	20/07/13	3359
HORN ANT	ETS	3117	18/05/10	20/05/10	00140394
HORN ANT	A.H.Systems	SAS-574	17/07/31	19/07/31	155
PreAmplifier	H.P	8447D	18/12/18	19/12/18	2944A07774
PreAmplifier	Agilent	8449B	18/07/05	19/07/05	3008A02108
High-pass filter	Wainwright	WHKX12-2580-3000-18000-80SS	18/07/05	19/07/05	3
Cable	DTNC	Cable	18/07/06	19/07/06	M-01
Cable	DTNC	Cable	18/07/06	19/07/06	M-02
Cable	Junkosha	MWX315	18/11/19	19/11/19	M-05
Cable	Junkosha	MWX221	18/11/19	19/11/19	M-06
Cable	Junkosha	MWX241	18/06/25	19/06/25	G-04
Cable	Junkosha	MWX241	18/06/25	19/06/25	G-07

Note1: The measurement antennas were calibrated in accordance to the requirements of ANSI C63.5-2017.

Note2: The cable is not a regular calibration item, so it has been calibrated by DT & C itself.

## 1.10 Summary of Test Results

FCC Part RSS Std.	Parameter	Limit (Using in 2400~ 2483.5 MHz)	Test Condition	Status Note 1
15.247(a) RSS-247(5.1)	Carrier Frequency Separation	$\geq 25$ kHz or $\geq$ Two thirds of the 20 dB BW, whichever is greater.	Conducted	C
	Number of Hopping Frequencies	$\geq 15$ hops		C
	20 dB Bandwidth	N/A		C
	Dwell Time	$\leq 0.4$ seconds		C
15.247(b) RSS-247(5.4)	Transmitter Output Power	<b>For FCC</b> $\leq 1$ Watt , if CHs $\geq 75$ Others $\leq 0.125$ W <b>For IC</b> if CHs $\geq 75$ $\leq 1$ Watt For Conducted Power $\leq 4$ Watt For e.i.r.p, Others $\leq 0.125$ W For Conducted Power. $\leq 0.5$ Watt For e.i.r.p		C
15.247(d) RSS-247(5.5)	Conducted Spurious Emissions	The radiated emission to any 100 kHz of out-band shall be at least 20 dB below the highest in-band spectral density.		C
RSS Gen(6.7)	Occupied Bandwidth (99 %)	N/A		C
15.247(d) 15.205 & 209 RSS-247(5.5) RSS-Gen (8.9 & 8.10)	Radiated Spurious Emissions	FCC 15.209 Limits	Radiated	C <sup>Note3</sup>
15.207 RSS-Gen(8.8)	AC Conducted Emissions	FCC 15.207 Limits	AC Line Conducted	C
15.203	Antenna Requirements	FCC 15.203	-	C
<p>Note 1 : C = Comply    NC = Not Comply    NT = Not Tested    NA = Not Applicable</p> <p>Note 2 : For radiated emission tests below 30 MHz were performed on semi-anechoic chamber which is correlated with OATS.</p> <p>Note 3 : This test item was performed in each axis and the worst case data was reported.</p>				

### 1.11 Conclusion of worst-case and operation mode

The EUT has three type of modulation (GFSK,  $\pi/4$ DQPSK and 8DPSK).

Therefore all applicable requirements were tested with all the modulations.

And packet type was tested at the worst case(DH5).

The field strength of spurious emission was measured in three orthogonal EUT positions (X-axis, Y-axis and Z-axis).

Tested frequency information,

- Hopping Function : Enable

	TX Frequency (MHz)	RX Frequency (MHz)
<b>Hopping Band</b>	2402 ~ 2480	2402 ~ 2480

- Hopping Function : Disable

	TX Frequency (MHz)	RX Frequency (MHz)
<b>Lowest Channel</b>	2402	2402
<b>Middle Channel</b>	2441	2441
<b>Highest Channel</b>	2480	2480

## 2. Maximum Peak Output Power Measurement

### 2.1 Test Setup

Refer to the APPENDIX I.

### 2.2 Limit

#### ■ FCC Requirements

The maximum peak output power of the intentional radiator shall not exceed the following :

1. §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
2. §15.247(b)(1), For frequency hopping systems operating in the 2400 – 2483.5 MHz employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725 – 5805 MHz band : 1 Watt.  
For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

#### ■ IC Requirements

1. RSS-247(5.4) (b), For FHSS operating in the band 2400 - 2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels, the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p shall not exceed 4 W, except as provided in section 5.4(e)

### 2.3 Test Procedure

1. The RF output power was measured with a spectrum analyzer connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency, A spectrum analyzer was used to record the shape of the transmit signal.
2. The peak output power of the fundamental frequency was measured with the spectrum analyzer using ;  
Span = approximately 5 times of the 20 dB bandwidth, centered on a hopping channel  
RBW  $\geq$  20 dB BW  
VBW  $\geq$  RBW  
Sweep = auto  
Detector function = peak  
Trace = max hold

## 2.4 Test Results


Modulation	Tested Channel	Frame Average Output Power		Peak Output Power	
		dBm	mW	dBm	mW
<u><b>GFSK</b></u>	Lowest	8.46	7.015	9.84	9.638
	Middle	8.17	6.561	9.53	8.974
	Highest	<b>8.69</b>	<b>7.396</b>	<b>9.97</b>	<b>9.931</b>
<u><b><math>\pi/4</math>DQPSK</b></u>	Lowest	6.31	4.276	9.85	9.661
	Middle	6.19	4.159	9.53	8.974
	Highest	<b>6.57</b>	<b>4.539</b>	<b>9.99</b>	<b>9.977</b>
<u><b>8DPSK</b></u>	Lowest	6.32	4.285	10.16	10.375
	Middle	6.22	4.188	9.80	9.550
	Highest	<b>6.58</b>	<b>4.550</b>	<b>10.29</b>	<b>10.691</b>

Note 1 : The frame average output power was tested using an average power meter for reference only.

Note 2 : See next pages for actual measured spectrum plots.


## Peak Output Power

## Lowest Channel & Modulation : GFSK

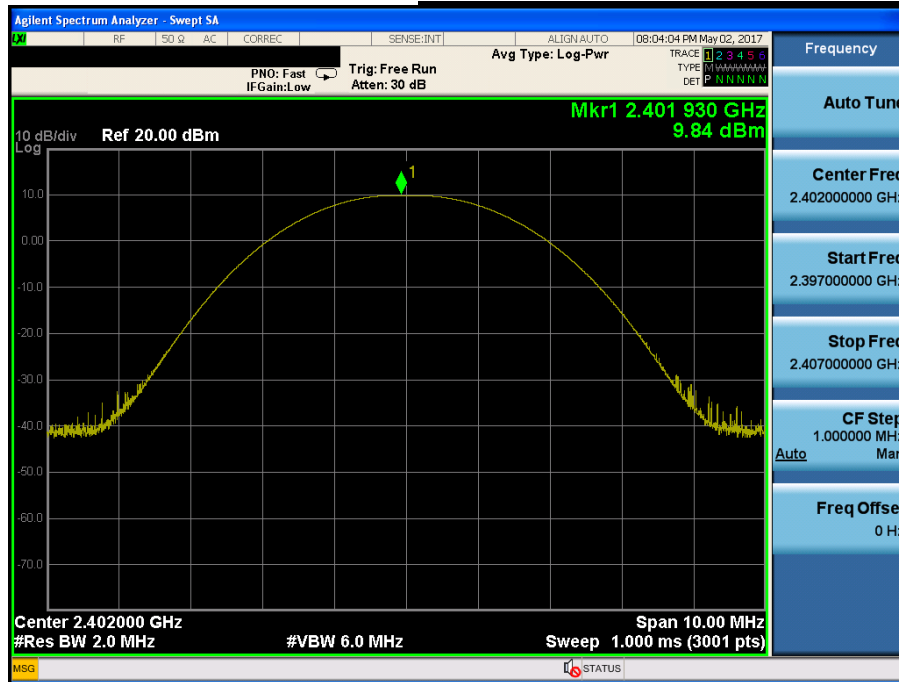


## Peak Output Power

## Middle Channel & Modulation : GFSK

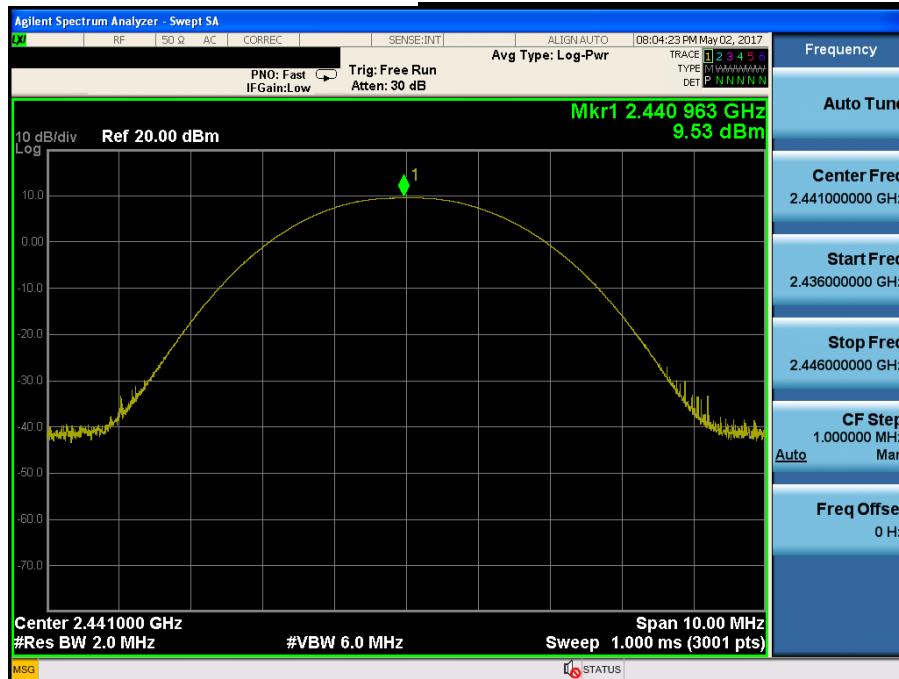


## Peak Output Power

## Highest Channel & Modulation : GFSK

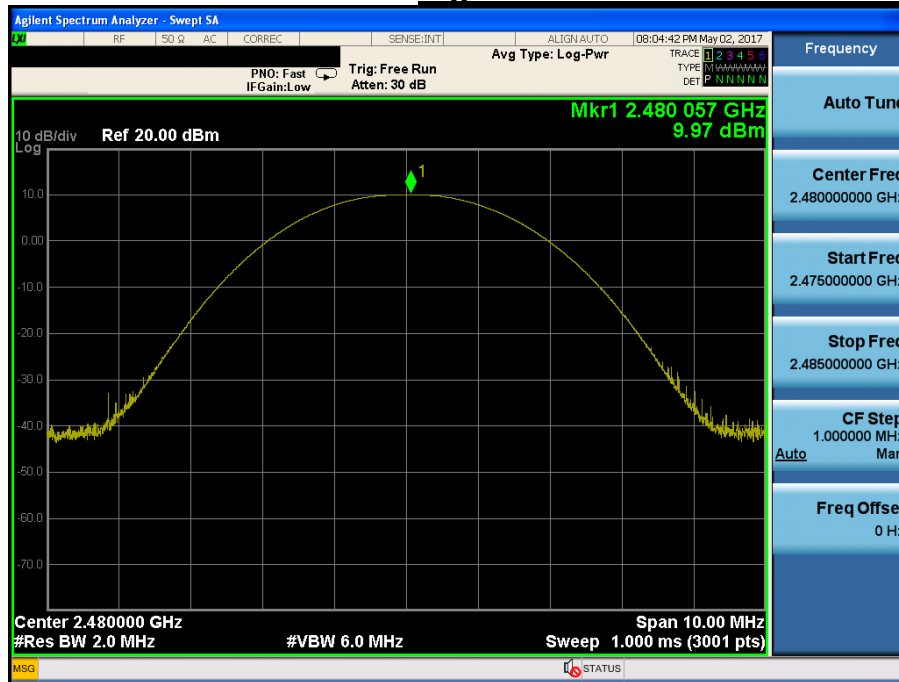


## Peak Output Power


## Lowest Channel & Modulation : $\pi/4$ DQPSK

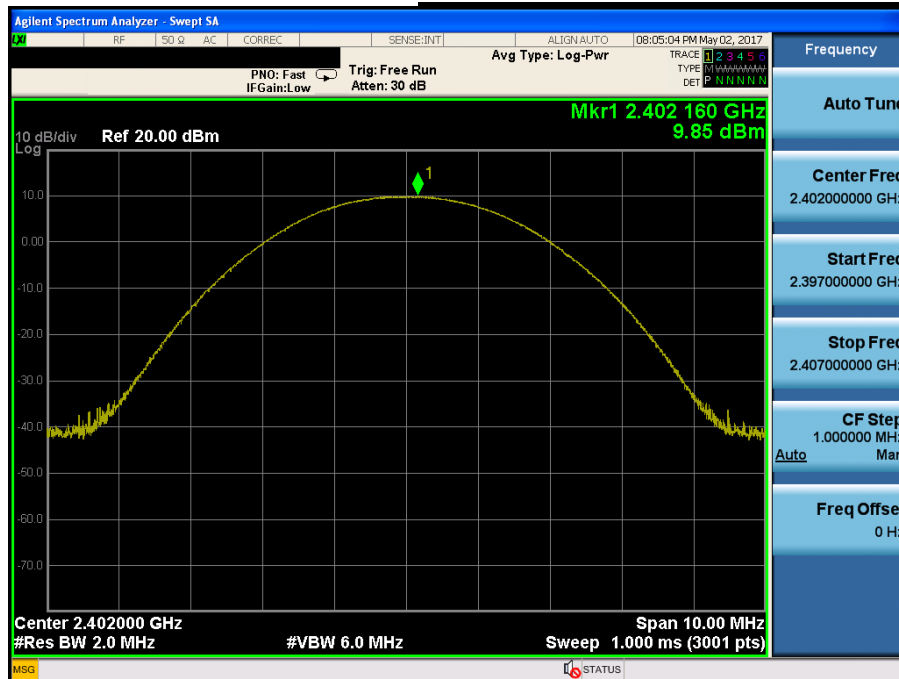

## Peak Output Power

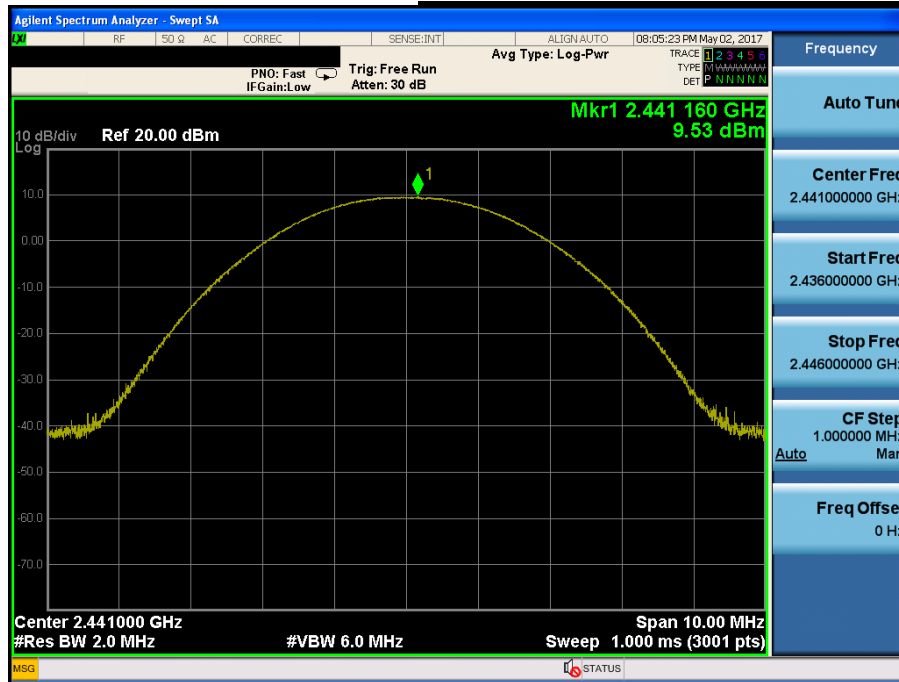Middle Channel & Modulation :  $\pi/4$ DQPSK


## Peak Output Power

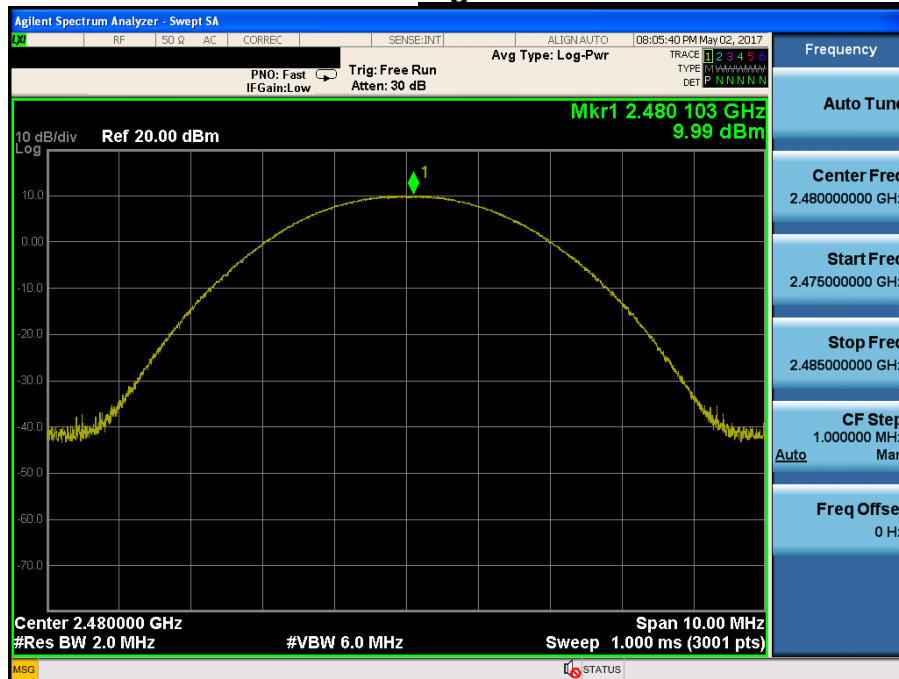Highest Channel & Modulation :  $\pi/4$ DQPSK




## Peak Output Power

## Lowest Channel & Modulation : 8DPSK

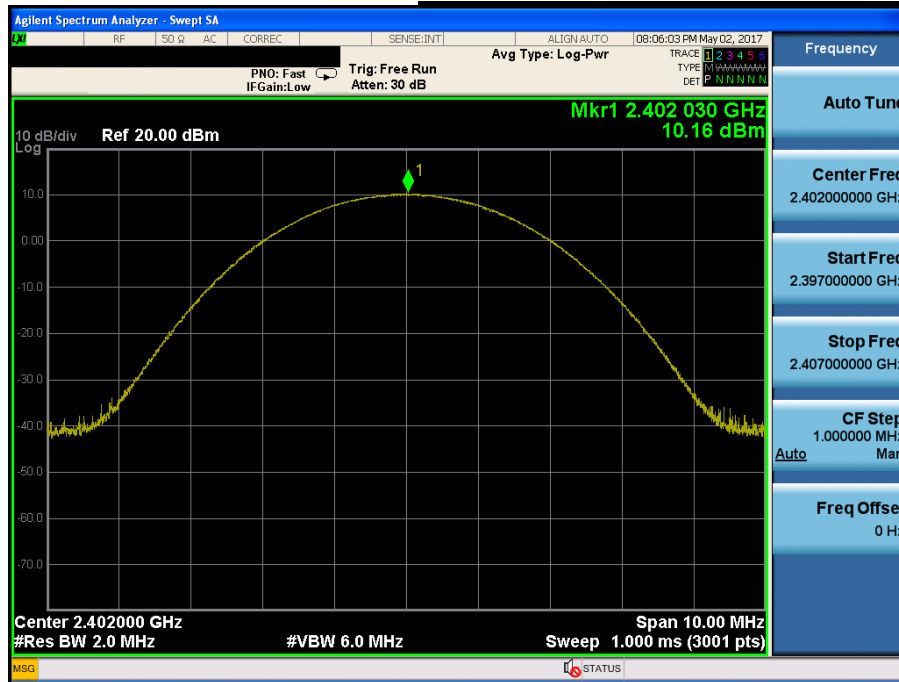


## Peak Output Power

## Middle Channel & Modulation : 8DPSK

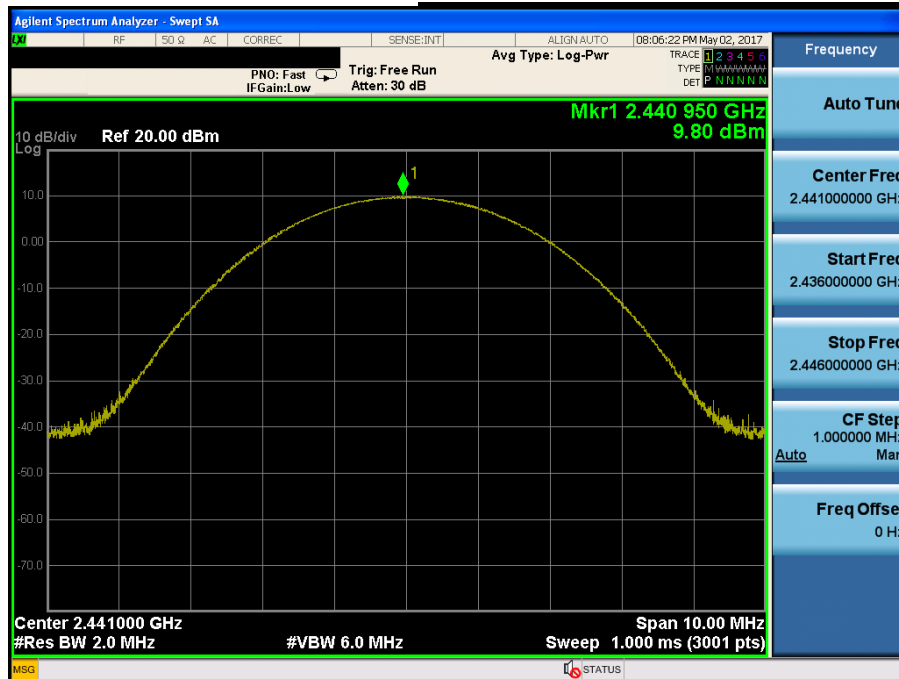

## Peak Output Power

## Highest Channel & Modulation : 8DPSK

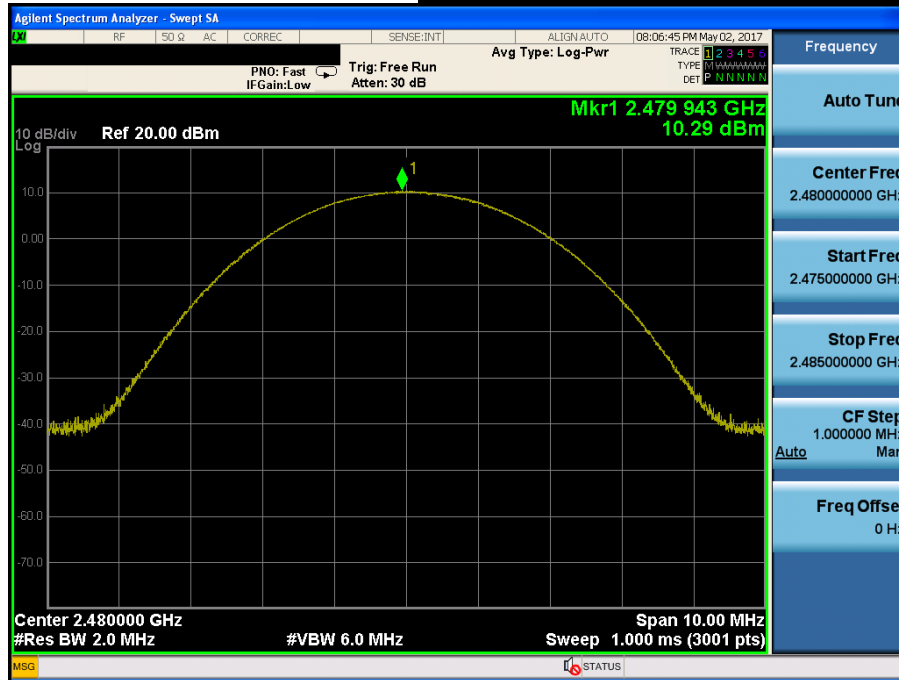

### 3. 20 dB BW

#### 3.1 Test Setup

Refer to the APPENDIX I.

#### 3.2 Limit

Limit : Not Applicable

#### 3.3 Test Procedure

1. The 20 dB bandwidth were measured with a spectrum analyzer connected to RF antenna Connector (conducted measurement) while EUT was operating in transmit mode. The analyzer center frequency was set to the EUT carrier frequency, using the analyzer.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using below setting:  
RBW = 1% to 5% of the 20 dB BW & Occupied BW  
VBW  $\geq 3 \times$  RBW  
Span = between two times and five times the 20 dB bandwidth & Occupied BW  
Sweep = auto  
Detector function = peak  
Trace = max hold


#### 3.4 Test Results

Modulation	Tested Channel	20 dB BW (MHz)
<u><b>GFSK</b></u>	Lowest	<b>0.930</b>
	Middle	0.930
	Highest	0.927
<u><b><math>\pi/4</math>DQPSK</b></u>	Lowest	1.316
	Middle	<b>1.331</b>
	Highest	1.319
<u><b>8DPSK</b></u>	Lowest	1.270
	Middle	<b>1.289</b>
	Highest	1.284

Note 1 : See next pages for actual measured spectrum plots.


## 20 dB Bandwidth & Occupied BW

## Lowest Channel & Modulation : GFSK

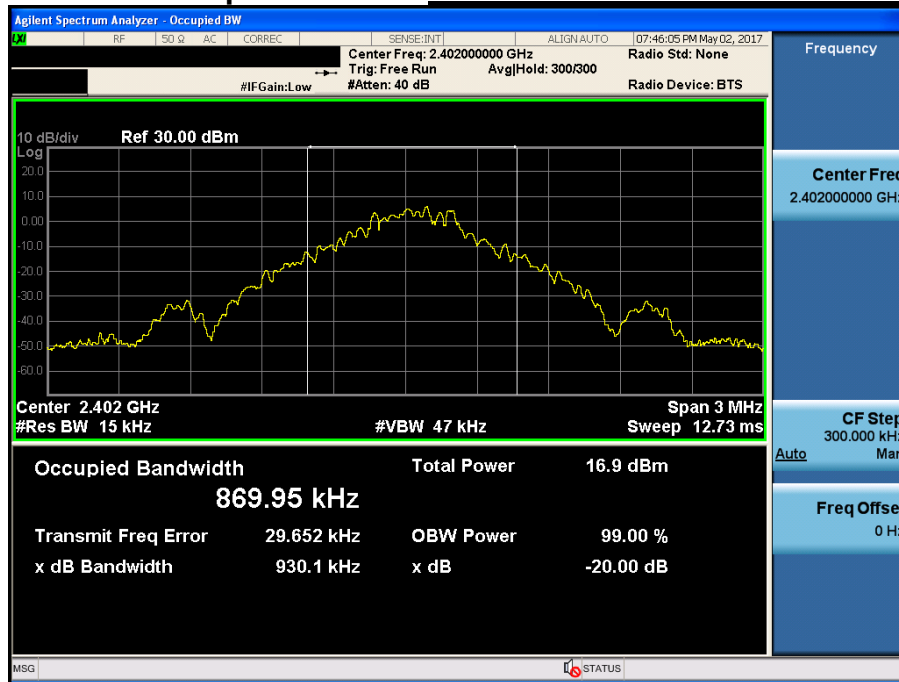


## 20 dB Bandwidth & Occupied BW

## Middle Channel & Modulation : GFSK

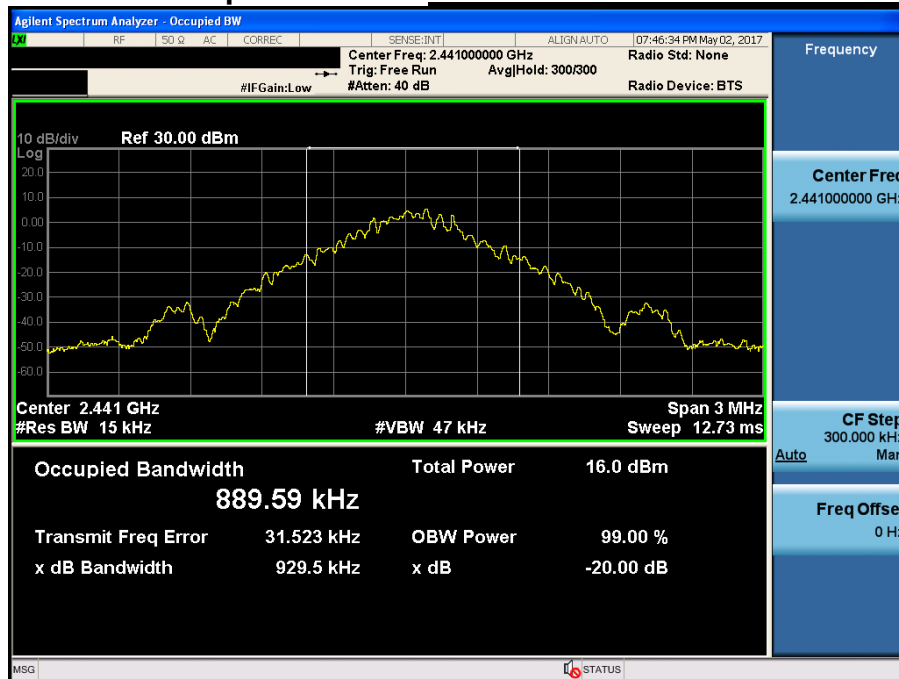


## 20 dB Bandwidth & Occupied BW

## Highest Channel & Modulation : GFSK

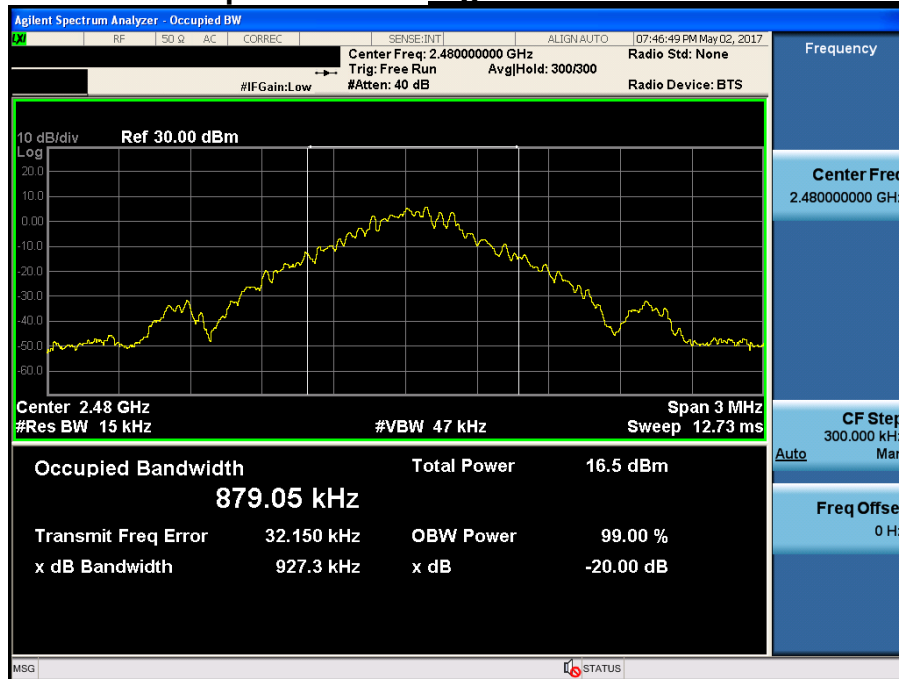


## 20 dB Bandwidth & Occupied BW

## Lowest Channel & Modulation : $\pi/4$ DQPSK

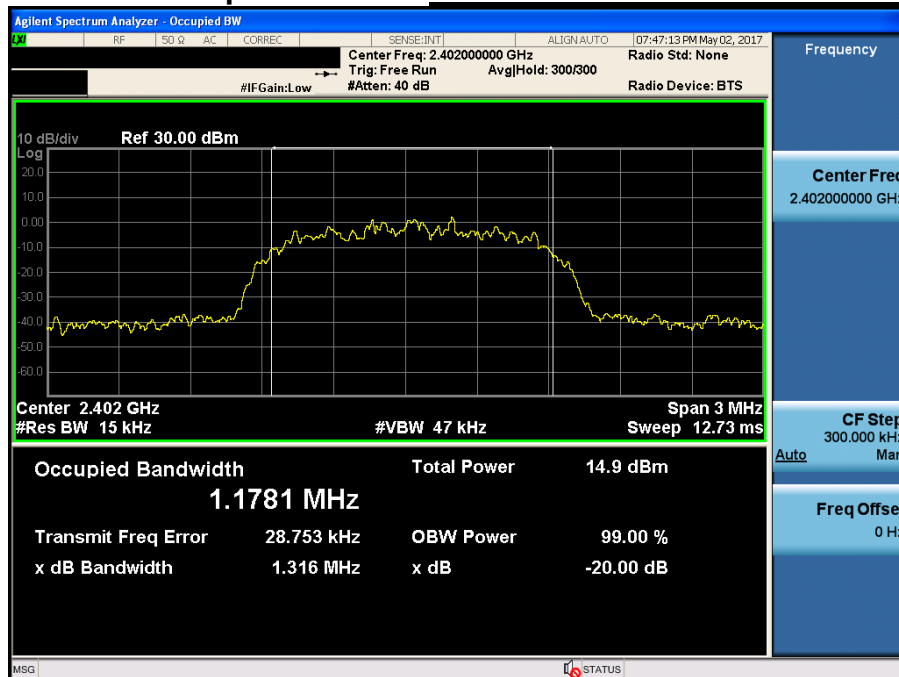

## 20 dB Bandwidth & Occupied BW

## Middle Channel & Modulation : $\pi/4$ DQPSK

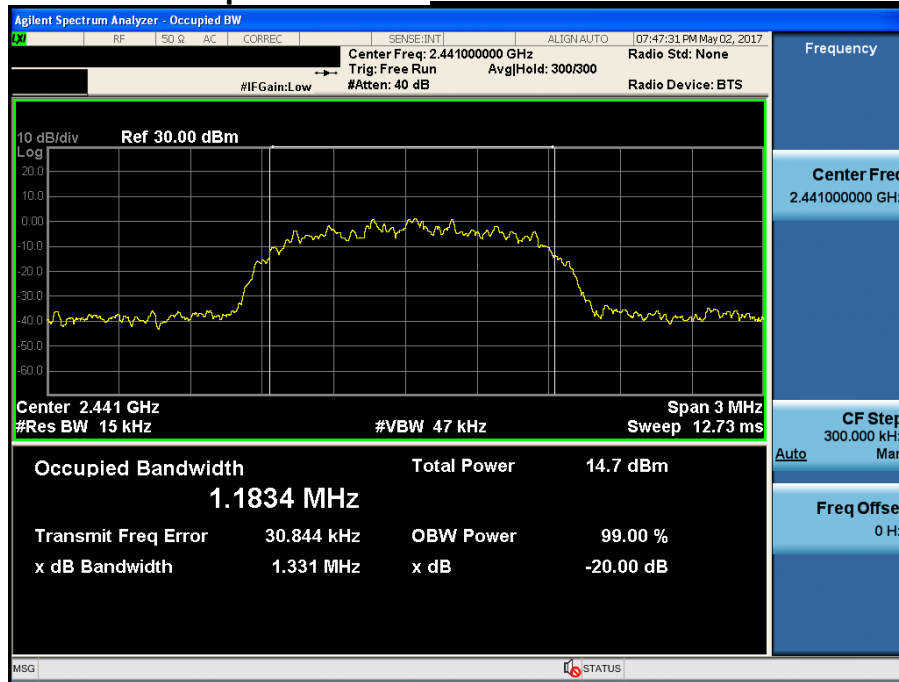


## 20 dB Bandwidth & Occupied BW

## Highest Channel & Modulation : $\pi/4$ DQPSK




## 20 dB Bandwidth & Occupied BW

## Lowest Channel & Modulation : 8DPSK

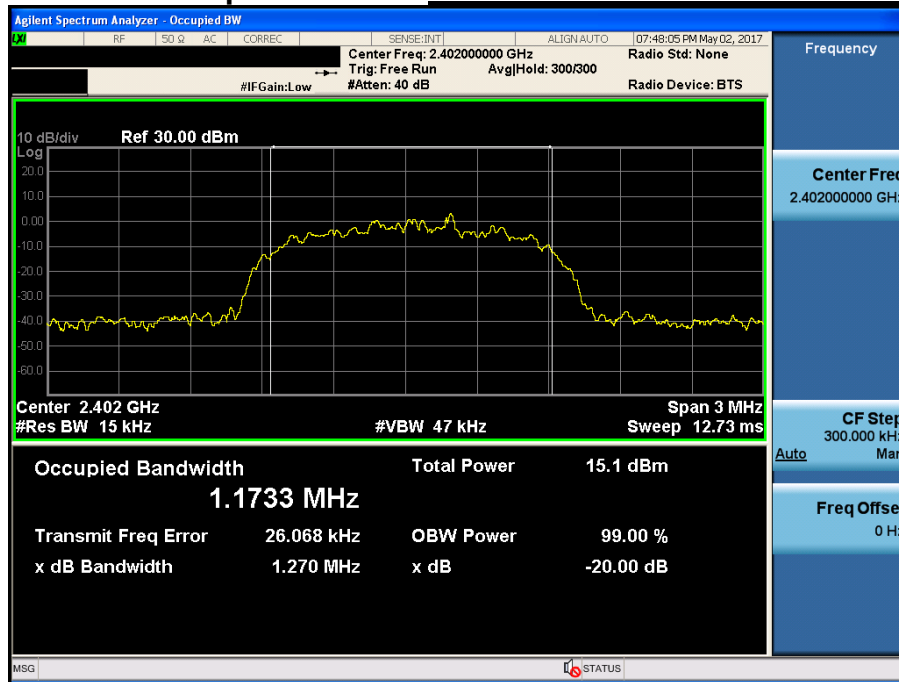


## 20 dB Bandwidth & Occupied BW

## Middle Channel & Modulation : 8DPSK

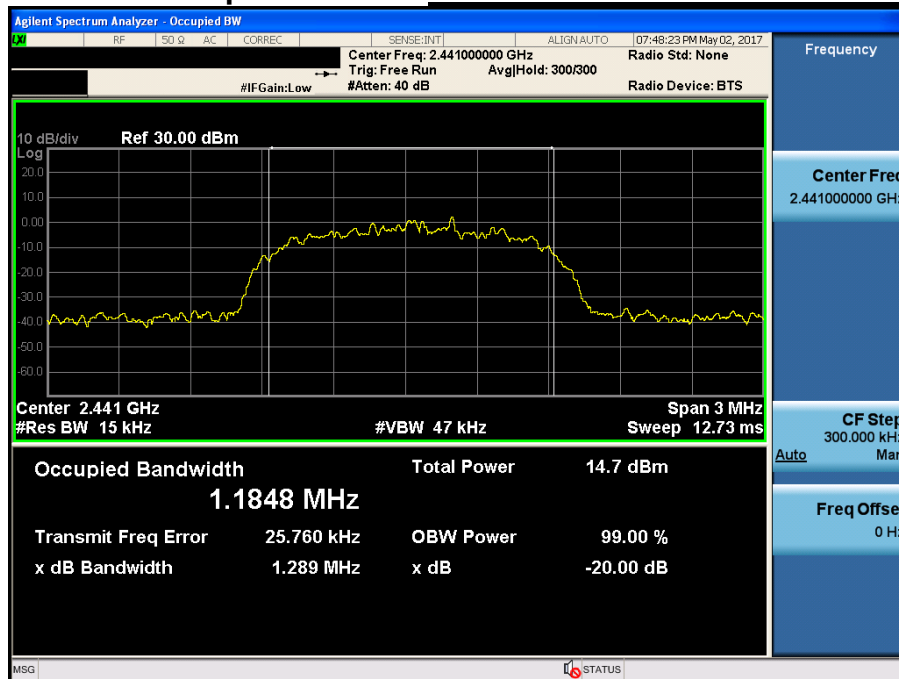

## 20 dB Bandwidth & Occupied BW

## Highest Channel & Modulation : 8DPSK

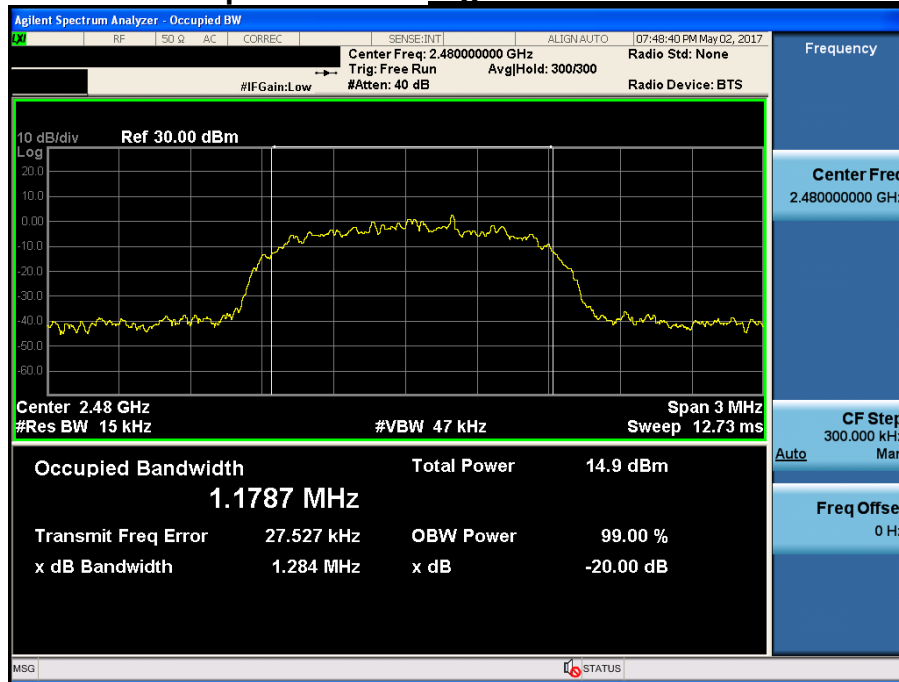



## 4. Carrier Frequency Separation

### 4.1 Test Setup

Refer to the APPENDIX I.

### 4.2 Limit

Limit :  $\geq 25$  kHz or  $\geq$  Two-Thirds of the 20 dB BW whichever is greater.

### 4.3 Procedure

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to :

Span = wide enough to capture the peaks of two adjacent channels

RBW = Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

### 4.4 Test Results

#### FH mode

Hopping Mode	Modulation	Peak of center channel (MHz)	Peak of adjacent Channel (MHz)	Test Result (MHz)
Enable	GFSK	2440.188	2441.188	1.000
	$\pi/4$ -DQPSK	2440.026	2441.026	1.000
	8DPSK	2440.024	2441.024	1.000

#### AFH mode


Hopping Mode	Modulation	Peak of center channel (MHz)	Peak of adjacent Channel (MHz)	Test Result (MHz)
Enable	GFSK	2439.922	2440.922	1.000
	$\pi/4$ -DQPSK	2440.028	2441.028	1.000
	8DPSK	2440.180	2441.180	1.000

Note 1 : See next pages for actual measured spectrum plots.


#### - Minimum Standard :

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.  
Alternatively, frequency hopping systems operating in the 2400 - 2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW


# Carrier Frequency Separation (FH) *Hopping mode : Enable & GFSK*

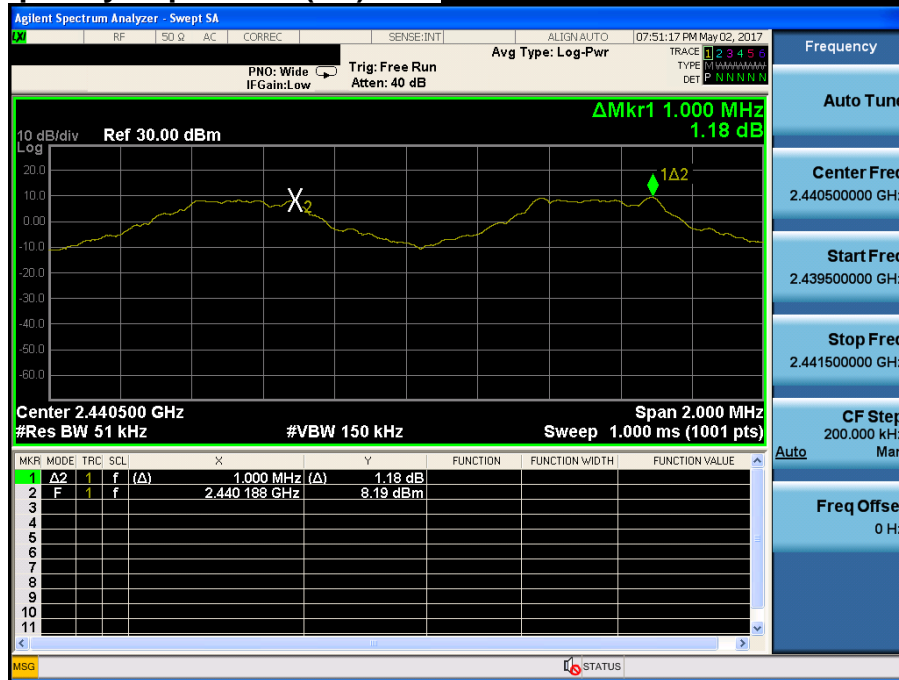

# Carrier Frequency Separation (FH) *Hopping mode : Enable & π/4-DQPSK*

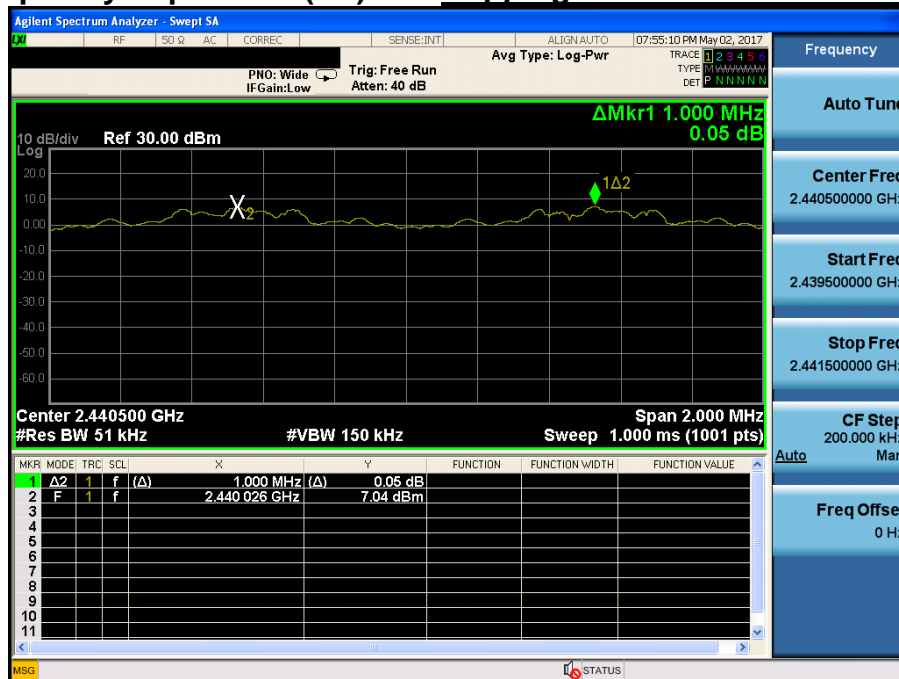


# Carrier Frequency Separation (FH) *Hopping mode : Enable & 8DPSK*

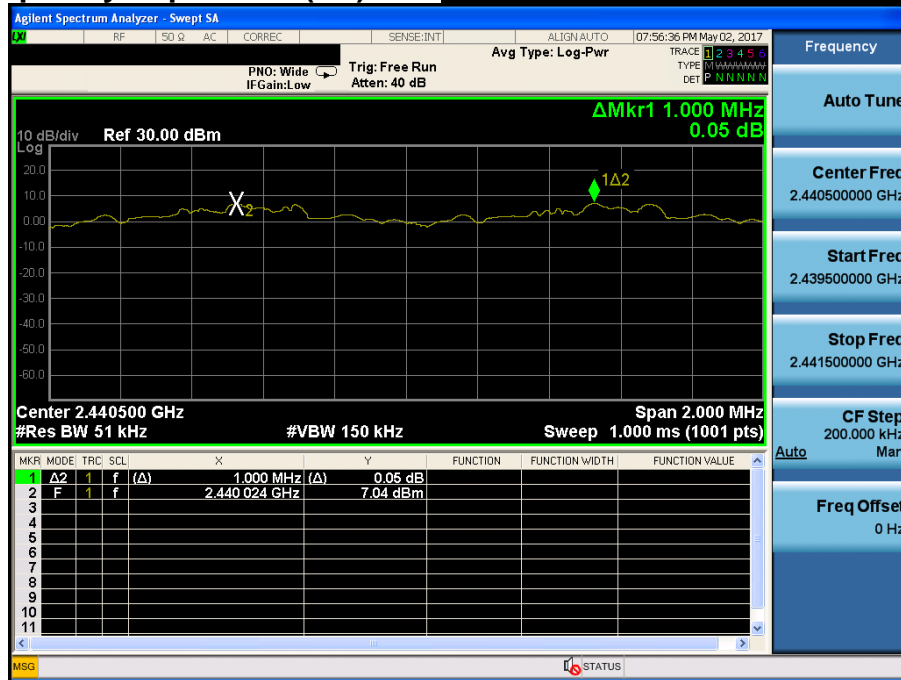


## Carrier Frequency Separation (AFH) *Hopping mode : Enable & GFSK*



## Carrier Frequency Separation (AFH) *Hopping mode : Enable & $\pi/4$ -DQPSK*

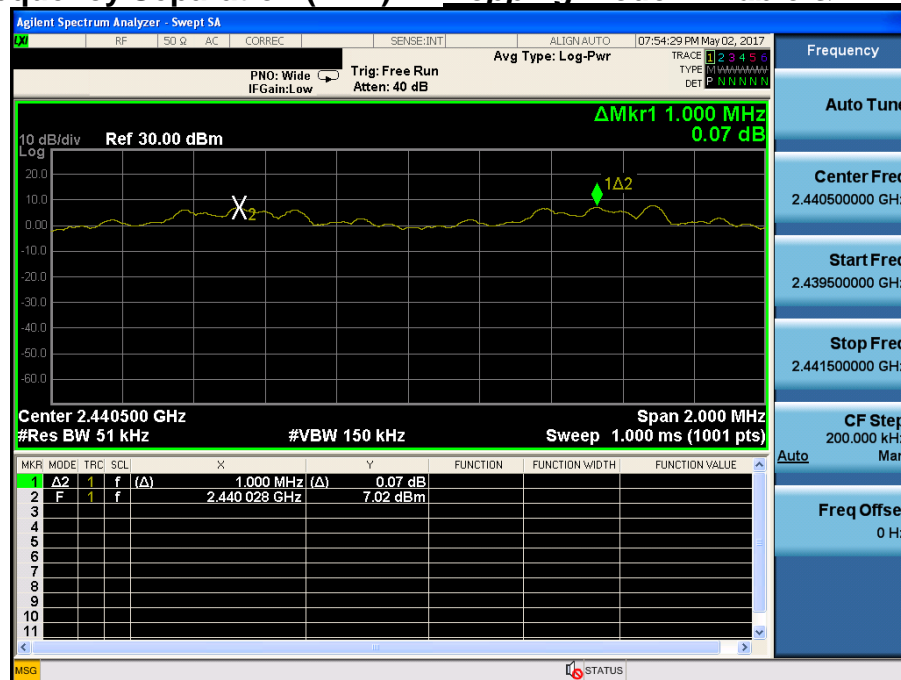

# Carrier Frequency Separation (AFH) *Hopping mode : Enable & 8DPSK*

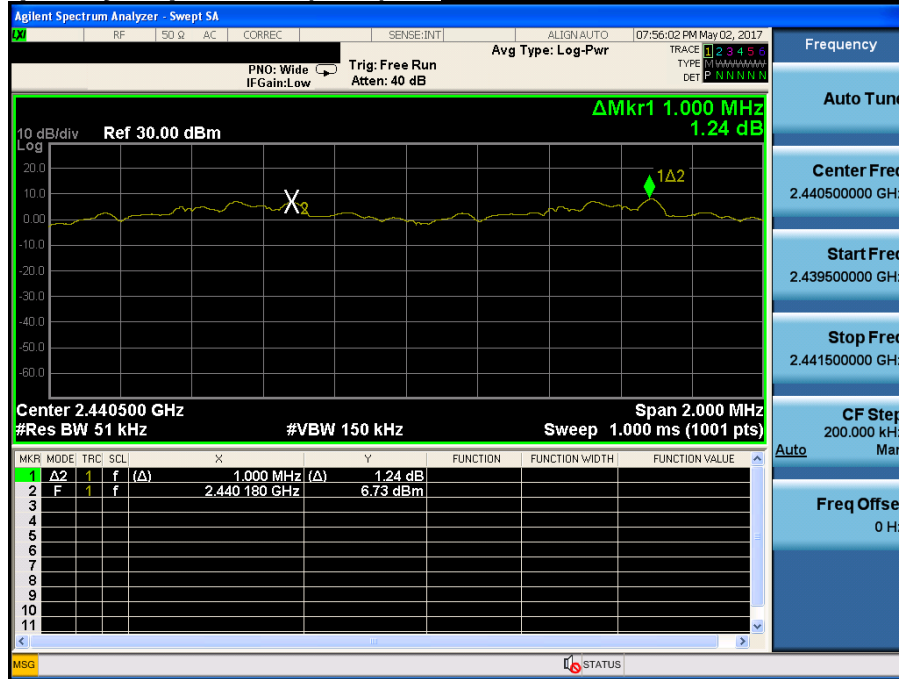

## 5. Number of Hopping Frequencies

### 5.1 Test Setup

Refer to the APPENDIX I.

### 5.2 Limit

Limit :  $\geq 15$  hops

### 5.3 Procedure

The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

To get higher resolution, two frequency ranges for FH mode within the 2400 ~ 2483.5 MHz were examined.

The spectrum analyzer is set to :

Span for FH mode = 50 MHz      Start Frequency = 2391.5 MHz,   Stop Frequency = 2441.5 MHz

Start Frequency = 2441.5 MHz,   Stop Frequency = 2491.5 MHz

Span for AFH mode = 50 MHz      Start Frequency = 2416.0 MHz,   Stop Frequency = 2466.0 MHz

RBW = To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

### 5.4 Test Results

#### FH mode

Hopping mode	Modulation	Test Result (Total Hops)
Enable	GFSK	79
	$\pi/4$ -DQPSK	79
	8DPSK	79

#### AFH mode


Hopping mode	Modulation	Test Result (Total Hops)
Enable	GFSK	20
	$\pi/4$ -DQPSK	20
	8DPSK	20

Note 1 : See next pages for actual measured spectrum plots.


#### - Minimum Standard :

At least 15 hops

## Number of Hopping Frequencies 1(FH) Hopping mode : Enable & GFSK

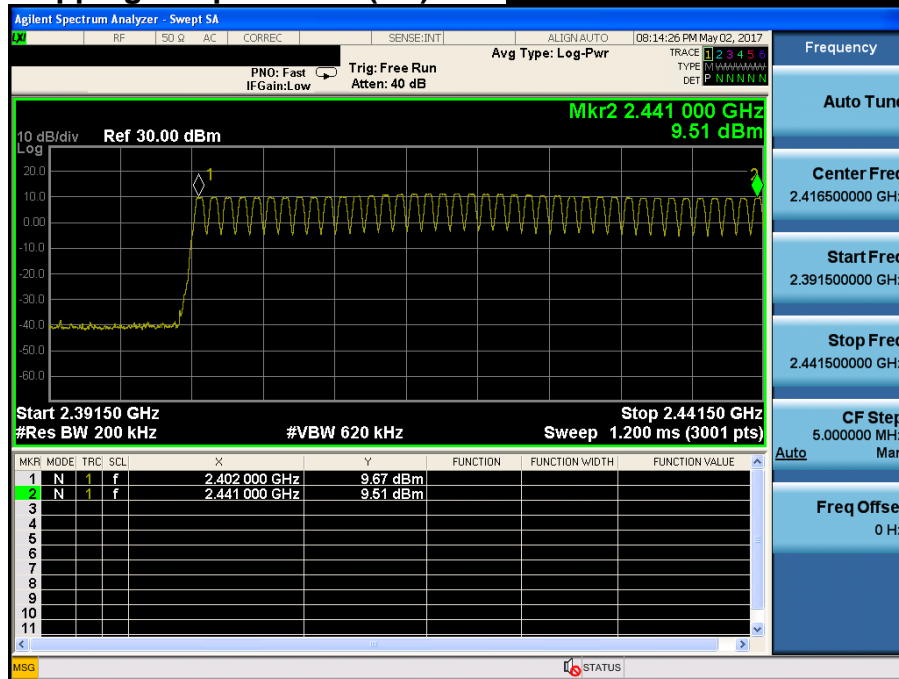


## Number of Hopping Frequencies 2(FH) Hopping mode : Enable & GFSK

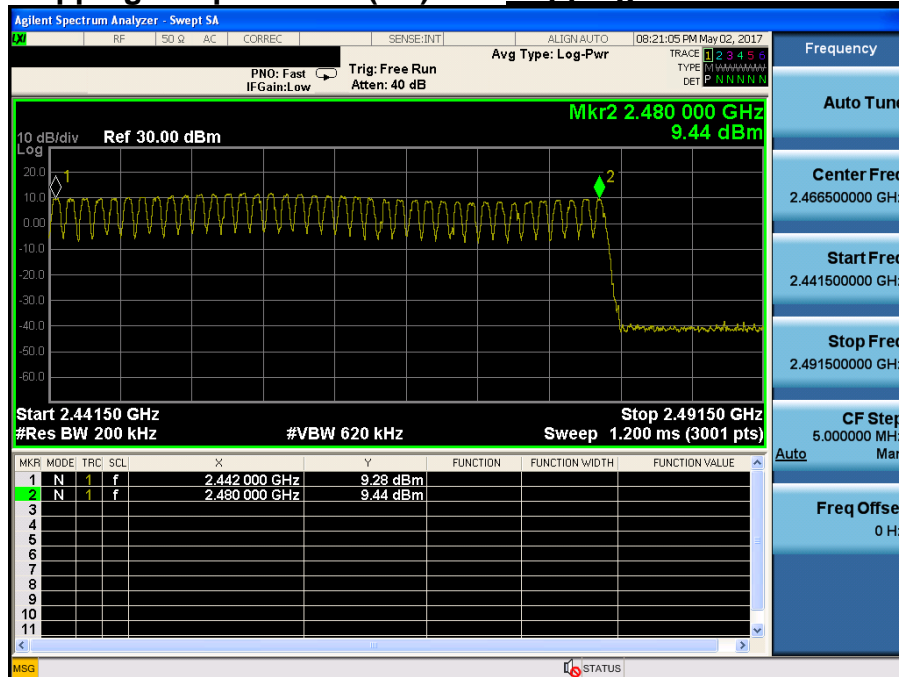


## Number of Hopping Frequencies 1(FH)

**Hopping mode : Enable &  $\pi/4$ -DQPSK**

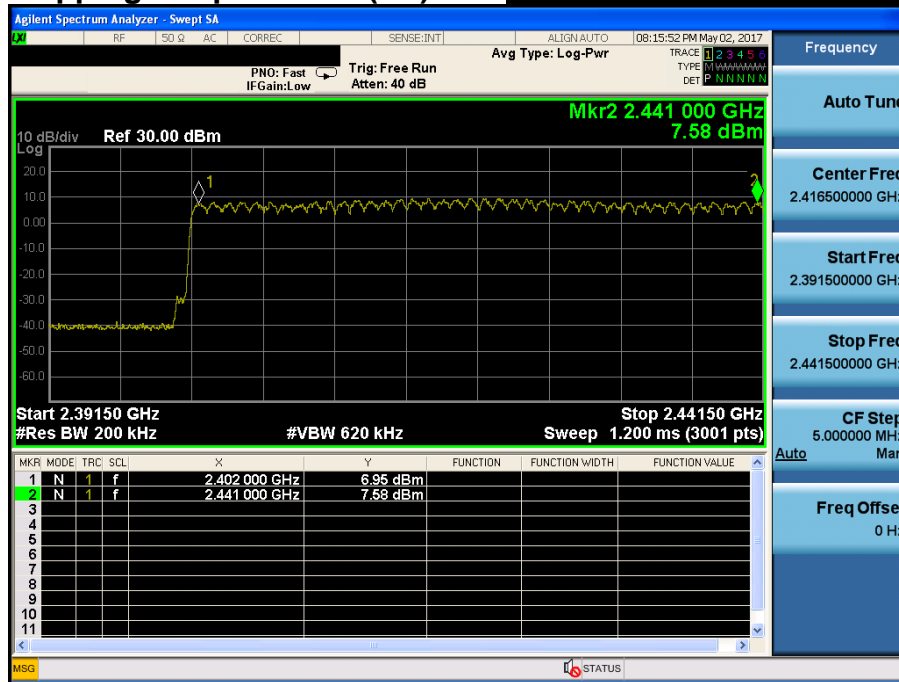

## Number of Hopping Frequencies 2(FH)

**Hopping mode : Enable &  $\pi/4$ -DQPSK**

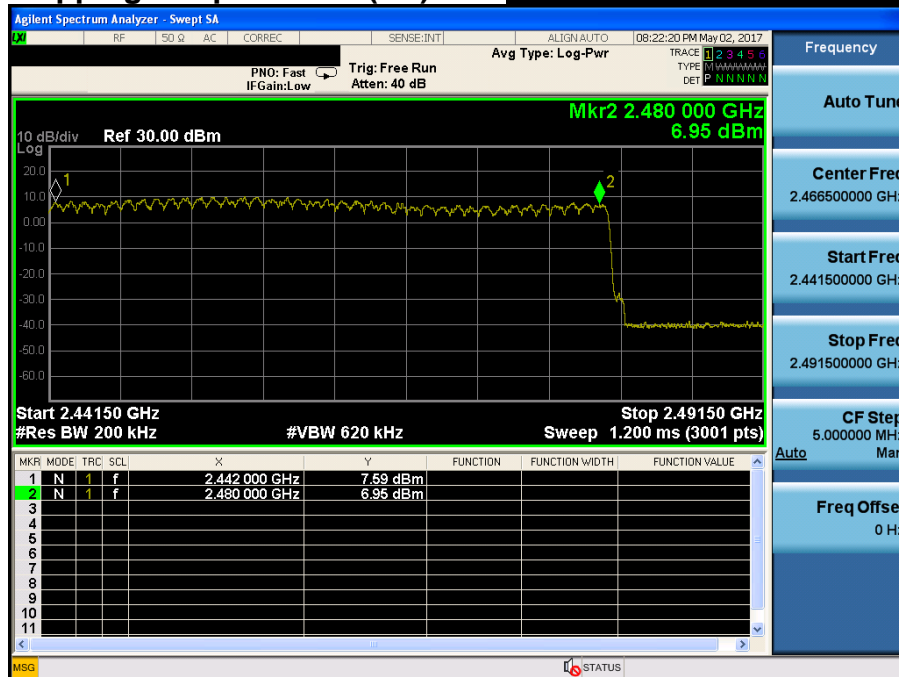





Number of Hopping Frequencies 1(FH) *Hopping mode : Enable & 8DPSK*



Number of Hopping Frequencies 2(FH) *Hopping mode : Enable & 8DPSK*

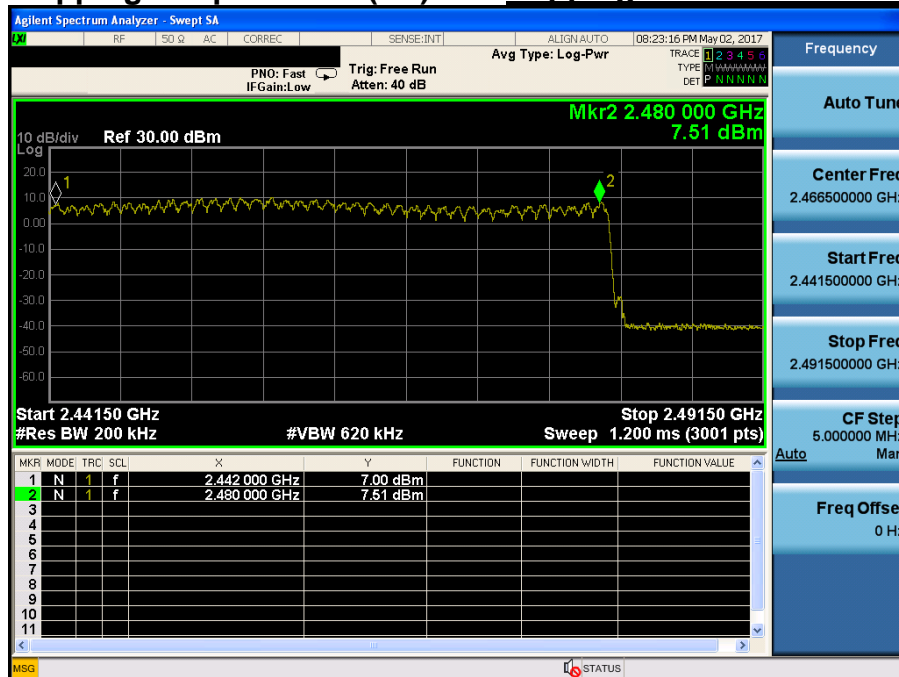


Number of Hopping Frequencies 1(AFH) Hopping mode : Enable & GFSK

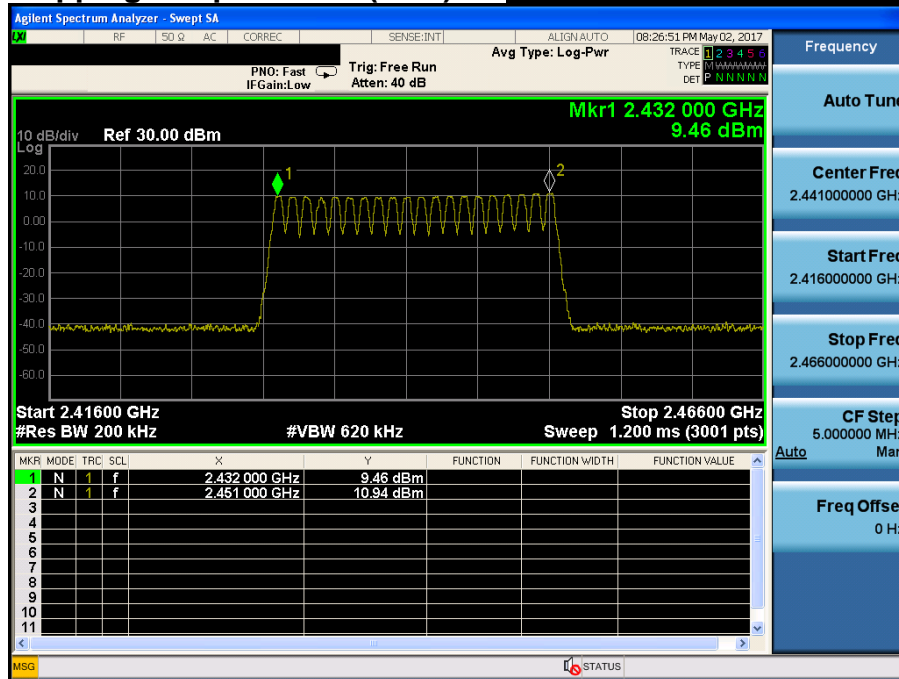

Number of Hopping Frequencies 1(AFH) Hopping mode : Enable &  $\pi/4$ -DQPSK



Number of Hopping Frequencies 1(AFH) *Hopping mode : Enable & 8DPSK*

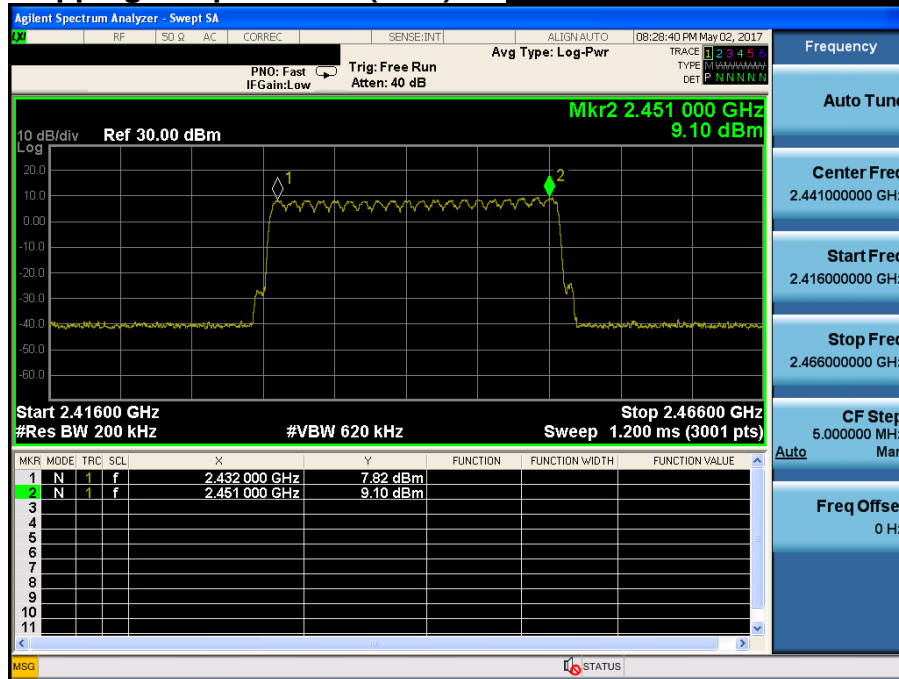

## 6. Time of Occupancy (Dwell Time)

### 6.1 Test Setup

Refer to the APPENDIX I.

### 6.2 Limit

The maximum permissible time of occupancy is 400 ms within a period of 400 ms multiplied by the number of hopping channels employed.

### 6.3 Test Procedure

The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to :

Center frequency = 2441 MHz

Span = zero

RBW = 1 MHz (RBW shall be  $\leq$  channel spacing and where possible RBW should be set  $\gg 1/T$ , where T is the expected dwell time per channel)

VBW  $\geq$  RBW

Detector function = peak

Trace = max hold

### 6.4 Test Results

#### FH mode

Hopping mode	Packet Type	Number of hopping Channels	Burst On Time (ms)	Period (ms)	Test Result (sec)
Enable	DH 5	79	2.880	3.750	0.307
	2 DH 5	79	2.880	3.750	0.307
	3 DH 5	79	2.880	3.750	0.307

#### AFH mode

Hopping mode	Packet Type	Number of hopping Channels	Burst On Time (ms)	Period (ms)	Test Result (sec)
Enable	DH 5	20	2.880	3.750	0.154
	2 DH 5	20	2.880	3.750	0.154
	3 DH 5	20	2.880	3.750	0.154

Note 1 : Dwell Time =  $0.4 \times \text{Hopping channel} \times \text{Burst ON time} \times$


$((\text{Hopping rate} \div \text{Time slots}) \div \text{Hopping channel})$

- Time slots for DH5 = 6 slots (TX = 5 slot / RX = 1 slot)


- Hopping Rate = 1600 for FH mode & 800 for AFH mode

Note 2 : See next pages for actual measured spectrum plots.


## Time of Occupancy (FH)

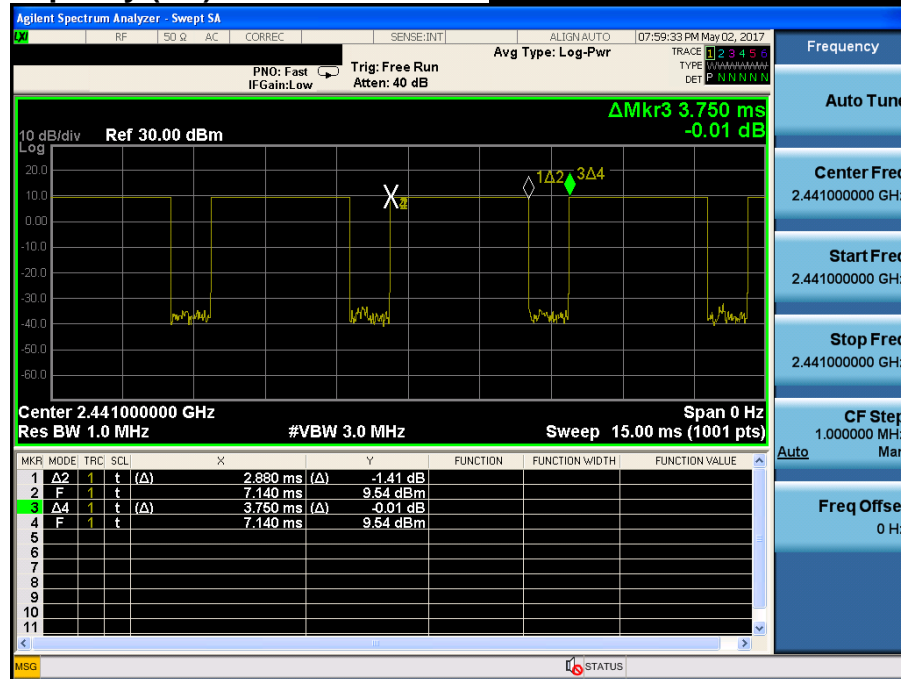Hopping mode : Enable & DH5


## Time of Occupancy (FH)

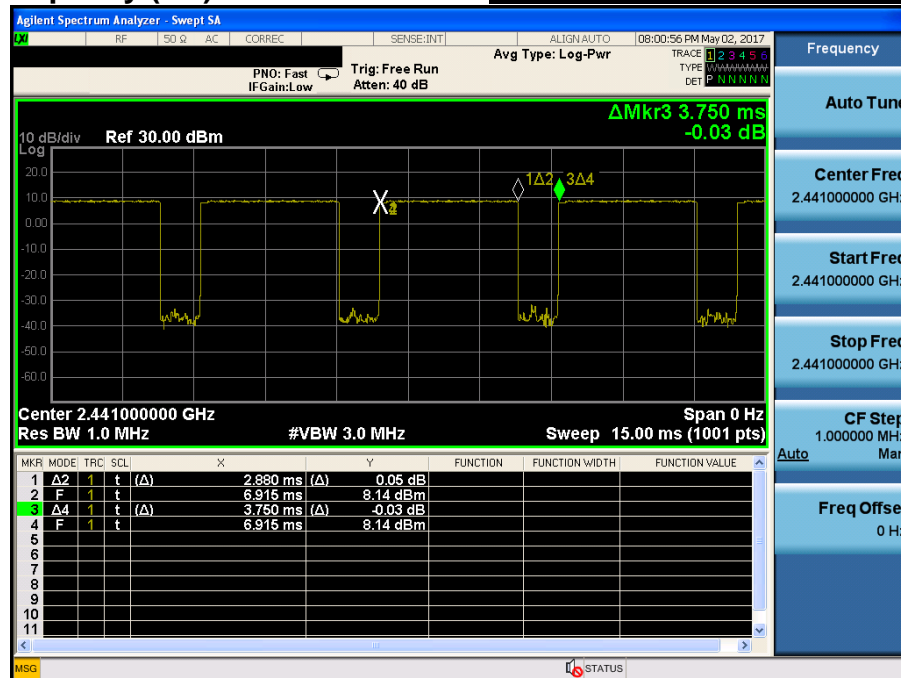Hopping mode : Enable & 2-DH5


## Time of Occupancy (FH)

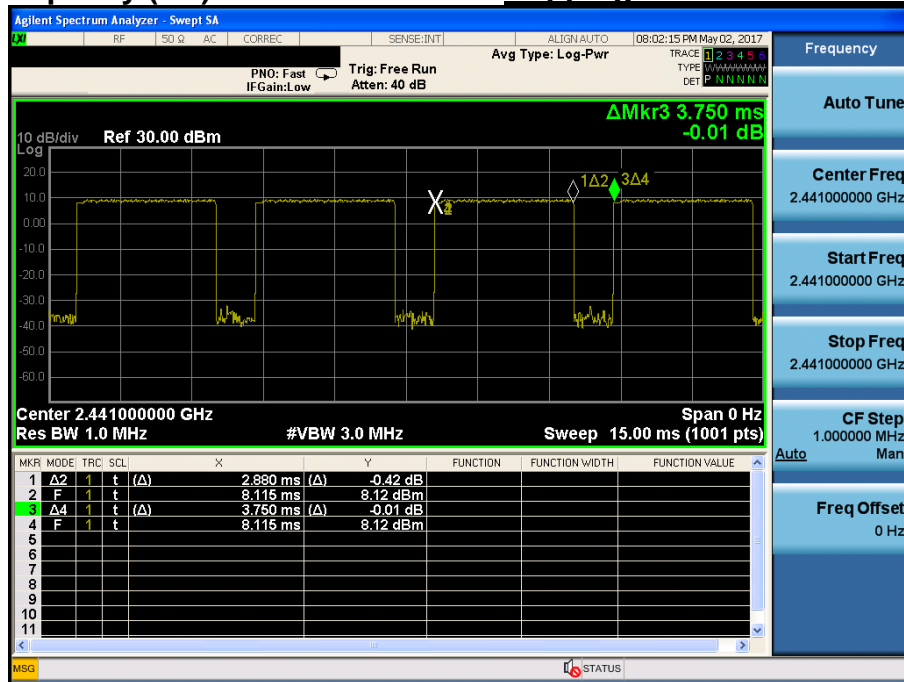Hopping mode : Enable & 3-DH5

## Time of Occupancy (AFH)

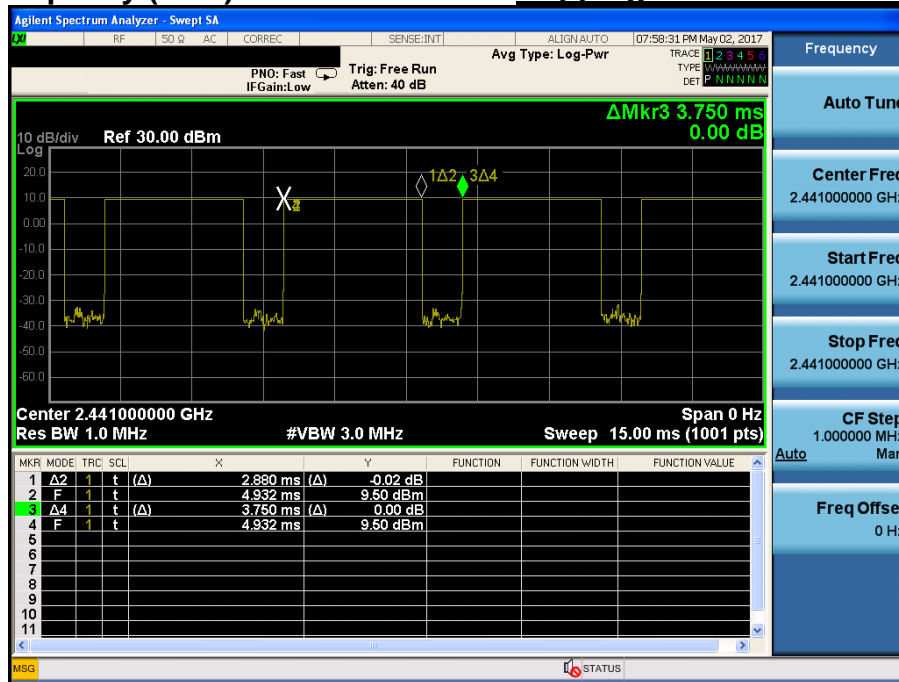
Hopping mode : Enable & DH5

## Time of Occupancy (AFH)

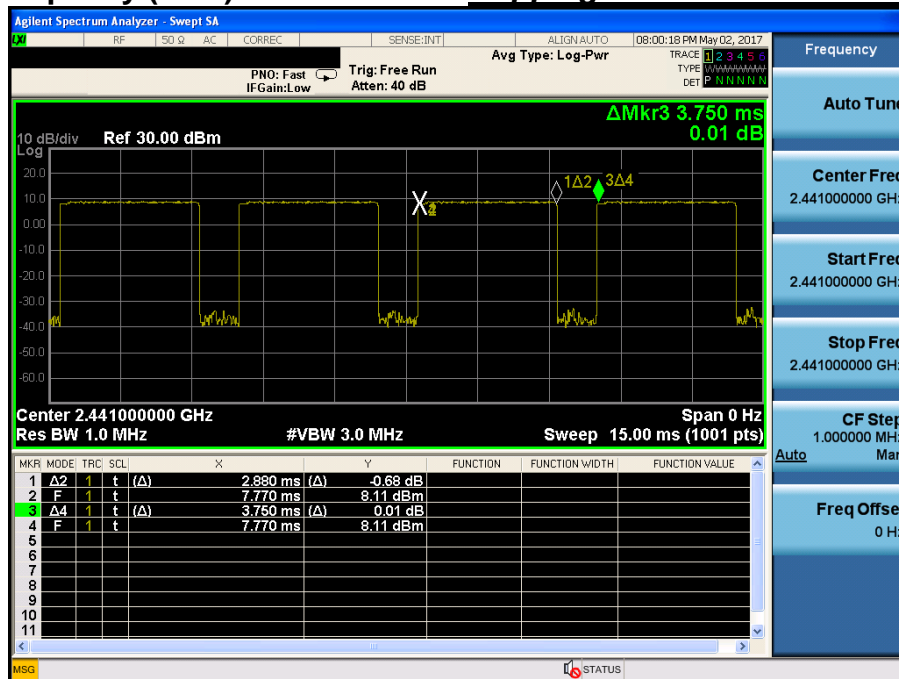Hopping mode : Enable & 2-DH5

# Time of Occupancy (AFH)

## Hopping mode : Enable & 3-DH5

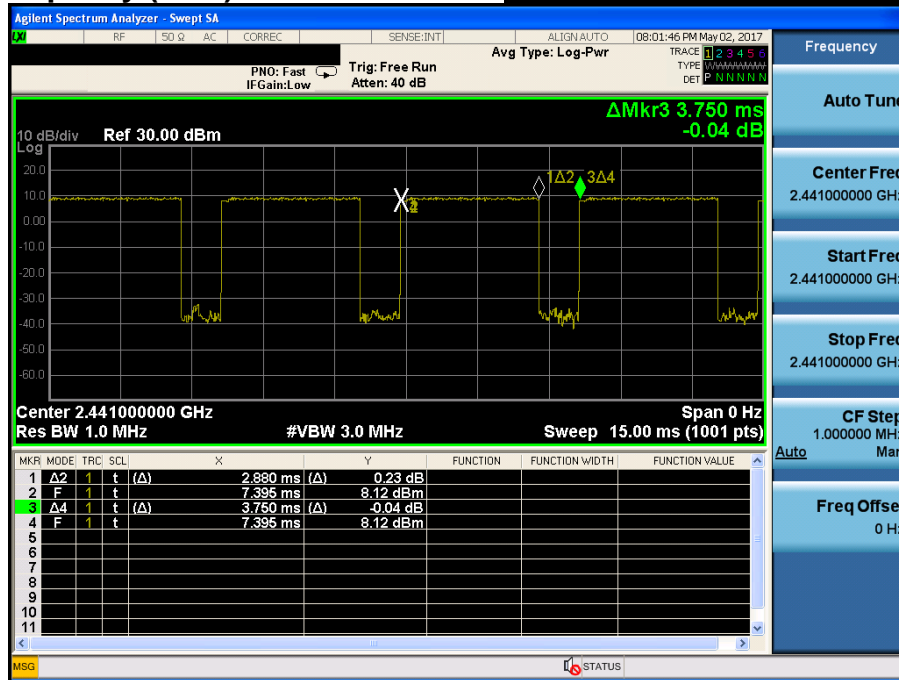



## 7. Transmitter Radiated Spurious Emissions and Conducted Spurious Emission

### 7.1 Test Setup

Refer to the APPENDIX I.

### 7.2 Limit

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section §15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section §15.205(a), must also comply the radiated emission limits specified in section §15.209(a) (see section §15.205(c))

According to § 15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

Frequency (MHz)	Limit (uV/m)	Measurement Distance (meter)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1705	24000/F (kHz)	30
1705 ~ 30.0	30	30
30 ~ 88	100 **	3
88 ~ 216	150 **	3
216 ~ 960	200 **	3
Above 960	500	3

\*\* Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 - 72 MHz, 76 - 88 MHz, 174 - 216 MHz or 470 - 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

According to § 15.205(a) and (b), only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	4.5 ~ 5.15	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	5.35 ~ 5.46	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~ 12.52025	149.9 ~ 150.05	1645.5 ~ 1646.5	7.25 ~ 7.75	17.7 ~ 21.4
4.125 ~ 4.128	12.57675 ~ 12.57725	156.52475 ~ 156.52525	1660 ~ 1710	8.025 ~ 8.5	22.01 ~ 23.12
4.17725 ~ 4.17775	13.36 ~ 13.41	156.7 ~ 156.9	1718.8 ~ 1722.2	9.0 ~ 9.2	23.6 ~ 24.0
4.20725 ~ 4.20775	16.42 ~ 16.423	162.0125 ~ 167.17	2200 ~ 2300	9.3 ~ 9.5	31.2 ~ 31.8
6.215 ~ 6.218	16.69475 ~ 16.69525	167.72 ~ 173.2	2310 ~ 2390	10.6 ~ 12.7	36.43 ~ 36.5
6.26775 ~ 6.26825	16.80425 ~ 16.80475	240 ~ 285	2483.5 ~ 2500	13.25 ~ 13.4	Above 38.6
6.31175 ~ 6.31225	25.5 ~ 25.67	322 ~ 335.4	2655 ~ 2900		
8.291 ~ 8.294	37.5 ~ 38.25	399.90 ~ 410	3260 ~ 3267		
8.362 ~ 8.366	73 ~ 74.6	608 ~ 614	3332 ~ 3339		
8.37625 ~ 8.38675	74.8 ~ 75.2	960 ~ 1240	3345.8 ~ 3358		
			3600 ~ 4400		

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

## 7.3. Test Procedures

### 7.3.1. Test Procedures for Radiated Spurious Emissions

1. The EUT is placed on a non-conductive table. For emission measurements at or below 1 GHz, the table height is 80 cm. For emission measurements above 1 GHz, the table height is 1.5 m.  
The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 1 or 3 meter away from the interference-receiving antenna.
3. For measurements above 1GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.
4. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
5. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
6. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Note: The radiated spurious emission was tested with below settings.

- Frequencies less than or equal to 1000 MHz

The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.

- Frequencies above 1000 MHz

The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz.

The result of Average measurement is calculated using PK result and duty correction factor

### 7.3.2. Test Procedures for Conducted Spurious Emissions

1. The transmitter output was connected to the spectrum analyzer.
2. The **reference level** of the fundamental frequency was measured with the spectrum analyzer using RBW = 100 kHz, VBW = 300 kHz.
3. The conducted spurious emission was tested each ranges were set as below.

**Frequency range : 9 kHz ~ 30 MHz**

RBW = 100 kHz, VBW = 300 kHz, SWEEP TIME = AUTO, DETECTOR = PEAK, TRACE = MAX HOLD, SWEEP POINT : 40001

**Frequency range : 30 MHz ~ 10 GHz, 10 GHz ~ 25 GHz**

RBW = 1 MHz, VBW = 3 MHz, SWEEP TIME = AUTO, DETECTOR = PEAK, TRACE = MAX HOLD, SWEEP POINT : 40001

**LIMIT LINE = 20 dB below of the reference level of above measurement procedure Step 2. (RBW = 100 kHz, VBW = 300 kHz)**

If the emission level with above setting was close to the limit (ie, less than 3 dB margin) then zoom scan is required using RBW = 100 kHz, VBW = 300 kHz, SPAN = 100 MHz and BINS = 2001 to get accurate emission level within 100 kHz BW.

Also the path loss for conducted measurement setup was used as described on the Appendix I of this test report.