



NVLAP LAB CODE 200707-0



FCC PART 15.247

MEASUREMENT AND TEST REPORT

For

Xinwei Electronic Co., Ltd., Quanzhou

Wan An Tang Xi Industrial Area. Luo Jiang Quanzhou Fujian China

FCC ID: UUPHST11

This Report Concerns: <input checked="" type="checkbox"/> Original Report	Equipment Type: Bluetooth Headset
Test Engineer: Andy Yan <i>Andy Yan</i>	
Report No.: RSZ07101201	
Test Date: 2007-10-18 to 2007-10-22	
Report Date: 2007-11-02	
Reviewed By: EMC Manager: Boni Baniqued <i>Boni Baniqued</i>	
Prepared By: Bay Area Compliance Laboratory Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008	

Note: This test report is for the customer shown above and their specific product only. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratory Corp. (Shenzhen). This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S)	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES	6
EQUIPMENT MODIFICATIONS	6
EXTERNAL I/O CABLE.....	7
CONFIGURATION OF TEST SETUP	8
BLOCK DIAGRAM OF TEST SETUP	9
SUMMARY OF TEST RESULTS.....	11
§15.247 (i) & §2.1093 - RF EXPOSURE.....	12
§15.203 - ANTENNA REQUIREMENT.....	13
STANDARD APPLICABLE	13
ANTENNA CONNECTOR CONSTRUCTION	13
§15.207 (a)- CONDUCTED EMISSIONS.....	14
MEASUREMENT UNCERTAINTY	14
EUT SETUP.....	14
EMI TEST RECEIVER SETUP.....	15
TEST EQUIPMENT LIST AND DETAILS.....	15
TEST PROCEDURE	15
TEST RESULTS SUMMARY	15
TEST DATA	16
PLOT(S) OF TEST DATA	16
§15.109, §15.205, §15.209, §15.247 - RADIATED EMISSIONS.....	19
APPLICABLE STANDARD	19
MEASUREMENT UNCERTAINTY	19
EUT SETUP.....	19
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	20
TEST EQUIPMENT LIST AND DETAILS.....	20
TEST PROCEDURE	20
CORRECTED AMPLITUDE & MARGIN CALCULATION	20
TEST RESULTS SUMMARY	21
TEST DATA	21
§15.247(a) (1)-CHANNEL SEPARATION TEST	25
APPLICABLE STANDARD	25
TEST EQUIPMENT LIST AND DETAILS.....	25
TEST PROCEDURE	25
TEST DATA	25
§15.247(a) (1) –20dB BANDWIDTH TESTING.....	29
APPLICABLE STANDARD	29
TEST EQUIPMENT LIST AND DETAILS.....	29
TEST PROCEDURE	29
TEST DATA	29
§15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	33

APPLICABLE STANDARD	33
TEST EQUIPMENT LIST AND DETAILS.....	33
TEST PROCEDURE	33
TEST DATA	33
§15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	35
APPLICABLE STANDARD	35
TEST EQUIPMENT LIST AND DETAILS.....	35
TEST PROCEDURE	35
TEST DATA	35
§15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	39
APPLICABLE STANDARD	39
TEST EQUIPMENT LIST AND DETAILS.....	39
TEST PROCEDURE	39
TEST DATA	39
§15.247(d) - BAND EDGES TESTING.....	43
APPLICABLE STANDARD	43
TEST EQUIPMENT LIST AND DETAILS.....	43
TEST PROCEDURE	43
TEST DATA	43

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The *Xinwei Electronic Co.,Ltd., Quanzhou*'s product, model number: *T11* or the "EUT" as referred to in this report is a *Bluetooth Headset*, which measures approximately: 4.1 cm L x 2.1 cm W x 1.6 cm H, rated input voltage: 3.7V Battery and DC 5V adapter.

AC/DC adapter:

Manufacturer: Mountronix

Model: GFP051T-0505

Input: AC 100-240 V 50/60 Hz 0.2A

Output: DC 5V 0.5A

** The test data gathered are from production sample, serial number: 0710007, assigned by BACL Shenzhen, we received the EUT on 2007-10-12.*

Objective

This Type approval report is prepared on behalf of *Xinwei Electronic Co., Ltd., Quanzhou* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203,15.205, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratory Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratory Corp. (Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratory Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 04, 2004. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratory Corp. (Shenzhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



NVLAP LAB CODE 200707-0

The current scope of accreditations can be found at
<http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user).

EUT Exercise Software

N/A.: the EUT was tested in frequency hopping/pairing mode.

Special Accessories

No special accessories were required during testing.

Equipment Modifications

Bay Area Compliance Laboratory Corp. (Shenzhen) has not done any modification on the EUT.

Host System Configuration List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
DELL	Motherboard	OWC297	CN-OWC297-70821-566-02BR	DoC
DELL	Power	NPS-250KB D	CN-0H2678-17972-56E8NBM	DoC
Seagate	Hard Disk	ST340014A	5JXK3NAD	DoC
DELL	3.5' Floppy	N/A	CN-0N8893-69802-54Q-02OZ	DoC
Lite-ON	CD-Rom	LTN-489S	N/A	DoC
Intel	Ethernet	PRO 10/100 VE	N/A	DoC
Intel	CPU	Celeron D-2533	N/A	DoC
ProMOS	Memory	V826632K24SATG-C0	0525-K1933700	DoC
DELL	PC	DELL 170L	CN-0TC670-70821-560-F4WQ	DoC

Local Support Equipment List and Details


Manufacturer	Description	Model	Serial Number	FCC ID
DELL	Keyboard	SK-8110	CN07N244-71616-56I-1I0O	DoC
DELL	Mouse	M071KC	519046820	DoC
DELL	LCD Monitor	1505FP	Y4287-7168-574-GBSH	DoC

External I/O Cable

Cable Description	Length (M)	From Port	To
Shielded Detachable K/B Cable	1.5	K/B Port /Host	K/B
Shielded Detachable Mouse Cable	1.5	Mouse Port /Host	Mouse
Shielded Detachable VGA Cable	1.5	VGA Port /Host	Monitor
Shielded Detachable Handset Cable	0.35	EUT	Ear
Shielded Detachable USB Power Cable	1.20	EUT	Adapter
Shielded Detachable Parreller Cable	1.3	Control board	PC
Shielded Detachable USB Cable	1.2	EUT	PC


Configuration of Test Setup

For Conducted emissions:




For Radiated emissions:

Transmitting mode:

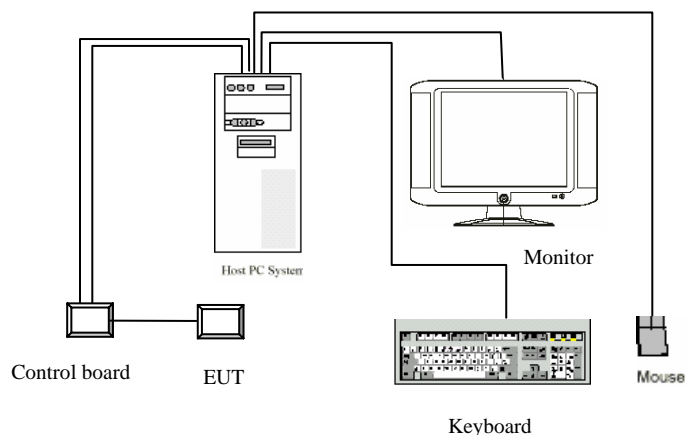


Charging mode:




Block Diagram of Test Setup

For Conducted emissions:

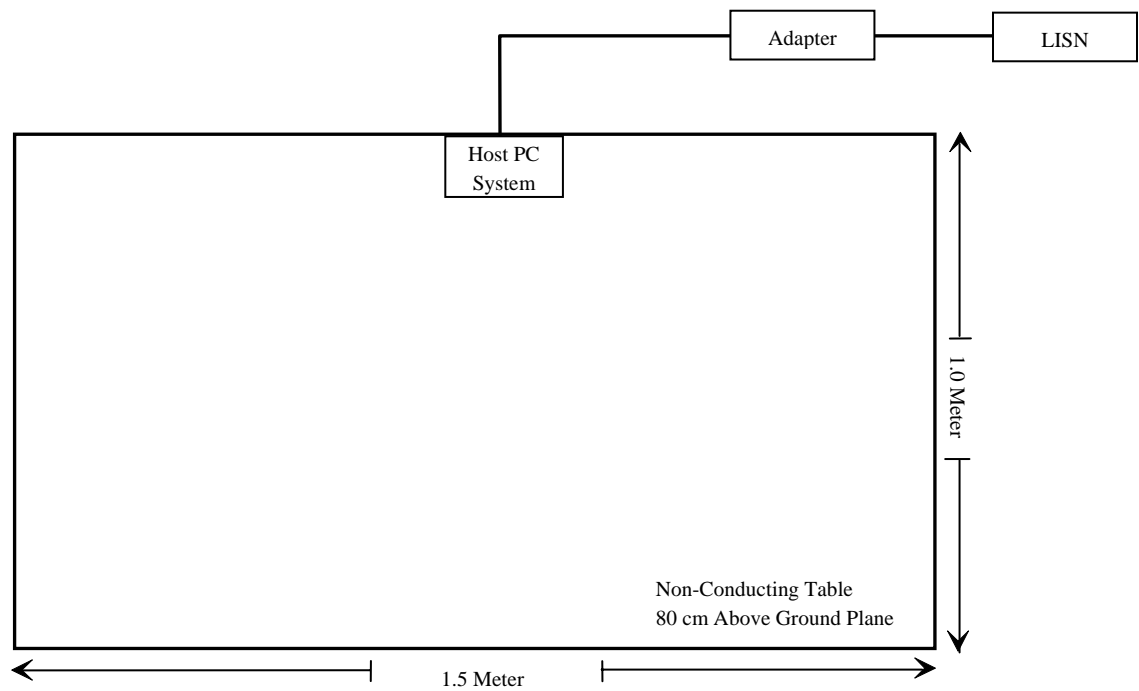


For Radiated emissions:

Transmitting mode:

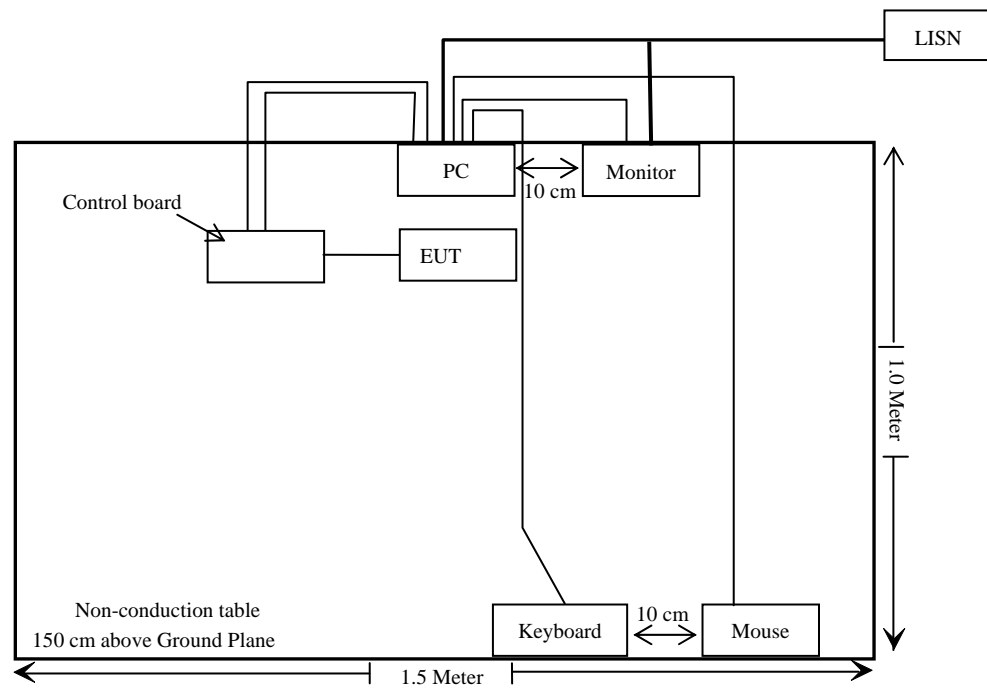

Charging mode:

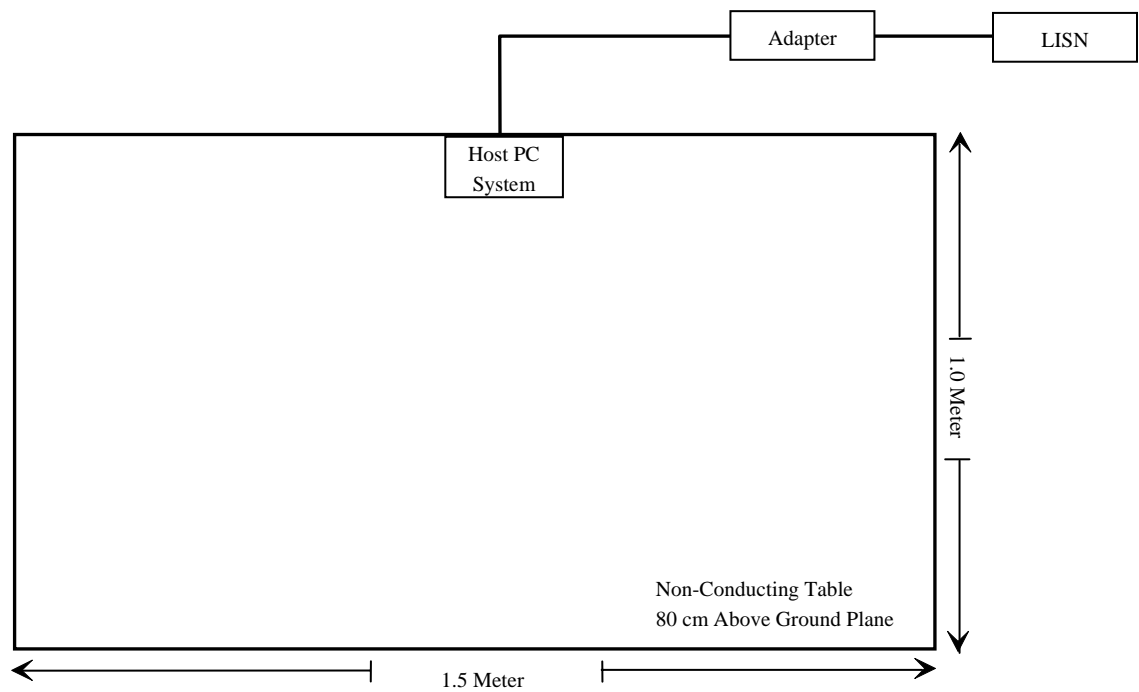

SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.107 (a)	Conducted Emission	Compliant
§15.247 (i) & §2.1093	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.205	Restricted Band	Compliant
§15.109, §15.205, §15.209, §15.247(d)	Radiated Emission	Compliant
§15.247 (a)(1)	20 dB Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges testing	Compliant

§15.247 (i) & §2.1093 - RF EXPOSURE

Standard Applicable

According to § 1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to FCC Exclusion list, In the following table, fGHz is mid-band frequency in GHz, and d is the distance to a person's body, excluding hands, wrists, feet, and ankles.

Exposure category	<u>low threshold</u>	<u>high threshold</u>
general population	$(60/f_{\text{GHz}}) \text{ mW}, d < 2.5 \text{ cm}$ $(120/f_{\text{GHz}}) \text{ mW}, d \geq 2.5 \text{ cm}$	$(900/f_{\text{GHz}}) \text{ mW}, d < 20 \text{ cm}$
occupational	$(375/f_{\text{GHz}}) \text{ mW}, d < 2.5 \text{ cm}$ $(900/f_{\text{GHz}}) \text{ mW}, d \geq 2.5 \text{ cm}$	$(2250/f_{\text{GHz}}) \text{ mW}, d < 20 \text{ cm}$

Routine SAR evaluation refers to that specifically required by § 2.1093, using measurements or computer simulation. When routine SAR evaluation is not required, portable transmitters with output power greater than the applicable low threshold require SAR evaluation to qualify for TCB approval.

+

Measurement Result:

This is a portable device and the Max peak output power is $0.4457\text{mW} < 24.98\text{mW} = (60/2.441\text{GHz}) \text{ mW}$

The SAR measurement is not necessary.

§15.203 - ANTENNA REQUIREMENT

Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Connector Construction

The EUT has a component antenna, which, in accordance to the above sections, is considered sufficient to comply with the provisions of these sections. Please see EUT photo for details.


§15.207 (a)- CONDUCTED EMISSIONS

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is ± 2.4 dB.

EUT Setup

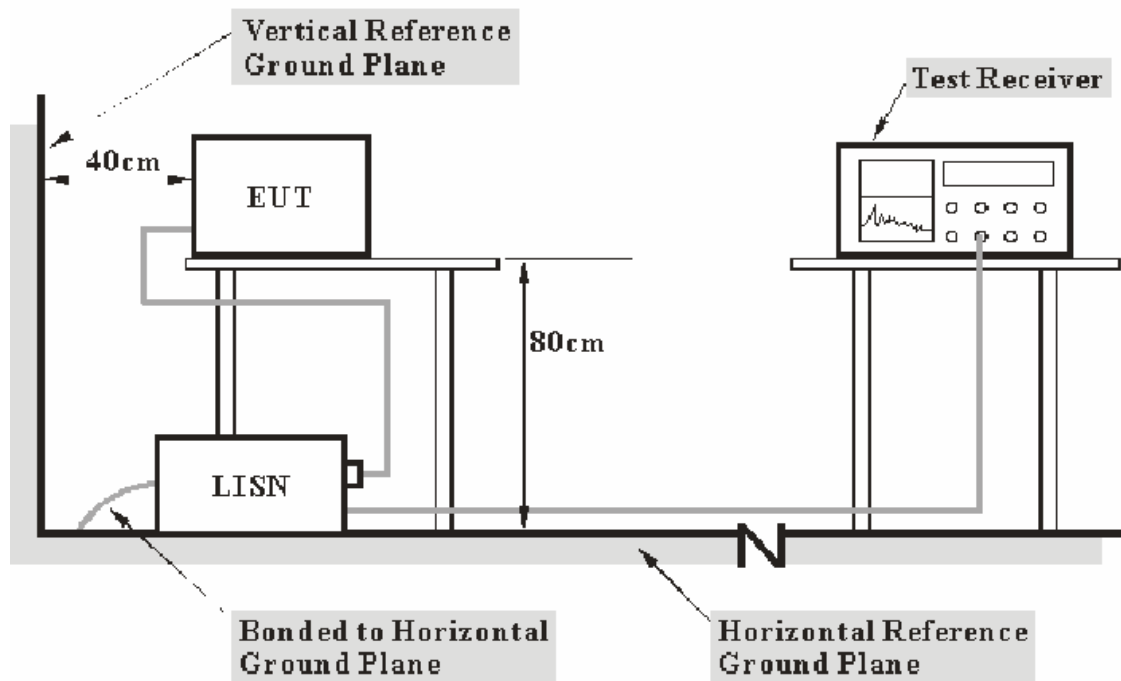

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15 Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<i>Frequency Range</i>	<i>IF B/W</i>
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Com-Power	L.I.S.N.	LI-200	12005	N/A	N/A
Com-Power	L.I.S.N.	LI-200	12008	N/A	N/A
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2007-10-16	2008-10-16
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2007-03-26	2008-03-26

* Com-Power's LISN were used as the supporting equipment.

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

During the conducted emission test, the adapter connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

3.63 dB at 0.360 MHz in the **Neutral** conductor mode.

Test Data**Environmental Conditions**

Temperature:	22 ° C
Relative Humidity:	55%
ATM Pressure:	100.0 kPa

The testing was performed by Andy Yan on 2007-10-18.

Test Mode: Charging

LINE CONDUCTED EMISSIONS				FCC PART 15 CLASS B	
Frequency MHz	Amplitude dBμV	Detector QP/AV	Phase Live/Neutral	Limit dBμV	Margin dB
0.360	45.10	AV	Neutral	48.73	3.63
0.540	40.00	AV	Neutral	46.00	6.00
0.360	51.10	QP	Neutral	58.73	7.63
0.360	50.30	QP	Live	58.73	8.43
0.660	36.20	AV	Neutral	46.00	9.80
0.300	50.20	QP	Neutral	60.24	10.04
0.540	45.20	QP	Neutral	56.00	10.80
1.260	35.10	AV	Neutral	46.00	10.90
0.360	37.80	AV	Live	48.73	10.93
0.540	44.30	QP	Live	56.00	11.70
0.660	44.20	QP	Neutral	56.00	11.80
0.300	38.40	AV	Neutral	50.24	11.84
0.660	43.90	QP	Live	56.00	12.10
0.300	48.10	QP	Live	60.24	12.14
0.540	31.40	AV	Live	46.00	14.60
1.265	41.10	QP	Live	56.00	14.90
1.260	40.30	QP	Neutral	56.00	15.70
0.180	46.90	QP	Live	64.49	17.59
0.180	46.60	QP	Neutral	64.49	17.89
0.180	35.90	AV	Neutral	54.49	18.59
1.265	27.30	AV	Live	46.00	18.70
0.300	30.10	AV	Live	50.24	20.14
0.660	25.70	AV	Live	46.00	20.30
0.180	29.90	AV	Live	54.49	24.59


Plot(s) of Test Data

Plot(s) of Test Data is presented hereinafter as reference.

Conducted Emission Test
FCC Part15B

18. Oct 07 10:47


EUT: Bluetooth Headset M/N: T11
Manuf: Xinwei
Op Cond: Charging
Operator: Andy
Test Spec: AC 120V/60Hz L
Comment: temp: 25 Humi 56%
File name: LLL.RES

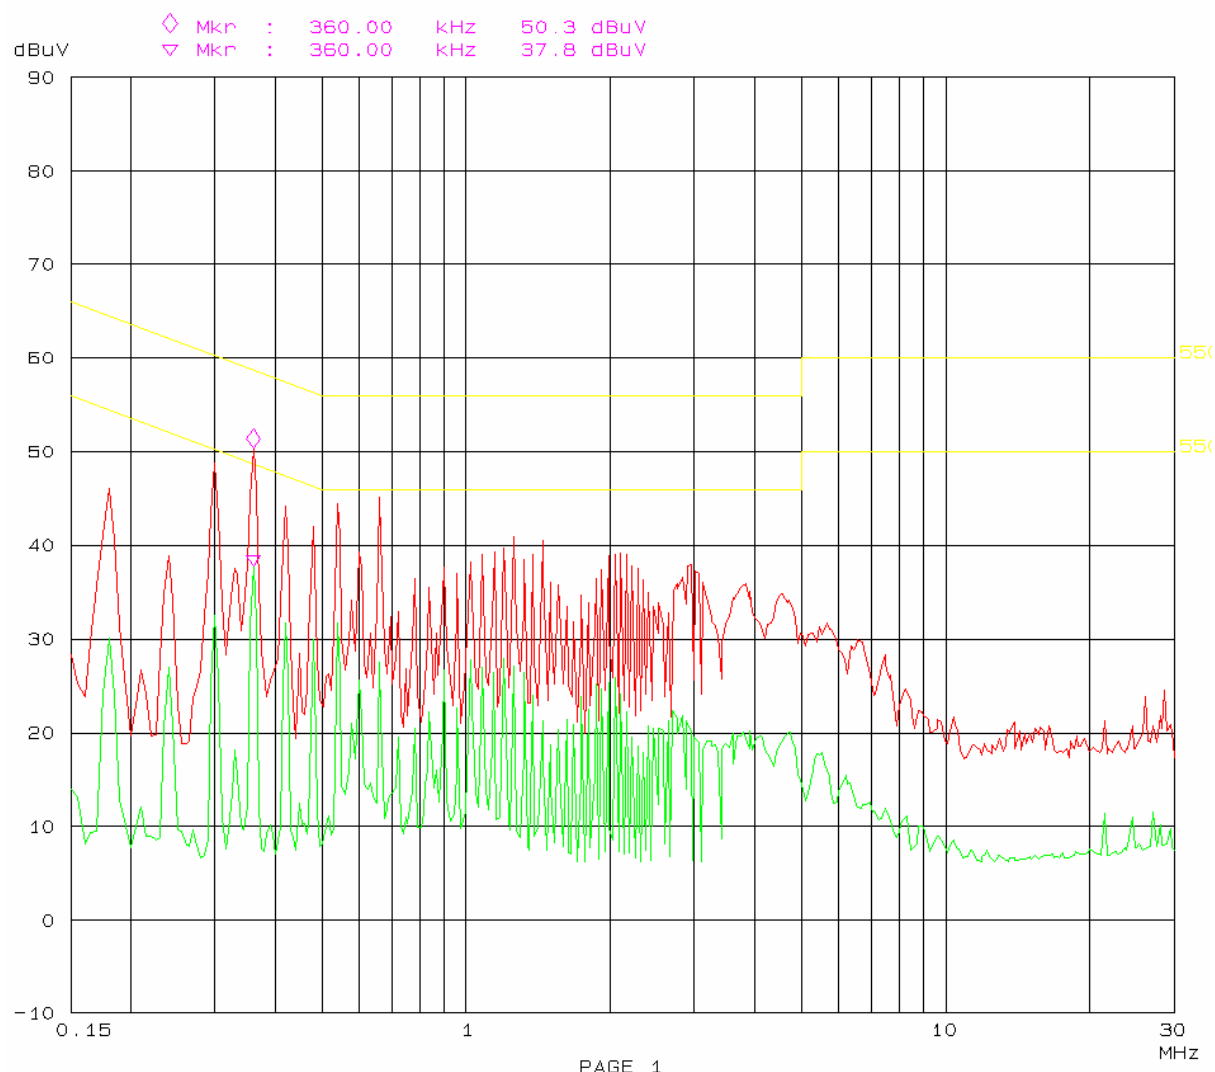

Conducted Emission Test
FCC Part15B

18. Oct 07 10:27

EUT: Bluetooth Headset M/N: T11
Manuf: Xinwei
Op Cond: Charging
Operator: Andy
Test Spec: AC 120V/60Hz N
Comment: temp: 25 Humi 56%
File name: LLL.RES

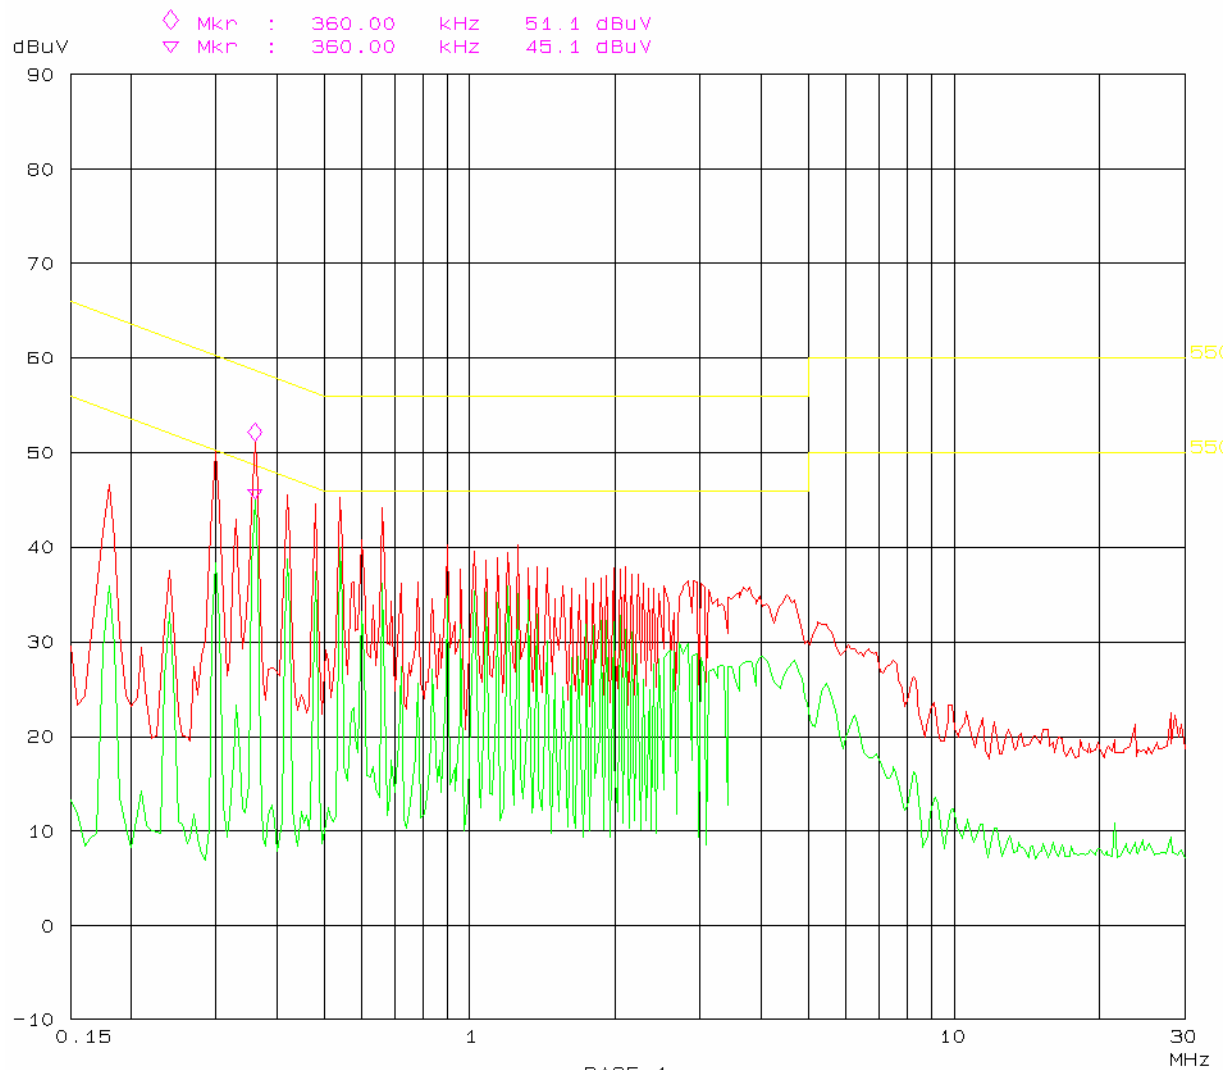

§15.109, §15.205, §15.209, §15.247 - RADIATED EMISSIONS

Applicable Standard


According to FCC §15.247 (d)

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is ± 4.0 dB.

EUT Setup

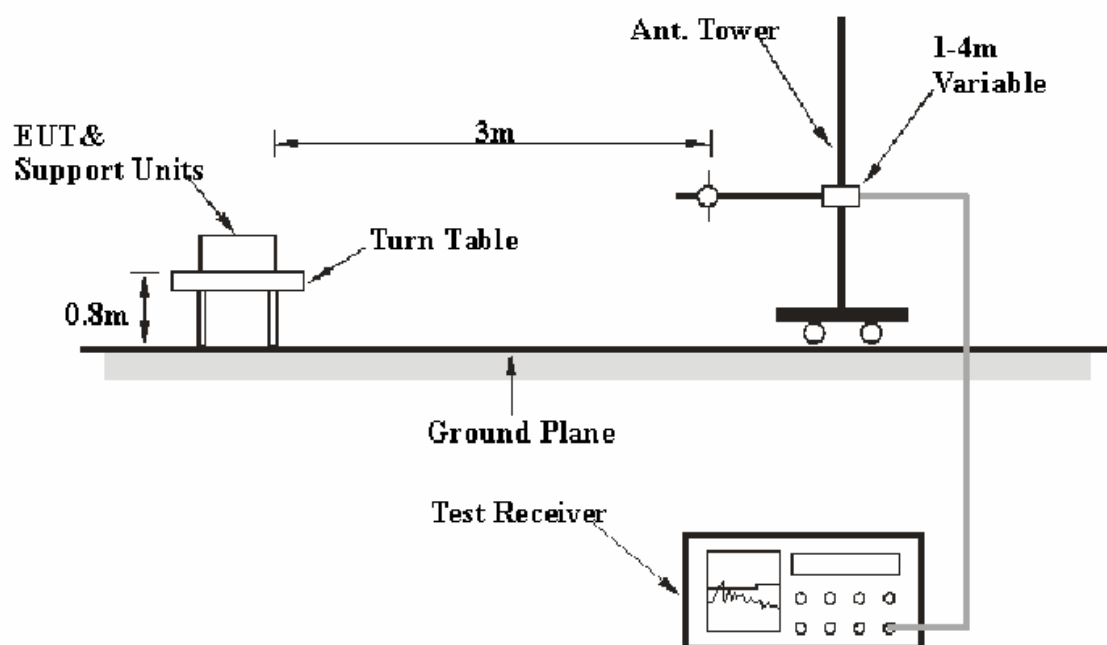

The radiated emission tests were performed in the 3 meters chamber B test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.109, FCC 15.209 and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>
30MHz – 1000 MHz	100 kHz	300 kHz
1000 MHz – 25 GHz	1 MHz	3 MHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2006-11-15	2007-11-15
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2007-10-16	2008-10-16
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2007-08-14	2008-08-14
HP	Amplifier	8449B	3008A00277	2006-09-29	2007-09-29
Sunol Sciences	Horn Antenna	DRH-118	A052604	2007-09-25	2008-09-25
Agilent	Spectrum Analyzer	8564E	3943A01781	2006-11-22	2007-11-22

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

For the radiated emissions test, the host PC was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the PK&AV detection mode.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corr. Ampl.}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.109, 15.205, 15.209, and 15.247, with the worst margin reading of:

Transmitting mode: 12.3 dB at 234.155025 MHz in the Vertical polarization, for 30 MHz-1000MHz
Transmitting mode: 7.18 dB at 4804 MHz in the Vertical polarization, for above 1GHz (Low Channel)
Transmitting mode: 4.83 dB at 4882 MHz in the Vertical polarization, for above 1GHz (Middle Channel)
Transmitting mode: 5.18 dB at 4960 MHz in the Horizontal polarization, for above 1GHz (High Channel)
Charging mode: 10.2 dB at 898.527125 MHz in the Vertical polarization


Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	52%
ATM Pressure:	100.9 kPa

The testing was performed by Andy Yan on 2007-10-22.

Test Mode: Transmitting (30-1000MHz)

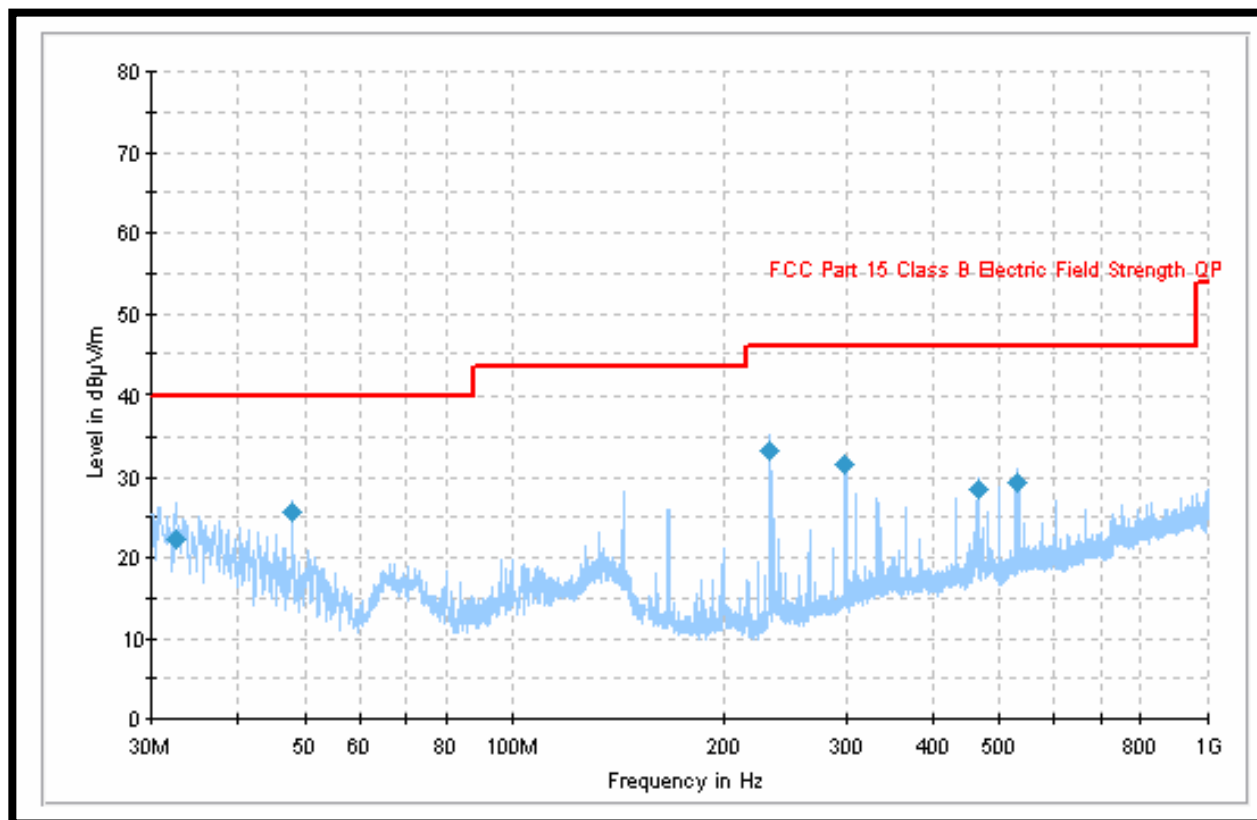


Frequency (MHz)	Quasi Peak (dBμV/m)	Antenna Height (cm)	Polarity	Turntable Position (deg)	Corr. (dB)	Limit (dBμV/m)	Margin (dB)
234.155025	33.7	244.0	V	66.0	-12.0	46.0	12.3
298.690625	31.7	208.0	V	124.0	-9.4	46.0	14.3
47.982950	25.5	401.0	H	101.0	-16.9	40.0	14.5
531.353275	29.4	187.0	V	353.0	-5.6	46.0	16.6
465.758525	29.3	222.0	V	0.0	-6.3	46.0	16.7
32.664425	22.3	235.0	H	93.0	-6.6	40.0	17.7

Test Mode: Transmitting (Above 1GHz)

Frequency	Meter Reading	Detector	Direction	Height	Polar	Antenna Loss	Cable loss	Amplifier Gain	Corr. Ampl.	FCC Part 15.247		
										Limit	Margin	Remarks
MHz	dBuV	PK/QP/AV	Degree	Meter	H / V	dB	dB	dB	dBuV/m	dBuV/m	dB	
Low Channel												
2402	85.08	PK	90	1.0	V	29.1	3.61	35	82.79			fundamental
2402	81.29	AV	45	1.0	V	29.1	3.61	35	79			fundamental
2402	81.6	PK	90	1.0	H	28.9	3.61	35	79.19			fundamental
2402	77.94	AV	45	1.0	H	28.9	3.61	35	75.45			fundamental
4804	40.88	AV	90	1.0	V	34.7	4.64	33.4	46.82	54	7.18	harmonic
4804	40.79	AV	90	1.0	H	34.6	4.64	33.4	46.63	54	7.37	harmonic
1601	50.24	AV	180	1.2	V	26.0	2.77	35.0	44.01	54	9.99	harmonic
1601	48.56	AV	180	1.2	H	26.5	2.77	35.0	42.83	54	11.17	harmonic
4804	46.93	PK	180	1.2	V	34.7	4.64	33.4	52.87	74	21.13	harmonic
4804	46.54	PK	180	1.2	H	34.6	4.64	33.4	52.38	74	21.62	harmonic
1601	54.47	PK	45	1.2	V	26.0	2.77	35.0	48.24	74	25.76	harmonic
1601	53.57	PK	45	1.2	H	26.5	2.77	35.0	47.84	74	26.16	harmonic
Middle Channel												
2441	80.30	PK	60	1.4	H	29.1	3.61	35	78.01			fundamental
2441	76.11	AV	152	1.3	H	29.1	3.61	35	73.82			fundamental
2441	84.38	PK	128	1.5	V	28.9	3.61	35	81.89			fundamental
2441	80.94	AV	156	1.2	V	28.9	3.61	35	78.45			fundamental
4882	43.33	AV	243	1.4	V	34.6	4.64	33.4	49.17	54	4.83	harmonic
4882	40.98	AV	142	1.6	H	34.7	4.64	33.4	46.92	54	7.08	harmonic
1627	52.01	AV	135	1.3	H	26.0	2.77	35.0	45.78	54	8.22	harmonic
1627	51.28	AV	85	1.5	V	26.5	2.77	35.0	45.55	54	8.45	harmonic
4882	47.03	PK	153	1.5	V	34.6	4.64	33.4	52.87	74	21.13	harmonic
4882	46.01	PK	234	1.8	H	34.7	4.64	33.4	51.95	74	22.05	harmonic
1627	54.65	PK	265	1.4	V	26.5	2.77	35.0	48.92	74	25.08	harmonic
1627	54.58	PK	156	1.4	H	26.0	2.77	35.0	48.35	74	25.65	harmonic
High Channel												
2480	79.59	PK	89	1.5	H	28.9	3.61	35	77.1			fundamental
2480	75.84	AV	65	1.5	H	28.9	3.61	35	73.35			fundamental
2480	83.91	PK	65	1.4	V	29.1	3.61	35	81.62			fundamental
2480	79.99	AV	65	1.6	V	29.1	3.61	35	77.7			fundamental
4960	43.07	AV	256	1.8	H	34.6	4.55	33.4	48.82	54	5.18	harmonic
4960	42.35	AV	142	1.5	V	34.7	4.55	33.4	48.2	54	5.80	harmonic
1653	53.76	AV	210	1.2	V	26.0	2.77	35.0	47.53	54	6.47	spurious
1653	52.28	AV	156	1.2	H	26.5	2.77	35.0	46.55	54	7.45	spurious
4960	46.23	PK	142	1.4	V	34.7	4.55	33.4	52.08	74	21.92	harmonic
4960	46.11	PK	145	1.4	H	34.6	4.55	33.4	51.86	74	22.14	harmonic
1653	56.95	PK	128	1.5	H	26.5	2.77	35.0	51.22	74	22.78	spurious
1653	56.04	PK	240	1.4	V	26.0	2.77	35.0	49.81	74	24.19	spurious

Test Mode: Charging

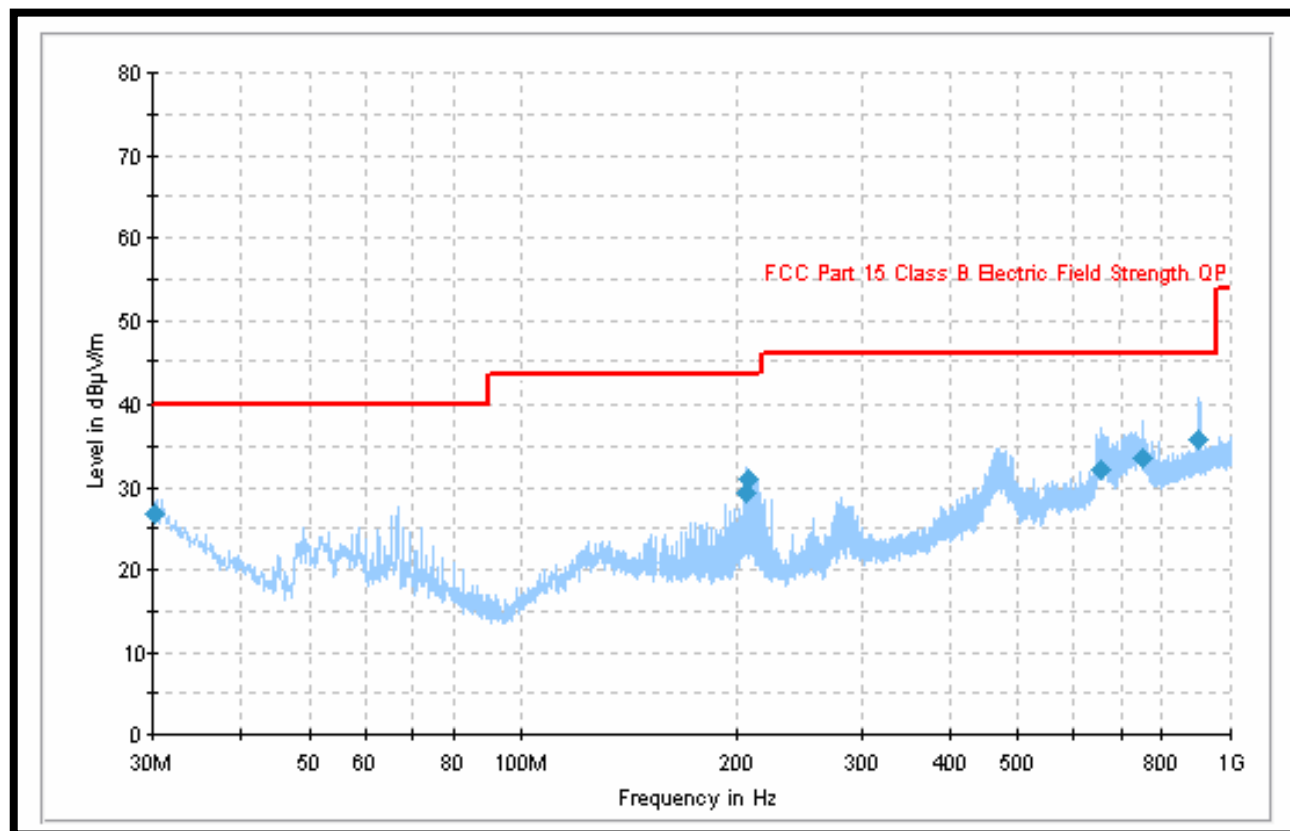

Frequency (MHz)	Quasi Peak (dBμV/m)	Antenna Height (cm)	Polarity	Turntable Position (deg)	Corr. (dB)	Limit (dBμV/m)	Margin (dB)
898.527125	35.8	187.0	V	42.0	1.3	46.0	10.2
207.983500	31.1	99.0	V	323.0	-12.7	43.5	12.4
749.844500	33.6	99.0	V	16.0	-0.7	46.0	12.4
30.219457	26.9	347.0	V	48.0	-3.6	40.0	13.1
655.451750	32.1	327.0	H	11.0	-2.5	46.0	13.9
205.320875	29.3	99.0	V	350.0	-12.4	43.5	14.2

§15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2007-10-16	2008-10-16

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 100 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another truce
3. Measure the channel separation.

Limit

FCC Part 15, Subpart C Section 15.247(a)(1). Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB Bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater

FREQUENCY RANGE (MHz)	Limit (kHz)
902-928	>25kHz or the 20dB bandwidth
2400-2483.5	>25kHz or two-thirds of the 20dB bandwidth
5725-5850	>25kHz or the 20dB bandwidth

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	100.9 kPa


The testing was performed by Andy Yan on 2007-10-22.

Test mode: Transmitting

Channel	Channel Frequency (MHz)	Channel Separation (KHz)	Limit (KHz)	Result
Low Channel	2402	1004	181	Pass
Adjacent Channel	2403			
Mid Channel	2441	1004	181	Pass
Adjacent Channel	2442			
High Channel	2480	1004	181	Pass
Adjacent Channel	2479			


Test Result: Pass

Please refer to following plots

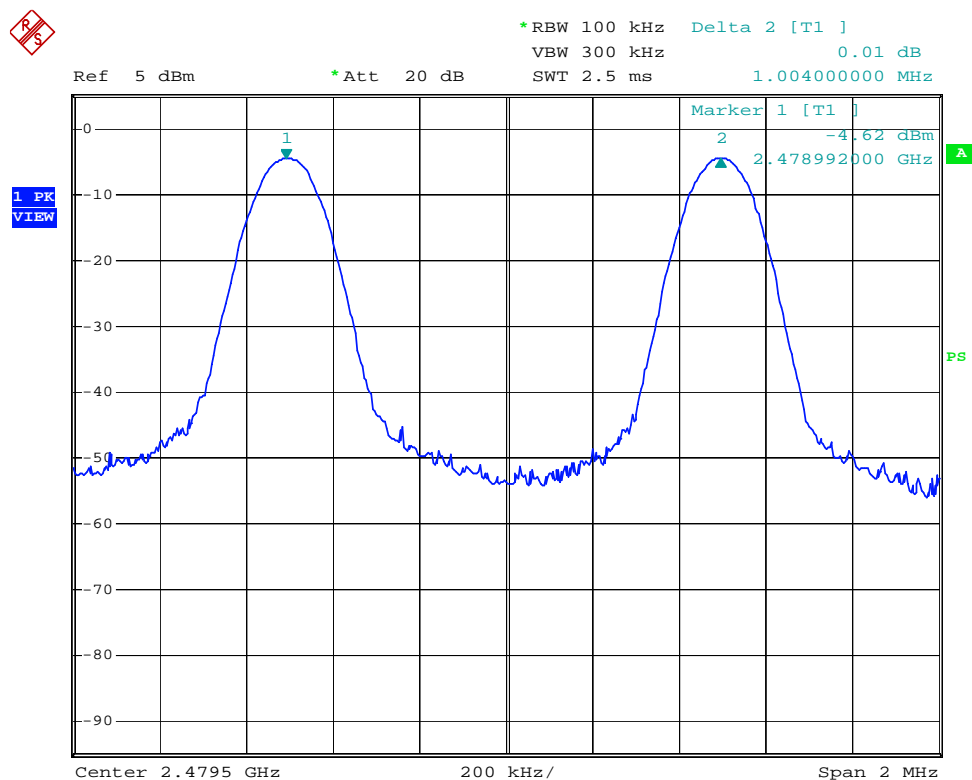


CHANNEL SEPRATION H

Date: 22.OCT.2007 17:42:54

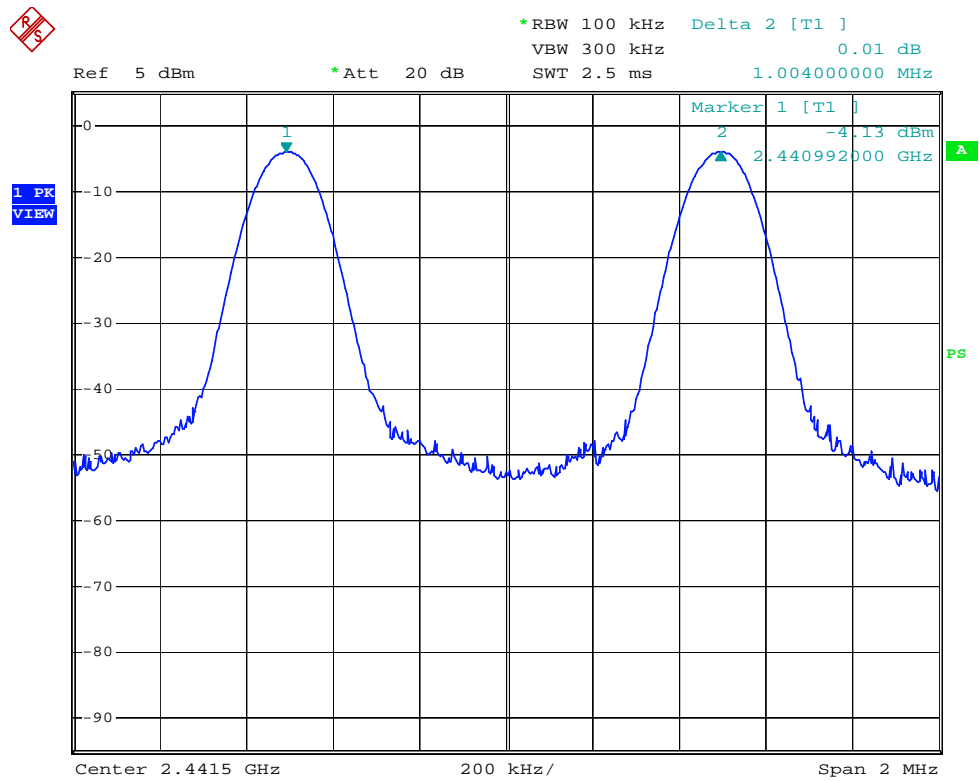

CHANNEL SEPRATION M

Date: 22.OCT.2007 17:41:36



§15.247(a) (1) –20dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2007-10-16	2008-10-16

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	53 %
ATM Pressure:	100.9 kPa


The testing was performed by Andy Yan on 2007-10-22.

Test Mode: Transmitting

Channel	Channel Frequency (MHz)	20dB Bandwidth (kHz)
Low Channel	2402	272
Mid Channel	2441	272
High Channel	2480	272


Test Result: Pass

Please refer to following plots

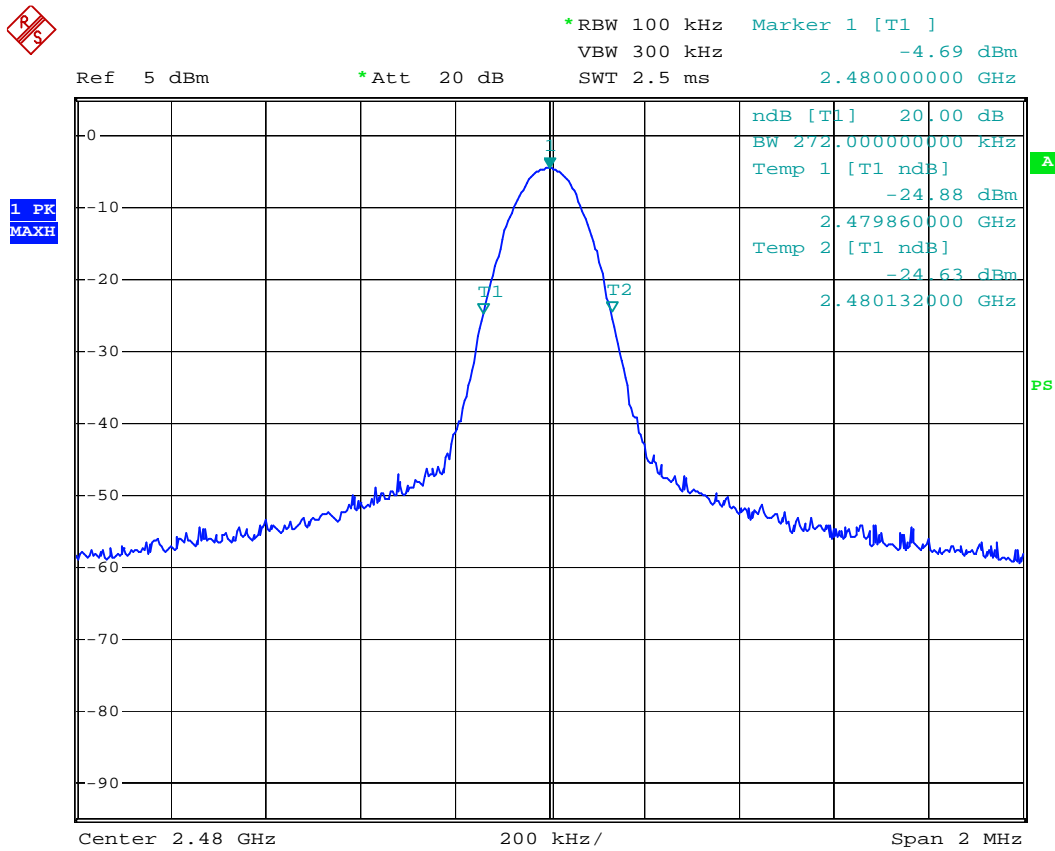


20dB Bandwidth H

Date: 22.OCT.2007 17:07:15

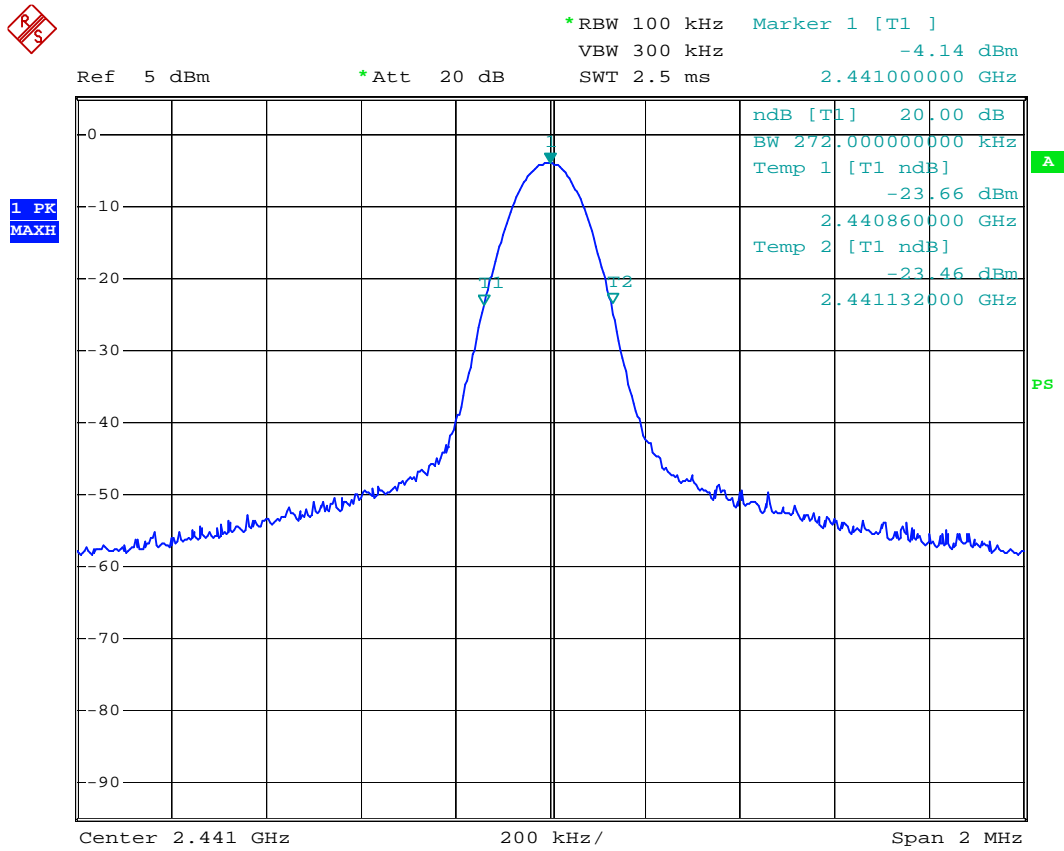

20dB Bandwidth M

Date: 22.OCT.2007 17:06:26

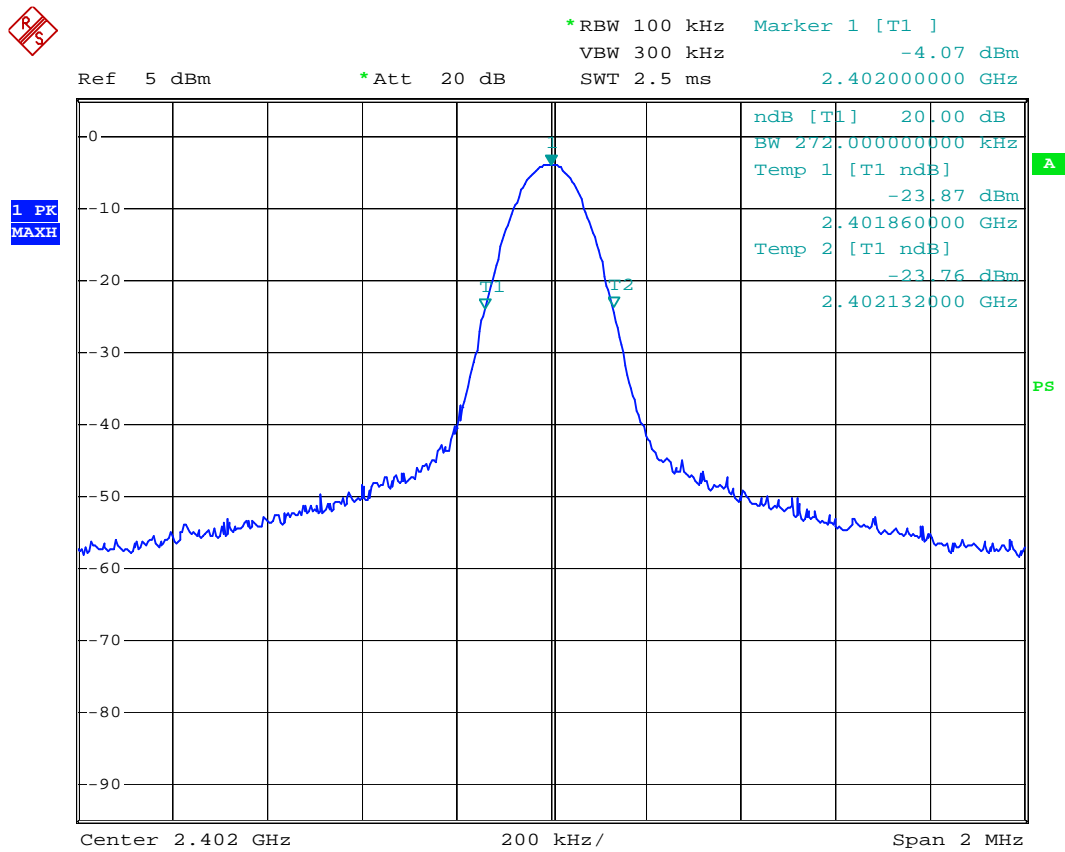

20dB Bandwidth 1

Date: 22.OCT.2007 17:05:46

§15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2007-10-16	2008-10-16

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in transmitting mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Limit

FCC Part 15, Subpart C Section 15.247

Frequency Range in 2400 to 2483.5 MHz	Quantity of Hopping Channel (CH)	Limit (CH)
2402-2480	79	>15

Test Data


Environmental Conditions

Temperature:	27 °C
Relative Humidity:	50 %
ATM Pressure:	100.9 kPa

The testing was performed by Andy Yan on 2007-10-22.

Test mode: Transmitting

Test Result: Pass



§15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2007-10-16	2008-10-16

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no.(s), The quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Limit

FCC Part 15, Subpart C Section 15.247.

FREQUENCY RANGE (MHz)	LIMIT (ms)		
	20dB bandwidth <250kHz (50 Channel)	20dB bandwidth >250kHz (50 Channel)	20dB bandwidth <1 MHz (79 Channel)
902-928	N/A	N/A	N/A
2400-2483.5	N/A	N/A	31.6s
5725-5850	N/A	N/A	N/A

Dwell Time= time slot length * hope rate/ number of hopping channels * 31.6s
Hop rate=1600/s

Test Data

Environmental Conditions

Temperature:	27 °C
Relative Humidity:	50 %
ATM Pressure:	100.9 kPa

The testing was performed by Andy Yan on 2007-10-22.


Test mode: Transmitting

Channel	Pulse width (msec)	Dwell time (sec)	Limit (sec)	Result
Low Channel	0.53	0.1696	0.4	Pass
Mid Channel	0.53	0.1696	0.4	Pass
High Channel	0.53	0.1696	0.4	Pass

NOTE: Dwell time=Pulse width (ms) × 1600 ÷ 2 ÷ 79 × 31.6 Second


Test Result: Pass

Please refer to following plots

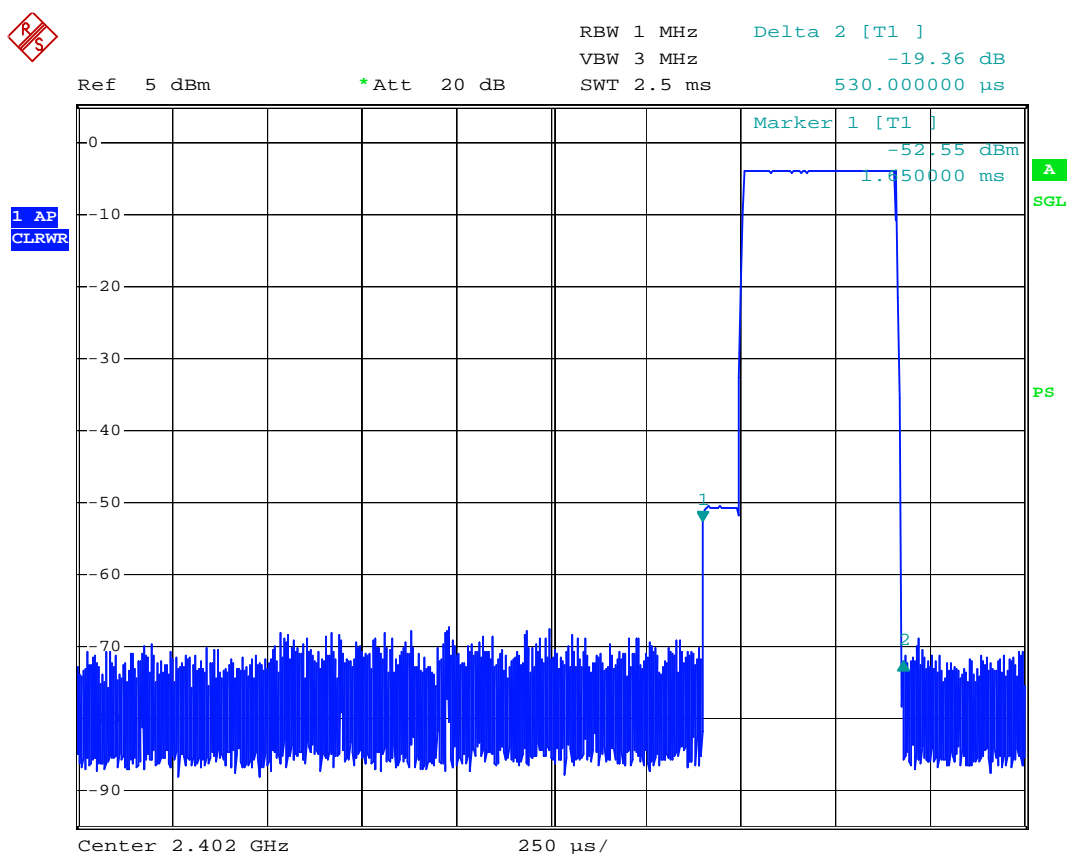


dwell time low

Date: 22.OCT.2007 17:03:01

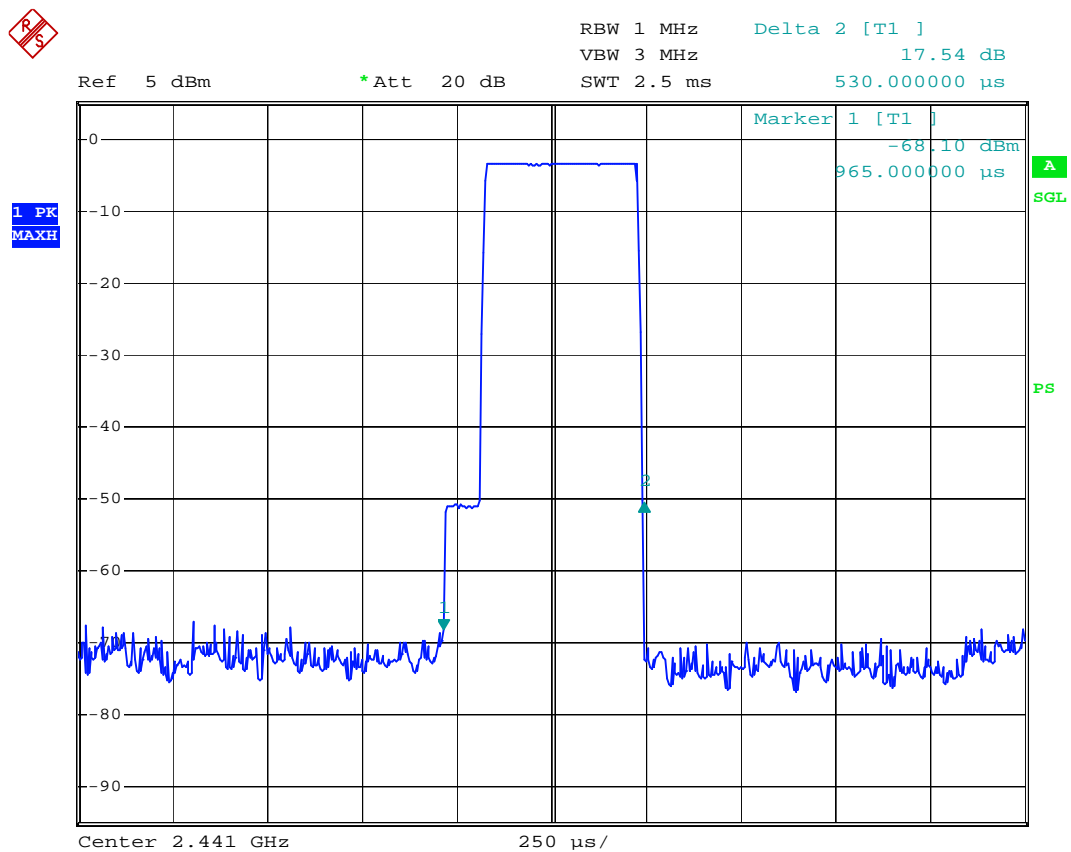

dwell time middle

Date: 22.OCT.2007 16:56:25

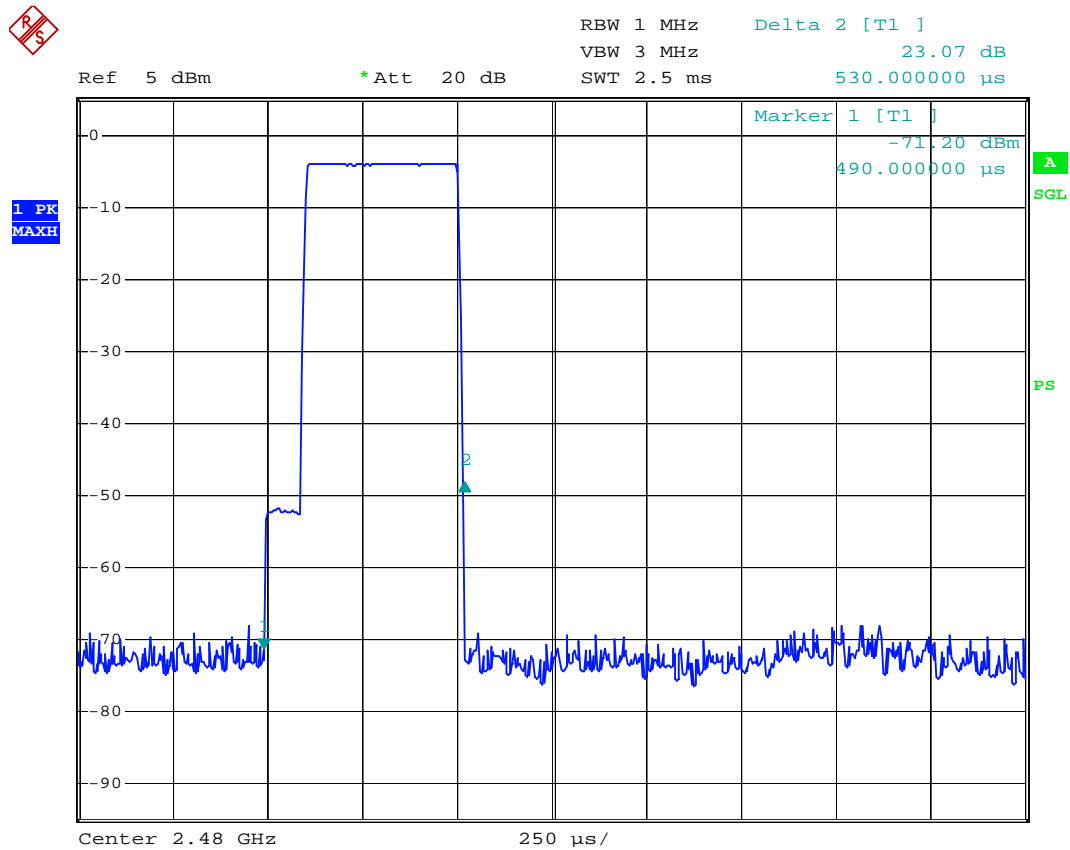

dwell time high

Date: 22.OCT.2007 16:55:36

§15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2007-10-16	2008-10-16

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI Test Receiver.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	53%
ATM Pressure:	100.9 kPa


The testing was performed by Andy Yan on 2007-10-22.

Test Mode: Transmitting

Channel	Channel Frequency (MHz)	Reading Power (dBm)	Power Output (mW)	Limit (w)
Low Channel	2402	-3.51	0.4457	1
Mid Channel	2441	-3.58	0.4385	1
High Channel	2480	-4.14	0.3855	1


Test Result: Pass

Please refer to the following plots

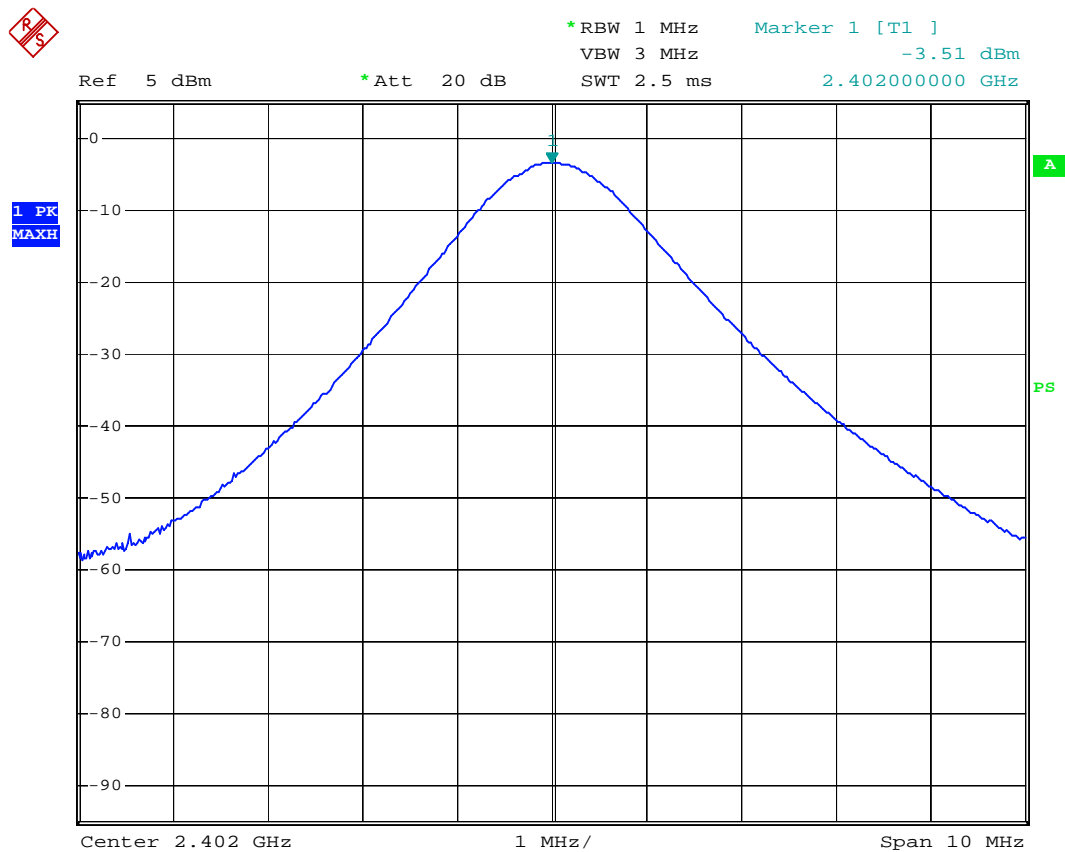


output power low

Date: 22.OCT.2007 16:50:44

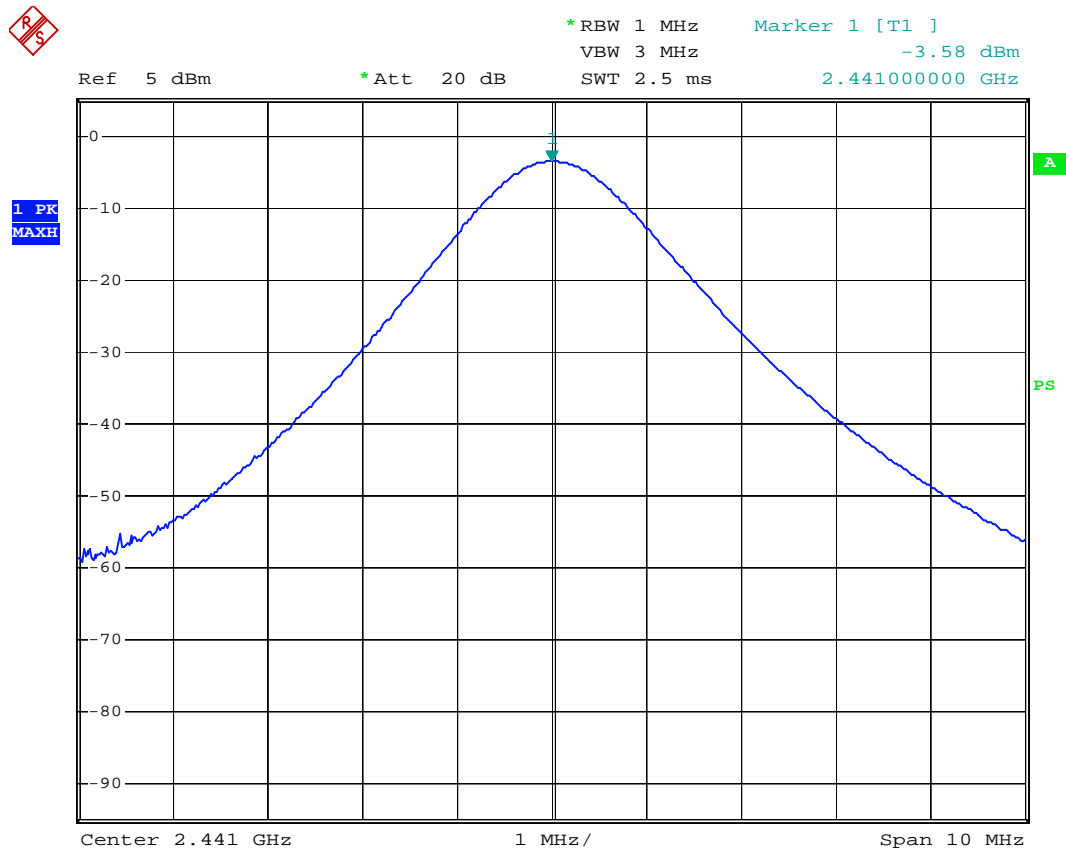

output power middle

Date: 22.OCT.2007 16:51:25

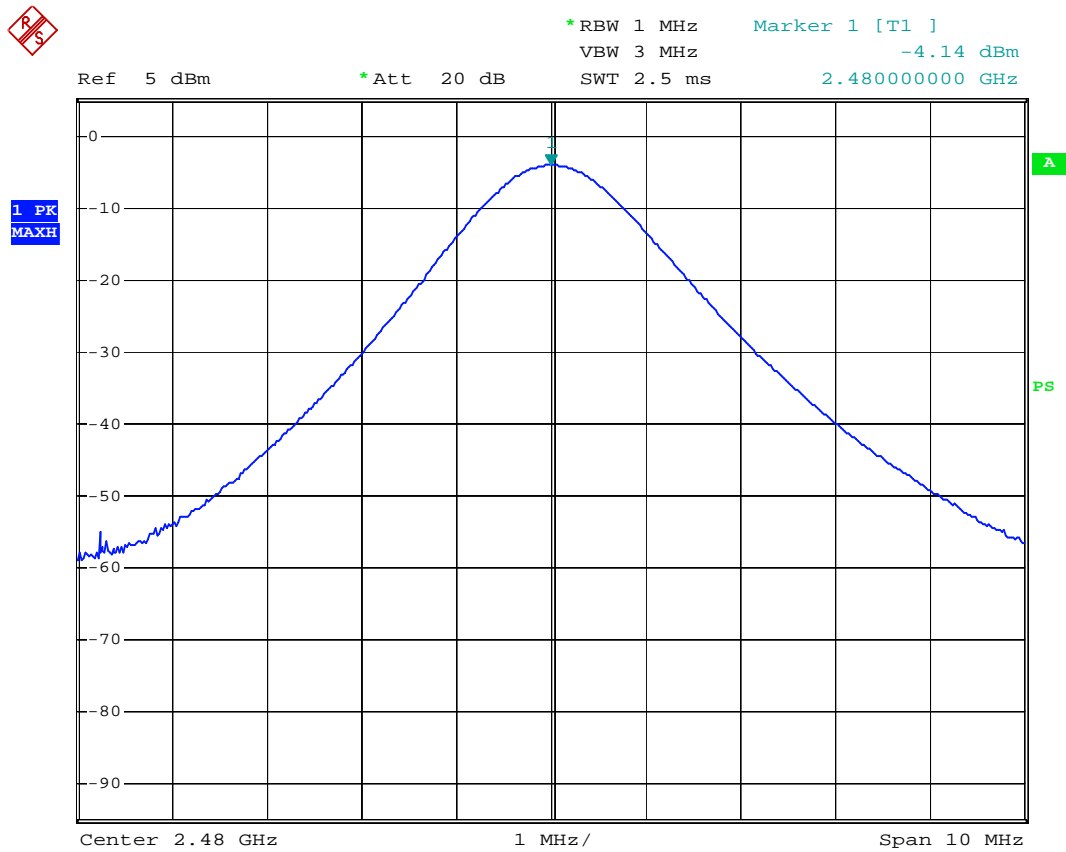

output power high

Date: 22.OCT.2007 16:52:13

§15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2007-10-16	2008-10-16

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	20 °C
Relative Humidity:	53 %
ATM Pressure:	100.9 kPa

The testing was performed by Andy Yan on 2007-10-22.


Test Mode: Transmitting

Frequency (MHz)	Attenuation(dBC)	Limit (dBC)
2395.590	56.33	20
2496.052	56.69	20

Note: Attenuation=Peak level - Emission level


Test Result: Pass

Please refer to the following plots

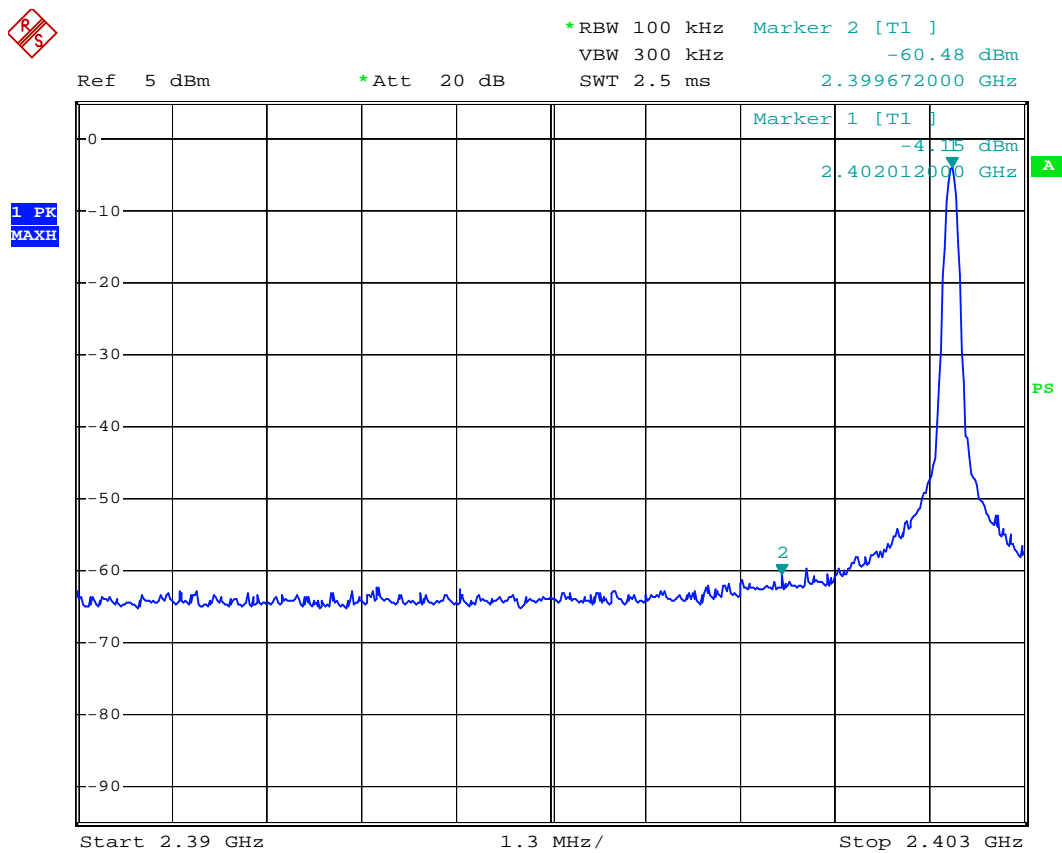

OUT OF BAND-LEFT

Date: 22.OCT.2007 17:13:39

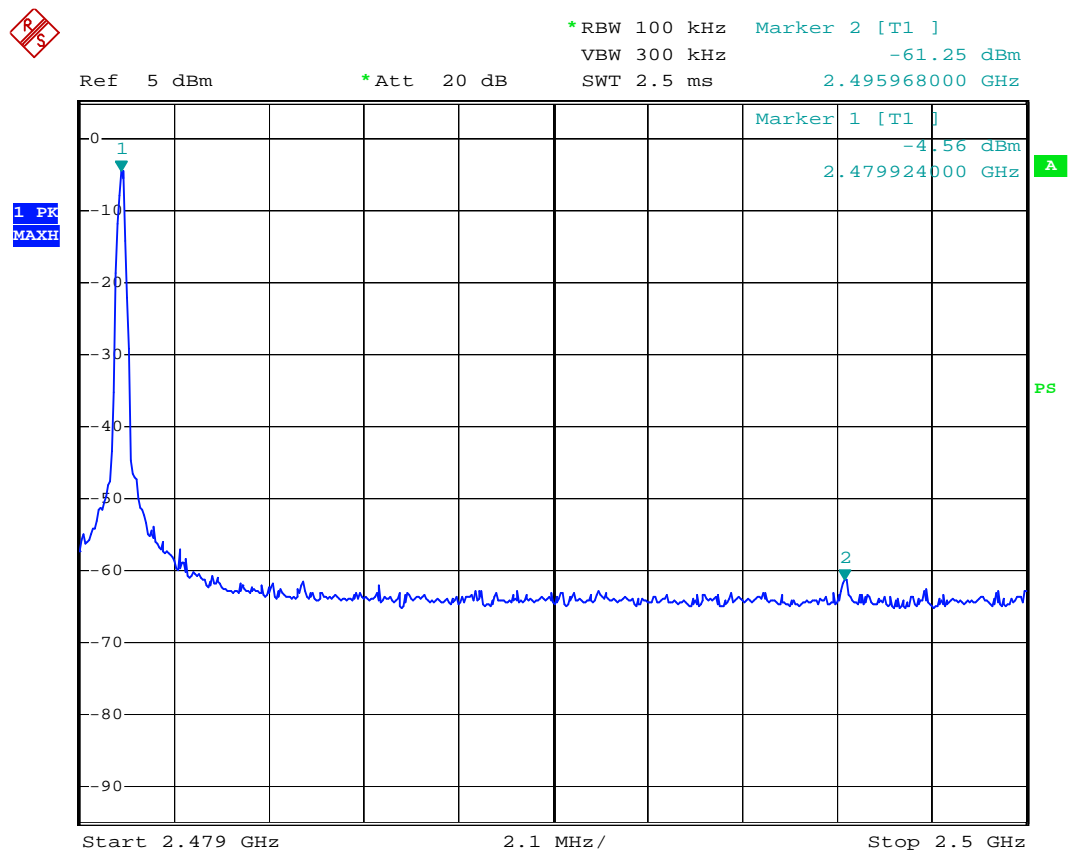

OUT OF BAND-RIGHT

Date: 22.OCT.2007 17:11:51