





Power Plane

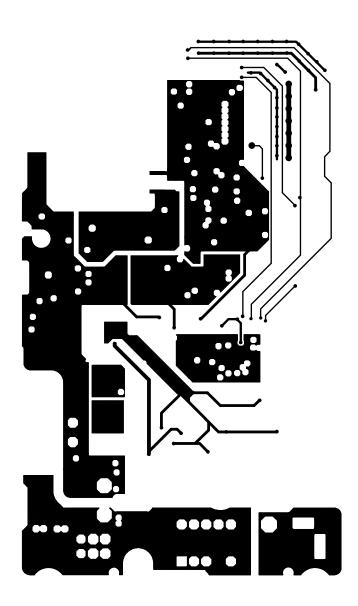

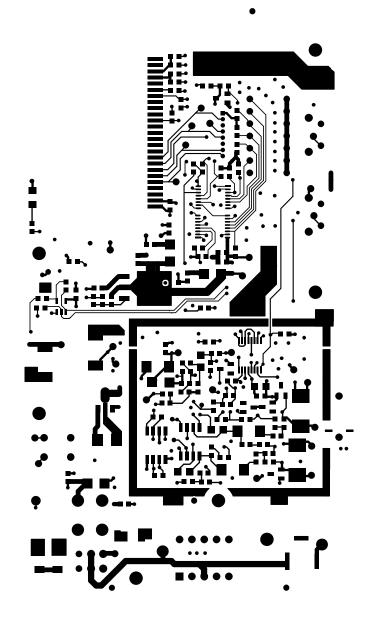

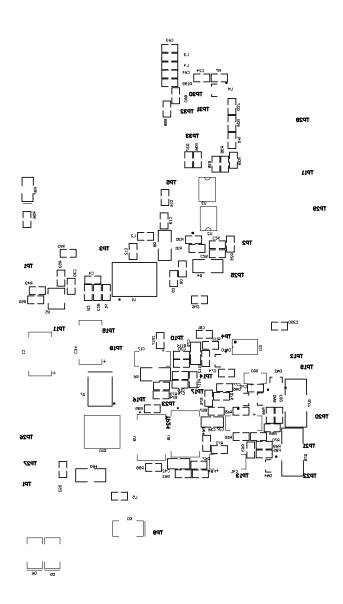


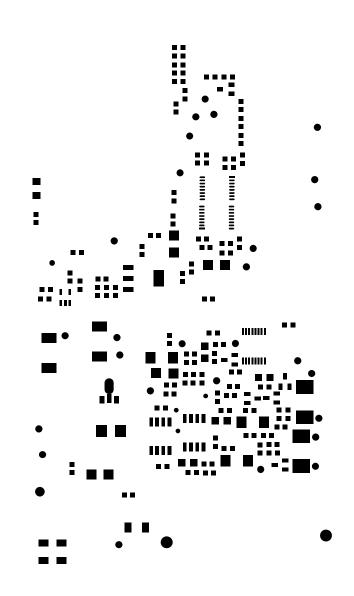




× \bowtie z z z z z z X a aaaa a a $\nabla \ \, \nabla \ \, \nabla \ \, \nabla \ \, \nabla$ mm m $\nabla \ \nabla \ \nabla$

 $\nabla \ \, \nabla \ \, \nabla \ \, \nabla \ \, \nabla$

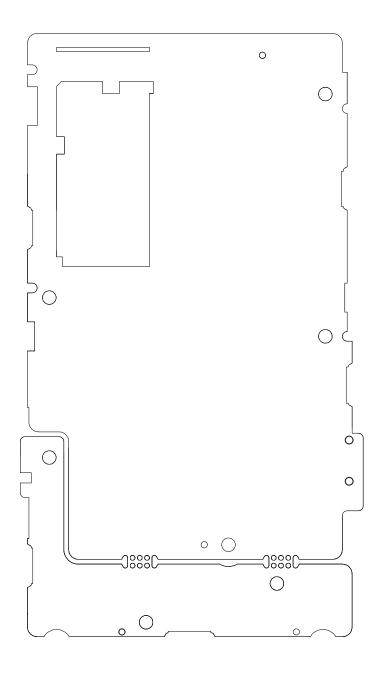

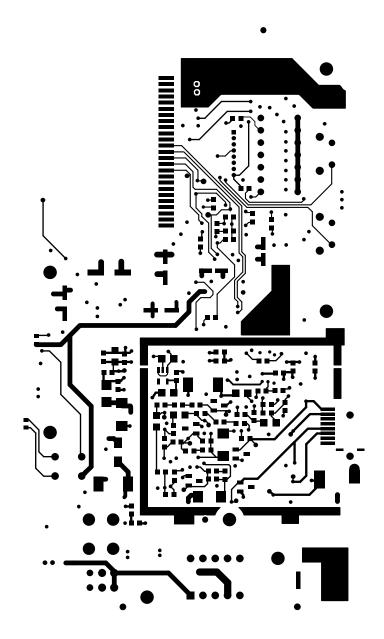

25 20 15 10 **TP6** Ses \vdash_{D} C52 TP13 6V GND GND

PCB material required for fabrication: FR-4 Dielectric Constant of FR-4: 4.6 Number of layers: 4-layers Finished PCB thickness: 1 mm (Tolerance: +/- 0.1mm) PCB Dimension: 125 mm x 71mm

CN2

Copper thickness requirement: 35um (1oz type)

Finishing: Gold Plating

--

Top Solder Mask

