DS9908R Poster

■ BLACK

■ PANTONE 307C

Post in Work Area

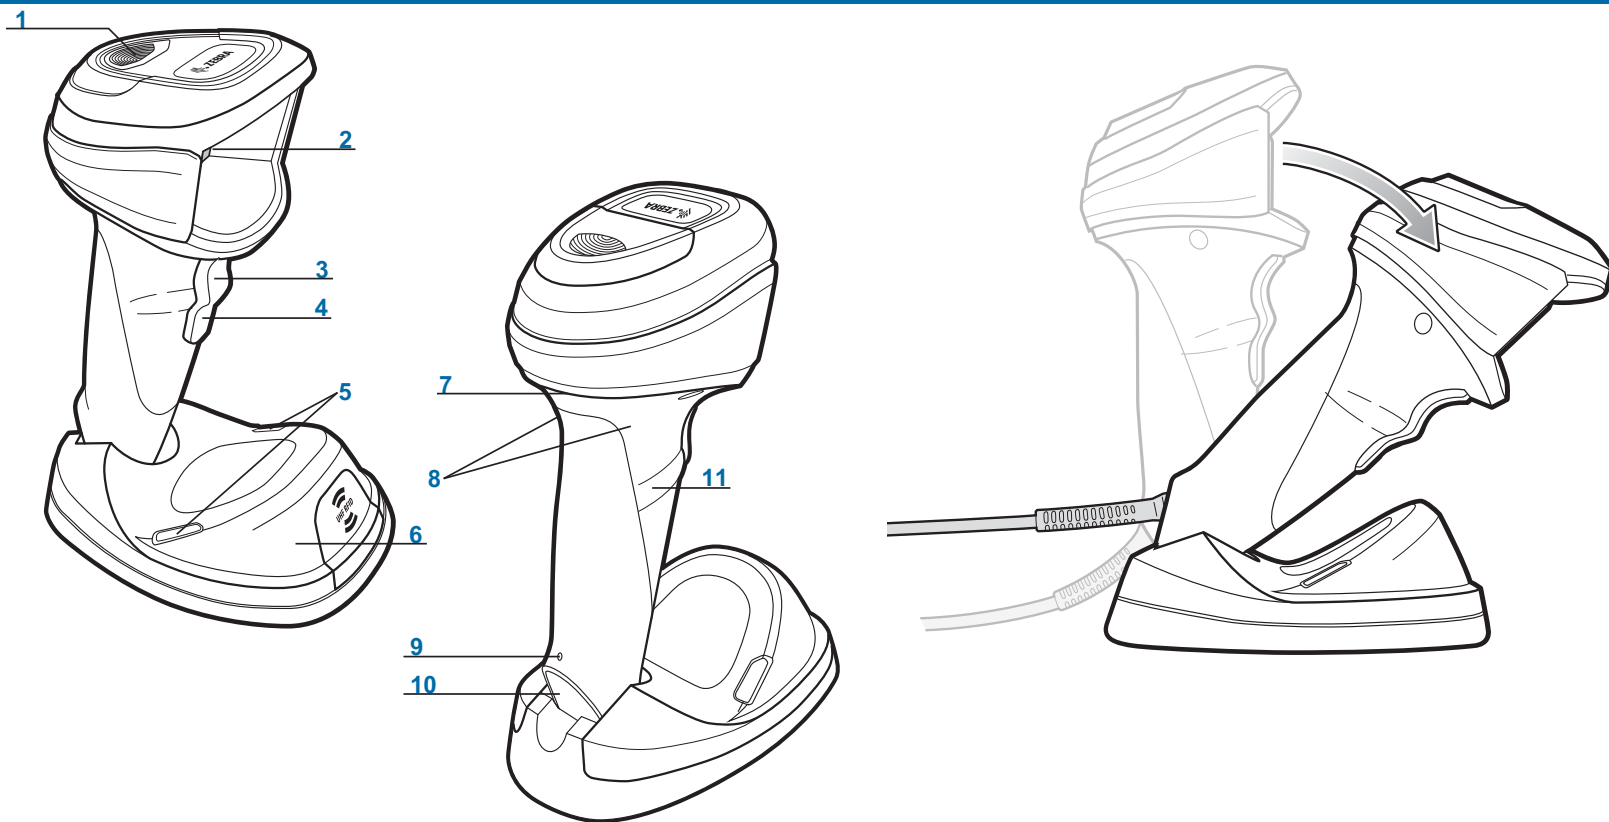# DS9908R
Hands-Free Imaging Scanner

Quick Start Guide

ZEBRA
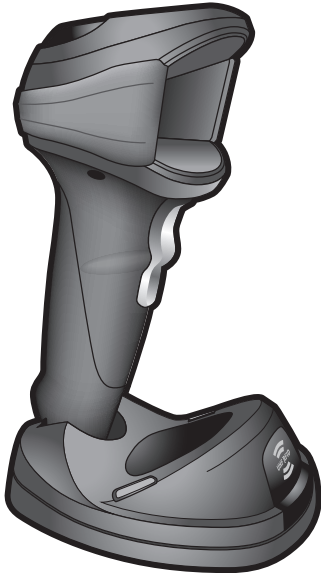
IMPORTANT: RFID CANNOT operate until RFID Country of Operation (parameter #1583) is set to the country where the product is used. Scan the appropriate barcode in the DS9908R Hands-Free Imaging Scanner Product Reference Guide Supplement (p/n MN-003377-xx) or configure with 123Scan.

FEATURES

1	Scan LED Indicator	5	RFID LED Indicators	9	Cable Release
2	Scan Window	6	RFID Antenna		Opening (Pinhole)
3	Trigger A	7	Speaker	10	Interface Cable Port
4	Trigger B	8	Hand-held Touch Zones	11	Finger Ridge

See
- Product Reference Guide Supplement for detailed RFID information
- Product Reference Guide for detailed imaging information

www.zebra.com/ds9900seriesretail
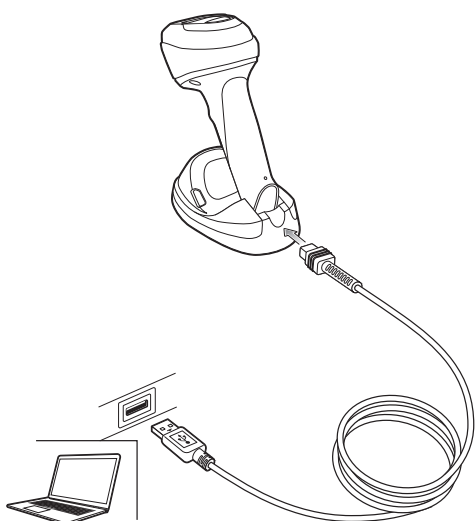www.zebra.com/ds9900serieslab
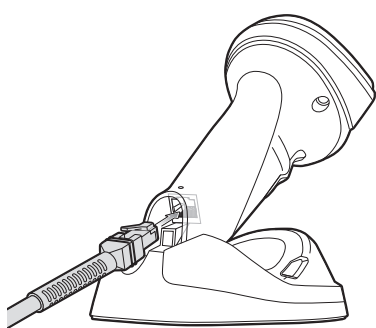
CABLE INSERTION   CABLE REMOVAL
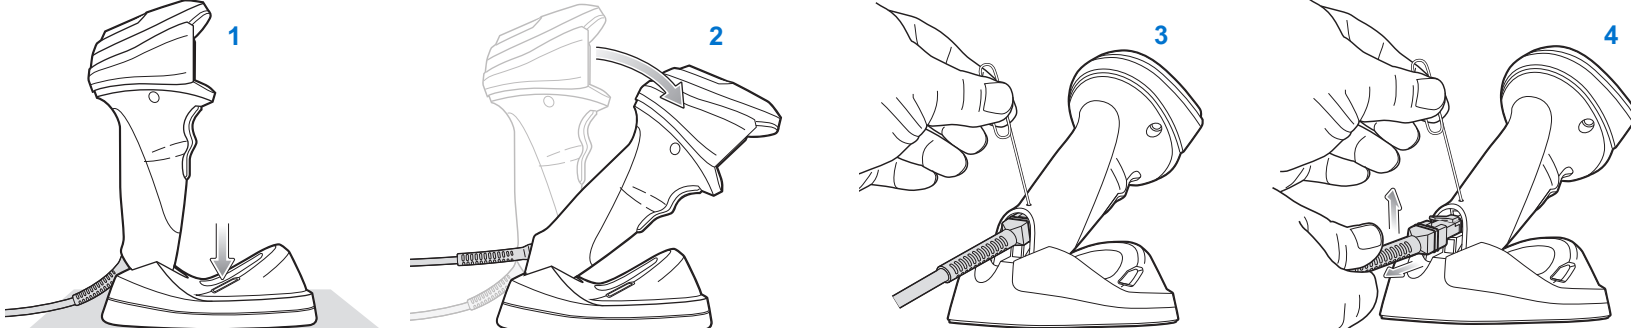
STEP 1 - CONNECT HOST INTERFACE   STEP 2 - SET UP INTERFACE (Scan Host Barcodes)

USB

USB
Scan **ONE** of the barcodes below
The imager automatically detects the host interface type and uses the default setting. If the default (*) does not meet your requirements, scan another host barcode below.
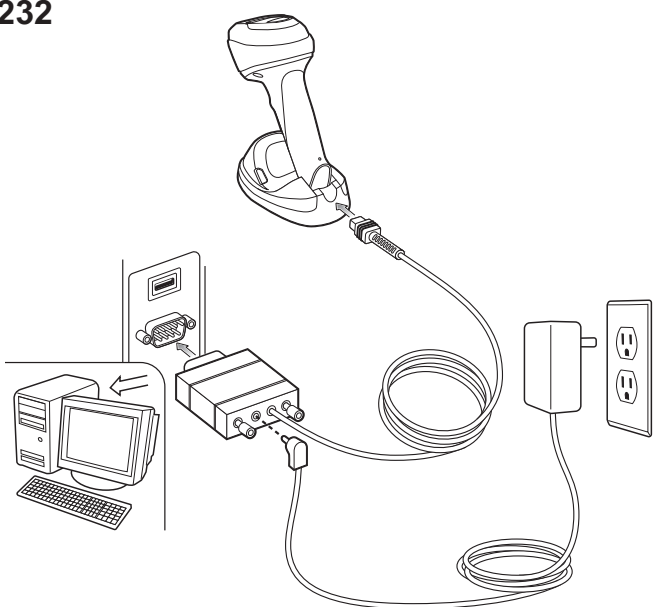
*USB KEYBOARD (HID)

IBM HAND-HELD USB

OPOS (IBM HAND-HELD with FULL DISABLE)

SNAPI WITH IMAGING

RS-232

RS-232
Scan **ONE** of the barcodes below
The imager automatically detects the host interface type and uses the default setting. If the default (*) does not meet your requirements, scan another host barcode below.

*STANDARD RS-232
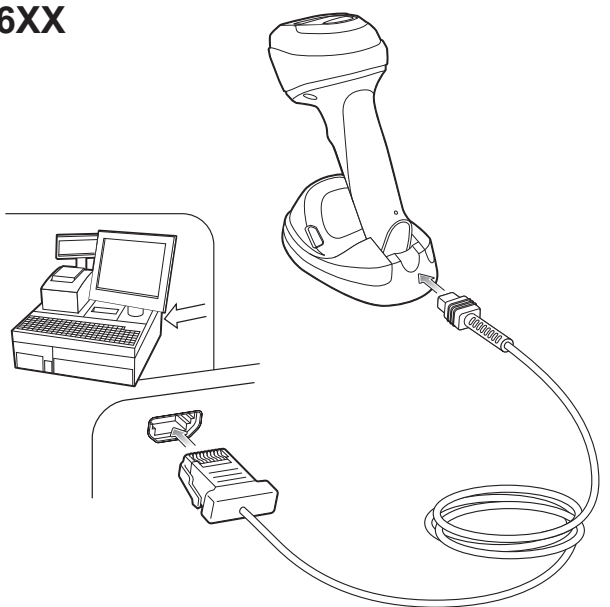
ICL RS-232

NIXDORF RS-232 MODE B

NIXDORF RS-232 MODE A

OPOS/JPOS

FUJITSU RS-232

IBM 46XX

IBM 46XX
Scan **ONE** of the barcodes below
The imager automatically detects the host interface type, but there is no default setting. Scan one of the barcodes below to select the appropriate port.

NON-IBM SCANNER EMULATION (PORT 5B)

TABLE-TOP SCANNER EMULATION (PORT 17)

HAND-HELD SCANNER EMULATION (PORT 9B)

RFID SAME TAG TIMEOUT   RFID TRIGGER MODES   RFID DATA TRANSMISSION FORMAT

DISABLE

CONTINUOUS

RAW

*2 SECONDS

*CONTINUOUS RE-REPORT

EPC URI

5 MINUTES

SINGLE TAG

GS1-128

CONTINUOUS FLUSH

SET DEFAULTS / ENTER KEY   TAB KEY   USB CAPS LOCK OVERRIDE

Set Defaults

RETURN TO FACTORY DEFAULTS

Add An Enter Key
(Carriage Return/Line Feed)
To add an Enter key after scanned data, scan the barcode below.

ADD AN ENTER KEY (CARRIAGE RETURN/LINE FEED)

Add A Tab Key
To add a Tab key after scanned data, scan the barcode below.

ADD A TAB KEY

USB - OVERRIDE CAPS LOCK KEY (ENABLE)

*USB - DO NOT OVERRIDE CAPS LOCK KEY (DISABLE)

Perforation