

Report No.: FG872506A



FCC RADIO TEST REPORT

FCC ID : UZ7TC77HL

Equipment : Touch computer

Brand Name : Zebra Model Name : TC77HL

Applicant : Zebra Technologies Corporation

1 Zebra Plaza Holtsville, NY 11742

Manufacturer : Zebra Technologies Corporation

1 Zebra Plaza Holtsville, NY 11742

Standard : 47 CFR Part 2, 22(H), 24(E), 27(L)

The product was received on Jul. 25, 2018 and testing was started from Aug. 11, 2018 and completed on Aug. 26, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Joseph Lin

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)

TEL: 886-3-327-3456 Page Number : 1 of 22 FAX: 886-3-328-4978 Issued Date : Sep. 19, 2018

Table of Contents

Report No.: FG872506A

His	story o	f this test report	3		
Su	mmar	y of Test Result	4		
1	Gene	eral Description	5		
	1.1	Product Feature of Equipment Under Test	5		
	1.2	Product Specification of Equipment Under Test	6		
	1.3	Modification of EUT			
	1.4	Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator	7		
	1.5	Testing Location	8		
	1.6	Applicable Standards			
2	Test	Configuration of Equipment Under Test	9		
	2.1	Test Mode	9		
	2.2	Connection Diagram of Test System	10		
	2.3	Support Unit used in test configuration	10		
	2.4	Measurement Results Explanation Example			
	2.5	Frequency List of Low/Middle/High Channels	11		
3	Conducted Test Result				
	3.1	Measuring Instruments	12		
	3.2	Test Setup			
	3.3	Conducted Output Power and ERP/EIRP	13		
	3.4	Peak-to-Average Ratio			
	3.5	99% Occupied Bandwidth and 26dB Bandwidth Measurement			
	3.6	Conducted Band Edge	16		
	3.7	Conducted Spurious Emission			
	3.8	Frequency Stability	18		
4	Radia	ated Test Items			
	4.1	Measuring Instruments			
	4.2	Test Setup			
	4.3	Test Result of Radiated Test			
	4.4	Field Strength of Spurious Radiation Measurement			
5		of Measuring Equipment			
6	Unce	ertainty of Evaluation	22		
Аp	pendi	x A. Test Results of Conducted Test			
Аp	pendi	x B. Test Results of ERP/EIRP and Radiated Test			
Аp	pendi	x C. Test Setup Photographs			

TEL: 886-3-327-3456 Page Number : 2 of 22 FAX: 886-3-328-4978 Issued Date : Sep. 19, 2018 : 01

Report Version

Report Template No.: BU5-FG22/24/27 Version 2.1

History of this test report

Report No.: FG872506A

Report No.	Version	Description	Issued Date
FG872506A	372506A 01 Initial issue of report		Sep. 19, 2018

TEL: 886-3-327-3456 Page Number : 3 of 22
FAX: 886-3-328-4978 Issued Date : Sep. 19, 2018

Summary of Test Result

Report No.: FG872506A

Report Ref Std. Clause Clause		Test Items	Result (PASS/FAIL)	Remark
	§2.1046	Conducted Output Power		
	§22.913 (a)(2)	Effective Radiated Power		
3.3	§24.232 (c)	Equivalent Isotropic Radiated Power	Pass	-
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power		
3.4	§24.232 (d)	Peak-to-Average Ratio	Pass	-
3.5	\$2.1049 \$22.917 (b) \$24.238 (b) \$27.53 (g) Security Occupied Bandwidth		Pass	-
3.6	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Band Edge Measurement	Pass	-
3.7	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Conducted Emission	Pass	-
	§2.1055 §22.355			-
3.8	§2.1055 §24.235 §27.54	Frequency Stability Temperature & Voltage	Frequency Stability Temperature & Voltage	
4.4	§2.1053 §22.917 (a)		Pass	Under limit 4.77 dB at 2474.000 MHz

Reviewed by: Wii Chang

Report Producer: Maggie Chiang

TEL: 886-3-327-3456 Page Number : 4 of 22
FAX: 886-3-328-4978 Issued Date : Sep. 19, 2018

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature					
Equipment	Touch computer				
Brand Name	Zebra				
Model Name	TC77HL				
FCC ID	UZ7TC77HL				
	GSM/EGPRS/WCDMA/HSPA/LTE/NFC/GNSS				
EUT cumparts Badies application	WLAN 11a/b/g/n HT20/HT40				
EUT supports Radios application	WLAN 11ac VHT20/VHT40/VHT80				
	Bluetooth BR/EDR/LE				
HW Version	DV				
SW Version	Android version 8.1.0				
FW Version	91-09-14.00-OG-U00-STD				
MFD	06JUL18				
EUT Stage	Engineering Sample				

Report No.: FG872506A

Remark: The above EUT's information was declared by manufacturer.

Specification of Accessories						
AC Adapter	Brand Name	Zebra	Part Number	PWR-BUA5V16W0WW		
4 PIN DC power cable	Brand Name	Zebra	Part Number	CBL-DC-383A1-01		
AC Power cable	Brand Name	Zebra	Part Number	50-16000-182R		
Snap-On USB/Charge Cable	Brand Name	Zebra	Part Number	CBL-TC7X-USB1-01		
Snap-On Charging Cable Cup	Brand Name	Zebra	Part Number	CHG-TC7X-CBL1-01		
Battery 1	Brand Name	Zebra	Part Number	BT-000318-01		
Battery 2 (Falcon 1S3P Battery Pack)	Brand Name	Zebra	Part Number	BT-000318-51		
Battery 3	Brand Name	Symbol	Part Number	82-171249-02		
Earphone 1	Brand Name	Zebra	Part Number	HDST-35MM-PTVP-01		
Earphone 2	Brand Name	Zebra	Part Number	HS2100-OTH		
Snap-on 3.5MM Audio Jack Adapter	Brand Name	Symbol	Part Number	ADP-TC7X-AUD35-01		
3.5mm Jack 43"(1.1m) Standard Cable	Brand Name	Zebra	Part Number	CBL-HS2100-3MS1-01		
Holster	Brand Name	Zebra	Part Number	SG-TC7X-HLSTR1-02		
Rigid Holster	Brand Name	Zebra	Part Number	SG-TC7X-RHLSTR1-01		

TEL: 886-3-327-3456 Page Number : 5 of 22
FAX: 886-3-328-4978 Issued Date : Sep. 19, 2018

1.2 Product Specification of Equipment Under Test

Standards-related Product Specification					
	GSM/GPF	RS/EDGE:			
	850:	824.2 MHz ~ 848.8 MHz			
	1900:	1850.2 MHz ~ 1909.8MHz			
Tx Frequency	WCDMA:				
	Band V:	826.4 MHz ~ 846.6 MHz			
	Band II:	1852.4 MHz ~ 1907.6 MHz			
	Band IV:	1712.4 MHz ~ 1752.6 MHz			
	GSM/GPR	RS/EDGE:			
	850:	869.2 MHz ~ 893.8 MHz			
	1900:	1930.2 MHz ~ 1989.8 MHz			
Rx Frequency	WCDMA:				
	Band V:	871.4 MHz ~ 891.6 MHz			
	Band II:	1932.4 MHz ~ 1987.6 MHz			
	Band IV:	2112.4 MHz ~ 2152.6 MHz			
	GSM/GPRS/EDGE:				
	850:	32.42 dBm			
	1900:	29.37 dBm			
Maximum Output Power to Antenna	WCDMA:				
	Band V:	23.99 dBm			
	Band II:	23.99 dBm			
	Band IV:	23.76 dBm			
Antenna Type	PIFA Anten	na			
	Cellular Ba	nd: 1.53 dBi			
Antenna Gain	PCS Band:	0.94 dBi			
	AWS Band: -0.50 dBi				
	GSM: GMS				
	GPRS: GM				
Type of Modulation	EDGE: GMSK / 8PSK				
	WCDMA: BPSK (Uplink) HSDPA: 64QAM (Downlink)				
	HSUPA: QPSK (Uplink)				

Report No.: FG872506A

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

TEL: 886-3-327-3456 Page Number : 6 of 22
FAX: 886-3-328-4978 Issued Date : Sep. 19, 2018

1.4 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

Report No.: FG872506A

FCC Rule	Frequency Range (MHz)	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	824.2 ~848.8	GSM850	GMSK	1.5136	0.0048 ppm	247KGXW
1 alt 22	024.2 ~040.0	GPRS class 8	OWOR	1.5150	0.00 4 0 ppm	24/10////
Part 22	824.2 ~848.8	GSM850	8PSK	0.2724	0.0049.ppm	246KG7W
Fait 22	024.2 ~040.0	EDGE class 8	OFSK	0.3724	0.0048 ppm	240NG7W
Dort 22	826.4 ~846.6	WCDMA Band V	BPSK	0.2173	0.0191 ppm	4M14F9W
Part 22		RMC 12.2Kbps				
Dort 24	1850.2 ~1909.8	GSM1900	GMSK	1.0740	0.0106 ppm	247KGXW
Part 24		GPRS class 8				
Part 24	1950 2 1000 9	GSM1900	ODGIV	0.4227	0.0048 ppm	248KG7W
Pail 24	1850.2 ~1909.8	EDGE class 8	8PSK			
Part 24	1852.4 ~ 1907.6	WCDMA Band II	DDCK	0.2442	0.00F2 nnm	4M14F9W
Fail 24		RMC 12.2Kbps	BPSK	0.3112	0.0053 ppm	
Dort 27	1710 / 1750 6	WCDMA Band IV	DDOK	0.2118	0.0248 ppm	41.44.450.47
Part 27	1712.4 ~ 1752.6	RMC 12.2Kbps	BPSK			4M14F9W

TEL: 886-3-327-3456 Page Number : 7 of 22
FAX: 886-3-328-4978 Issued Date : Sep. 19, 2018

1.5 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Report No.: FG872506A

Test Site	SPORTON INTERNATIONAL INC.				
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978				
Test Site No.	Sporton Site No.				
	TH03-HY				

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.			
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855			
Test Site No.	Sporton Site No. 03CH10-HY			

Note: The test site complies with ANSI C63.4 2014 requirement.

1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- + ANSI C63.26-2015
- ANSI / TIA-603-E
- 47 CFR Part 2, 22(H), 24(E), 27(L)
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

- 1. All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

TEL: 886-3-327-3456 Page Number : 8 of 22
FAX: 886-3-328-4978 Issued Date : Sep. 19, 2018

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Report No.: FG872506A

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

Radiated emissions were investigated as following frequency range:

- 1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
- 2. 30 MHz to 18000 MHz for WCDMA Band IV.
- 3. 30 MHz to 19100 MHz for GSM1900 and WCDMA Band II.

All modes and data rates and positions were investigated.


Test modes are chosen to be reported as the worst case configuration below:

Test Modes						
Band	Radiated TCs	Conducted TCs				
CCM 950	■ GPRS Class 8 Link	■ GPRS Class 8 Link				
GSM 850	■ EDGE Class 8 Link	■ EDGE Class 8 Link				
CSM 4000	■ GPRS Class 8 Link	■ GPRS Class 8 Link				
GSM 1900	■ EDGE Class 8 Link	■ EDGE Class 8 Link				
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link				
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link				
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link				

Remark: All the radiated test cases were performance with Battery 1, Earphone 1, and SIM 1.

TEL: 886-3-327-3456 Page Number : 9 of 22
FAX: 886-3-328-4978 Issued Date : Sep. 19, 2018

2.2 Connection Diagram of Test System

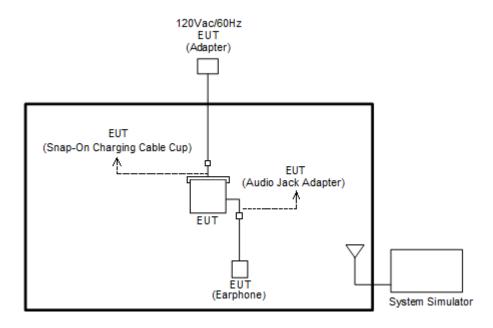

Report No.: FG872506A

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example:

Offset(dB) = RF cable loss(dB) + attenuator factor(dB). = 4.2 + 10 = 14.2 (dB)

TEL: 886-3-327-3456 Page Number : 10 of 22
FAX: 886-3-328-4978 Issued Date : Sep. 19, 2018

2.5 Frequency List of Low/Middle/High Channels

Frequency List						
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest		
CCMOEO	Channel	128	189	251		
GSM850	Frequency	824.2	836.4	848.8		
WCDMA	Channel	4132	4182	4233		
Band V	Frequency	826.4	836.4	846.6		
GSM1900	Channel	512	661	810		
GSW1900	Frequency	1850.2	1880.0	1909.8		
WCDMA	Channel	9262	9400	9538		
Band II	Frequency	1852.4	1880.0	1907.6		
WCDMA	Channel	1312	1413	1513		
Band IV	Frequency	1712.4	1732.6	1752.6		

Report No.: FG872506A

TEL: 886-3-327-3456 Page Number : 11 of 22
FAX: 886-3-328-4978 Issued Date : Sep. 19, 2018


3 Conducted Test Result

3.1 Measuring Instruments

See list of measuring instruments of this test report.


3.2 Test Setup

3.2.1 Conducted Output Power




Report No.: FG872506A

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

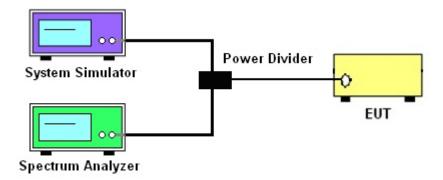

3.2.3 Frequency Stability

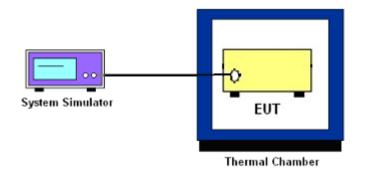

3.2.4 Test Result of Conducted Test

Please refer to Appendix A.

TEL: 886-3-327-3456 Page Number : 12 of 22 FAX: 886-3-328-4978 Issued Date : Sep. 19, 2018

3.3 Conducted Output Power and ERP/EIRP

3.3.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

Report No.: FG872506A

The ERP of mobile transmitters must not exceed 7 Watts for GSM850 and WCDMA Band V.

The EIRP of mobile transmitters must not exceed 2 Watts for GSM1900 and WCDMA Band II.

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV.

According to KDB 412172 D01 Power Approach,

 $EIRP = P_T + G_T - L_C$, ERP = EIRP - 2.15, where

 P_T = transmitter output power in dBm

 G_T = gain of the transmitting antenna in dBi

 L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.3.2 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

TEL: 886-3-327-3456 Page Number : 13 of 22 FAX: 886-3-328-4978 Issued Date : Sep. 19, 2018

3.4 Peak-to-Average Ratio

3.4.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 5.7.1

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 2. Set EUT to transmit at maximum output power.
- 3. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.

Report No.: FG872506A

- 4. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.
- 5. Record the maximum PAPR level associated with a probability of 0.1%.

TEL: 886-3-327-3456 Page Number : 14 of 22 FAX: 886-3-328-4978 Issued Date : Sep. 19, 2018

3.5 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.5.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

Report No.: FG872506A

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 4.2

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency.
 The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
- 3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- 4. Set the detection mode to peak, and the trace mode to max hold.
- Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace. (this is the reference value)
- 6. Determine the "-26 dB down amplitude" as equal to (Reference Value X).
- 7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the "–X dB down amplitude" determined in step 6. If a marker is below this "-X dB down amplitude" value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
- 8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

TEL: 886-3-327-3456 Page Number : 15 of 22 FAX: 886-3-328-4978 Issued Date : Sep. 19, 2018

3.6 Conducted Band Edge

3.6.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

Report No.: FG872506A

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.0.

- 1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
- 2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. The band edges of low and high channels for the highest RF powers were measured.
- 4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 5. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

TEL: 886-3-327-3456 Page Number : 16 of 22 FAX: 886-3-328-4978 Issued Date : Sep. 19, 2018

3.7 Conducted Spurious Emission

3.7.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

Report No.: FG872506A

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.7.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.0.

- 1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.The path loss was compensated to the results for each measurement.
- 3. The middle channel for the highest RF power within the transmitting frequency was measured.
- 4. The conducted spurious emission for the whole frequency range was taken.
- 5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 6. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

TEL: 886-3-327-3456 Page Number : 17 of 22 FAX: 886-3-328-4978 Issued Date : Sep. 19, 2018

3.8 Frequency Stability

3.8.1 Description of Frequency Stability Measurement

22.355

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency.

Report No.: FG872506A

24.235 & 27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.8.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

- 1. The EUT was set up in the thermal chamber and connected with the system simulator.
- With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
- 3. With power OFF, the temperature was raised in 10°C steps up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.8.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

- 1. The EUT was placed in a temperature chamber at 20±5° C and connected with the system simulator.
- 2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
- 3. The variation in frequency was measured for the worst case.

TEL: 886-3-327-3456 Page Number : 18 of 22
FAX: 886-3-328-4978 Issued Date : Sep. 19, 2018


4 Radiated Test Items

4.1 Measuring Instruments

See list of measuring instruments of this test report.


4.2 Test Setup

For radiated test from 30MHz to 1GHz

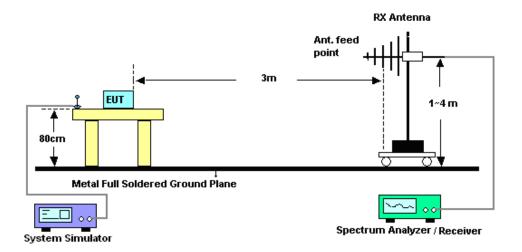

Report No.: FG872506A

For radiated test above 1GHz

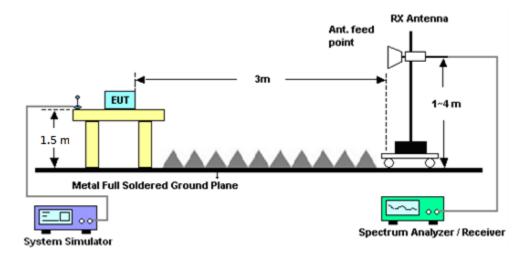

4.3 Test Result of Radiated Test

Please refer to Appendix B.

TEL: 886-3-327-3456 Page Number : 19 of 22 FAX: 886-3-328-4978 Issued Date : Sep. 19, 2018

4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

Report No.: FG872506A

4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 5.8 and ANSI / TIA-603-E Section 2.2.12.

- The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
- 2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
- 6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 8. Taking the record of output power at antenna port.
- 9. Repeat step 7 to step 8 for another polarization.
- 10. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 11. ERP (dBm) = EIRP 2.15
- 12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 13. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

TEL: 886-3-327-3456 Page Number : 20 of 22 FAX: 886-3-328-4978 Issued Date : Sep. 19, 2018

5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Jun. 29, 2018	Aug. 11, 2018	Jun. 28, 2019	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SU-641	92013721	-30℃ ~70℃	Dec. 06, 2017	Aug. 11, 2018	Dec. 05, 2019	Conducted (TH03-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL883644	Voltage:0~20V;C urrent:0~5A	Dec. 06, 2017	Aug. 11, 2018	Dec. 05, 2019	Conducted (TH03-HY)
Base Station (Measure)	Rohde & Schwarz	CMU200	117997	GSM / GPRS / WCDMA / CDMA	Aug. 20, 2017	Aug. 11, 2018	Aug. 19, 2018	Conducted (TH03-HY)
Amplifier	SONOMA	310N	187311	9kHz~1GHz	Oct. 19, 2017	Aug. 23, 2018~ Aug. 26, 2018	Oct. 18, 2018	Radiation (03CH10-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	35413&02	30MHz~1GHz	Dec. 18, 2017	Aug. 23, 2018~ Aug. 26, 2018	Dec. 17, 2018	Radiation (03CH10-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1325	1GHz ~ 18GHz	Sep. 27, 2017	Aug. 23, 2018~ Aug. 26, 2018	Sep. 26, 2018	Radiation (03CH10-HY)
Preamplifier	Keysight	83017A	MY53270078	1GHz~26.5GHz	Oct. 25, 2017	Aug. 23, 2018~ Aug. 26, 2018	Oct. 24, 2018	Radiation (03CH10-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200485	10Hz ~ 44GHz	Oct. 31, 2017	Aug. 23, 2018~ Aug. 26, 2018	Oct. 30, 2018	Radiation (03CH10-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Aug. 23, 2018~ Aug. 26, 2018	N/A	Radiation (03CH10-HY)
Turn Table	EMEC	TT 2200	N/A	0~360 Degree	N/A	Aug. 23, 2018~ Aug. 26, 2018	N/A	Radiation (03CH10-HY)
Software	Audix	E3 6.2009-8-24	RK-001042	N/A	N/A	Aug. 23, 2018~ Aug. 26, 2018	N/A	Radiation (03CH10-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104 / 102	MY11692/4PE, MY11693/4PE, MY2855/2	30M-1G	Nov. 14, 2017	Aug. 23, 2018~ Aug. 26, 2018	Nov. 13, 2018	Radiation (03CH10-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104 / 102	MY11692/4PE, MY11693/4PE, MY2855/2	1G-18G	Nov. 14, 2017	Aug. 23, 2018~ Aug. 26, 2018	Nov. 13, 2018	Radiation (03CH10-HY)

Report No.: FG872506A

TEL: 886-3-327-3456 Page Number : 21 of 22 FAX: 886-3-328-4978 Issued Date : Sep. 19, 2018

6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.17
---	------

Report No.: FG872506A

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of	2.40
Confidence of 95% (U = 2Uc(y))	3.48

<u>Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)</u>

Measuring Uncertainty for a Level of	4.00
Confidence of 95% (U = 2Uc(y))	4.00

TEL: 886-3-327-3456 Page Number : 22 of 22 FAX: 886-3-328-4978 Issued Date : Sep. 19, 2018



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

Conducted Power (*Unit: dBm)						
Band	GSM850		GSM1900			
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880	1909.8
GSM	32.18	32.21	32.39	29.32	28.91	29.33
GPRS class 8	32.21	32.22	32.42	29.37	28.92	29.37
GPRS class 10	31.18	31.12	31.17	28.31	28.21	28.30
GPRS class 11	29.91	29.73	29.66	27.25	27.03	27.02
GPRS class 12	29.00	29.00	29.08	26.20	26.13	26.25
EGPRS class 8	26.19	26.29	26.33	25.28	25.26	25.32
EGPRS class 10	26.24	25.80	25.71	24.80	24.74	24.84
EGPRS class 11	25.26	24.60	24.50	23.74	23.67	23.76
EGPRS class 12	24.55	23.97	23.81	23.12	23.06	23.17

Report No. : FG872506A

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6
RMC 12.2K	23.85	23.95	23.99	23.78	23.99	23.98
HSDPA Subtest-1	22.81	22.92	22.99	22.70	22.77	22.67
HSDPA Subtest-2	22.78	22.95	22.96	22.69	22.75	22.65
HSDPA Subtest-3	22.23	22.46	22.44	22.19	22.30	22.16
HSDPA Subtest-4	22.20	22.45	22.40	22.17	22.28	22.14
HSUPA Subtest-1	22.79	22.90	22.94	22.64	22.68	22.60
HSUPA Subtest-2	20.73	20.87	20.94	20.63	20.66	20.58
HSUPA Subtest-3	21.76	21.88	21.93	21.60	21.63	21.55
HSUPA Subtest-4	20.77	20.83	20.90	20.60	20.63	20.56
HSUPA Subtest-5	22.82	22.89	22.95	22.74	22.78	22.56



	Conducted Power (*Unit: dBm)				
Band	WCDMA Band IV				
Channel	1312 1413 1513				
Frequency	1712.4	1732.6	1752.6		
RMC 12.2K	23.60	23.76	23.67		
HSDPA Subtest-1	22.48	22.65	22.56		
HSDPA Subtest-2	22.47	22.63	22.54		
HSDPA Subtest-3	21.97	22.19	22.03		
HSDPA Subtest-4	21.93	22.16	22.01		
HSUPA Subtest-1	22.45	22.63	22.53		
HSUPA Subtest-2	20.42	20.68	20.52		
HSUPA Subtest-3	21.43	21.68	21.52		
HSUPA Subtest-4	20.40	20.67	20.51		
HSUPA Subtest-5	22.49	22.66	22.56		

Report No. : FG872506A

A2. GSM


Peak-to-Average Ratio

Mode	GSN	Limit: 13dB	
Mod.	GPRS class 8	EDGE class 8	Result
Lowest CH	0.44	3.16	
Middle CH	0.44	3.44	PASS
Highest CH	0.44	3.52	
Mode	GSM	Limit: 13dB	
Mod.	GPRS class 8	EDGE class 8	Result
	0.00	0.40	
Lowest CH	0.36	3.16	
Lowest CH Middle CH	0.36	3.16	PASS

Report No.: FG872506A


TEL: 886-3-327-3456 Page Number : A2-1 of 15

Report No.: FG872506A

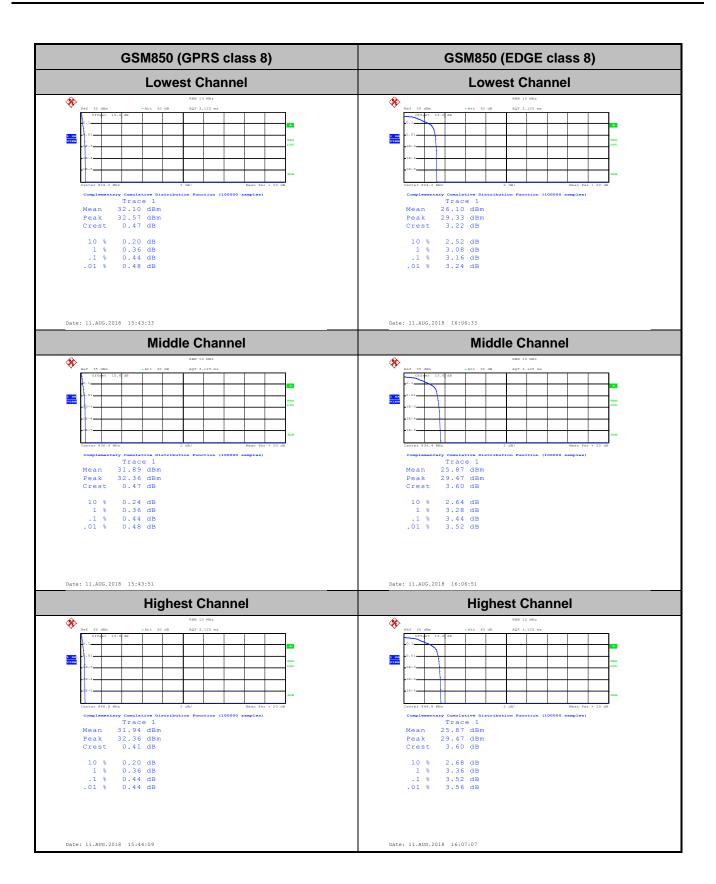

Page Number TEL: 886-3-327-3456 : A2-2 of 15

CC RADIO TEST REPORT Report No. : FG872506A

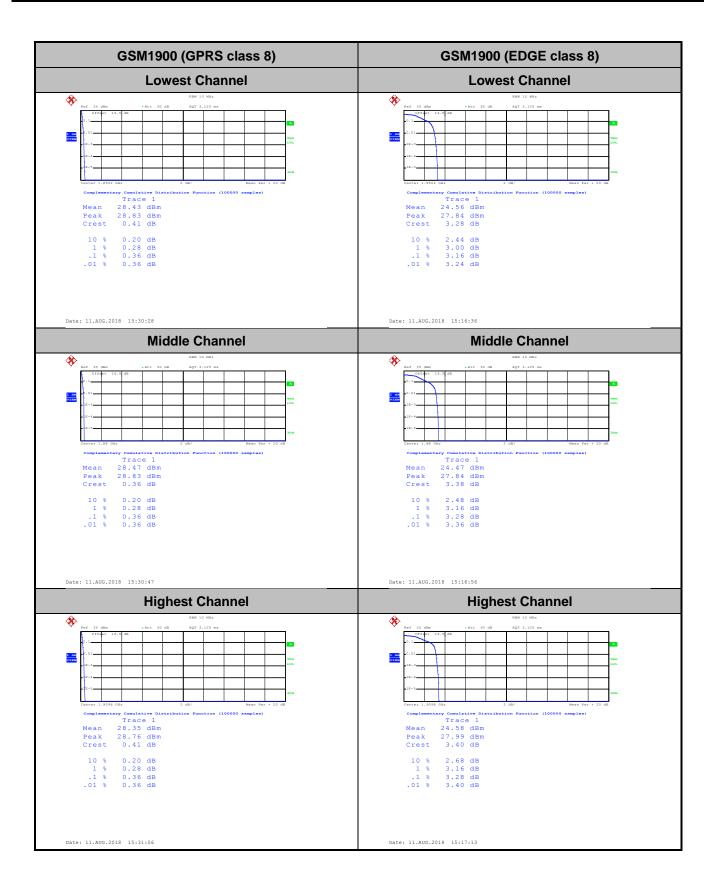

TEL: 886-3-327-3456 Page Number: A2-3 of 15


26dB Bandwidth

Mode	GSM850		
Mod.	GPRS class 8	EDGE class 8	
Lowest CH	0.311	0.292	
Middle CH	0.307	0.314	
Highest CH	0.302	0.300	
Mode	GSM	1900	
Mod.	GPRS class 8	EDGE class 8	
Lowest CH	0.313	0.308	
Middle CH	0.303	0.308	
Highest CH	0.310	0.298	

Report No. : FG872506A


TEL: 886-3-327-3456 Page Number : A2-4 of 15

CC RADIO TEST REPORT Report No. : FG872506A

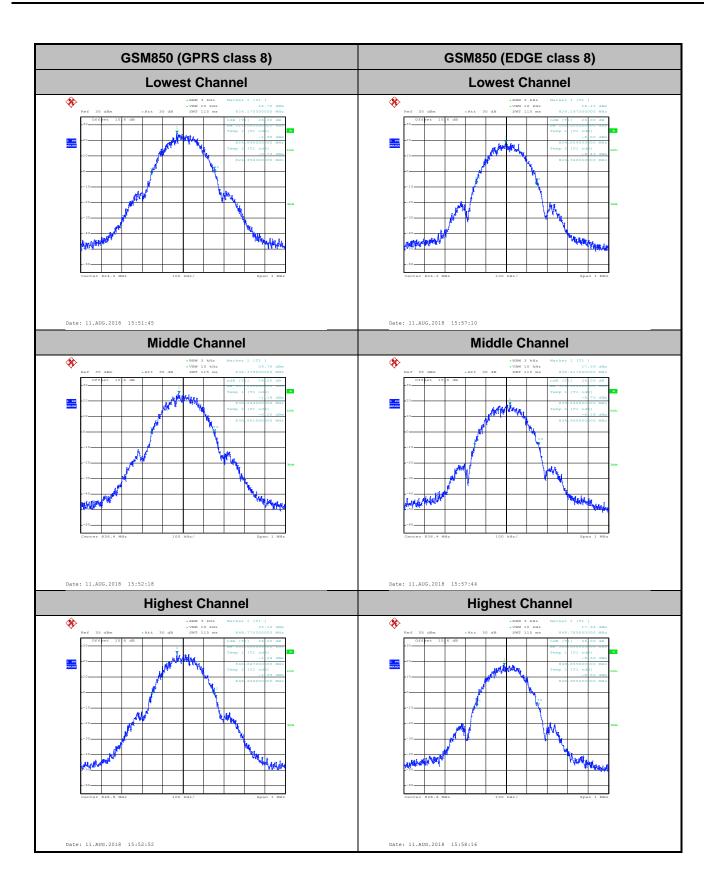

TEL: 886-3-327-3456 Page Number: A2-5 of 15

CC RADIO TEST REPORT Report No. : FG872506A

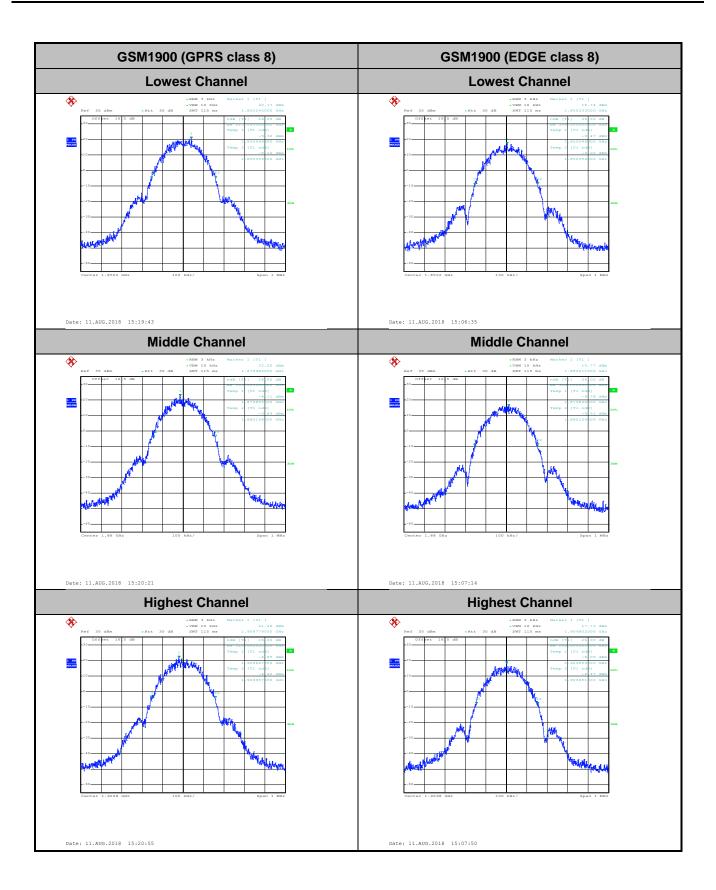

TEL: 886-3-327-3456 Page Number: A2-6 of 15

Occupied Bandwidth


Mode	GSM850		
Mod.	GPRS class 8	EDGE class 8	
Lowest CH	0.247	0.246	
Middle CH	0.242	0.244	
Highest CH	0.244	0.245	
Mode	GSM	1900	
Mod.	GPRS class 8	EDGE class 8	
Lowest CH	0.246	0.246	
Middle CH	0.247	0.248	
Highest CH	0.246	0.247	

Report No.: FG872506A

TEL: 886-3-327-3456 Page Number : A2-7 of 15


GSM850 (GPRS class 8) GSM850 (EDGE class 8) **Lowest Channel Lowest Channel** Date: 11.AUG.2018 15:53:31 Date: 11.AUG.2018 15:58:54 **Middle Channel Middle Channel Highest Channel Highest Channel**

Report No.: FG872506A

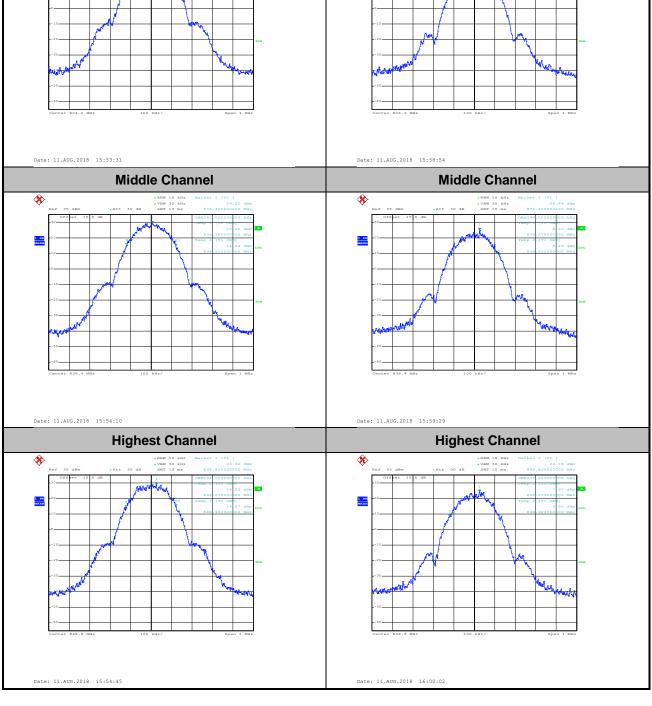


TEL: 886-3-327-3456 Page Number : A2-8 of 15



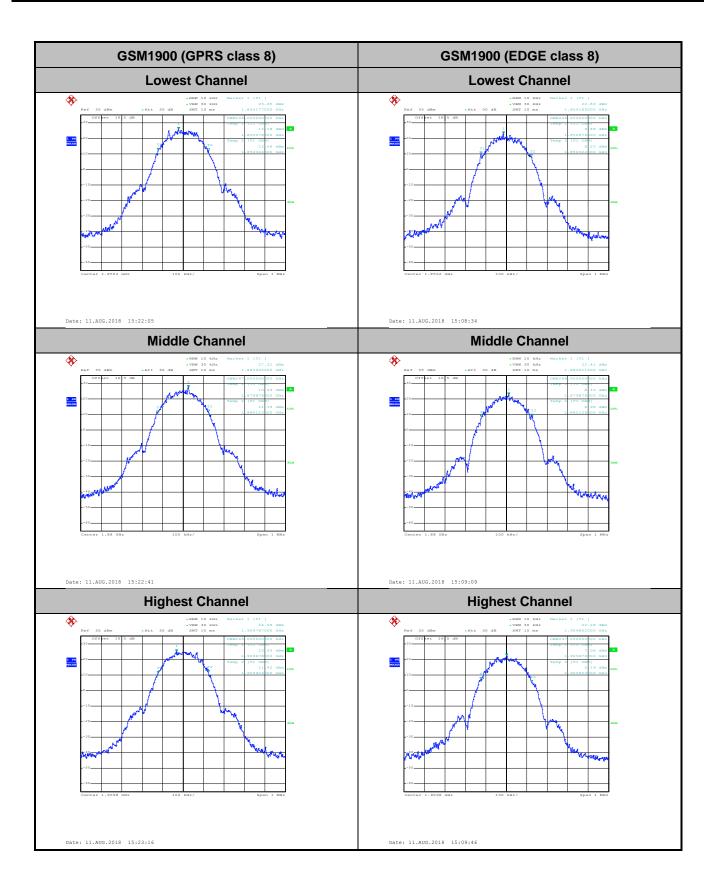


TEL: 886-3-327-3456 Page Number: A2-9 of 15


Conducted Band Edge

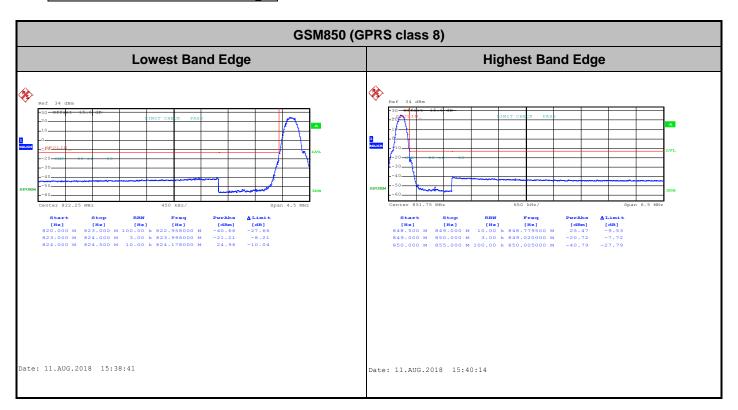


Report No.: FG872506A

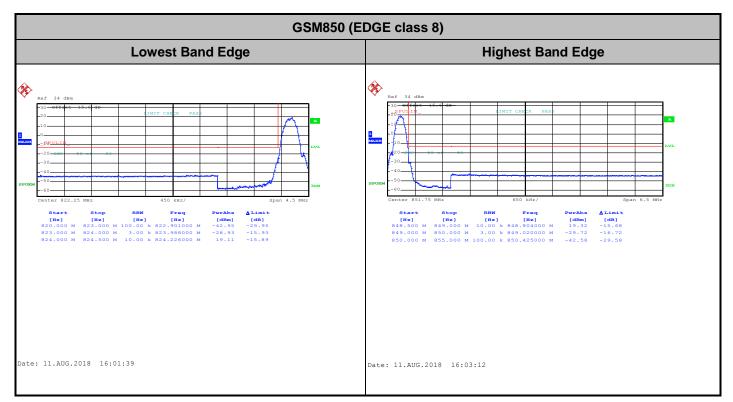

TEL: 886-3-327-3456 Page Number : A2-10 of 15

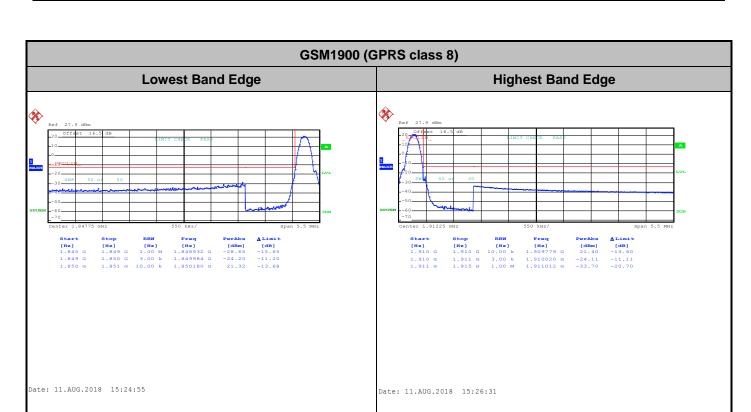


Report No.: FG872506A

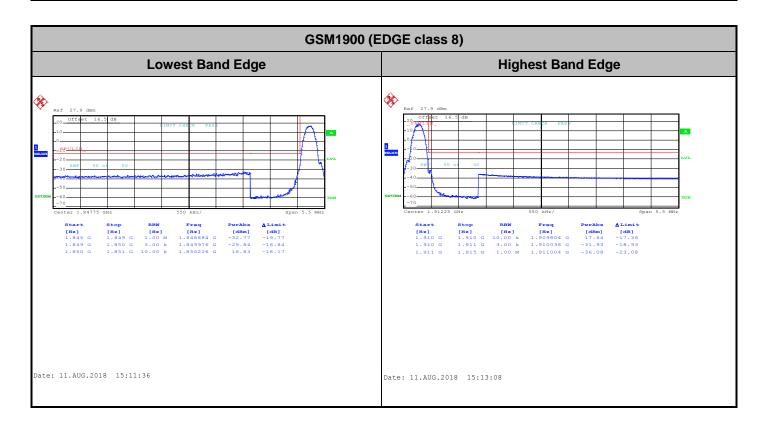


TEL: 886-3-327-3456 Page Number: A2-11 of 15

Conducted Spurious Emission

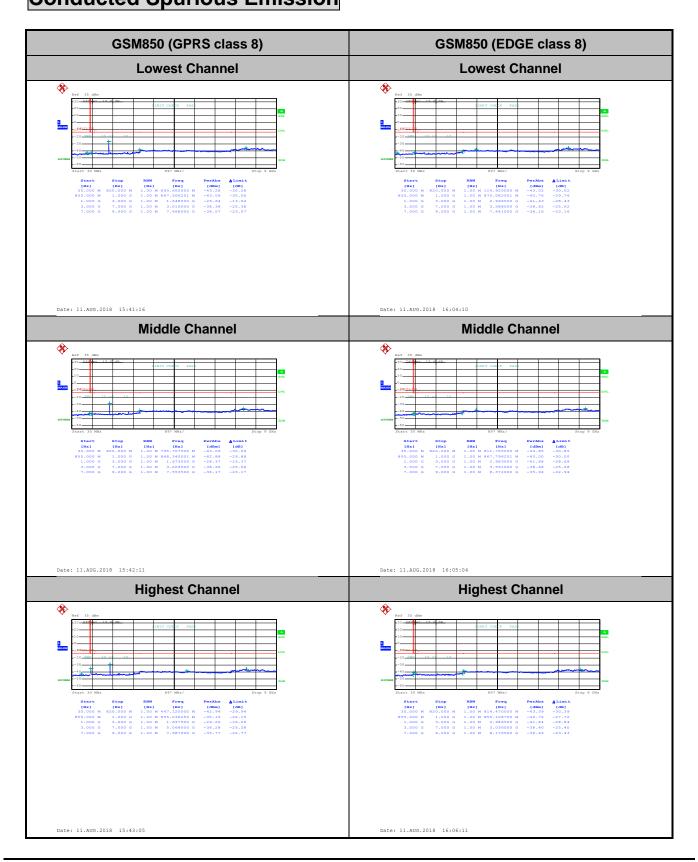

Report No.: FG872506A

TEL: 886-3-327-3456 Page Number : A2-12 of 15

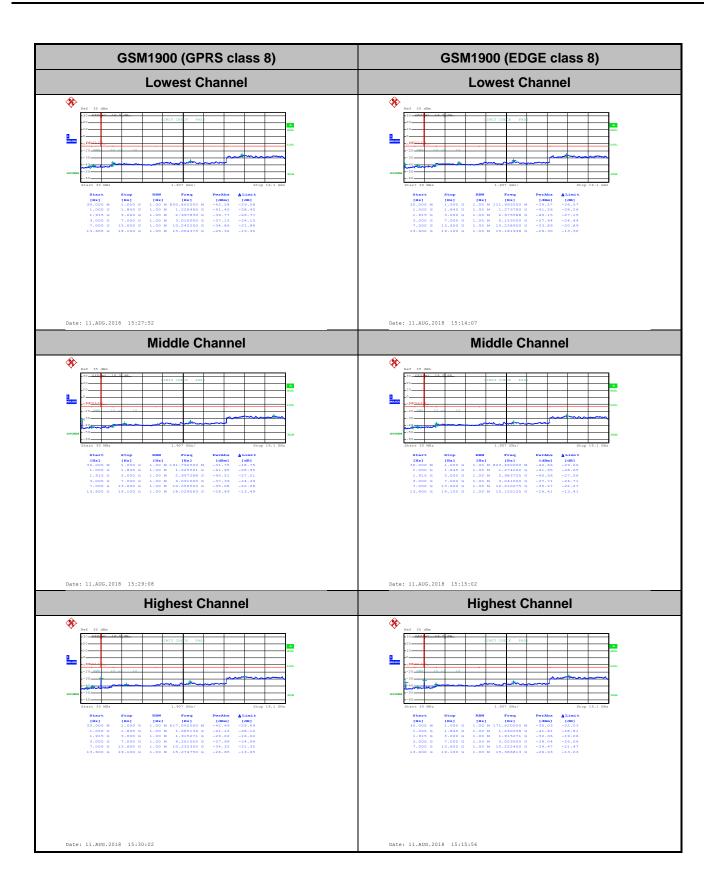

TEL: 886-3-327-3456 Page Number : A2-13 of 15

Frequency Stability

Test Conditions	Middle Channel	GSM850 (GPRS class 8)	GSM850 (EDGE class 8)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviatio	on (ppm)	Result
50	Normal Voltage	0.0024	0.0012	
40	Normal Voltage	0.0000	0.0012	
30	Normal Voltage	0.0036	0.0048	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0012	0.0000	
0	Normal Voltage	0.0024	0.0000	DAGG
-10	Normal Voltage	0.0024	0.0012	PASS
-20	Normal Voltage	0.0024	0.0024	
-30	Normal Voltage	0.0048	0.0012	
3.6	Maximum Voltage	0.0012	0.0012	
3.3	Normal Voltage	0.0000	0.0000	
3.0	Battery End Point	0.0000	0.0000	

Report No. : FG872506A

TEL: 886-3-327-3456 Page Number : A2-14 of 15

Test Conditions	Middle Channel	GSM1900 (GPRS class 8)	GSM1900 (EDGE class 8)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation	on (ppm)	Result
50	Normal Voltage	0.0106	0.0048	
40	Normal Voltage	0.0085	0.0043	
30	Normal Voltage	0.0064	0.0048	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0043	0.0005	
0	Normal Voltage	0.0064	0.0011	DACC
-10	Normal Voltage	0.0090	0.0011	PASS
-20	Normal Voltage	0.0059	0.0000	
-30	Normal Voltage	0.0043	0.0000	
3.6	Maximum Voltage	0.0011	0.0005	
3.3	Normal Voltage	0.0000	0.0000	
3.0	Battery End Point	0.0011	0.0011	

Note:

- 1. Normal Voltage = 3.3V. ; Battery End Point (BEP) = 3.0 V. ; Maximum Voltage =3.6 V
- 2. The frequency fundamental emissions stay within the authorized frequency block.

TEL: 886-3-327-3456 Page Number : A2-15 of 15

A3. WCDMA


Peak-to-Average Ratio

Mode	WCDMA Band V	WCDMA Band V WCDMA Band II		Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	3.24	3.24	3.00	
Middle CH	3.28	3.20	3.08	PASS
Highest CH	3.28	3.08	3.08	

Report No. : FG872506A


TEL: 886-3-327-3456 Page Number : A3-1 of 15



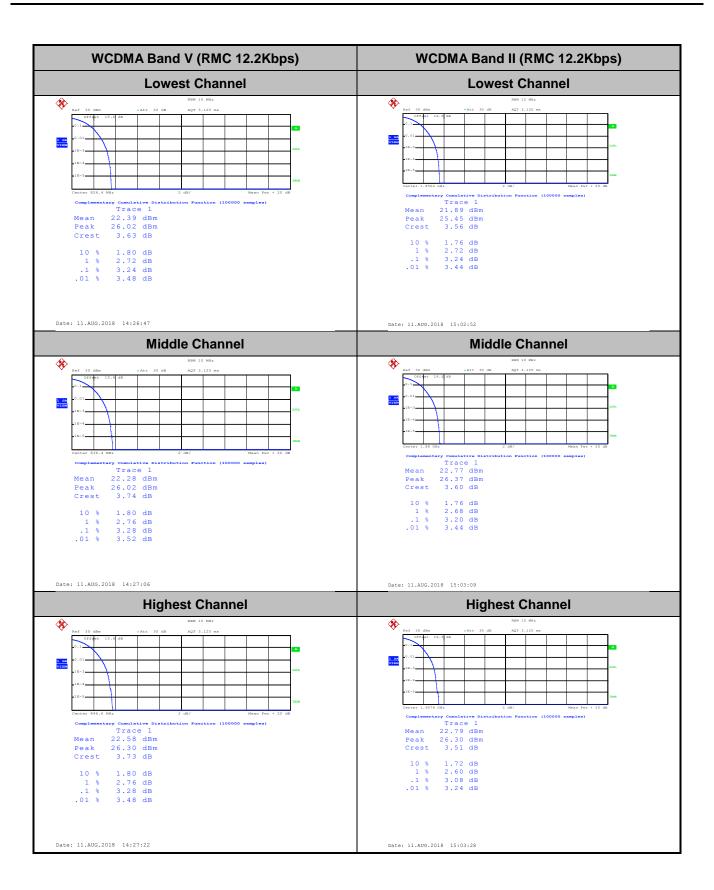

TEL: 886-3-327-3456 Page Number : A3-2 of 15



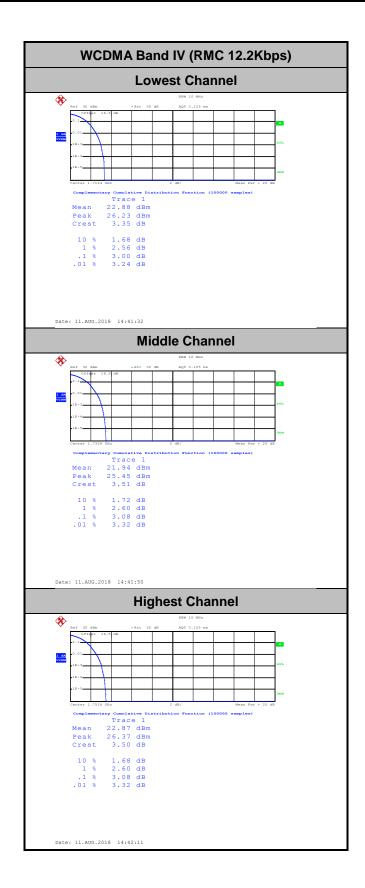


TEL: 886-3-327-3456 Page Number : A3-3 of 15

26dB Bandwidth


Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.70	4.70	4.73
Middle CH	4.70	4.70	4.71
Highest CH	4.68	4.71	4.72

Report No. : FG872506A

TEL: 886-3-327-3456 Page Number : A3-4 of 15

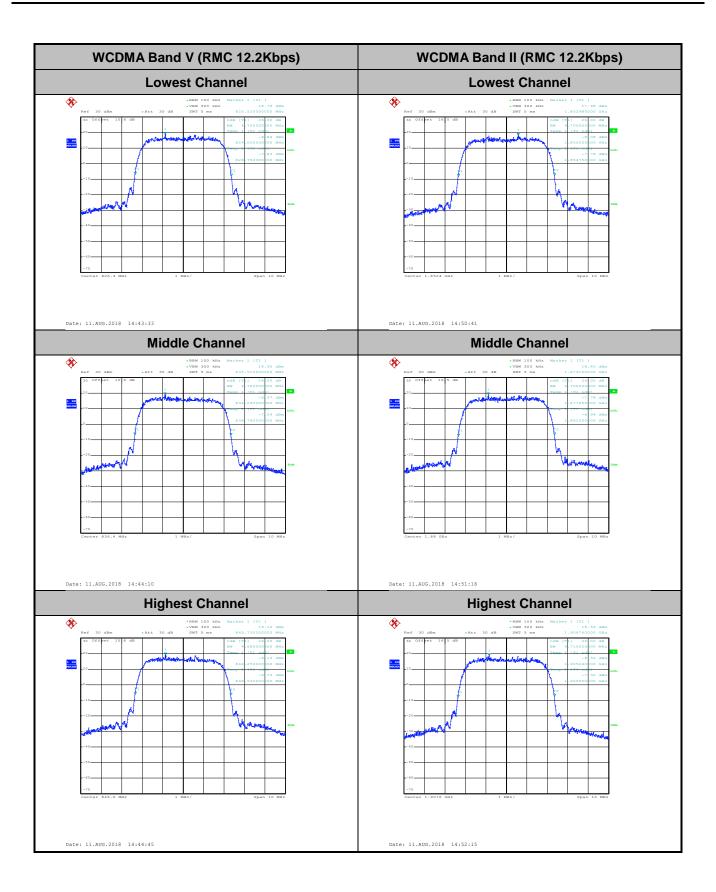

TEL: 886-3-327-3456 Page Number : A3-5 of 15

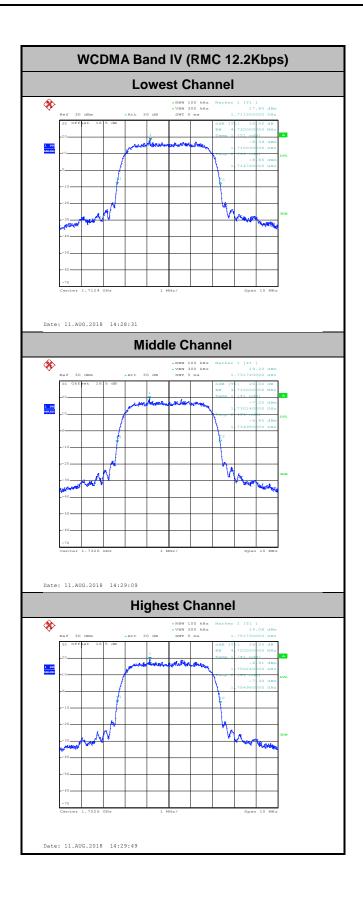

TEL: 886-3-327-3456 Page Number: A3-6 of 15

Occupied Bandwidth


Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.14	4.14	4.14
Middle CH	4.14	4.14	4.14
Highest CH	4.13	4.13	4.13

Report No. : FG872506A


TEL: 886-3-327-3456 Page Number : A3-7 of 15

WCDMA Band V (RMC 12.2Kbps) WCDMA Band II (RMC 12.2Kbps) **Lowest Channel Lowest Channel** * * Date: 11.AUG.2018 14:45:27 Date: 11.AUG.2018 14:52:58 **Middle Channel Middle Channel Highest Channel Highest Channel**

Report No.: FG872506A

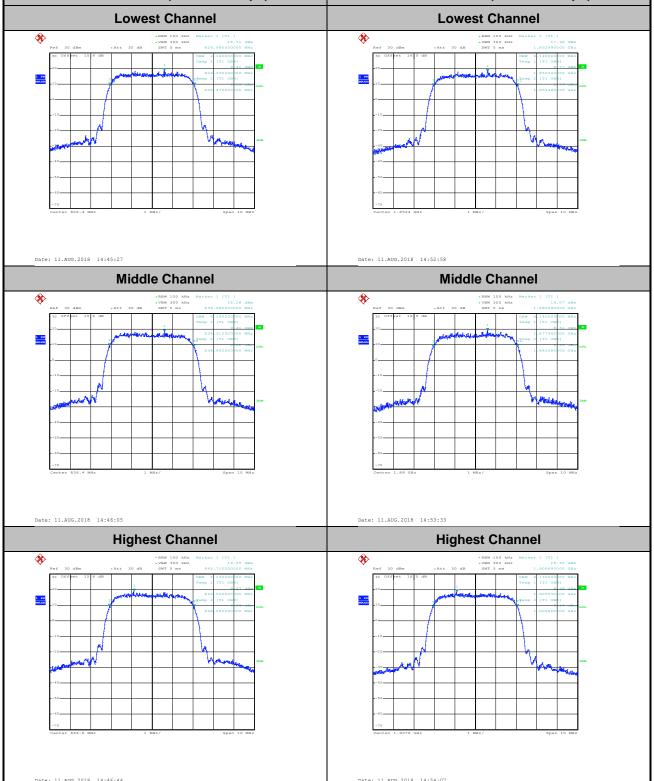


TEL: 886-3-327-3456 Page Number : A3-8 of 15

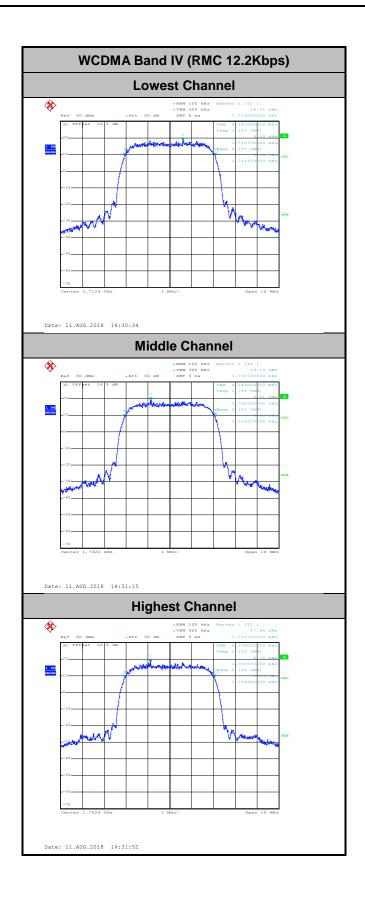


TEL: 886-3-327-3456 Page Number: A3-9 of 15

Conducted Band Edge

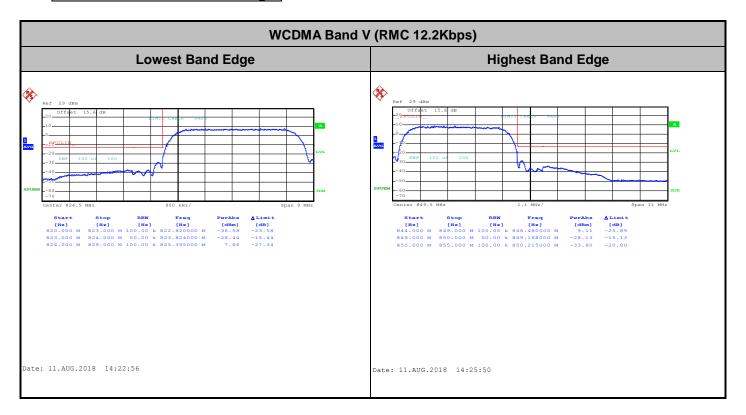

Report No.: FG872506A

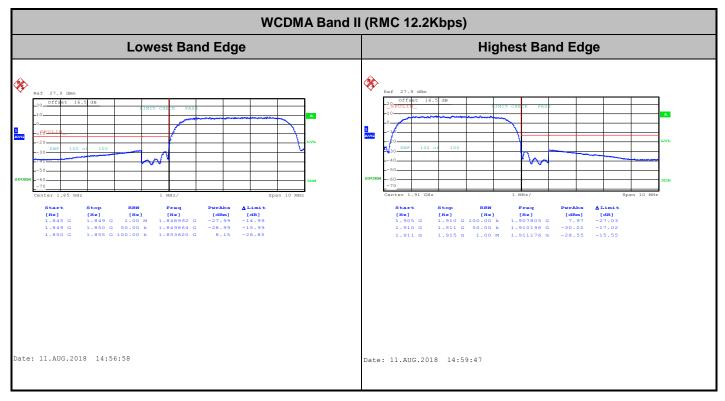

TEL: 886-3-327-3456 Page Number : A3-10 of 15

Comparison of Comparison o

Date: 11.AUG.2018 14:37:36


Report No.: FG872506A

TEL: 886-3-327-3456 Page Number: A3-11 of 15

FAX: 886-3-328-4978

Date: 11.AUG.2018 14:34:44


Conducted Spurious Emission

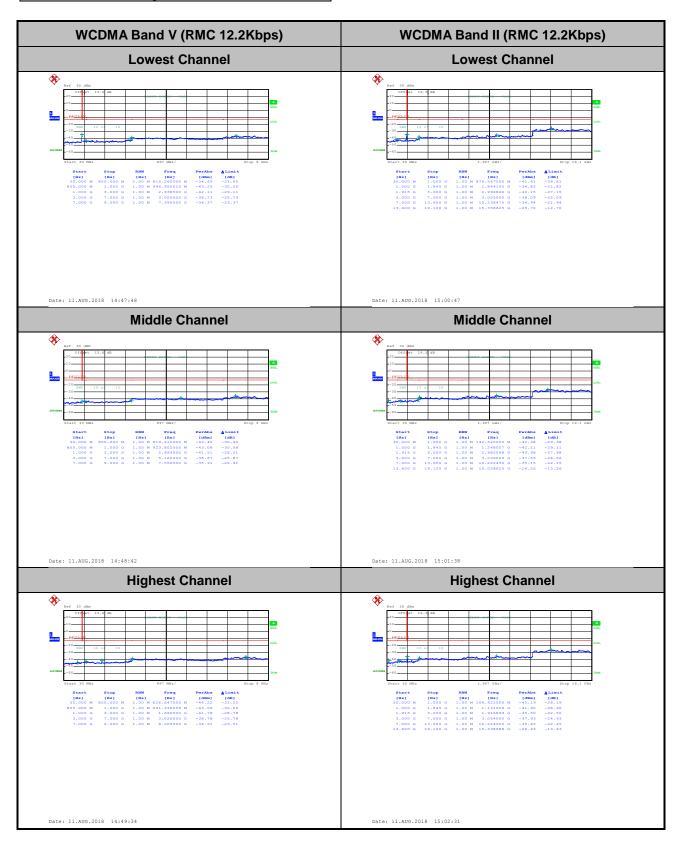

Report No.: FG872506A

TEL: 886-3-327-3456 Page Number : A3-12 of 15



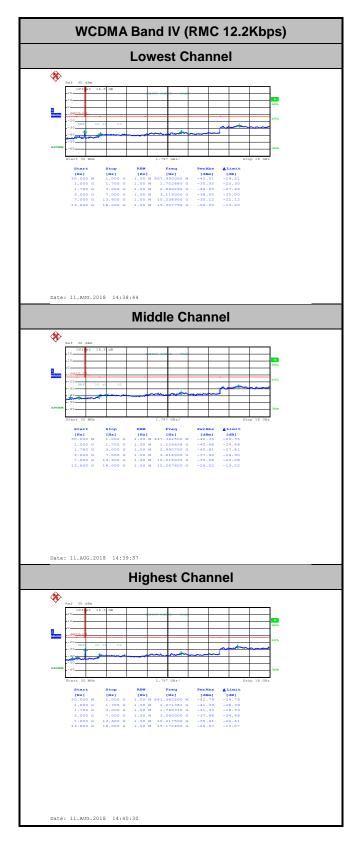

TEL: 886-3-327-3456 Page Number : A3-13 of 15

Frequency Stability

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0179	
40	Normal Voltage	0.0191	
30	Normal Voltage	0.0143	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0000	
0	Normal Voltage	0.0012	DAGG
-10	Normal Voltage	0.0012	PASS
-20	Normal Voltage	0.0024	
-30	Normal Voltage	0.0036	
3.6	Maximum Voltage	0.0012	
3.3	Normal Voltage	0.0000	
3.0	Battery End Point	0.0012	

Report No. : FG872506A

TEL: 886-3-327-3456 Page Number : A3-14 of 15

Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0053	
40	Normal Voltage	0.0053	
30	Normal Voltage	0.0027	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0000	
0	Normal Voltage	0.0011	DA CC
-10	Normal Voltage	0.0011	PASS
-20	Normal Voltage	0.0011	
-30	Normal Voltage	0.0016	
3.6	Maximum Voltage	0.0005	
3.3	Normal Voltage	0.0000	
3.0	Battery End Point	0.0011	

Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0248	
40	Normal Voltage	0.0190	
30	Normal Voltage	0.0069	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0046	
0	Normal Voltage	0.0075	DAGG
-10	Normal Voltage	0.0075	PASS
-20	Normal Voltage	0.0029	
-30	Normal Voltage	0.0000	
3.6	Maximum Voltage	0.0006	
3.3	Normal Voltage	0.0000	
3.0	Battery End Point	0.0006	

Note:

- 1. Normal Voltage = 3.3V. ; Battery End Point (BEP) = 3.0 V. ; Maximum Voltage = 3.6 V
- 2. The frequency fundamental emissions stay within the authorized frequency block.

TEL: 886-3-327-3456 Page Number : A3-15 of 15

Appendix B. Test Results of ERP/EIRP and Radiated Test

Report No. : FG872506A

ERP/EIRP

Channel	Mode	Cond	ucted	ERP		
Chamilei	Wiode	Power (dBm)	Power (Watts)	ERP(dBm)	ERP(W)	
Lowest	GSM850	32.21	1.6634	31.59	1.4421	
Middle	GPRS class 8	32.22	1.6672	31.60	1.4454	
Highest	(GT - LC = 1.53 dB)	32.42	1.7458	31.80	1.5136	
Lowest	GSM850	26.19	0.4159	25.57	0.3606	
Middle	EDGE class 8	26.29	0.4256	25.67	0.3690	
Highest	(GT - LC = 1.53 dB)	26.33	0.4295	25.71	0.3724	
Lowest	WCDMA Band V	23.85	0.2427	23.23	0.2104	
Middle	RMC 12.2Kbps	23.95	0.2483	23.33	0.2153	
Highest	(GT - LC = 1.53 dB)	23.99	0.2506	23.37	0.2173	
Limit	ERP < 7W	Result		PASS		

Channel	Mode	Cond	ucted	EIRP		
Channel	Wode	Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)	
Lowest	GSM1900	29.37	0.8650	30.31	1.0740	
Middle	GPRS class 8	28.92	0.7798	29.86	0.9683	
Highest	(GT - LC = 0.94 dB)	29.37	0.8650	30.31	1.0740	
Lowest	GSM1900	25.28	0.3373	26.22	0.4188	
Middle	EDGE class 8	25.26	0.3357	26.20	0.4169	
Highest	(GT - LC = 0.94 dB)	25.32	0.3404	26.26	0.4227	
Lowest	WCDMA Band II	23.78	0.2388	24.72	0.2965	
Middle	RMC 12.2Kbps	23.99	0.2506	24.93	0.3112	
Highest	(GT - LC = 0.94 dB)	23.98	0.2500	24.92	0.3105	
Limit	EIRP < 2W	Re	sult	PA	SS	

Channel	Mode	Cond	ucted	EIRP		
Chamilei	Wiode	Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)	
Lowest	WCDMA Band IV	23.60	0.2291	23.10	0.2042	
Middle	RMC 12.2Kbps	23.76	0.2377	23.26	0.2118	
Highest	(GT - LC = -0.5 dB)	23.67	0.2328	23.17	0.2075	
Limit	EIRP < 1W	Re	sult	PA	SS	

Radiated Spurious Emission

GPRS 850

Report No.: FG872506A

GPRS 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
	1649	-38.76	-13	-25.76	-47.42	-44.50	0.81	8.70	Н
	2474	-42.83	-13	-29.83	-56.62	-50.40	1.04	10.76	Н
	3298	-58.47	-13	-45.47	-73.94	-67.08	1.10	11.86	Н
	4123	-30.90	-13	-17.90	-48.97	-40.05	1.38	12.68	Н
Laurant									Н
Lowest	1649	-38.51	-13	-25.51	-46.76	-44.25	0.81	8.70	V
	2474	-48.34	-13	-35.34	-62.4	-55.91	1.04	10.76	V
	3298	-58.59	-13	-45.59	-74.4	-67.20	1.10	11.86	V
	4123	-56.57	-13	-43.57	-74.9	-65.72	1.38	12.68	V
									V
	1672	-44.35	-13	-31.35	-53.72	-50.17	0.82	8.79	Н
	2509	-45.00	-13	-32.00	-59.08	-52.61	1.05	10.81	Н
	3345	-57.30	-13	-44.30	-72.84	-66.01	1.10	11.96	Н
N 41 - 1 - 11 -									Н
Middle	1672	-46.32	-13	-33.32	-54.92	-52.14	0.82	8.79	V
	2509	-51.45	-13	-38.45	-64.93	-59.06	1.05	10.81	V
	3345	-58.48	-13	-45.48	-74.39	-67.19	1.10	11.96	V
									V
	1696	-46.27	-13	-33.27	-55.76	-52.17	0.83	8.88	Н
	2544	-40.63	-13	-27.63	-54.48	-48.26	1.06	10.84	Н
	3393	-56.66	-13	-43.66	-72.12	-65.47	1.10	12.06	Н
1 lball out									Н
Highest	1696	-50.31	-13	-37.31	-58.89	-56.21	0.83	8.88	V
	2544	-44.10	-13	-31.10	-58.2	-51.73	1.06	10.84	V
	3393	-58.03	-13	-45.03	-73.86	-66.84	1.10	12.06	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

TEL: 886-3-327-3456 Page Number: B2-1 of 9

EDGE 850

Report No. : FG872506A

				EDG	E 850				
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
	1649	-44.58	-13	-31.58	-53.43	-50.32	0.81	8.70	Н
	2474	-17.77	-13	-4.77	-31.63	-25.34	1.04	10.76	Н
	3298	-57.41	-13	-44.41	-72.81	-66.02	1.10	11.86	Н
	4123	-19.46	-13	-6.46	-37.12	-28.61	1.38	12.68	Н
	5772	-22.68	-13	-9.68	-44.48	-31.85	1.93	13.25	Н
	7422	-36.48	-13	-23.48	-62.59	-43.10	2.44	11.21	Н
Lowest									Н
Lowest	1649	-44.36	-13	-31.36	-53.2	-50.10	0.81	8.70	V
	2474	-18.63	-13	-5.63	-32.67	-26.20	1.04	10.76	V
	3298	-58.69	-13	-45.69	-74.5	-67.30	1.10	11.86	V
	4123	-20.31	-13	-7.31	-39.41	-29.46	1.38	12.68	V
	5772	-29.39	-13	-16.39	-52.45	-38.56	1.93	13.25	V
	7422	-33.59	-13	-20.59	-59.24	-40.21	2.44	11.21	V
									V
	1672	-45.39	-13	-32.39	-54.31	-51.21	0.82	8.79	Н
	2509	-39.57	-13	-26.57	-53.45	-47.18	1.05	10.81	Н
	3345	-57.18	-13	-44.18	-73.06	-65.89	1.10	11.96	Н
N 41 - 1 - 11 -									Н
Middle	1672	-46.86	-13	-33.86	-55.66	-52.68	0.82	8.79	V
	2509	-46.33	-13	-33.33	-59.94	-53.94	1.05	10.81	V
	3345	-58.17	-13	-45.17	-74.13	-66.88	1.10	11.96	V
									V

TEL: 886-3-327-3456 Page Number : B2-2 of 9

	1696	-46.41	-13	-33.41	-55.23	-52.31	0.83	8.88	Н
	2544	-42.51	-13	-29.51	-56.16	-50.14	1.06	10.84	Н
	3393	-56.50	-13	-43.50	-71.85	-65.31	1.10	12.06	Н
Llimboot									Н
Highest	1696	-50.27	-13	-37.27	-59	-56.17	0.83	8.88	V
	2544	-44.73	-13	-31.73	-58.53	-52.36	1.06	10.84	V
	3393	-58.48	-13	-45.48	-74.18	-67.29	1.10	12.06	V
		_	_						V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

TEL: 886-3-327-3456 Page Number : B2-3 of 9

WCDMA Band V

Report No.: FG872506A

				WCDM	A Band V				
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
	1649	-52.67	-13	-39.67	-61.78	-58.41	0.81	8.70	Н
	2474	-60.32	-13	-47.32	-73.77	-67.89	1.04	10.76	Н
	3298	-55.63	-13	-42.63	-71.24	-64.24	1.10	11.86	Н
	4123	-54.13	-13	-41.13	-72.31	-63.28	1.38	12.68	Н
Lowest									Н
Lowest	1649	-58.41	-13	-45.41	-66.95	-64.15	0.81	8.70	V
	2474	-60.44	-13	-47.44	-74.32	-68.01	1.04	10.76	V
	3298	-58.65	-13	-45.65	-74.75	-67.26	1.10	11.86	V
	4123	-56.19	-13	-43.19	-75.14	-65.34	1.38	12.68	V
									V
	1672	-54.49	-13	-41.49	-63.26	-60.31	0.82	8.79	Н
	2509	-60.39	-13	-47.39	-73.89	-68.00	1.05	10.81	Н
	3345	-56.39	-13	-43.39	-72.03	-65.10	1.10	11.96	Н
									Н
Middle	1672	-60.33	-13	-47.33	-69.03	-66.15	0.82	8.79	V
	2509	-60.59	-13	-47.59	-74.11	-68.20	1.05	10.81	V
	3345	-58.59	-13	-45.59	-74.54	-67.30	1.10	11.96	V
									V
	1696	-51.46	-13	-38.46	-60.83	-57.36	0.83	8.88	Н
	2544	-60.17	-13	-47.17	-74.6	-67.80	1.06	10.84	Н
	3393	-55.38	-13	-42.38	-70.71	-64.19	1.10	12.06	Н
	4241	-54.97	-13	-41.97	-73.44	-64.15	1.32	12.65	Н
									Н
Highest	1696	-58.38	-13	-45.38	-67.65	-64.28	0.83	8.88	V
	2544	-60.55	-13	-47.55	-74.39	-68.18	1.06	10.84	V
	3393	-58.48	-13	-45.48	-74.29	-67.29	1.10	12.06	V
	4241	-55.89	-13	-42.89	-75.02	-65.07	1.32	12.65	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

TEL: 886-3-327-3456 Page Number : B2-4 of 9

GPRS 1900

Report No. : FG872506A

				GPR	S 1900				
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
	3700	-52.63	-13	-39.63	-70.61	-63.86	1.23	12.46	Н
	5548	-35.39	-13	-22.39	-56.81	-46.88	1.80	13.29	Н
	7398	-49.80	-13	-36.80	-76.2	-58.61	2.43	11.24	Н
	9251	-41.53	-13	-28.53	-71.57	-50.23	2.85	11.55	Н
Lawast									Н
Lowest	3700	-56.35	-13	-43.35	-74.35	-67.58	1.23	12.46	V
	5548	-41.58	-13	-28.58	-63.79	-53.07	1.80	13.29	V
	7398	-49.45	-13	-36.45	-76.02	-58.26	2.43	11.24	V
	9251	-45.50	-13	-32.50	-75.17	-54.20	2.85	11.55	V
									V
	3763	-48.42	-13	-35.42	-66.17	-59.66	1.27	12.51	Н
	5639	-35.47	-13	-22.47	-57.39	-46.89	1.85	13.27	Н
	7518	-48.99	-13	-35.99	-76.38	-57.61	2.49	11.11	Н
	9398	-38.42	-13	-25.42	-69.03	-46.92	2.90	11.40	Н
Middle									Н
Middle	3763	-53.35	-13	-40.35	-71.46	-64.59	1.27	12.51	V
	5639	-41.27	-13	-28.27	-63.95	-52.69	1.85	13.27	V
	7518	-49.13	-13	-36.13	-76.45	-57.75	2.49	11.11	V
	9398	-45.53	-13	-32.53	-74.9	-54.03	2.90	11.40	V
									V

TEL: 886-3-327-3456 Page Number : B2-5 of 9

	3819	-41.63	-13	-28.63	-59.22	-52.88	1.31	12.56	Η
	5730	-39.13	-13	-26.13	-61.37	-50.48	1.90	13.25	Н
	7641	-48.13	-13	-35.13	-74.24	-56.72	2.59	11.18	Н
	9552	-43.35	-13	-30.35	-74.39	-51.69	2.95	11.29	Н
l limb a at									Н
Highest	3819	-43.36	-13	-30.36	-61.74	-54.61	1.31	12.56	V
	5730	-45.55	-13	-32.55	-68.35	-56.90	1.90	13.25	V
	7641	-49.71	-13	-36.71	-76.07	-58.30	2.59	11.18	V
	9552	-45.68	-13	-32.68	-76.32	-54.02	2.95	11.29	V
									V
	·	·	· ·		· ·	·	·	•	

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

TEL: 886-3-327-3456 Page Number : B2-6 of 9

EDGE 1900

Report No.: FG872506A

				EDG	E 1900				
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
	3700	-47.14	-13	-34.14	-62.82	-58.37	1.23	12.46	Н
	5548	-43.31	-13	-30.31	-63	-54.80	1.80	13.29	Н
	7403	-51.73	-13	-38.73	-76.08	-60.53	2.43	11.24	Н
Lowest									Н
Lowest	3700	-53.77	-13	-40.77	-69.97	-65.00	1.23	12.46	V
	5548	-49.49	-13	-36.49	-69.98	-60.98	1.80	13.29	V
	7403	-52.07	-13	-39.07	-76.15	-60.87	2.43	11.24	V
									V
	3763	-42.29	-13	-29.29	-58.04	-53.53	1.27	12.51	Н
	5639	-47.03	-13	-34.03	-66.87	-58.45	1.85	13.27	Н
	7526	-50.76	-13	-37.76	-75.43	-59.38	2.50	11.12	Н
N 41 - 1 - 11 -									Н
Middle	3763	-53.91	-13	-40.91	-70.27	-65.15	1.27	12.51	V
	5639	-50.53	-13	-37.53	-71.03	-61.95	1.85	13.27	V
	7526	-50.96	-13	-37.96	-75.46	-59.58	2.50	11.12	V
									V
	3819	-44.26	-13	-31.26	-60.12	-55.51	1.31	12.56	Н
	5730	-48.37	-13	-35.37	-68.39	-59.72	1.90	13.25	Н
	7638	-51.75	-13	-38.75	-75.83	-60.35	2.58	11.18	Н
ند د حاسنا ا									Н
Highest	3819	-52.23	-13	-39.23	-68.77	-63.48	1.31	12.56	V
	5730	-50.41	-13	-37.41	-71.09	-61.76	1.90	13.25	V
	7638	-51.86	-13	-38.86	-76.01	-60.46	2.58	11.18	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

TEL: 886-3-327-3456 Page Number : B2-7 of 9

WCDMA Band II

Report No.: FG872506A

				WCDM	A Band II				
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
	3700	-54.01	-13	-41.01	-69.69	-65.24	1.23	12.46	Н
	5550	-55.99	-13	-42.99	-75.68	-67.48	1.80	13.29	Н
	7400	-51.41	-13	-38.41	-75.74	-60.22	2.43	11.24	Н
Lowest									Н
Lowest	3700	-56.70	-13	-43.70	-72.9	-67.93	1.23	12.46	V
	5550	-55.20	-13	-42.20	-75.68	-66.69	1.80	13.29	V
	7400	-52.32	-13	-39.32	-76.38	-61.13	2.43	11.24	V
									V
	3763	-56.13	-13	-43.13	-71.88	-67.37	1.27	12.51	Н
	5645	-56.31	-13	-43.31	-76.17	-67.73	1.85	13.27	Н
	7526	-51.11	-13	-38.11	-75.78	-59.73	2.50	11.12	Н
Middle									Н
Middle	3763	-57.89	-13	-44.89	-74.25	-69.13	1.27	12.51	V
	5645	-55.57	-13	-42.57	-76.09	-66.99	1.85	13.27	V
	7526	-51.45	-13	-38.45	-75.95	-60.07	2.50	11.12	V
									V
	3819	-55.92	-13	-42.92	-71.78	-67.17	1.31	12.56	Н
	5729	-56.14	-13	-43.14	-76.16	-67.49	1.90	13.25	Н
	7638	-51.91	-13	-38.91	-75.99	-60.51	2.58	11.18	Н
l limb o o t									Н
Highest	3819	-56.60	-13	-43.60	-73.14	-67.85	1.31	12.56	V
	5729	-55.13	-13	-42.13	-75.81	-66.48	1.90	13.25	V
	7638	-51.93	-13	-38.93	-76.08	-60.53	2.58	11.18	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

TEL: 886-3-327-3456 Page Number : B2-8 of 9

WCDMA Band IV

Report No.: FG872506A

				WCDM	A Band V				
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
	3427	-51.85	-13	-38.85	-68.01	-62.89	1.10	12.14	Н
	5140	-54.15	-13	-41.15	-75.54	-65.49	1.53	12.87	Н
	6854	-50.53	-13	-37.53	-75.78	-60.30	2.18	11.95	Н
Lowest									Н
Lowesi	3427	-54.69	-13	-41.69	-71.55	-65.73	1.10	12.14	V
	5140	-53.58	-13	-40.58	-75.66	-64.92	1.53	12.87	V
	6854	-50.60	-13	-37.60	-76.06	-60.37	2.18	11.95	V
									V
	3462	-54.97	-13	-41.97	-69.78	-66.09	1.10	12.22	Н
	5193	-57.47	-13	-44.47	-76.63	-68.84	1.56	12.93	Н
	6924	-52.68	-13	-39.68	-75.91	-62.35	2.21	11.88	Н
Middle									Н
Middle	3462	-58.36	-13	-45.36	-73.53	-69.48	1.10	12.22	V
	5193	-56.66	-13	-43.66	-76.52	-68.03	1.56	12.93	V
	6924	-51.98	-13	-38.98	-75.7	-61.65	2.21	11.88	V
									V
	3504	-51.94	-13	-38.94	-69.38	-63.14	1.10	12.30	Н
	5254	-54.97	-13	-41.97	-76.14	-66.37	1.60	13.00	Н
	7008	-49.65	-13	-36.65	-75.37	-59.19	2.24	11.79	Н
ئے میار									Н
Highest	3504	-56.22	-13	-43.22	-73.87	-67.42	1.10	12.30	V
	5254	-54.36	-13	-41.36	-76.09	-65.76	1.60	13.00	V
	7008	-49.76	-13	-36.76	-75.75	-59.30	2.24	11.79	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

TEL: 886-3-327-3456 Page Number: B2-9 of 9