FCC RF Test Report

APPLICANT: Zebra Technologies Corporation

EQUIPMENT: Hub

BRAND NAME: ZEBRA

MODEL NAME : MPACT-HUBFXD

FCC ID : UZ7MPACTHUBFXD

STANDARD : FCC Part 15 Subpart C §15.247

CLASSIFICATION: (DTS) Digital Transmission System

The product was received on Sep. 22, 2016 and testing was completed on Oct. 15, 2016. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager

SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UZ7MPACTHUBFXD Page Number : 1 of 37
Report Issued Date : Dec. 09, 2016
Report Version : Rev. 01

1190

Report No.: FR692215B

TABLE OF CONTENTS

RE	VISIO	N HISTORY	3	
SU	MMA	RY OF TEST RESULT	4	
1	GEN	GENERAL DESCRIPTION		
	1.1 1.2 1.3 1.4 1.5 1.6 1.7	Applicant	5 6 6 6	
2	TEST	T CONFIGURATION OF EQUIPMENT UNDER TEST	8	
	2.12.22.32.42.52.6	Carrier Frequency and Channel Test Mode Connection Diagram of Test System Support Unit used in test configuration and system EUT Operation Test Setup Measurement Results Explanation Example	9 10 11	
3	TEST RESULT			
	3.1 3.2 3.3 3.4 3.5 3.6 3.7	6dB and 99% Bandwidth Measurement Output Power Measurement Power Spectral Density Measurement Conducted Band Edges and Spurious Emission Measurement Radiated Band Edges and Spurious Emission Measurement AC Conducted Emission Measurement Antenna Requirements	14 15 17 27	
4	LIST	OF MEASURING EQUIPMENT	36	
5	UNC	ERTAINTY OF EVALUATION	37	
		DIX A. CONDUCTED TEST RESULTS		
ΑP	PEND	DIX B. RADIATED SPURIOUS EMISSION		
ΑP	PEND	DIX C. RADIATED SPURIOUS EMISSION PLOTS		
ΑP	PEND	DIX D. DUTY CYCLE PLOTS		
ΑP	PEND	DIX E. SETUP PHOTOGRAPHS		

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UZ7MPACTHUBFXD Page Number : 2 of 37
Report Issued Date : Dec. 09, 2016
Report Version : Rev. 01

Report No. : FR692215B

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR692215B	Rev. 01	Initial issue of report	Dec. 09, 2016

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978

FCC ID : UZ7MPACTHUBFXD

Page Number : 3 of 37
Report Issued Date : Dec. 09, 2016

Report No. : FR692215B

Report Version : Rev. 01

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)	Power Output Measurement	≤ 30dBm	Pass	-
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges	- ≤ 20dBc	Pass	-
3.4		Conducted Spurious Emission		Pass	-
3.5 15.247(d)		Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 1.07 dB at and 2390.000 MHz 2483.520 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 9.40 dB at 0.542 MHz
3.7	3.7 15.203 & Antenna Requirement 15.247(b)		N/A	Pass	-

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UZ7MPACTHUBFXD Page Number : 4 of 37
Report Issued Date : Dec. 09, 2016
Report Version : Rev. 01

Report No. : FR692215B

1 General Description

1.1 Applicant

Zebra Technologies Corporation

1 Zebra Plaza, Holtsville, NY 11742

1.2 Manufacturer

Zebra Technologies Corporation

1 Zebra Plaza, Holtsville, NY 11742

1.3 Product Feature of Equipment Under Test

Product Feature				
Equipment	Hub			
Brand Name	ZEBRA			
Model Name	MPACT-HUBFXD			
FCC ID	UZ7MPACTHUBFXD			
EUT supports Radios application	WLAN 11a/b/g/n HT20 Bluetooth LE			
Wifi Code version	6.0.109.9			
Wifi Tools version	9.0.0.341360			
EUT Stage	Identical Prototype			

Report No.: FR692215B

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Specification of Accessories					
Adapter	Brand Name	ZEBRA	Model Number	PS000081A01	
USB Cable	Brand Name	ZEBRA	P/N	25-MCXUSB-01R	

 SPORTON INTERNATIONAL INC.
 Page Number
 : 5 of 37

 TEL: 886-3-327-3456
 Report Issued Date
 : Dec. 09, 2016

 FAX: 886-3-328-4978
 Report Version
 : Rev. 01

FCC ID : UZ7MPACTHUBFXD Report Template No.: BU5-FR15CWL Version 1.3

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification				
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz			
	<eut antenna="" j301="" with=""></eut>			
	802.11b : 20.87 dBm (0.1222 W)			
	802.11g : 22.77 dBm (0.1892 W)			
Maximum (Peak) Output Power to	802.11n HT20 : 22.77 dBm (0.1892 W)			
antenna	<eut antenna="" j300="" with=""></eut>			
	802.11b : 20.74 dBm (0.1186 W)			
	802.11g : 22.62 dBm (0.1828 W)			
	802.11n HT20 : 22.45 dBm (0.1758 W)			
	<eut antenna="" j301="" with=""></eut>			
99% Occupied Bandwidth	802.11b : 13.70MHz			
39 % Occupied Baildwidth	802.11g : 21.55MHz			
	802.11n HT20 : 23.30MHz			
Antenna Type / Gain	Dipole Antenna type with gain 1.10 dBi			
Type of Medulation	802.11b: DSSS (DBPSK / DQPSK / CCK)			
Type of Modulation	802.11g/n: OFDM (BPSK/QPSK/16QAM/64QAM)			

Report No.: FR692215B

Remark: This device has two kinds of WLAN antenna (J301 Antenna and J300 Antenna), and the J301 has max RF Power. Thus, all tests were performed with J301 Antenna.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.				
	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park,				
Test Site Location	Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.				
rest site Location	TEL: +886-3-327-3456				
	FAX: +886-3-328-4978				
Took Cita No		Sporton Site No.			
Test Site No.	TH02-HY	CO05-HY	03CH07-HY		

Note: The test site complies with ANSI C63.4 2014 requirement.

 SPORTON INTERNATIONAL INC.
 Page Number
 : 6 of 37

 TEL: 886-3-327-3456
 Report Issued Date
 : Dec. 09, 2016

 FAX: 886-3-328-4978
 Report Version
 : Rev. 01

FCC ID : UZ7MPACTHUBFXD

Report Template No.: BU5-FR15CWL Version 1.3

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
- ANSI C63.10-2013

Remark:

- All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UZ7MPACTHUBFXD Page Number : 7 of 37
Report Issued Date : Dec. 09, 2016
Report Version : Rev. 01

Report No.: FR692215B

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (J301 Antenna) were recorded in this report.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
	1	2412	7	2442
	2	2417	8	2447
2400 2402 F MI I-	3	2422	9	2452
2400-2483.5 MHz	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UZ7MPACTHUBFXD Page Number : 8 of 37
Report Issued Date : Dec. 09, 2016
Report Version : Rev. 01

Report No.: FR692215B

2.2 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates as below table.

Modulation	Data Rate	
802.11b	1 Mbps	
802.11g	6 Mbps	
802.11n HT20	MCS0	

	Test Cases						
AC Conducted	Mode 1:	Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter					
Emission		(PS000081A01))					


SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UZ7MPACTHUBFXD Page Number : 9 of 37
Report Issued Date : Dec. 09, 2016
Report Version : Rev. 01


Report No.: FR692215B

2.3 Connection Diagram of Test System

<WLAN Tx Mode>

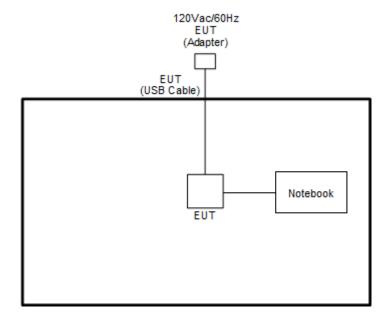

<AC Conducted Emission Mode>

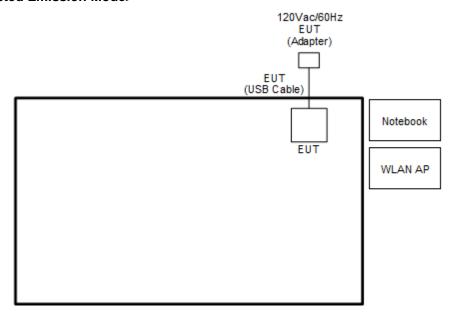

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UZ7MPACTHUBFXD Page Number : 10 of 37
Report Issued Date : Dec. 09, 2016
Report Version : Rev. 01

Report Template No.: BU5-FR15CWL Version 1.3

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
2.	Notebook	ASUS	MS2392	PD97265NG	N/A	AC I/P: Unshielded, 1.2m DC O/P: Shielded,
						1.8m
3.	Test Notebook -26	Lenovo	E335	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN function, programmed RF utility, "Tx Tool" installed in the notebook make the EUT provide functions like channel selection and power level for continuous transmitting and receiving signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$Offset(dB) = RF \ cable \ loss(dB) + attenuator \ factor(dB).$$

= 4.2 + 10 = 14.2 (dB)

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

- 1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r05.
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
- 5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
- 6. Measure and record the results in the test report.

3.1.4 Test Setup




TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UZ7MPACTHUBFXD Page Number : 12 of 37
Report Issued Date : Dec. 09, 2016
Report Version : Rev. 01

Report No.: FR692215B

3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

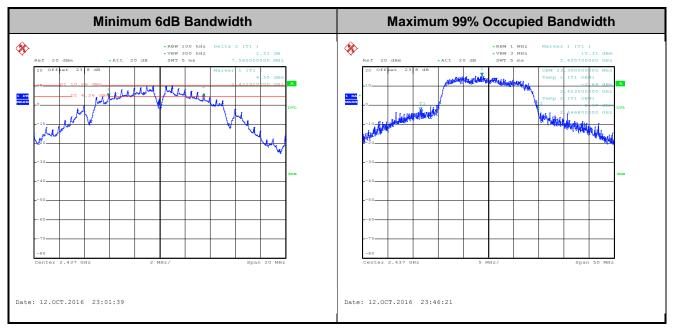

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UZ7MPACTHUBFXD Page Number : 13 of 37
Report Issued Date : Dec. 09, 2016
Report Version : Rev. 01

Report No.: FR692215B

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

- The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas.
 Guidance v03r05 section 9.1.2 PKPM1 Peak power meter method.
- 2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UZ7MPACTHUBFXD Page Number : 14 of 37
Report Issued Date : Dec. 09, 2016
Report Version : Rev. 01

Report No.: FR692215B

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

- The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz.
 Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
- 5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
- 6. Measure and record the results in the test report.

3.3.4 Test Setup




TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UZ7MPACTHUBFXD Page Number : 15 of 37
Report Issued Date : Dec. 09, 2016
Report Version : Rev. 01

Report No.: FR692215B

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

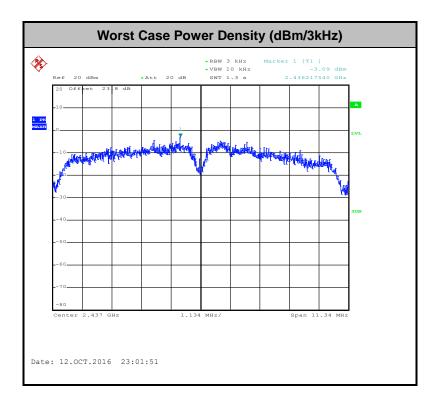

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UZ7MPACTHUBFXD Page Number : 16 of 37
Report Issued Date : Dec. 09, 2016
Report Version : Rev. 01

Report No.: FR692215B

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

- 1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
- 5. Measure and record the results in the test report.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup



SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UZ7MPACTHUBFXD Page Number : 17 of 37


Report Issued Date : Dec. 09, 2016

Report Version : Rev. 01

Report No.: FR692215B

3.4.5 Test Result of Conducted Band Edges and Spurious Emission


Test Mode :	802.11b	Temperature :	21~25
Test Band :	2.4GHz Low	Relative Humidity :	51~54
Test Channel :	01	Test Engineer :	Derek Hsu

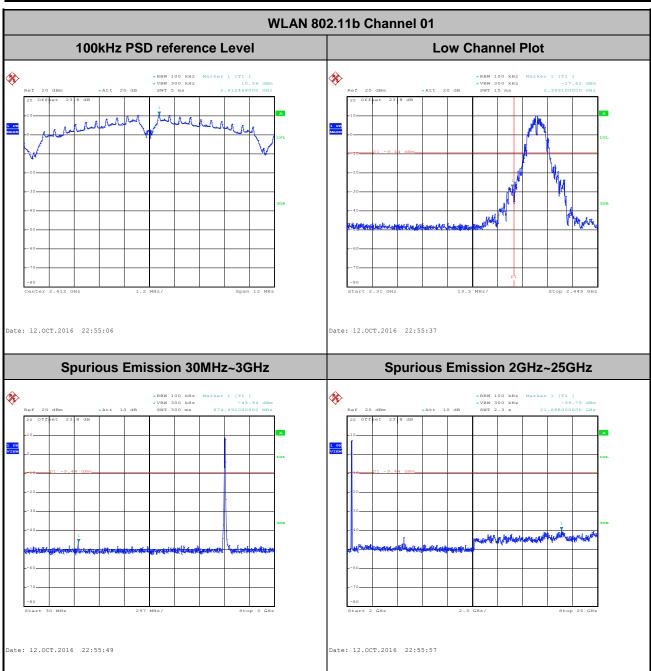

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UZ7MPACTHUBFXD Page Number : 18 of 37
Report Issued Date : Dec. 09, 2016
Report Version : Rev. 01

Report No.: FR692215B


Test Mode :	802.11b	Temperature :	21~25
Test Band :	2.4GHz Mid	Relative Humidity :	51~54
Test Channel :	06	Test Engineer :	Derek Hsu

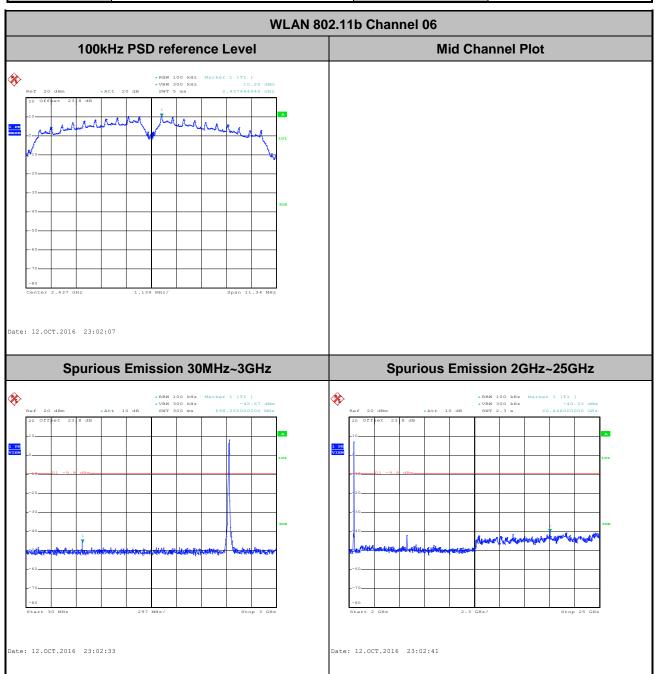

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UZ7MPACTHUBFXD Page Number : 19 of 37
Report Issued Date : Dec. 09, 2016
Report Version : Rev. 01

Report No.: FR692215B

Test Mode:802.11bTemperature:21~25Test Band:2.4GHz HighRelative Humidity:51~54Test Channel:11Test Engineer:Derek Hsu

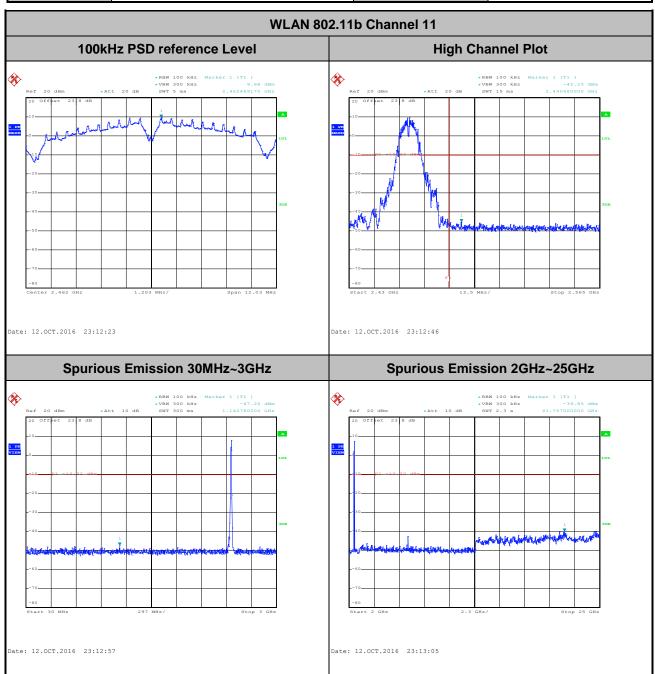


TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UZ7MPACTHUBFXD Page Number : 20 of 37
Report Issued Date : Dec. 09, 2016
Report Version : Rev. 01

Report Template No.: BU5-FR15CWL Version 1.3

 Test Mode :
 802.11g
 Temperature :
 21~25

 Test Band :
 2.4GHz Low
 Relative Humidity :
 51~54


 Test Channel :
 01
 Test Engineer :
 Derek Hsu

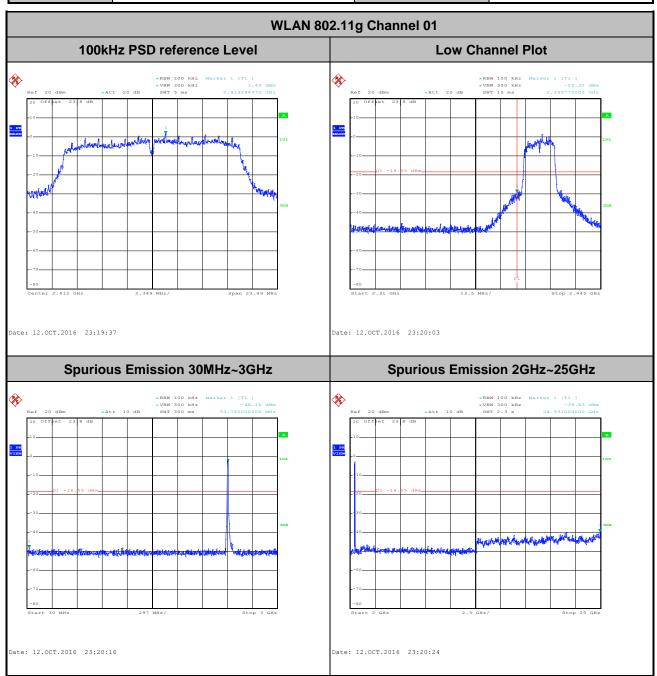

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UZ7MPACTHUBFXD Page Number : 21 of 37
Report Issued Date : Dec. 09, 2016
Report Version : Rev. 01

Report Template No.: BU5-FR15CWL Version 1.3


Test Mode :	802.11g	Temperature :	21~25
Test Band :	2.4GHz Mid	Relative Humidity :	51~54
Test Channel :	06	Test Engineer :	Derek Hsu

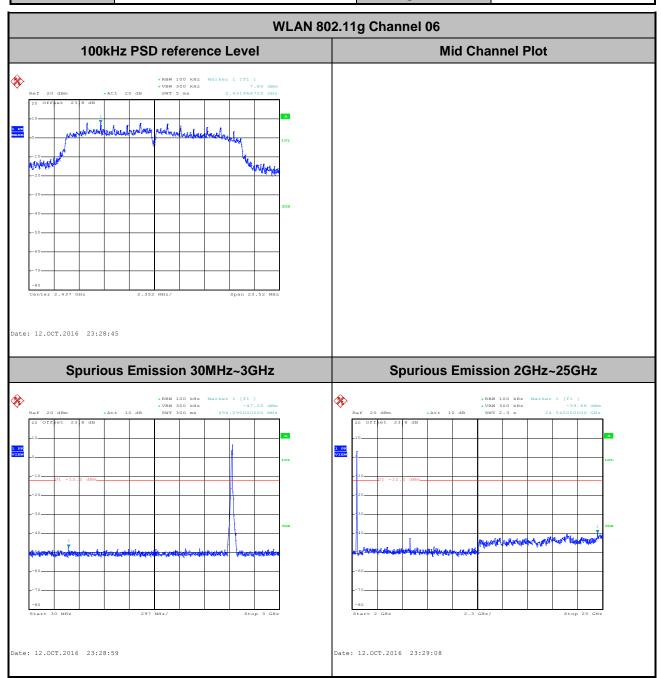

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UZ7MPACTHUBFXD Page Number : 22 of 37
Report Issued Date : Dec. 09, 2016
Report Version : Rev. 01

Report No.: FR692215B

Test Mode:802.11gTemperature:21~25Test Band:2.4GHz HighRelative Humidity:51~54Test Channel:11Test Engineer:Derek Hsu

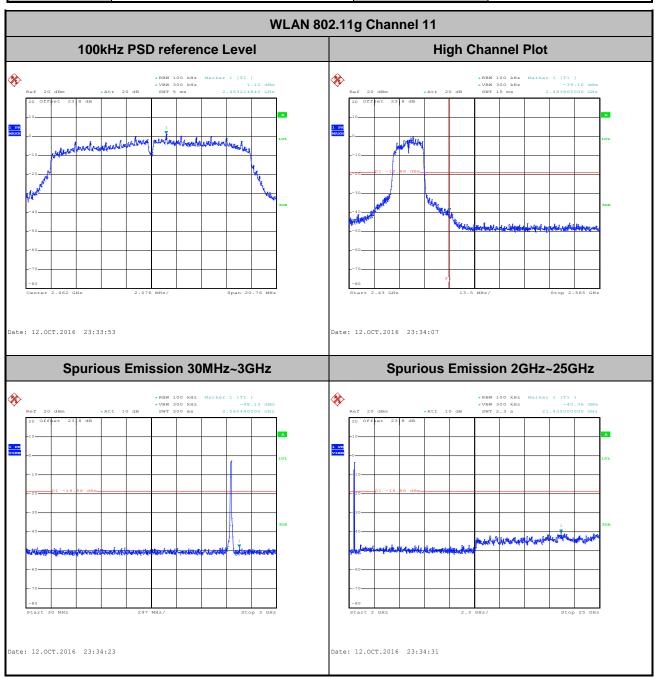


TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UZ7MPACTHUBFXD Page Number : 23 of 37
Report Issued Date : Dec. 09, 2016
Report Version : Rev. 01

Report Template No.: BU5-FR15CWL Version 1.3

 Test Mode :
 802.11n HT20
 Temperature :
 21~25

 Test Band :
 2.4GHz Low
 Relative Humidity :
 51~54


 Test Channel :
 01
 Test Engineer :
 Derek Hsu

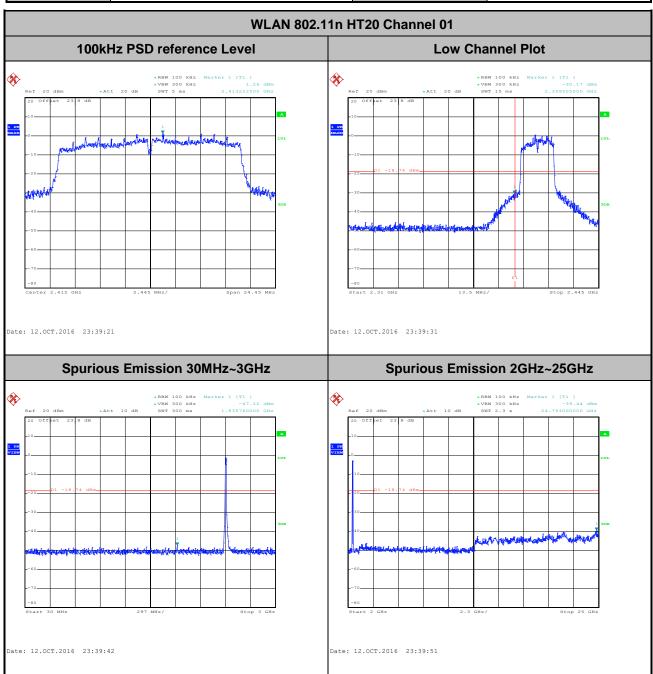

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UZ7MPACTHUBFXD Page Number : 24 of 37
Report Issued Date : Dec. 09, 2016
Report Version : Rev. 01

Report Template No.: BU5-FR15CWL Version 1.3

Test Mode :	802.11n HT20	Temperature :	21~25
Test Band :	2.4GHz Mid	Relative Humidity :	51~54
Test Channel:	06	Test Engineer :	Derek Hsu

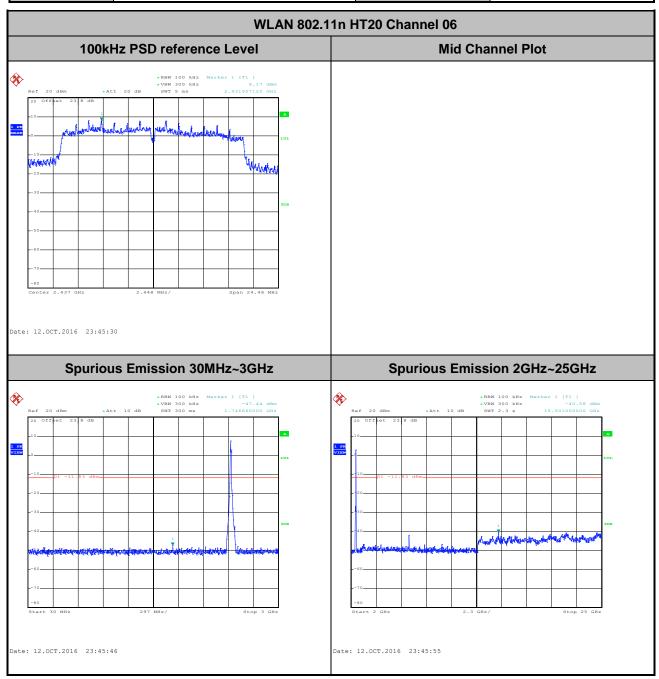


TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UZ7MPACTHUBFXD Page Number : 25 of 37
Report Issued Date : Dec. 09, 2016
Report Version : Rev. 01

Report Template No.: BU5-FR15CWL Version 1.3

 Test Mode :
 802.11n HT20
 Temperature :
 21~25

 Test Band :
 2.4GHz High
 Relative Humidity :
 51~54

 Test Channel :
 11
 Test Engineer :
 Derek Hsu

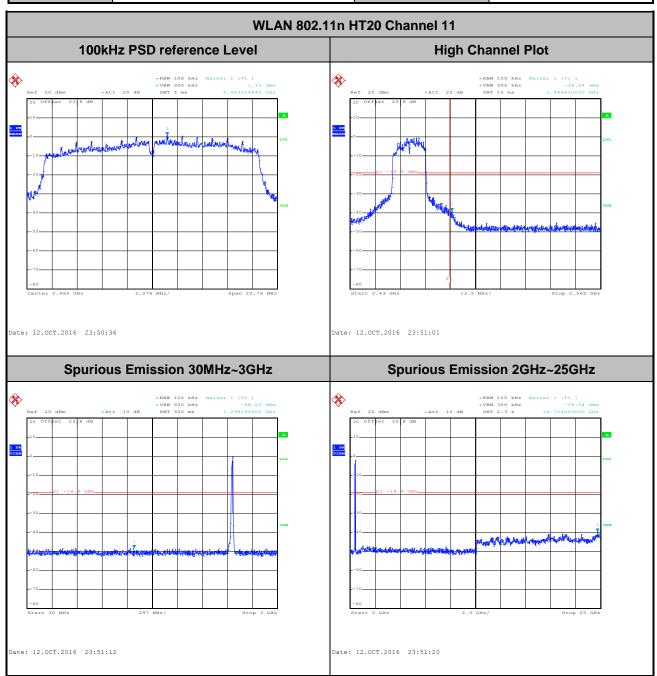

TEL: 886-3-327-3456 FAX: 886-3-328-4978

FCC ID : UZ7MPACTHUBFXD

Page Number : 26 of 37
Report Issued Date : Dec. 09, 2016
Report Version : Rev. 01

Report No.: FR692215B

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency	Field Strength	Measurement Distance
(MHz)	(microvolts/meter)	(meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UZ7MPACTHUBFXD Page Number : 27 of 37
Report Issued Date : Dec. 09, 2016
Report Version : Rev. 01

Report Template No.: BU5-FR15CWL Version 1.3

3.5.3 Test Procedures

- 1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
- 2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
- The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- 4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 5. Corrected Reading: Antenna Factor + Cable Loss + Read Level Preamp Factor = Level
- 6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
- 7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for f < 1 GHz; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \ge 1$ GHz for peak measurement. For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

SPORTON INTERNATIONAL INC. TEL: 886-3-327-3456

FAX: 886-3-328-4978 FCC ID: UZ7MPACTHUBFXD Page Number : 28 of 37
Report Issued Date : Dec. 09, 2016
Report Version : Rev. 01

Report No.: FR692215B

3.5.4 Test Setup

For radiated emissions below 30MHz




For radiated emissions from 30MHz to 1GHz



TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UZ7MPACTHUBFXD Page Number : 29 of 37
Report Issued Date : Dec. 09, 2016
Report Version : Rev. 01

Report No.: FR692215B

For radiated emissions above 1GHz

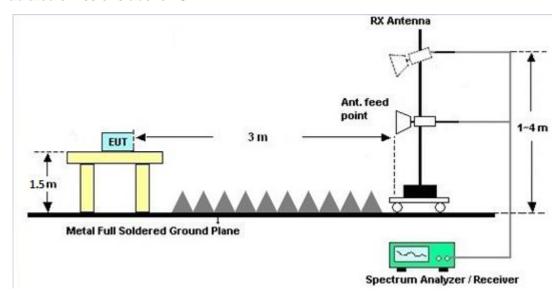

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.

TEL: 886-3-327-3456 FAX: 886-3-328-4978

FCC ID: UZ7MPACTHUBFXD

Page Number : 30 of 37
Report Issued Date : Dec. 09, 2016
Report Version : Rev. 01

Report No.: FR692215B

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Report No.: FR692215B

Frequency of Emission	Conducted Limit (dBμV)			
(MHz)	Quasi-Peak	Average		
0.15-0.5	66 to 56*	56 to 46*		
0.5-5	56	46		
5-30	60	50		

^{*}Decreases with the logarithm of the frequency.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 **Test Procedures**

- 1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
- 2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- 3. All the support units are connecting to the other LISN.
- 4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- 5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- 6. Both sides of AC line were checked for maximum conducted interference.
- 7. The frequency range from 150 kHz to 30 MHz was searched.
- 8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

TEL: 886-3-327-3456 FAX: 886-3-328-4978

Report Version : Rev. 01 FCC ID: UZ7MPACTHUBFXD Report Template No.: BU5-FR15CWL Version 1.3

Page Number

: 31 of 37

Report Issued Date: Dec. 09, 2016

3.6.4 Test Setup



AMN = Artificial mains network (LISN)

AE = Associated equipment

EUT = Equipment under test

ISN = Impedance stabilization network

SPORTON INTERNATIONAL INC.


TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UZ7MPACTHUBFXD Page Number : 32 of 37
Report Issued Date : Dec. 09, 2016
Report Version : Rev. 01

Report No.: FR692215B

3.6.5 **Test Result of AC Conducted Emission**

Test Mode :	Mode 1	Temperature :	21~24 ℃			
Test Engineer :	Arthur Hsieh	Relative Humidity :	51~53%			
Test Voltage :	120Vac / 60Hz	Phase :	Line			
Function Type :	Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter					

(PS000081A01))

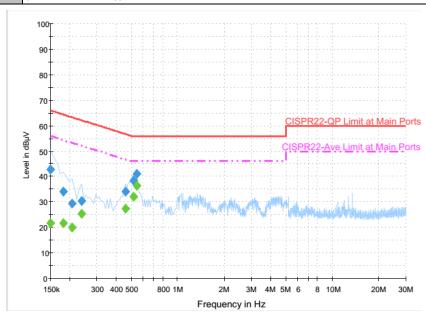

Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	42.9	Off	L1	19.6	23.1	66.0
0.182000	34.0	Off	L1	19.6	30.4	64.4
0.206000	29.5	Off	L1	19.6	33.9	63.4
0.238000	30.4	Off	L1	19.6	31.8	62.2
0.462000	34.0	Off	L1	19.6	22.7	56.7
0.518000	38.6	Off	L1	19.6	17.4	56.0
0.542000	41.0	Off	L1	19.6	15.0	56.0

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	21.8	Off	L1	19.6	34.2	56.0
0.182000	21.8	Off	L1	19.6	32.6	54.4
0.206000	20.0	Off	L1	19.6	33.4	53.4
0.238000	25.3	Off	L1	19.6	26.9	52.2
0.462000	27.3	Off	L1	19.6	19.4	46.7
0.518000	32.0	Off	L1	19.6	14.0	46.0
0.542000	36.6	Off	L1	19.6	9.4	46.0


SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UZ7MPACTHUBFXD Page Number : 33 of 37 Report Issued Date : Dec. 09, 2016 Report Version : Rev. 01

Report No.: FR692215B



Test Mode :	Mode 1	Temperature :	21~24 ℃			
Test Engineer :	Arthur Hsieh	Relative Humidity :	51~53%			
Test Voltage :	120Vac / 60Hz	Phase :	Neutral			
Function Type :	Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter					

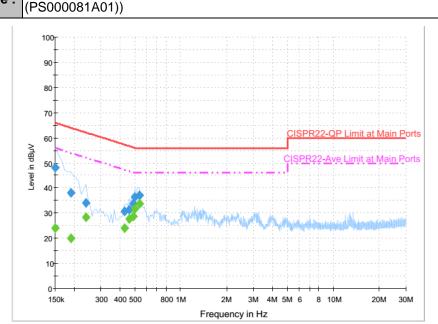

Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	48.1	Off	N	19.6	17.9	66.0
0.190000	38.0	Off	N	19.6	26.0	64.0
0.238000	34.0	Off	N	19.6	28.2	62.2
0.430000	30.7	Off	N	19.6	26.6	57.3
0.462000	31.5	Off	N	19.6	25.2	56.7
0.486000	33.7	Off	N	19.6	22.5	56.2
0.502000	36.4	Off	N	19.6	19.6	56.0
0.534000	37.1	Off	N	19.6	18.9	56.0

Final Result : Average

mai Nesait . Average								
Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)		
0.150000	24.2	Off	N	19.6	31.8	56.0		
0.190000	20.1	Off	N	19.6	33.9	54.0		
0.238000	28.5	Off	N	19.6	23.7	52.2		
0.430000	24.0	Off	N	19.6	23.3	47.3		
0.462000	27.7	Off	N	19.6	19.0	46.7		
0.486000	28.6	Off	N	19.6	17.6	46.2		
0.502000	31.8	Off	N	19.6	14.2	46.0		
0.534000	33.6	Off	N	19.6	12.4	46.0		

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UZ7MPACTHUBFXD Page Number : 34 of 37
Report Issued Date : Dec. 09, 2016
Report Version : Rev. 01

Report No.: FR692215B

3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

TEL: 886-3-327-3456 FAX: 886-3-328-4978

FCC ID: UZ7MPACTHUBFXD

Page Number : 35 of 37
Report Issued Date : Dec. 09, 2016
Report Version : Rev. 01

Report No.: FR692215B

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Anritsu	ML2495A	1036004	300MHz~40GH z	Jul. 28, 2016	Oct. 05, 2016 ~ Oct. 12, 2016	Jul. 27, 2017	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	1027253	300MHz~40GH z	Jul. 28, 2016	Oct. 05, 2016 ~ Oct. 12, 2016	Jul. 27, 2017	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 17, 2016	Oct. 05, 2016 ~ Oct. 12, 2016	Jun. 16, 2017	Conducted (TH02-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Oct. 15, 2016	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Aug. 30, 2016	Oct. 15, 2016	Aug. 29, 2017	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 02, 2015	Oct. 15, 2016	Dec. 01, 2016	Conduction (CO05-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	35419&03	30MHz to 1GHz	Jan. 13, 2016	Sep. 30, 2016 ~ Oct. 05, 2016	Jan. 12, 2017	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 19, 2016	Sep. 30, 2016 ~ Oct. 05, 2016	Aug. 18, 2017	Radiation (03CH07-HY)
EMI Test Receiver	Keysight	N9038A (MXE)	MY541300 85	20Hz ~ 8.4GHz	Nov. 04, 2015	Sep. 30, 2016 ~ Oct. 05, 2016	Nov. 03, 2016	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Sep. 02, 2015	Sep. 30, 2016 ~ Oct. 05, 2016	Sep. 01, 2017	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	1GHz ~ 18GHz	Apr. 15, 2016	Sep. 30, 2016 ~ Oct. 05, 2016	Apr. 14, 2017	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz-1GHz	Mar. 18, 2016	Sep. 30, 2016 ~ Oct. 05, 2016	Mar. 17, 2017	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A023 62	1GHz~ 26.5GHz	Oct. 19, 2015	Sep. 30, 2016 ~ Oct. 05, 2016	Oct. 18, 2016	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9010A	MY534701 18	10Hz~44GHz	Feb. 27, 2016	Sep. 30, 2016 ~ Oct. 05, 2016	Feb. 26, 2017	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Sep. 30, 2016 ~ Oct. 05, 2016	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Sep. 30, 2016 ~ Oct. 05, 2016	N/A	Radiation (03CH07-HY)
Loop Cable	Rohde & Schwarz	N/A	N/A	9KHz~30MHz	Dec. 03, 2015	Sep. 30, 2016 ~ Oct. 05, 2016	Dec. 02, 2016	Radiation (03CH07-HY)
Preamplifier	MITEQ	JS44-180040 00-33-8P	1840917	18GHz ~ 40GHz	Jun. 14, 2016	Sep. 30, 2016 ~ Oct. 05, 2016	Jun. 13, 2017	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170 584	18GHz- 40GHz	Nov. 02, 2015	Sep. 30, 2016 ~ Oct. 05, 2016	Nov. 01, 2016	Radiation (03CH07-HY)

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UZ7MPACTHUBFXD Page Number : 36 of 37
Report Issued Date : Dec. 09, 2016
Report Version : Rev. 01

Report No. : FR692215B

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence	2.7
of 95% (U = 2Uc(y))	2.1

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence	
of 95% (U = 2Uc(y))	5.7

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence	5.5
of 95% (U = 2Uc(y))	5.5

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence	5.0
of 95% (U = 2Uc(y))	5.2

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: UZ7MPACTHUBFXD Page Number : 37 of 37
Report Issued Date : Dec. 09, 2016
Report Version : Rev. 01

Report No.: FR692215B

Report Template No.: BU5-FR15CWL Version 1.3

Appendix A. Conducted Test Results

<EUT with J300 Antenna>

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978

FCC ID: UZ7MPACTHUBFXD

Page Number : A1-1 of 1 Report Issued Date: Dec. 09, 2016

Report Version : Rev. 01

Report Template No.: BU5-FR15EWL Version 1.0

Report Number : FR692215B

A1 - DTS Part

Test Engineer:	Derek Hsu	Temperature:	21~25	°C
Test Date:	2016/10/5~2016/10/12	Relative Humidity:	51~54	%

Report Number : 692215B

TEST RESULTS DATA 6dB and 99% Occupied Bandwidth

	2.4GHz Band													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail						
11b	1Mbps	J301	1	2412	13.15	8.00	0.50	Pass						
11b	1Mbps	J301	6	2437	13.70	7.56	0.50	Pass						
11b	1Mbps	J301	11	2462	12.65	8.02	0.50	Pass						
11g	6Mbps	J301	1	2412	17.20	15.66	0.50	Pass						
11g	6Mbps	J301	6	2437	21.55	15.68	0.50	Pass						
11g			11	2462	16.80	13.84	0.50	Pass						
HT20	MCS0	J301	1	2412	18.15	16.30	0.50	Pass						
HT20	MCS0	J301	6	2437	23.30	16.32	0.50	Pass						
HT20	MCS0	J301	11	2462	17.85	13.84	0.50	Pass						

Report Number : 692215B

TEST RESULTS DATA Peak Power Table

	2.4GHz Band												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail			
11b	1Mbps	1	1	2412	20.66	30.00	1.10	21.76	36.00	Pass			
11b	1Mbps	1	6	2437	20.87	30.00	1.10	21.97	36.00	Pass			
11b	1Mbps	1	11	2462	20.46	30.00	1.10	21.56	36.00	Pass			
11g	6Mbps	1	1	2412	21.14	30.00	1.10	22.24	36.00	Pass			
11g	6Mbps	1	6	2437	22.77	30.00	1.10	23.87	36.00	Pass			
11g	6Mbps	1	11	2462	20.95	30.00	1.10	22.05	36.00	Pass			
HT20	MCS0	1	1	2412	21.12	30.00	1.10	22.22	36.00	Pass			
HT20	MCS0	1	6	2437	22.77	30.00	1.10	23.87	36.00	Pass			
HT20	MCS0	1	11	2462	20.76	30.00	1.10	21.86	36.00	Pass			

Report Number: 692215B

TEST RESULTS DATA Average Power Table (Reporting Only)

	2.4GHz Band													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)								
11b	1Mbps	1	1	2412	0.00	18.26								
11b	1Mbps	1	6	2437	0.00	18.81								
11b	1Mbps	1	11	2462	0.00	17.85								
11g	6Mbps	1	1	2412	0.12	12.20								
11g	6Mbps	1	6	2437	0.12	18.89								
11g	6Mbps	1	11 2462 0.12		0.12	11.41								
HT20	MCS0 1		1	2412	0.13	12.16								
HT20	MCS0	1	6	2437	0.13	18.43								
HT20	MCS0	1	11	2462	0.13	11.28								

Report Number: 692215B

TEST RESULTS DATA Peak Power Density

-														
	2.4GHz Band													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail						
11b	1Mbps	J301	1	2412	-4.71	1.10	8.00	Pass						
11b	1Mbps	J301	6	2437	-3.09	1.10	8.00	Pass						
11b	1Mbps	J301	11	2462	-5.29	1.10	8.00	Pass						
11g	6Mbps	J301	1	2412	-13.00	1.10	8.00	Pass						
11g	6Mbps	J301	6	2437	-5.26	1.10	8.00	Pass						
11g	6Mbps	J301	11	2462	-13.20	1.10	8.00	Pass						
HT20	MCS0	J301	1	2412	-11.83	1.10	8.00	Pass						
HT20	MCS0	J301	6	2437	-6.39	1.10	8.00	Pass						
HT20	MCS0	J301	11	2462	-14.11	1.10	8.00	Pass						

<EUT with J301 Antenna>

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978

 ${\sf FCC\ ID: UZ7MPACTHUBFXD}$

Page Number : A2-1 of 1

Report Issued Date : Dec. 09, 2016 Report Version : Rev. 01

Report No. : FR692215B

Report Template No.: BU5-FR15EWL Version 1.0

Report Number : FR692215B

A1 - DTS Part

Test Engineer:	Derek Hsu	Temperature:	21~25	°C
Test Date:	2016/10/5~2016/10/12	Relative Humidity:	51~54	%

Report Number : 692215B

TEST RESULTS DATA 6dB and 99% Occupied Bandwidth

	2.4GHz Band													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail						
11b	1Mbps	J301	1	2412	13.15	8.00	0.50	Pass						
11b	1Mbps	J301	6	2437	13.70	7.56	0.50	Pass						
11b	1Mbps	J301	11	2462	12.65	8.02	0.50	Pass						
11g	6Mbps	J301	1	2412	17.20	15.66	0.50	Pass						
11g	6Mbps	J301	6	2437	21.55	15.68	0.50	Pass						
11g			11	2462	16.80	13.84	0.50	Pass						
HT20	MCS0	J301	1	2412	18.15	16.30	0.50	Pass						
HT20	MCS0	J301	6	2437	23.30	16.32	0.50	Pass						
HT20	MCS0	J301	11	2462	17.85	13.84	0.50	Pass						

Report Number : 692215B

TEST RESULTS DATA Peak Power Table

	2.4GHz Band												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail			
11b	1Mbps	1	1	2412	20.66	30.00	1.10	21.76	36.00	Pass			
11b	1Mbps	1	6	2437	20.87	30.00	1.10	21.97	36.00	Pass			
11b	1Mbps	1	11	2462	20.46	30.00	1.10	21.56	36.00	Pass			
11g	6Mbps	1	1	2412	21.14	30.00	1.10	22.24	36.00	Pass			
11g	6Mbps	1	6	2437	22.77	30.00	1.10	23.87	36.00	Pass			
11g	6Mbps	1	11	2462	20.95	30.00	1.10	22.05	36.00	Pass			
HT20	MCS0	1	1	2412	21.12	30.00	1.10	22.22	36.00	Pass			
HT20	MCS0	1	6	2437	22.77	30.00	1.10	23.87	36.00	Pass			
HT20	MCS0	1	11	2462	20.76	30.00	1.10	21.86	36.00	Pass			

Report Number: 692215B

TEST RESULTS DATA Average Power Table (Reporting Only)

			2	.4GHz E	Band	
	1	1				
Mod.	1Mbps 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1			Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.00	18.26
11b	1Mbps	1	6	2437	0.00	18.81
11b	1Mbps	1	11	2462	0.00	17.85
11g	6Mbps	1	1	2412	0.12	12.20
11g	6Mbps	1	6	2437	0.12	18.89
11g	6Mbps	1	11	2462	0.12	11.41
HT20	MCS0	1	1	2412	0.13	12.16
HT20	MCS0	1	6	2437	0.13	18.43
HT20	MCS0	1	11	2462	0.13	11.28

Report Number: 692215B

TEST RESULTS DATA Peak Power Density

-								
				2	.4GHz Band	i		
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	J301	1	2412	-4.71	1.10	8.00	Pass
11b	1Mbps	J301	6	2437	-3.09	1.10	8.00	Pass
11b	1Mbps	J301	11	2462	-5.29	1.10	8.00	Pass
11g	6Mbps	J301	1	2412	-13.00	1.10	8.00	Pass
11g	6Mbps	J301	6	2437	-5.26	1.10	8.00	Pass
11g	6Mbps	J301	11	2462	-13.20	1.10	8.00	Pass
HT20	MCS0	J301	1	2412	-11.83	1.10	8.00	Pass
HT20	MCS0	J301	6	2437	-6.39	1.10	8.00	Pass
HT20	MCS0	J301	11	2462	-14.11	1.10	8.00	Pass

Appendix B. Radiated Spurious Emission

Test Engineer :	Jesse Wang, James Chiu and Ken Wu	Temperature :	21~24°C
		Relative Humidity :	50~54%

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
		2387.595	56.87	-17.13	74	51.71	32.19	7.31	34.34	134	292	Р	Н
		2388.225	48.42	-5.58	54	43.26	32.19	7.31	34.34	134	292	Α	Н
	*	2412	108.33	-	-	103.08	32.24	7.31	34.3	134	292	Р	Н
	*	2412	105.46	-	-	100.21	32.24	7.31	34.3	134	292	Α	Н
802.11b													Н
CH 01													Н
2412MHz		2386.02	55.38	-18.62	74	50.22	32.19	7.31	34.34	362	213	Р	V
2412111112		2388.225	45.46	-8.54	54	40.3	32.19	7.31	34.34	362	213	Α	V
	*	2412	102.78	-	-	97.53	32.24	7.31	34.3	362	213	Р	V
	*	2412	99.95	-	-	94.7	32.24	7.31	34.3	362	213	Α	V
													V
													٧
		2384.48	55.65	-18.35	74	50.54	32.14	7.31	34.34	108	293	Р	Н
		2389.1	45.08	-8.92	54	39.91	32.19	7.31	34.33	108	293	Α	Н
	*	2437	109.75	-	-	104.3	32.34	7.36	34.25	108	293	Р	Н
	*	2437	106.5	-	-	101.05	32.34	7.36	34.25	108	293	Α	Н
000 441		2484.53	56.36	-17.64	74	50.69	32.45	7.4	34.18	108	293	Р	Н
802.11b CH 06		2484.6	46.45	-7.55	54	40.78	32.45	7.4	34.18	108	293	Α	Н
2437MHz		2363.06	55.43	-18.57	74	50.48	32.09	7.24	34.38	281	266	Р	/
2431 WITZ		2388.82	44.65	-9.35	54	39.48	32.19	7.31	34.33	281	266	Α	٧
	*	2437	103.03	-	-	97.58	32.34	7.36	34.25	281	266	Р	٧
	*	2437	99.73	-	-	94.28	32.34	7.36	34.25	281	266	А	٧
		2499.79	56.76	-17.24	74	51.01	32.5	7.4	34.15	281	266	Р	V
		2484.6	45.28	-8.72	54	39.61	32.45	7.4	34.18	281	266	Α	V

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 Page Number

: B1 of B12



WIFI Peak Pol. Note Frequency Level Over Limit Read Antenna Cable Preamp Ant Table Ant. Limit Line Level **Factor** Loss Factor Pos Pos Avg. (dB) (dB \(V/m \) (dB_µV) (MHz) (dBµV/m) (dB/m) (dB) (dB) (deg) (P/A) (H/V) (cm) * 2462 113.63 108.04 32.4 34.21 102 286 Н 7.4 * 2462 110.29 104.7 32.4 7.4 34.21 102 286 Α Н --Ρ 2483.52 59.53 -14.47 74 53.86 32.45 7.4 34.18 102 286 Н 2483.52 52.52 -1.48 54 46.85 32.45 7.4 34.18 102 286 Α Η Η 802.11b Н **CH 11** 2462 107.38 101.79 32.4 7.4 34.21 239 266 Р ٧ 2462MHz 2462 104.39 98.8 32.4 7.4 34.21 239 266 Α ٧ ٧ 2485.44 56.33 -17.67 74 50.65 32.45 7.4 34.17 239 266 239 266 Α ٧ 2483.52 47.2 -6.8 54 41.53 32.45 7.4 34.18 ٧ ٧ No other spurious found. Remark

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978

^{2.} All results are PASS against Peak and Average limit line.

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
		4824	53.02	-20.98	74	66.74	33.64	11.68	59.04	100	282	Р	Н
		4824	50.96	-3.04	54	64.68	33.64	11.68	59.04	100	282	Α	Н
802.11b													Н
CH 01													Н
2412MHz		4824	52.16	-21.84	74	65.88	33.64	11.68	59.04	110	9	Р	V
24 I ZIVI NZ		4824	49.85	-4.15	54	63.57	33.64	11.68	59.04	110	9	Α	V
													V
													V
		4874	50.6	-23.4	74	64.47	33.54	11.53	58.94	100	0	Р	Н
		7311	42.91	-31.09	74	52.34	34.69	13.81	57.93	100	0	Р	Н
802.11b													Н
CH 06		4074	40.05	05.05	74	00.50	00.54	44.50	50.04	400	0	_	Н
2437MHz		4874	48.65	-25.35	74	62.52	33.54	11.53	58.94	100	0	Р	V
		7311	42.59	-31.41	74	52.02	34.69	13.81	57.93	100	0	Р	V
													V
		4924	49.32	-24.68	74	63.35	33.44	11.37	58.84	100	0	Р	Н
		7386	40.3	-33.7	74	49.94	34.47	13.95	58.06	100	0	Р	Н
000 441													Н
802.11b													Н
CH 11		4924	47.07	-26.93	74	61.1	33.44	11.37	58.84	100	0	Р	V
2462MHz		7386	41.38	-32.62	74	51.02	34.47	13.95	58.06	100	0	Р	V
													V
													V

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 Page Number

: B3 of B12

2.4GHz 2400~2483.5MHz WIFI 802.11g (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBµV/m)	(dB)	(dBµV/m)		(dB/m)	(dB)	(dB)	(cm)		(P/A)	
		2390	66.18	-7.82	74	61.01	32.19	7.31	34.33	107	293	Р	Н
		2390	52.93	-1.07	54	47.76	32.19	7.31	34.33	107	293	Α	Н
	*	2412	107.62	-	-	102.37	32.24	7.31	34.3	107	293	Р	Н
	*	2412	99.87	-	-	94.62	32.24	7.31	34.3	107	293	Α	Н
802.11g													Н
CH 01													Н
2412MHz		2386.965	58.18	-15.82	74	53.02	32.19	7.31	34.34	362	213	Р	V
2412111112		2390	47.61	-6.39	54	42.44	32.19	7.31	34.33	362	213	Α	V
	*	2412	101.5	-	-	96.25	32.24	7.31	34.3	362	213	Р	V
	*	2412	93.74	-	-	88.49	32.24	7.31	34.3	362	213	Α	٧
													٧
													٧
		2389.94	58.38	-15.62	74	53.21	32.19	7.31	34.33	105	293	Р	Н
		2389.94	48.58	-5.42	54	43.41	32.19	7.31	34.33	105	293	Α	Н
	*	2437	111.16	-	-	105.71	32.34	7.36	34.25	105	293	Р	Н
	*	2437	103.4	-	-	97.95	32.34	7.36	34.25	105	293	Α	Н
000 44 =		2483.76	63.54	-10.46	74	57.87	32.45	7.4	34.18	105	293	Р	Н
802.11g CH 06		2483.69	52.37	-1.63	54	46.7	32.45	7.4	34.18	105	293	Α	Н
2437MHz		2330.16	55.94	-18.06	74	51.21	31.98	7.18	34.43	221	269	Р	V
2701 WII IZ		2389.8	46.09	-7.91	54	40.92	32.19	7.31	34.33	221	269	Α	٧
	*	2437	103.88	-	-	98.43	32.34	7.36	34.25	221	269	Р	٧
	*	2437	96.53	-	-	91.08	32.34	7.36	34.25	221	269	Α	٧
		2484.46	58.21	-15.79	74	52.54	32.45	7.4	34.18	221	269	Р	V
		2483.5	48.77	-5.23	54	43.1	32.45	7.4	34.18	221	269	Α	V

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 Page Number

: B4 of B12



WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dB _µ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
	*	2462	109.12	-	-	103.53	32.4	7.4	34.21	102	284	Р	Н
	*	2462	102.11	-	-	96.52	32.4	7.4	34.21	102	284	Α	Н
		2484.08	65.77	-8.23	74	60.1	32.45	7.4	34.18	102	284	Р	Н
		2483.52	52.85	-1.15	54	47.18	32.45	7.4	34.18	102	284	Α	Н
													Н
802.11g													Н
CH 11 2462MHz	*	2462	103.79	-	-	98.2	32.4	7.4	34.21	240	267	Р	V
2402IVII IZ	*	2462	96.33	-	-	90.74	32.4	7.4	34.21	240	267	Α	V
		2483.64	58.84	-15.16	74	53.17	32.45	7.4	34.18	240	267	Р	V
		2483.56	47.49	-6.51	54	41.82	32.45	7.4	34.18	240	267	Α	V
													V
													V
	1. No	other spurious	s found										
Remark		results are PA		.									

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978

2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant. 1		(MHz)	(dBµV/m)	Limit (dB)	Line (dBµV/m)	Level (dBµV)	Factor (dB/m)	Loss (dB)	Factor (dB)	Pos (cm)	Pos (deg)	Avg. (P/A)	(H/V)
•		4824	44.36	-29.64	74	58.08	33.64	11.68	59.04	100	0	P	H
													Н
													Н
802.11g													Н
CH 01		4824	43.11	-30.89	74	56.83	33.64	11.68	59.04	100	0	Р	V
2412MHz													V
													V
													٧
		4874	46.4	-27.6	74	60.27	33.54	11.53	58.94	100	0	Р	Н
		7311	42.87	-31.13	74	52.3	34.69	13.81	57.93	100	0	Р	Н
													Н
802.11g													Н
CH 06 2437MHz		4874	43.58	-30.42	74	57.45	33.54	11.53	58.94	100	0	Р	V
2437 WII 12		7311	41.28	-32.72	74	50.71	34.69	13.81	57.93	100	0	Р	V
													V
													V
		4924	40.09	-33.91	74	54.12	33.44	11.37	58.84	100	0	Р	Н
		7386	39.19	-34.81	74	48.83	34.47	13.95	58.06	100	0	Р	Н
802.11g													Н
CH 11													Н
2462MHz		4924	40.47	-33.53	74	54.5	33.44	11.37	58.84	100	0	Р	V
		7386	40.16	-33.84	74	49.8	34.47	13.95	58.06	100	0	Р	V
													V
													V

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 Page Number

: B6 of B12

2.4GHz 2400~2483.5MHz WIFI 802.11n HT20 (Band Edge @ 3m)

Report No. : FR692215B

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.		, .		Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dB _µ V)	(dB/m)	(dB)	(dB)	(cm)		(P/A)	
		2389.905	66.09	-7.91	74	60.92	32.19	7.31	34.33	107	293	•	Н
		2390	52.68	-1.32	54	47.51	32.19	7.31	34.33	107	293	Α	Н
	*	2412	106.56	-	-	101.31	32.24	7.31	34.3	107	293	Р	Н
	*	2412	99.41	-	-	94.16	32.24	7.31	34.3	107	293	Α	Н
802.11n													Н
HT20													Н
CH 01		2389.59	58.29	-15.71	74	53.12	32.19	7.31	34.33	362	213	Р	V
2412MHz		2390	47.72	-6.28	54	42.55	32.19	7.31	34.33	362	213	Α	V
	*	2412	100.6	-	-	95.35	32.24	7.31	34.3	362	213	Р	V
	*	2412	93.27	-	-	88.02	32.24	7.31	34.3	362	213	Α	V
													V
													V
		2389.66	60.67	-13.33	74	55.5	32.19	7.31	34.33	105	293	Р	Н
		2389.66	48.28	-5.72	54	43.11	32.19	7.31	34.33	105	293	Α	Н
	*	2437	110.27	-	-	104.82	32.34	7.36	34.25	105	293	Р	Н
	*	2437	102.67	-	-	97.22	32.34	7.36	34.25	105	293	Α	Н
802.11n		2483.76	63.03	-10.97	74	57.36	32.45	7.4	34.18	105	293	Р	Н
HT20		2483.55	52.12	-1.88	54	46.45	32.45	7.4	34.18	105	293	Α	Н
CH 06		2382.24	55.13	-18.87	74	50.03	32.14	7.31	34.35	221	269	Р	V
2437MHz		2389.66	45.77	-8.23	54	40.6	32.19	7.31	34.33	221	269	Α	V
	*	2437	102.92	-	-	97.47	32.34	7.36	34.25	221	269	Р	V
	*	2437	95.58	-	-	90.13	32.34	7.36	34.25	221	269	Α	V
		2491.11	55.95	-18.05	74	50.21	32.5	7.4	34.16	221	269	Р	V
		2484.25	47.58	-6.42	54	41.91	32.45	7.4	34.18	221	269	Α	V

SPORTON INTERNATIONAL INC. Page Number : B7 of B12



WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant. 1		(MHz)	(dBµV/m)	Limit (dB)	Line (dBµV/m)	Level (dBµV)	Factor (dB/m)	Loss (dB)	Factor (dB)	Pos (cm)		Avg. (P/A)	
	*	2462	108.87	-	-	103.28	32.4	7.4	34.21	102	284	Р	Н
	*	2462	101.56	-	-	95.97	32.4	7.4	34.21	102	284	Α	Н
		2483.6	68.1	-5.9	74	62.43	32.45	7.4	34.18	102	284	Р	Н
		2483.52	52.93	-1.07	54	47.26	32.45	7.4	34.18	102	284	Р	Н
802.11n													Н
HT20													Н
CH 11	*	2464	102.76	-	-	97.17	32.4	7.4	34.21	240	267	Р	V
2462MHz	*	2462	95.45	-	-	89.86	32.4	7.4	34.21	240	267	Α	V
		2483.52	61.75	-12.25	74	56.08	32.45	7.4	34.18	240	267	Р	V
		2483.6	47.68	-6.32	54	42.01	32.45	7.4	34.18	240	267	Α	V
													V
													V

Remark

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978

^{1.} No other spurious found.

^{2.} All results are PASS against Peak and Average limit line.

2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V
		4824	43.19	-30.81	74	56.91	33.64	11.68	59.04	100	0	Р	Н
													Н
802.11n													Н
HT20													Н
CH 01		4824	44.56	-29.44	74	58.28	33.64	11.68	59.04	100	0	Р	V
2412MHz													V
													V
													V
		4874	49.09	-24.91	74	62.96	33.54	11.53	58.94	100	0	Р	Н
		7311	40.44	-33.56	74	49.87	34.69	13.81	57.93	100	0	Р	Н
802.11n													Н
HT20													Н
CH 06		4874	45.04	-28.96	74	58.91	33.54	11.53	58.94	100	0	Р	V
2437MHz		7311	40.62	-33.38	74	50.05	34.69	13.81	57.93	100	0	Р	V
													V
													V
		4924	40.09	-33.91	74	54.12	33.44	11.37	58.84	100	0	Р	Н
		7386	39.84	-34.16	74	49.48	34.47	13.95	58.06	100	0	Р	Н
802.11n													Н
HT20													Н
CH 11		4924	41.41	-32.59	74	55.44	33.44	11.37	58.84	100	0	Р	V
2462MHz		7386	39.6	-34.4	74	49.24	34.47	13.95	58.06	100	0	Р	V
													V
													V

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 Page Number

: B9 of B12

Emission below 1GHz

2.4GHz WIFI 802.11n HT20 (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V
		55.38	31.29	-8.71	40	47.87	13.55	1.07	31.2	-	-	Р	Н
		96.15	35.08	-8.42	43.5	49.02	15.88	1.28	31.1	-	-	Р	Н
		299.73	38.6	-7.4	46	47.48	19.8	2.32	31	100	51	Р	Н
		400.8	35.78	-10.22	46	41.6	22.41	2.67	30.9	-	-	Р	Н
		660.5	37.28	-8.72	46	38.1	26.01	3.65	30.48	-	-	Р	Н
		853.7	33	-13	46	30.57	28.72	4.1	30.39	-	-	Р	Н
													Н
													Н
													Н
													Н
2.4GHz													Н
802.11n													Н
HT20		31.89	31.62	-8.38	40	37.01	24.92	1.07	31.38	100	197	Р	V
LF		210.36	20.57	-22.93	43.5	33.86	16.3	1.87	31.46	-	-	Р	V
		260.31	21.96	-24.04	46	30.99	20	2.32	31.35	-	-	Р	V
		757.1	31.2	-14.8	46	30.75	27.28	3.82	30.65	-	-	Р	V
		909.7	33.13	-12.87	46	30.31	29.24	4.12	30.54	-	-	Р	V
		957.3	33.62	-12.38	46	29.86	30.22	4.07	30.53	-	-	Р	V
													V
													V
													V
													V
													V
													V

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 Page Number

: B10 of B12

Note symbol

Report No. : FR692215B

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not				
	exceed the level of the fundamental frequency.				
!	Test result is over limit line.				
P/A	Peak or Average				
H/V	Horizontal or Vertical				

SPORTON INTERNATIONAL INC. Page Number : B11 of B12

A calculation example for radiated spurious emission is shown as below:

Report No.: FR692215B

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	Р	Н
CH 01												-	
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	Α	Н

1. Level($dB\mu V/m$) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBµV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dB μ V/m) – Limit Line(dB μ V/m)

For Peak Limit @ 2390MHz:

- 1. Level(dBµV/m)
- = Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBµV) Preamp Factor(dB)
- $= 32.22(dB/m) + 4.58(dB) + 54.51(dB\mu V) 35.86 (dB)$
- $= 55.45 (dB\mu V/m)$
- 2. Over Limit(dB)
- = Level(dBµV/m) Limit Line(dBµV/m)
- $= 55.45(dB\mu V/m) 74(dB\mu V/m)$
- = -18.55(dB)

For Average Limit @ 2390MHz:

- 1. Level(dBµV/m)
- = Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBµV) Preamp Factor(dB)
- $= 32.22(dB/m) + 4.58(dB) + 42.6(dB\mu V) 35.86 (dB)$
- $= 43.54 (dB\mu V/m)$
- 2. Over Limit(dB)
- = Level($dB\mu V/m$) Limit Line($dB\mu V/m$)
- $= 43.54(dB\mu V/m) 54(dB\mu V/m)$
- = -10.46(dB)

Both peak and average measured complies with the limit line, so test result is "PASS".

SPORTON INTERNATIONAL INC. Page Number : B12 of B12

Appendix C. Radiated Spurious Emission Plots

Test Engineer :	Jesse Wang, James Chiu and Ken Wu	Temperature :	21~24°C	
		Relative Humidity :	50~54%	

Report No.: FR692215B


Note symbol

-L	Low channel location
-R	High channel location


SPORTON INTERNATIONAL INC. Page Number : C1 of C35


2.4GHz 2400~2483.5MHz


WIFI 802.11b (Band Edge @ 3m)

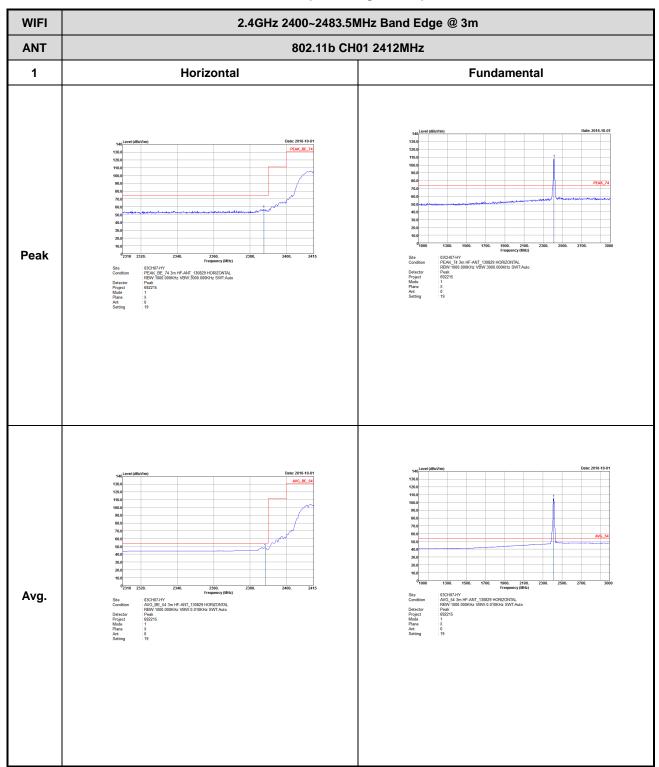

TEL: 886-3-327-3456 FAX: 886-3-328-4978

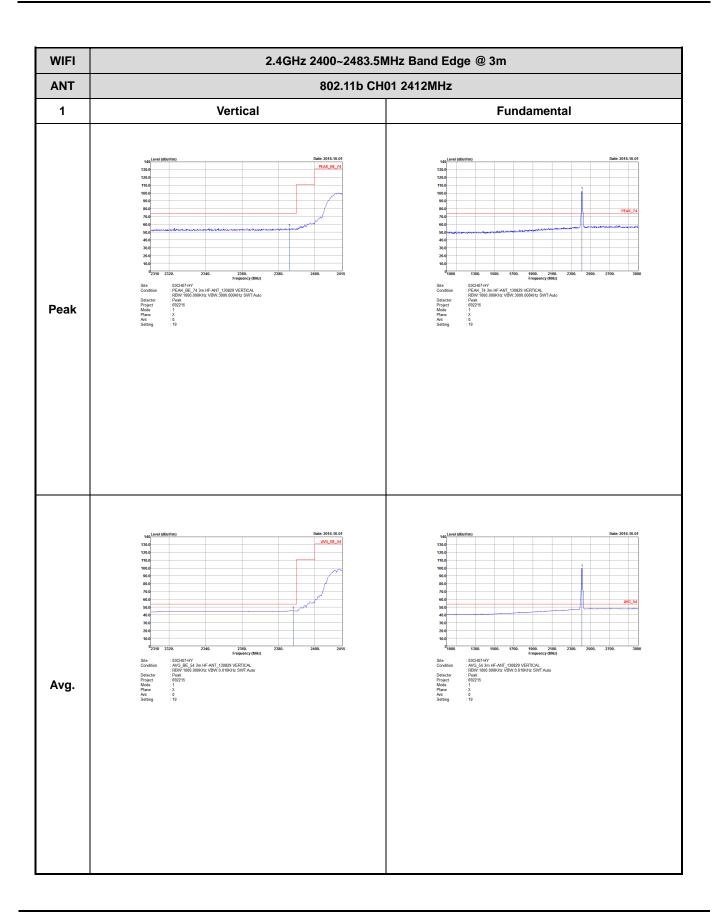


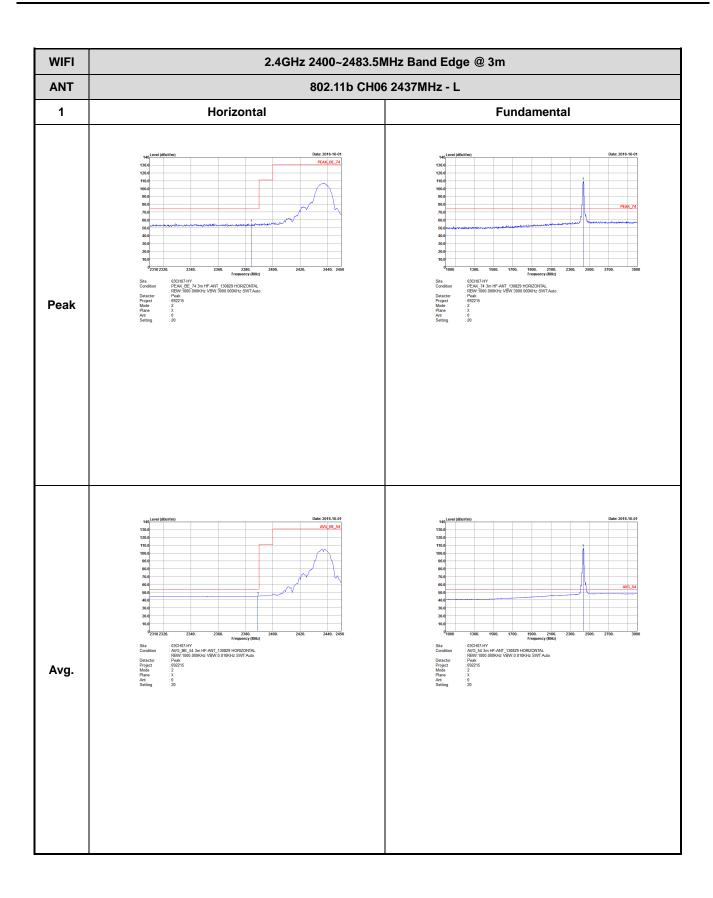

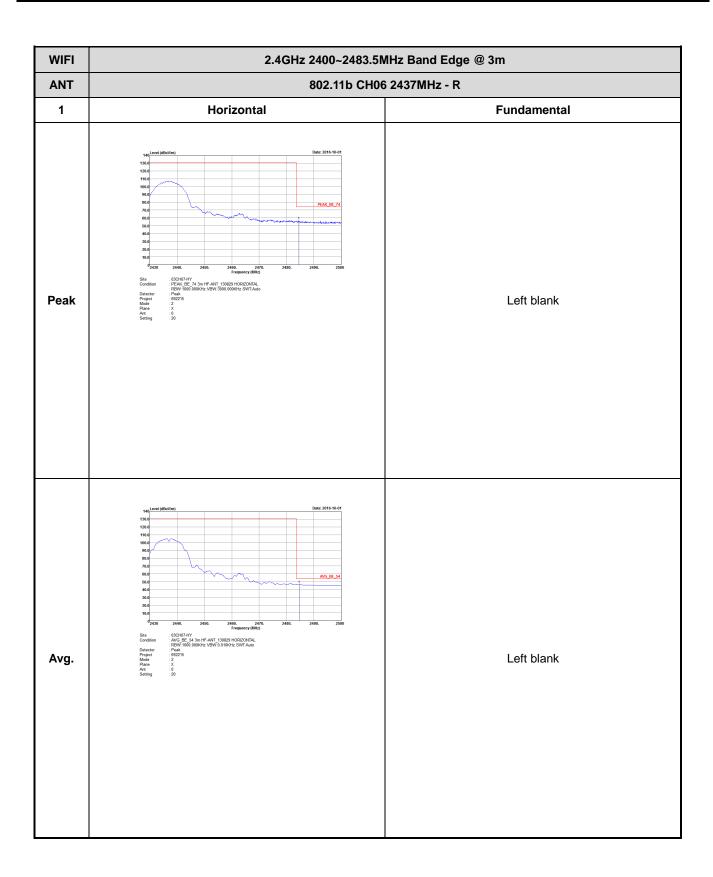



WIFI 2.4GHz 2400~2483.5MHz Band Edge @ 3m ANT 802.11b CH06 2437MHz - L 1 Vertical **Fundamental** 03CH07-HY
PEAK_BE_74 3m HF-ANT_130829 VERTICAL
RBW-1000 000KHz VBW-3000 000KHz SWT-Auto
Peak
692215
2 Peak : 03CH07-HY : AVG_BE_54 3m HF-ANT_130829 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto : Peak : 692215 : 2 Avg.

TEL: 886-3-327-3456 FAX: 886-3-328-4978

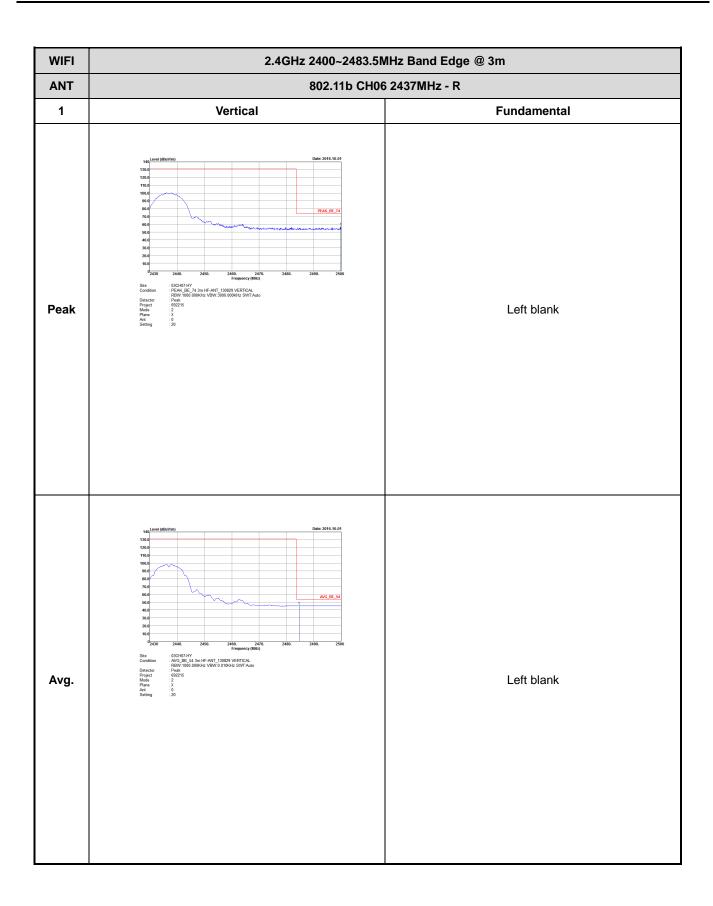




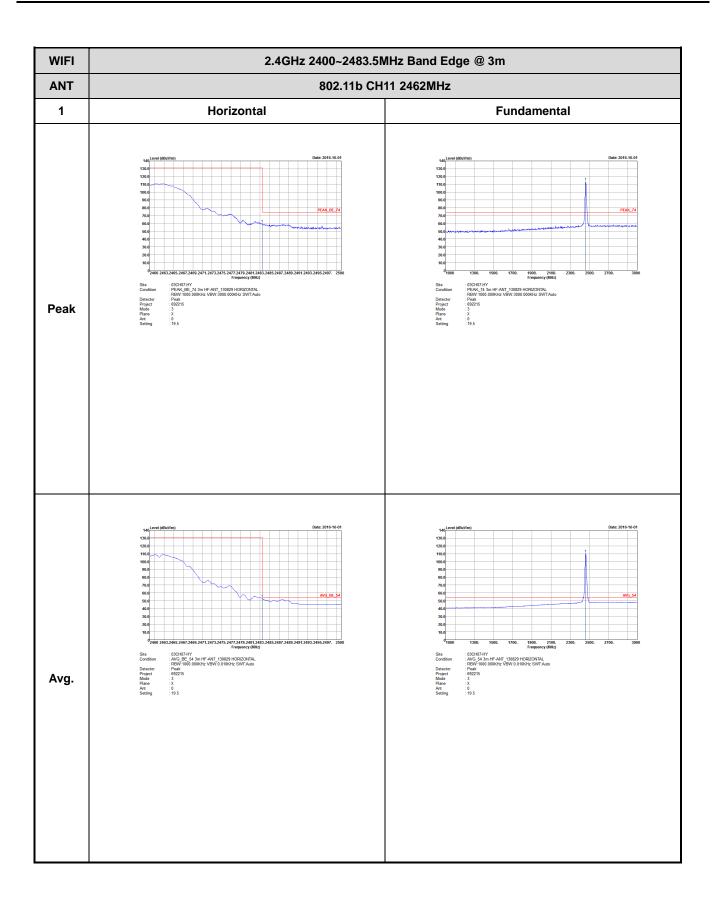

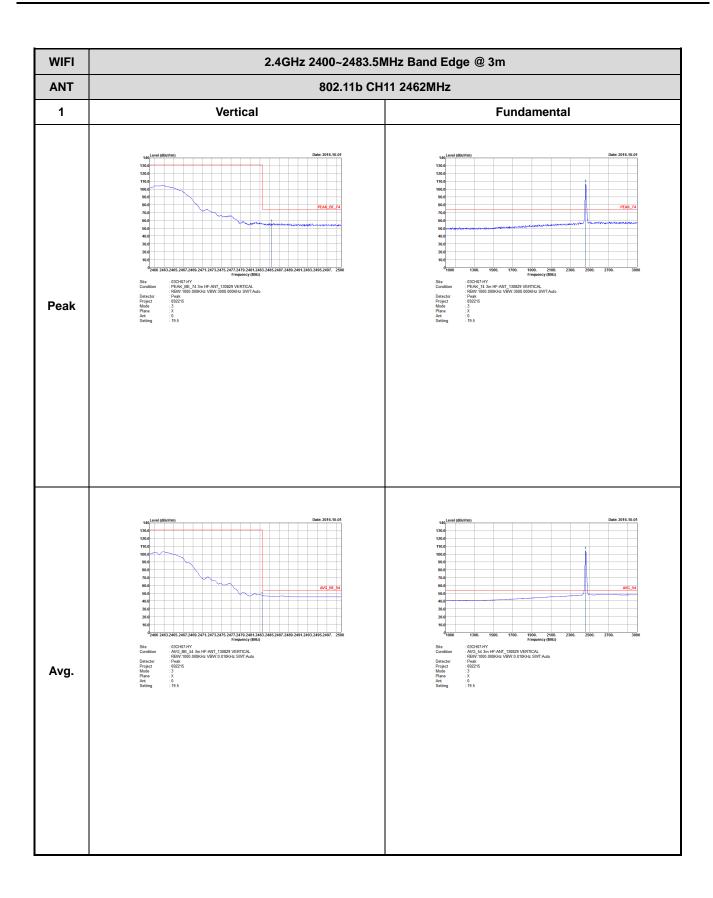



2.4GHz 2400~2483.5MHz


WIFI 802.11g (Band Edge @ 3m)

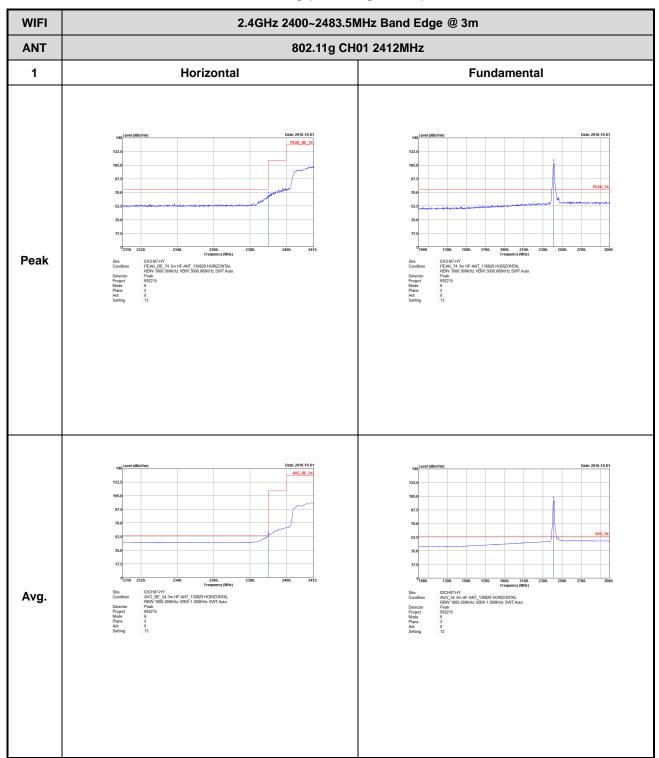



TEL: 886-3-327-3456 FAX: 886-3-328-4978

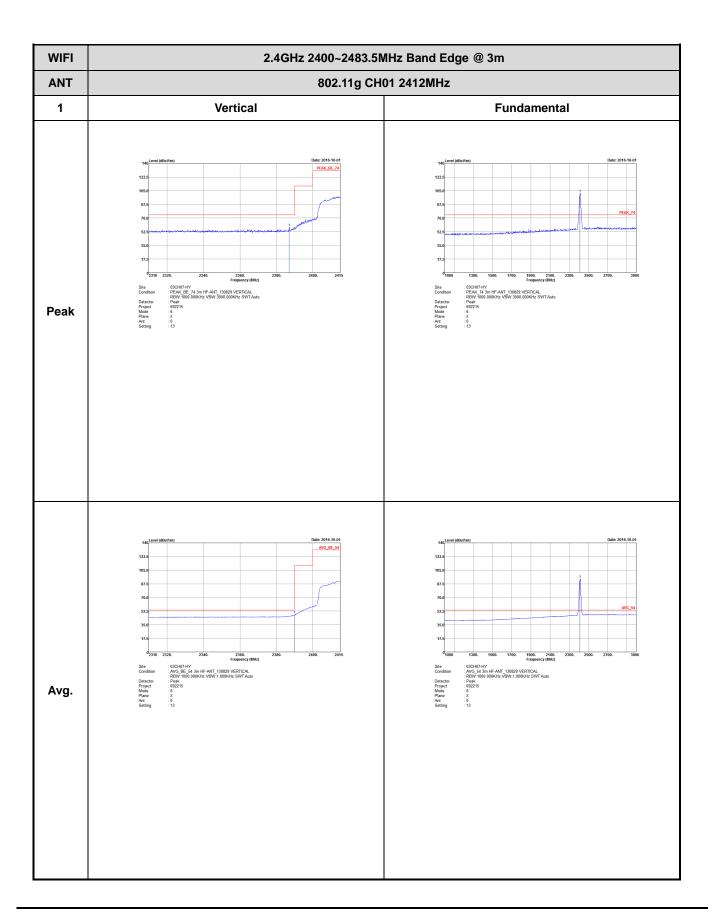

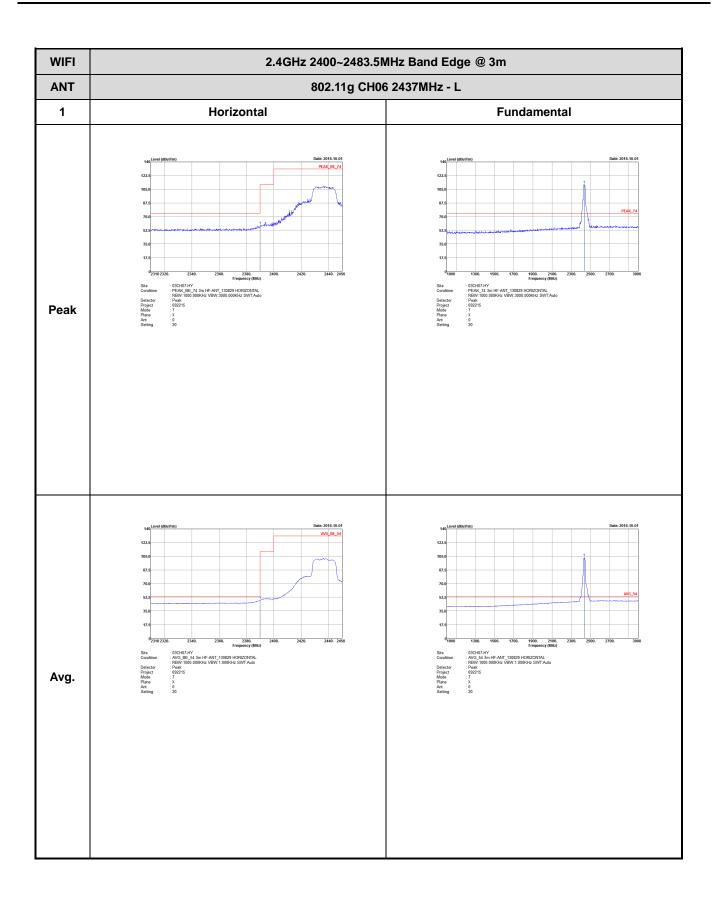


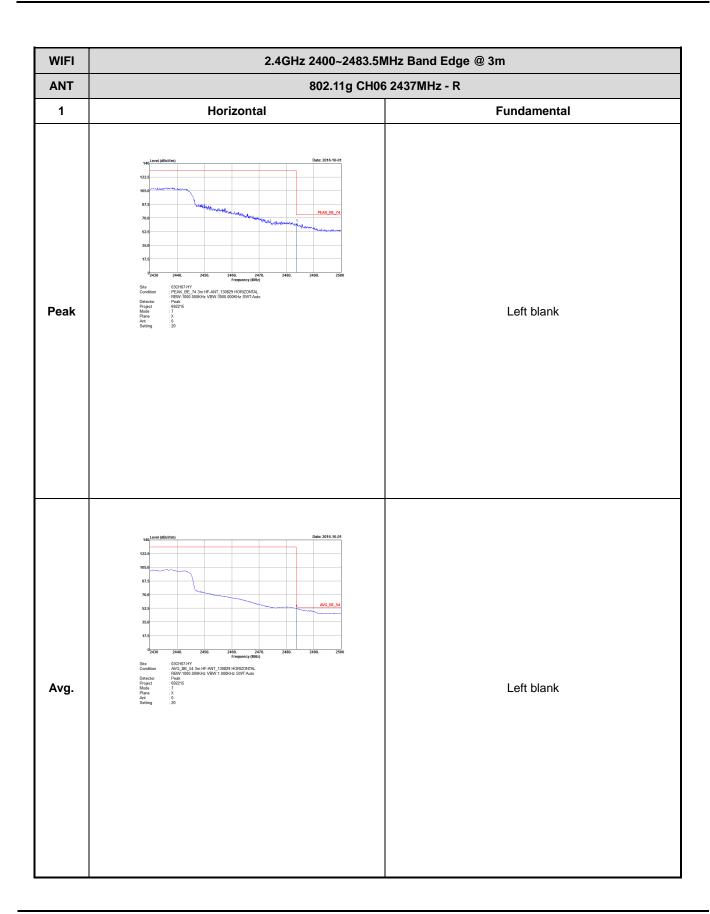


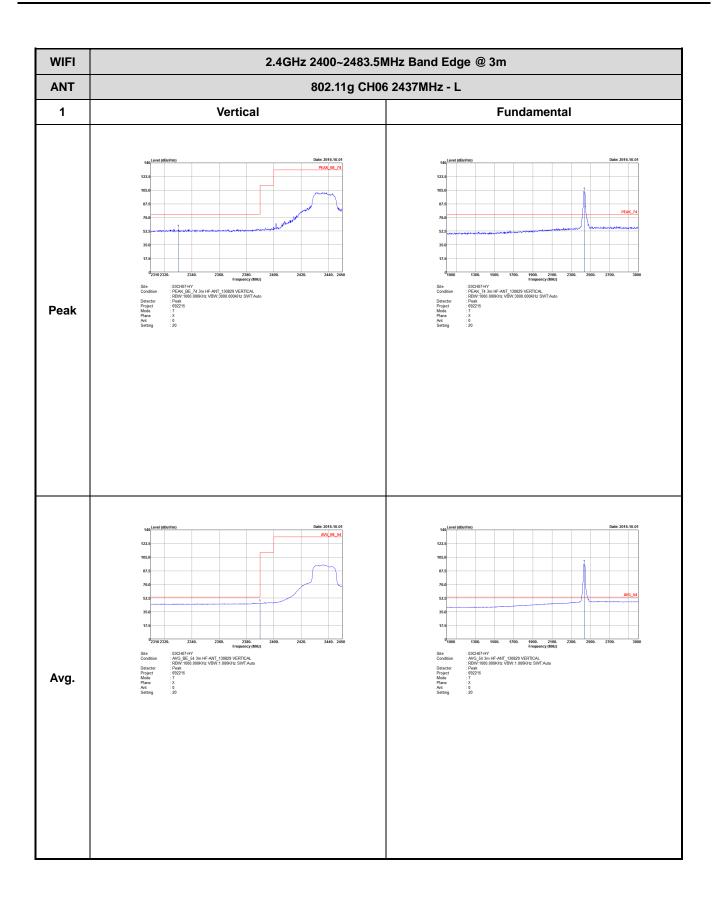

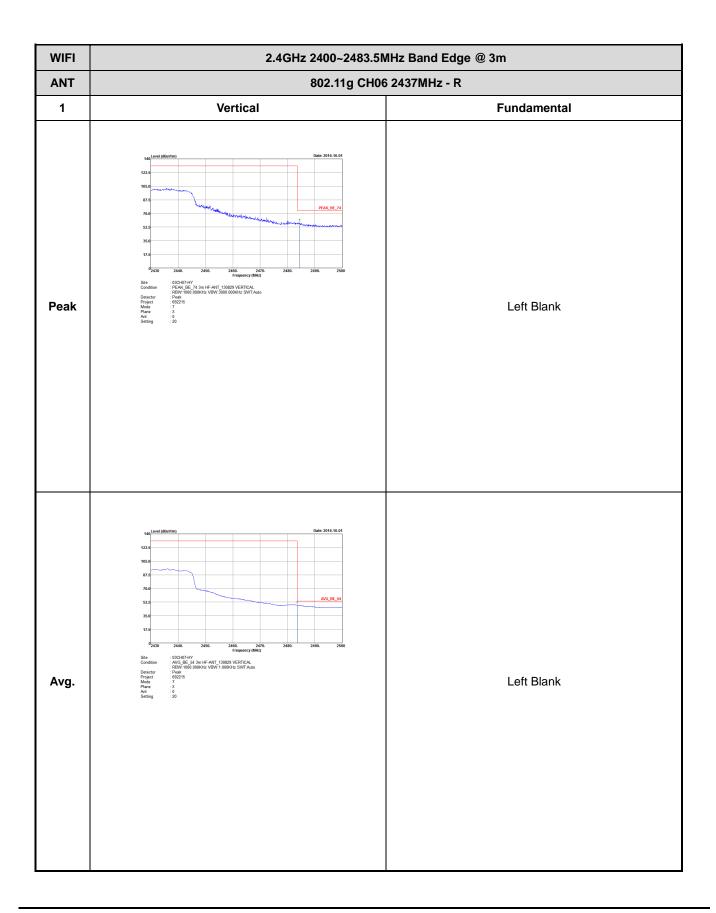




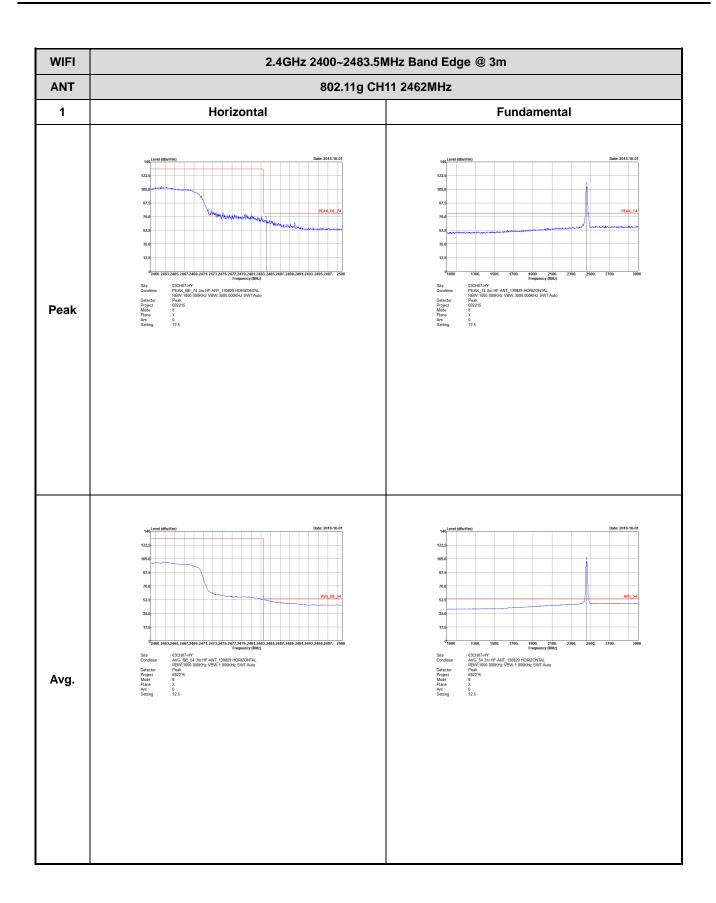

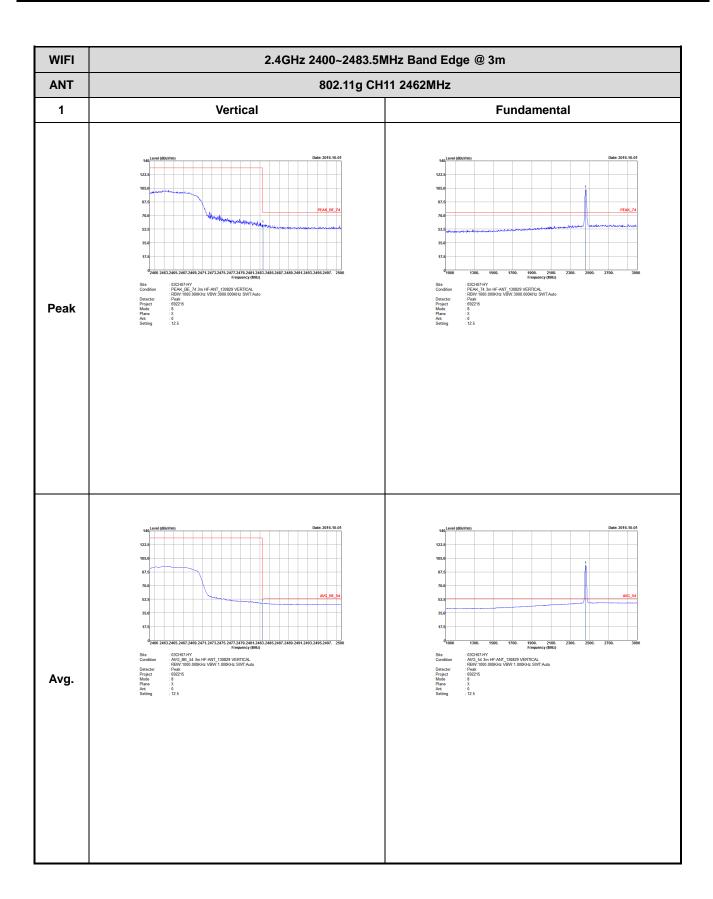

2.4GHz 2400~2483.5MHz


WIFI 802.11n HT20 (Band Edge @ 3m)

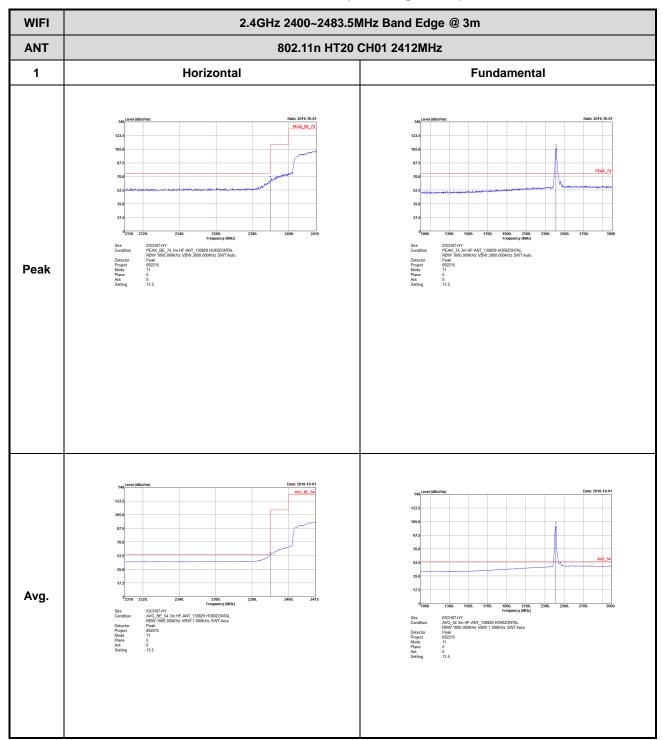



TEL: 886-3-327-3456 FAX: 886-3-328-4978


WIFI 2.4GHz 2400~2483.5MHz Band Edge @ 3m ANT 802.11n HT20 CH01 2412MHz 1 Vertical **Fundamental** Peak ... 2364.
2364.7:HY
: 0.3CH07:HY
: AVG BE 54 3m HF-ANT 130829 VERTICAL
: ESBY-1000 00041z V9W1, 0.00041z SWT-Auto
: 592215
: 11
: X
: 0
: 13.5 Avg.

TEL: 886-3-327-3456 FAX: 886-3-328-4978

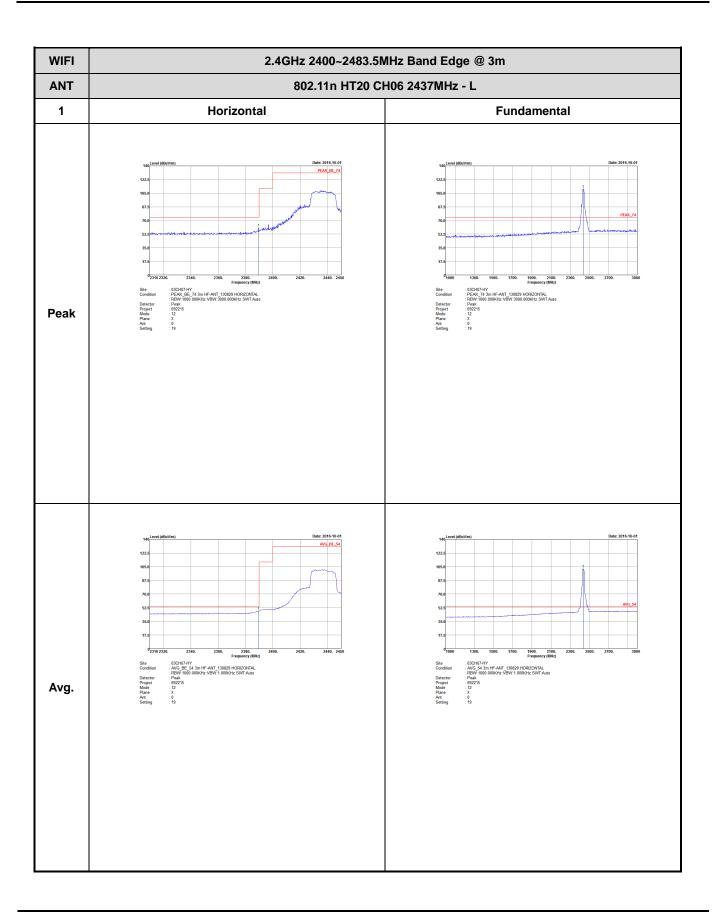


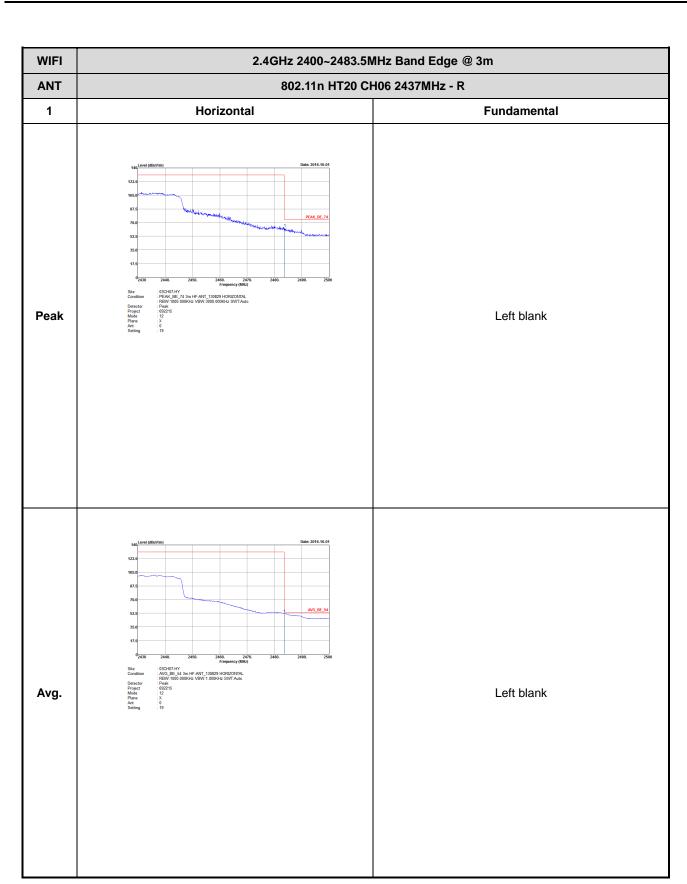

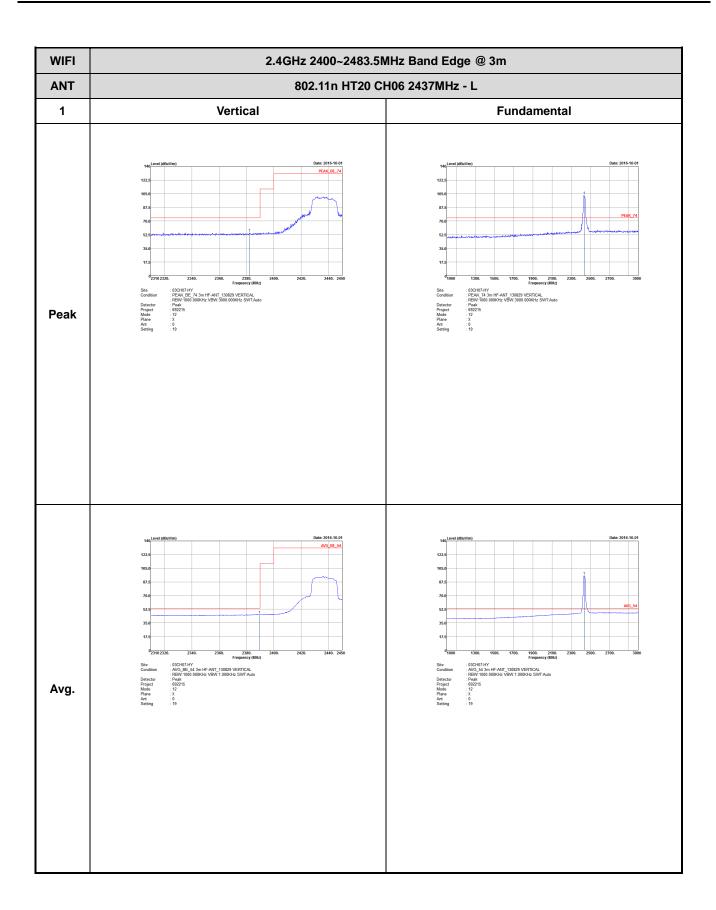


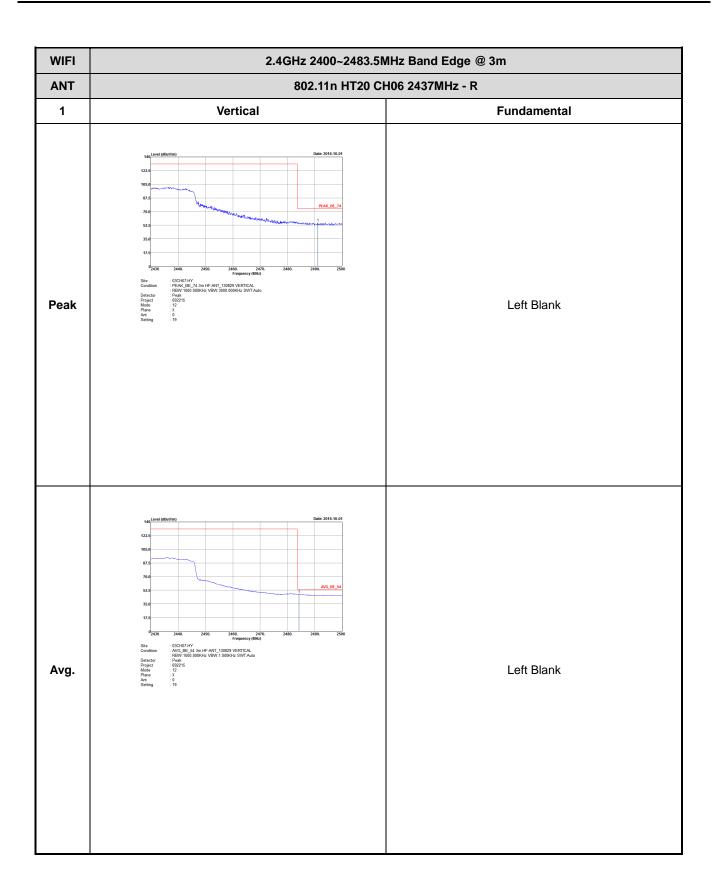

FCC RF Test Report

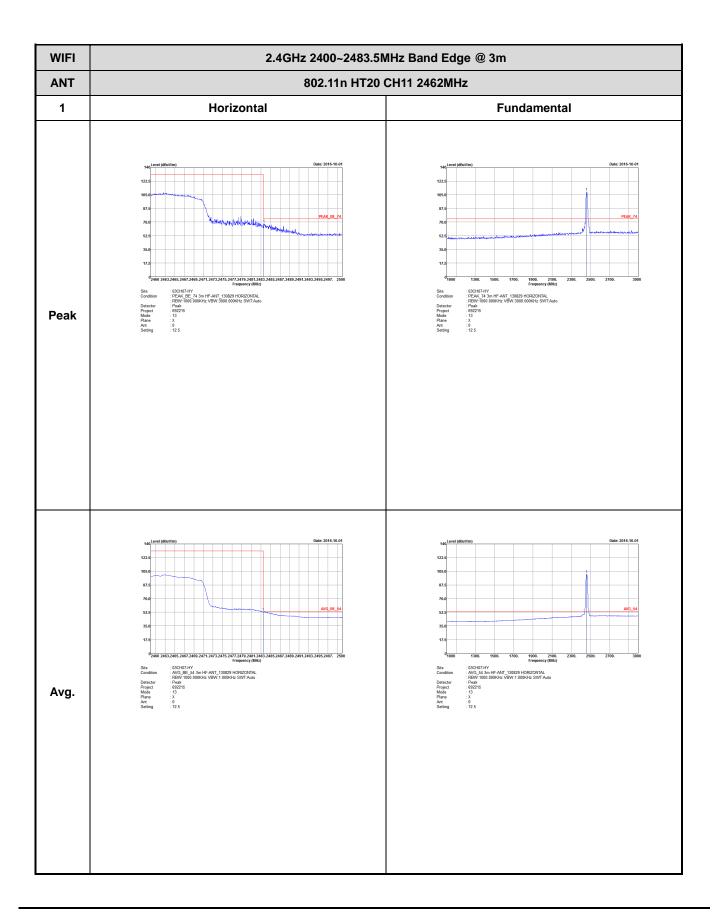


TEL: 886-3-327-3456 FAX: 886-3-328-4978

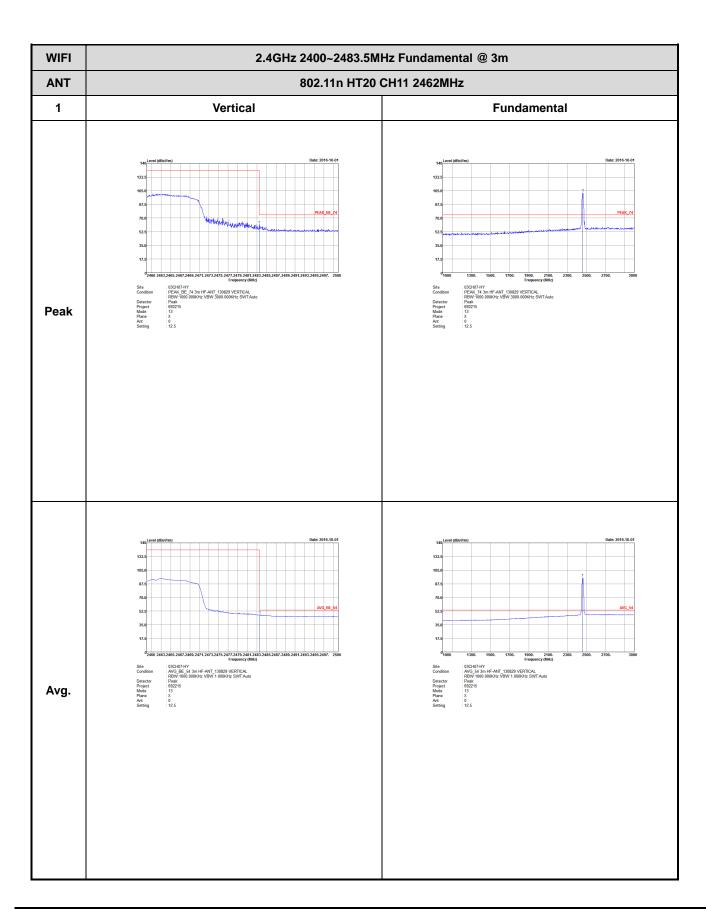



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

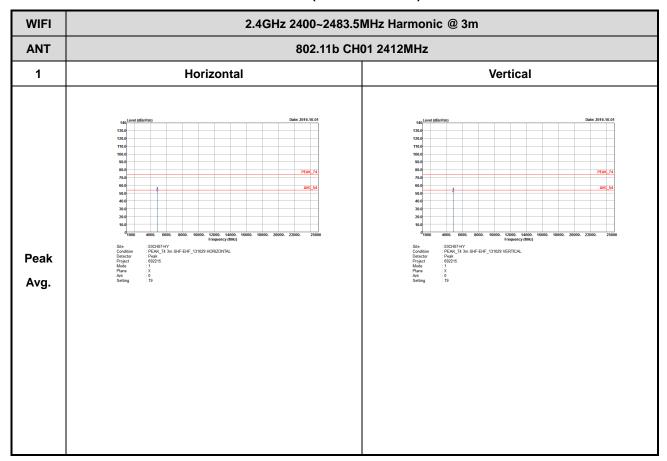


TEL: 886-3-327-3456 FAX: 886-3-328-4978

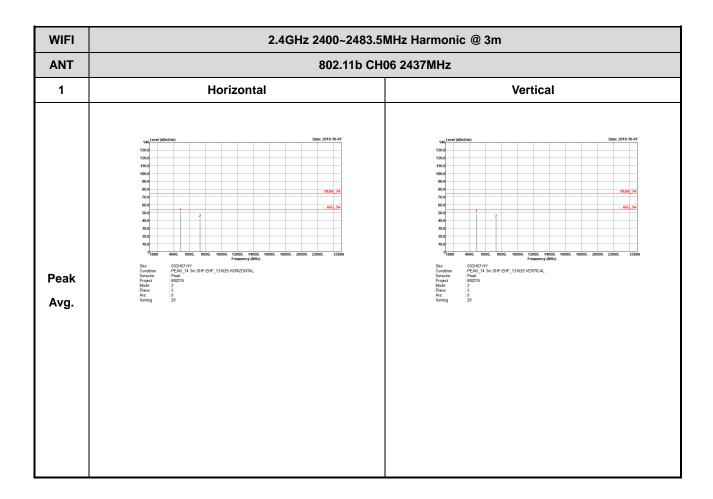

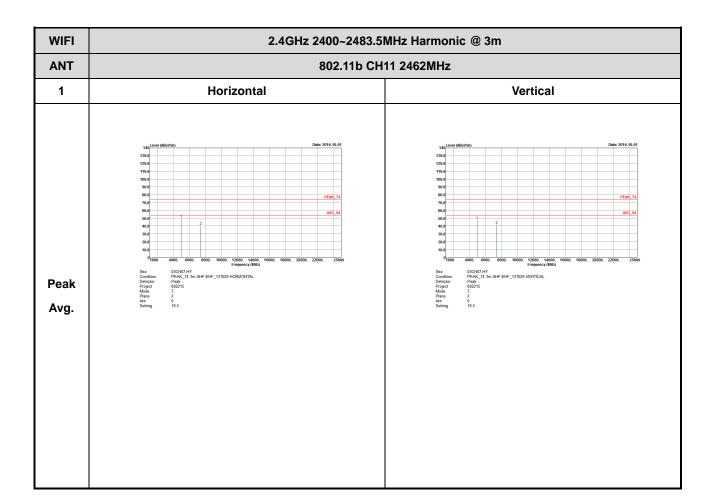



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

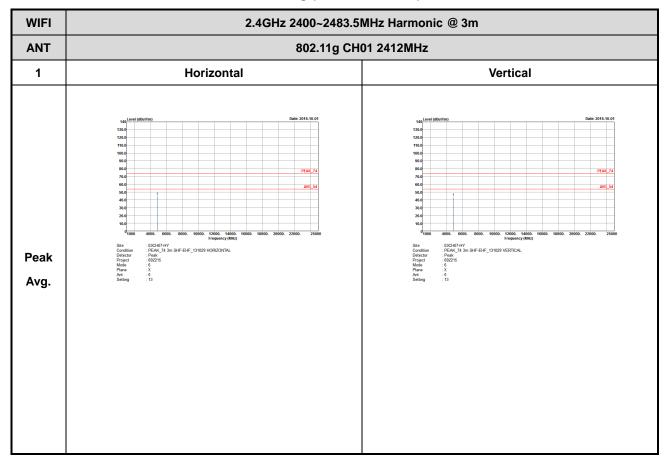


TEL: 886-3-327-3456 FAX: 886-3-328-4978

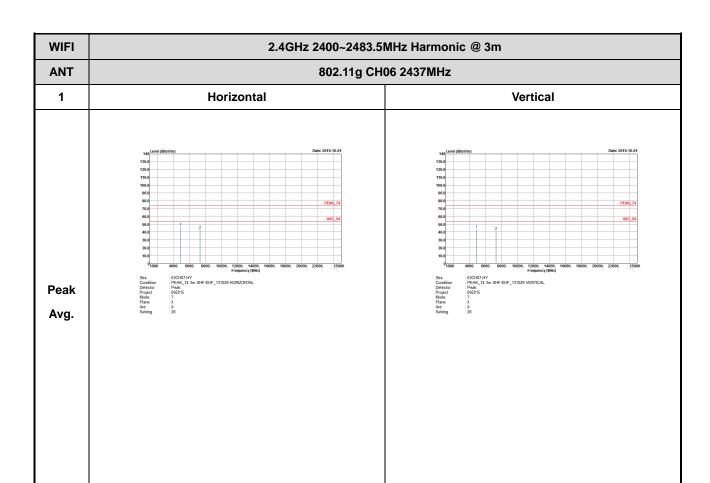

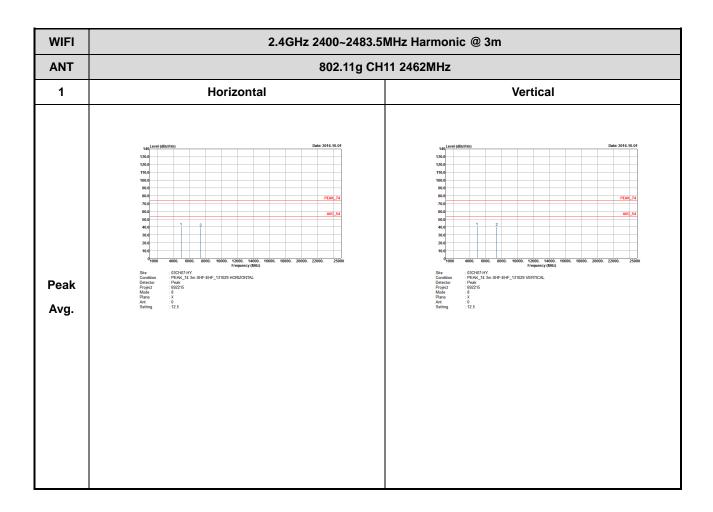



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

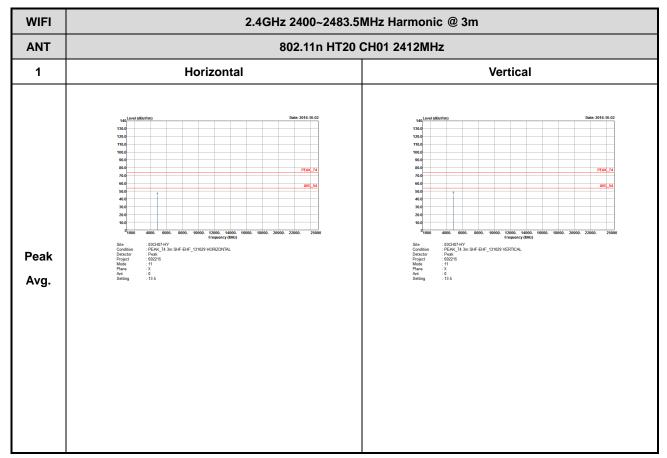


TEL: 886-3-327-3456 FAX: 886-3-328-4978

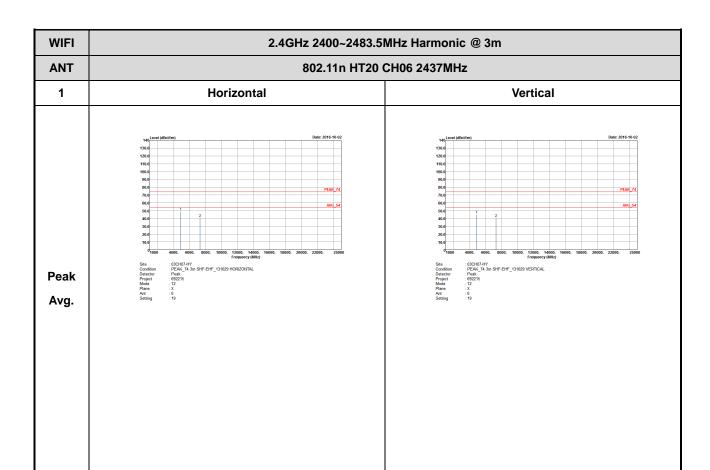

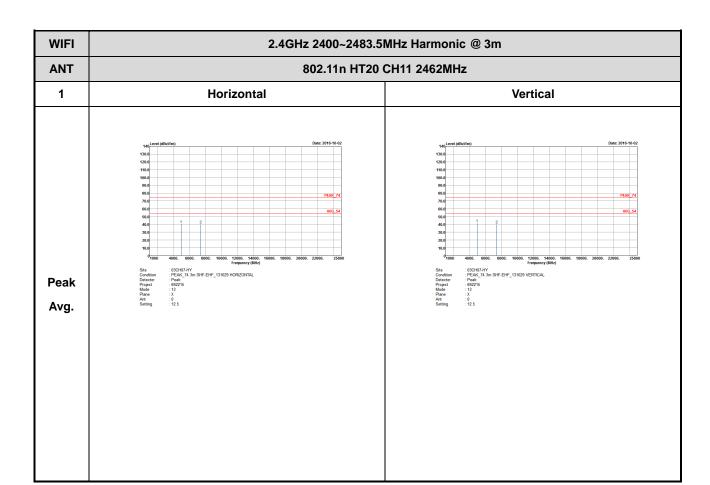

Emission below 1GHz

2.4GHz WIFI 802.11n HT20 (LF)

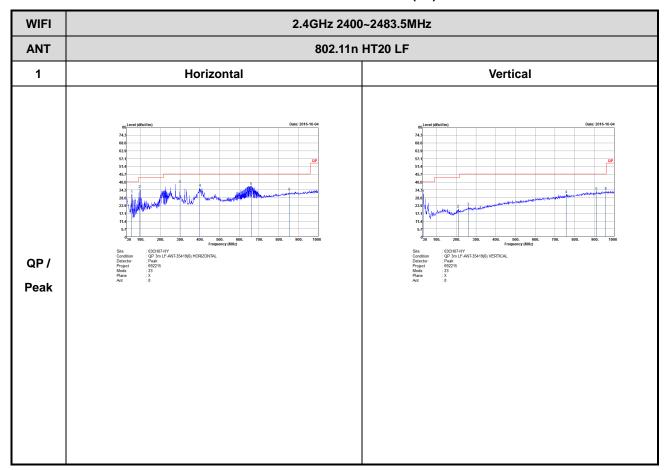


TEL: 886-3-327-3456 FAX: 886-3-328-4978




Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
802.11b	100.000	-	-	10Hz
802.11g	97.22	1400.00	0.71	1kHz
802.11n HT20	97.02	1300.00	0.77	1kHz

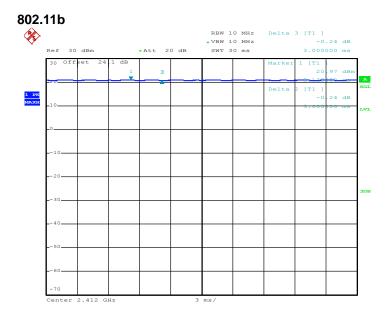


Date: 6.0CT.2016 00:36:37




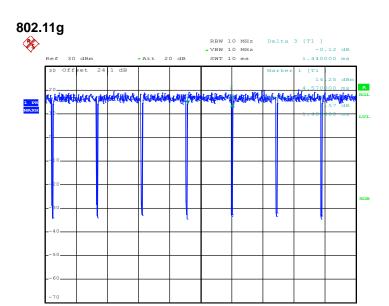

Date: 6.OCT.2016 00:40:24

802.11n HT20





Date: 6.OCT.2016 00:43:56

TEL: 886-3-327-3456 FAX: 886-3-328-4978