

Annex to Report

Dosimetric Assessment of the Portable Device Kyocera F42 (FCC ID: V65OASY1)

According to the FCC Requirements

November 24, 2011

IMST GmbH

Carl-Friedrich-Gauß-Str. 2
D-47475 Kamp-Lintfort

Customer

KYOCERA Corporation
2-1-1 Kagahara, Tsuzuki-ku,
224-8502 Yokohama-shi
Japan

The test results only relate to the items tested. This report shall not be reproduced except in full without the written approval of the testing laboratory.

1 Subject of Investigation



Fig. 1: Pictures of the device under test.

9.5 Pictures of the Device under Test

Figure 16 - 18 show the device under test and the used accessories.



Fig. 16: Front and side view of the Kyocera F42.



Fig. 17: Back and side view of the Kyocera F42.



Fig. 18: Pictures of the used headset under test.

9.6 Test positions for the Device under Test

Figure 19 - 24 show the test positions for the SAR measurements for the Kyocera F42.



Fig. 19: Cheek position, left side.



Fig. 20: Tilted position, left side.



Fig. 21: Cheek position, right side.



Fig. 22: Tilted position, right side.

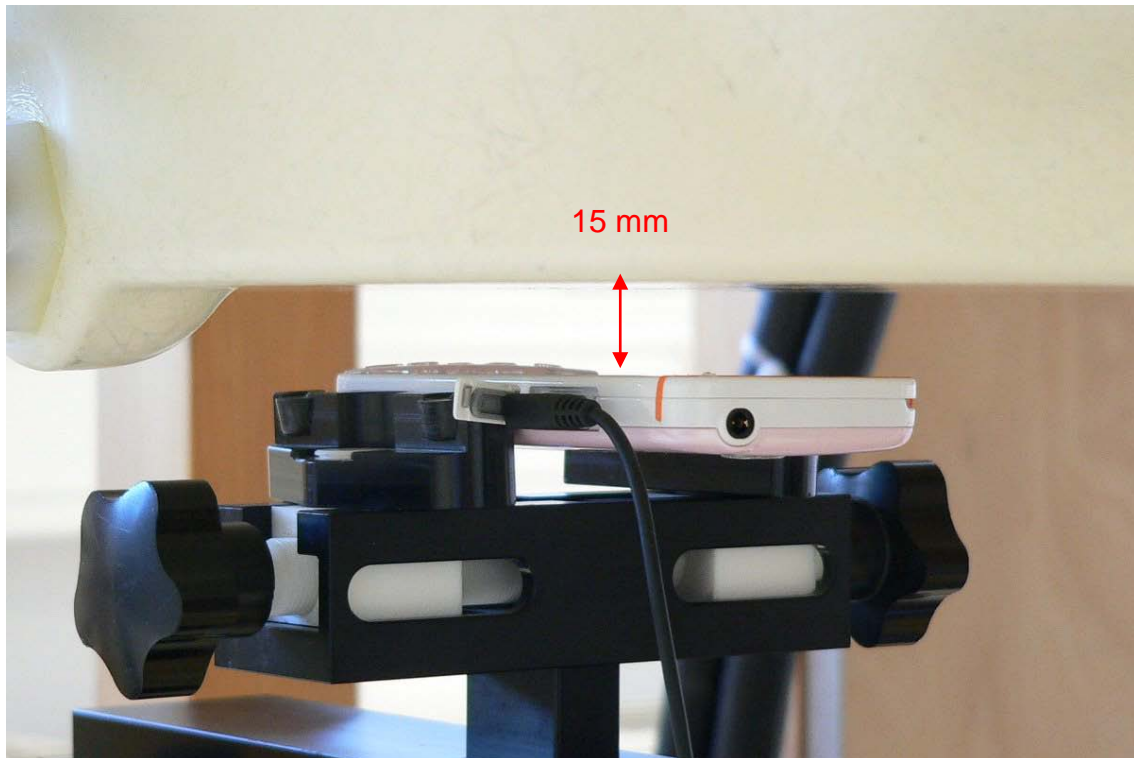


Fig. 23: Body worn configuration, position 1, display towards the phantom, headset attached, 15 mm distance

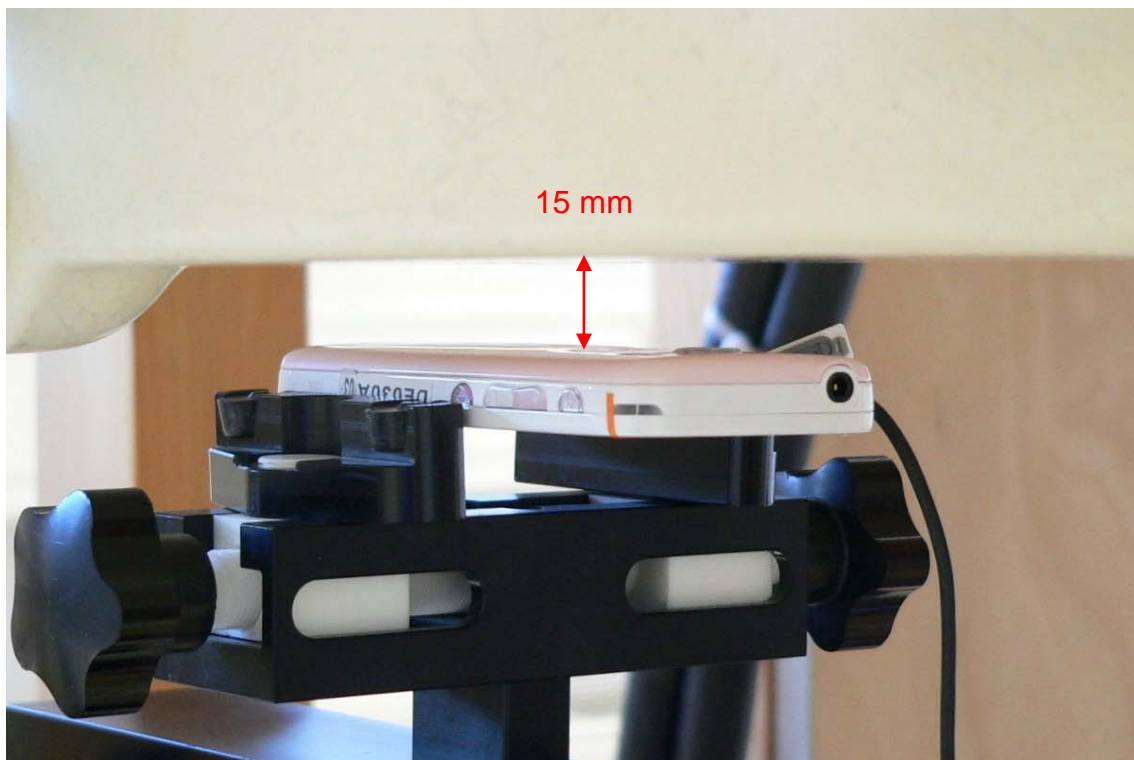


Fig. 24: Body worn configuration, position 2, display towards the ground, headset attached, 15 mm distance.