



Applicant:	Kyocera
FCC ID:	V65S2150
Report #:	CT- S2150-9B1-0812-R0

EXHIBIT 9 Appendix B1: SAR DISTRIBUTION PLOTS (HEAD)

CELL



Applicant:	Kyocera
FCC ID:	V65S2150
Report #:	CT- S2150-9B1-0812-R0

Test Laboratory: Comptest/Kyocera

Date: 08/10/2012

FCC S2150 CDMA-800 BC-0 Left, Ch. 384, Left Cheek

Communication System: CDMA-800, Frequency: 836.52 MHz, Duty Cycle: 1:1

Medium: Head 835 MHz, Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 43.2$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Left Section

DASY4 Configuration:

Probe: ES3DV3 - SN3035, ConvF(6.04, 6.04, 6.04), Calibrated: 2/22/2012

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE4 Sn530, Calibrated: 5/30/2012

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

Temperature:

Room T = 21.8 \pm 1 deg C, Liquid T = 22.0 \pm 1 deg C

CDMA-800 Ch384 LC/Area Scan (101x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.480 mW/g


CDMA-800 Ch384 LC/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.99 V/m; Power Drift = 0.125 dB

Peak SAR (extrapolated) = 1.11 W/kg


SAR(1 g) = 0.445 mW/g; SAR(10 g) = 0.300 mW/g

Maximum value of SAR (measured) = 0.488 mW/g

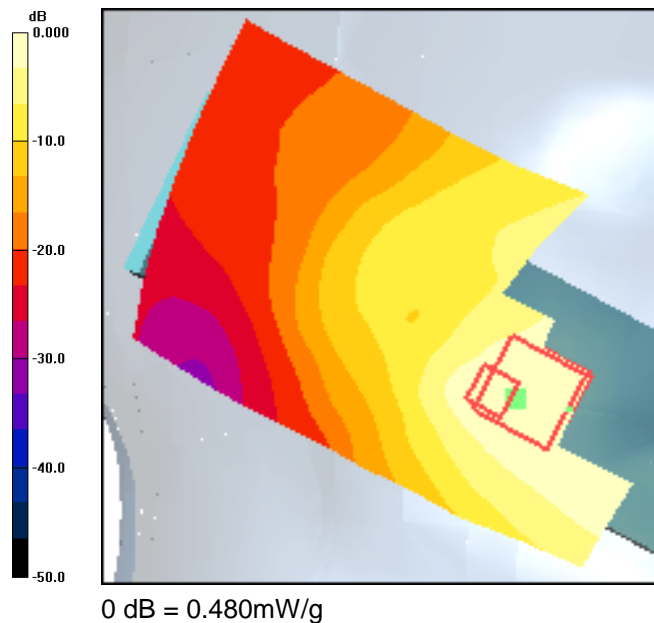



Applicant:	Kyocera
FCC ID:	V65S2150
Report #:	CT- S2150-9B1-0812-R0

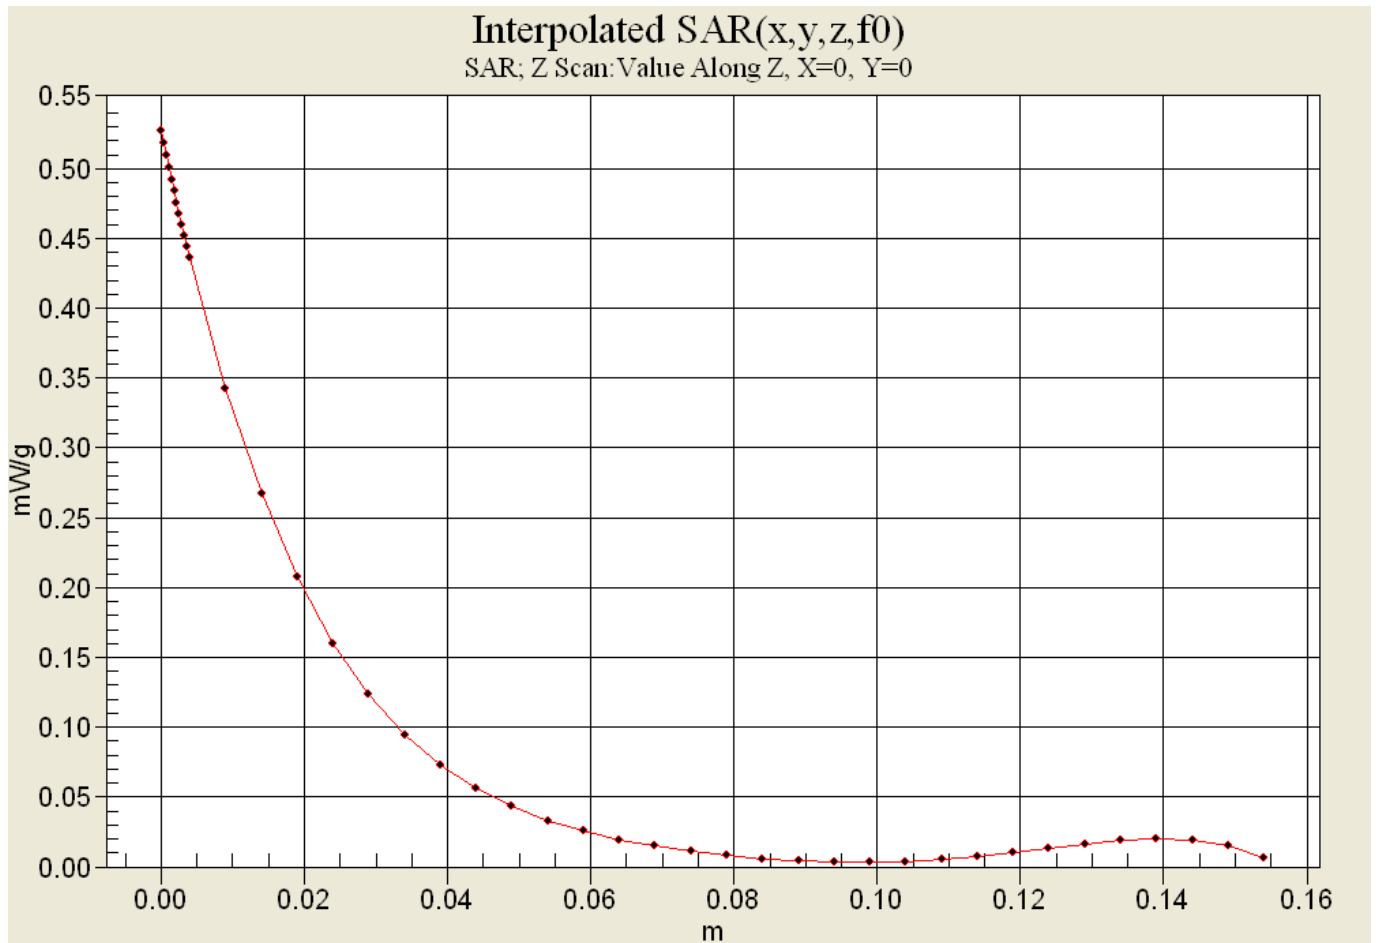



Applicant:	Kyocera
FCC ID:	V65S2150
Report #:	CT- S2150-9B1-0812-R0

Test Laboratory: Comptest/Kyocera

Date: 08/10/2012

FCC S2150 CDMA-800 BC-0 Left, Ch. 384, Left Tilt

Communication System: CDMA-800, Frequency: 836.52 MHz, Duty Cycle: 1:1

Medium: Head 835 MHz, Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 43.2$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Left Section

DASY4 Configuration:

Probe: ES3DV3 - SN3035, ConvF(6.04, 6.04, 6.04), Calibrated: 2/22/2012

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE4 Sn530, Calibrated: 5/30/2012

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

Temperature:

Room T = 21.8 \pm 1 deg C, Liquid T = 22.0 \pm 1 deg C

CDMA-800 Ch384 LT/Area Scan (101x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.084 mW/g


CDMA-800 Ch384 LT/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.66 V/m; Power Drift = -0.169 dB

Peak SAR (extrapolated) = 0.093 W/kg

SAR(1 g) = 0.072 mW/g; SAR(10 g) = 0.058 mW/g

Maximum value of SAR (measured) = 0.074 mW/g

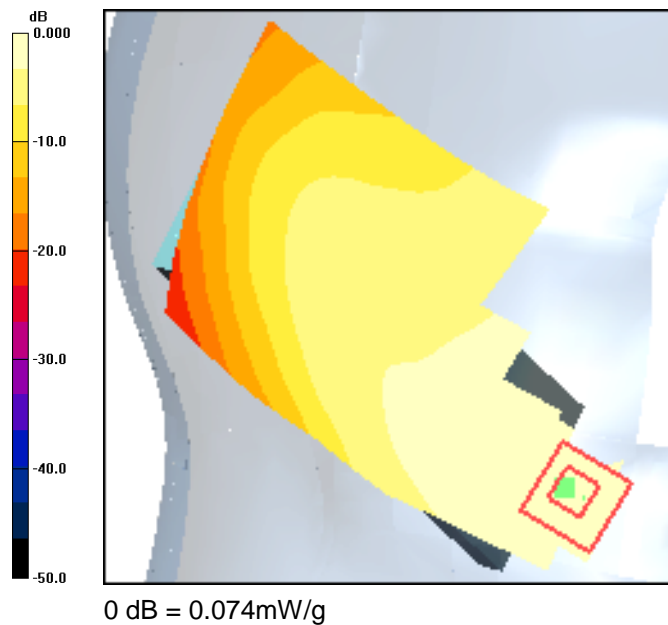



Applicant:	Kyocera
FCC ID:	V65S2150
Report #:	CT- S2150-9B1-0812-R0

Test Laboratory: Comptest/Kyocera

Date: 08/10/2012

FCC S2150 CDMA-800 BC-0 Right, Ch. 384, Right Cheek

Communication System: CDMA-800, Frequency: 836.52 MHz, Duty Cycle: 1:1

Medium: Head 835 MHz, Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 43.2$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Right Section

DASY4 Configuration:

Probe: ES3DV3 - SN3035, ConvF(6.04, 6.04, 6.04), Calibrated: 2/22/2012

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE4 Sn530, Calibrated: 5/30/2012

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

Temperature:

Room T = 21.8 °C ± 1 deg C, Liquid T = 22.0 °C ± 1 deg C

CDMA-800 Ch384 RC/Area Scan (101x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.622 mW/g


CDMA-800 Ch384 RC/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.40 V/m; Power Drift = -0.110 dB

Peak SAR (extrapolated) = 0.899 W/kg

SAR(1 g) = 0.591 mW/g; SAR(10 g) = n.a.


Maximum value of SAR (measured) = 0.634 mW/g

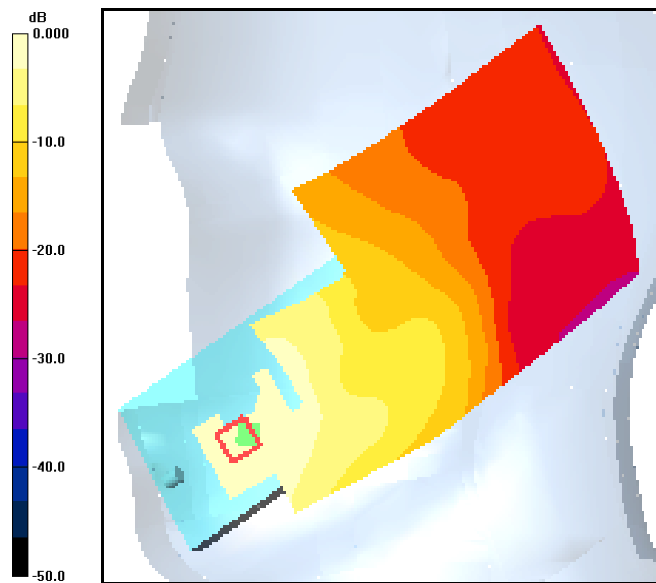

0 dB = 0.622mW/g



Applicant:	Kyocera
FCC ID:	V65S2150
Report #:	CT- S2150-9B1-0812-R0

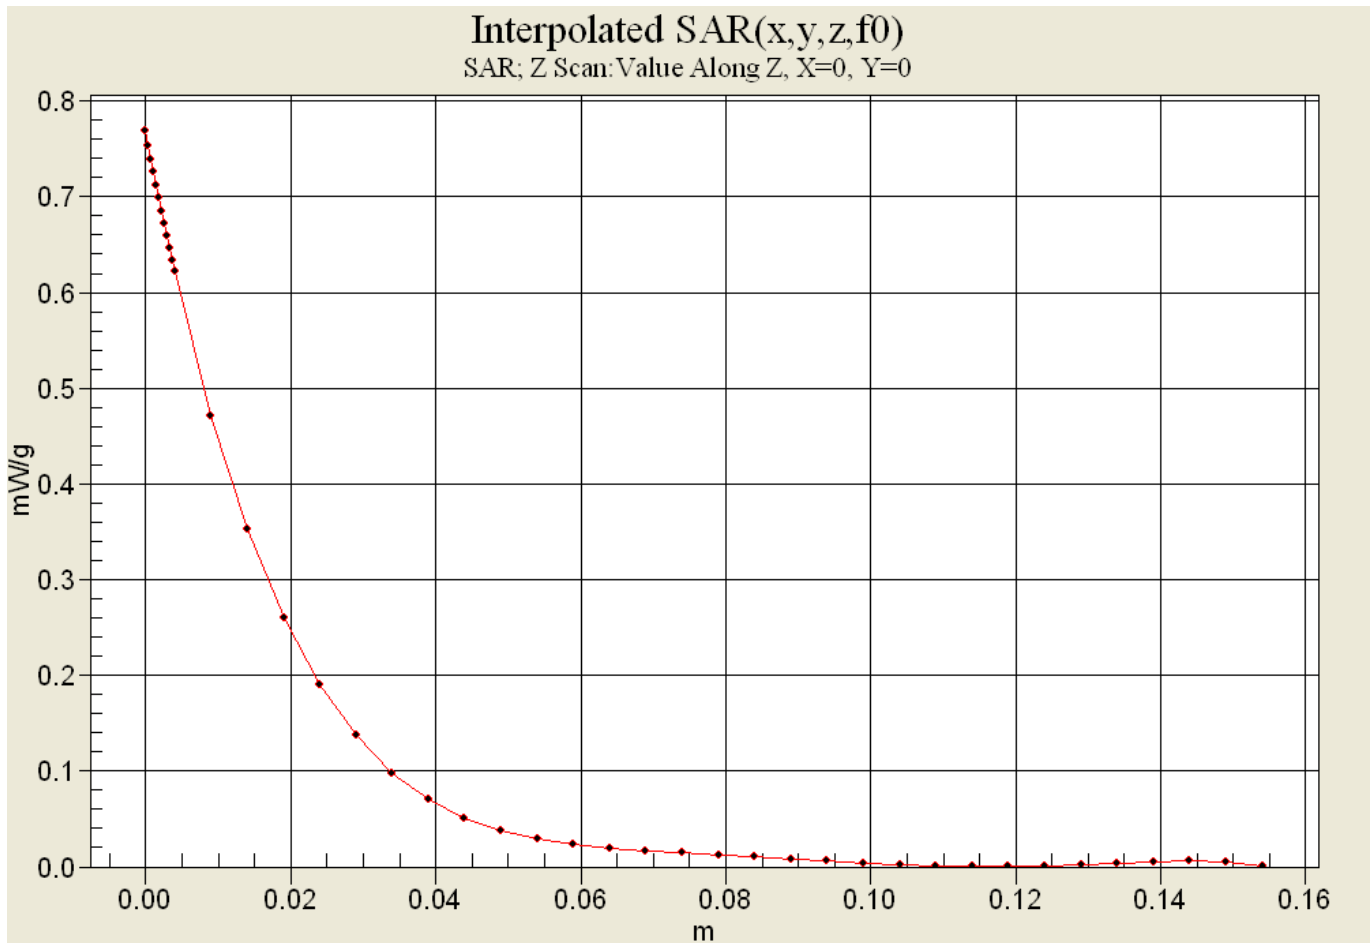



Applicant:	Kyocera
FCC ID:	V65S2150
Report #:	CT- S2150-9B1-0812-R0

Test Laboratory: Comptest/Kyocera

Date: 08/10/2012

FCC S2150 CDMA-800 BC-0 Right, Ch. 384, Right Tilt

Communication System: CDMA-800, Frequency: 836.52 MHz, Duty Cycle: 1:1

Medium: Head 835 MHz, Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 43.2$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Right Section

DASY4 Configuration:

Probe: ES3DV3 - SN3035, ConvF(6.04, 6.04, 6.04), Calibrated: 2/22/2012

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE4 Sn530, Calibrated: 5/30/2012

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

Temperature:

Room T = 21.8 \pm 1 deg C, Liquid T = 22.0 \pm 1 deg C

CDMA-800 Ch384 RT/Area Scan (91x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.073 mW/g


CDMA-800 Ch384 RT/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.55 V/m; Power Drift = -0.044 dB

Peak SAR (extrapolated) = 0.097 W/kg

SAR(1 g) = 0.072 mW/g; SAR(10 g) = 0.050 mW/g

Maximum value of SAR (measured) = 0.076 mW/g

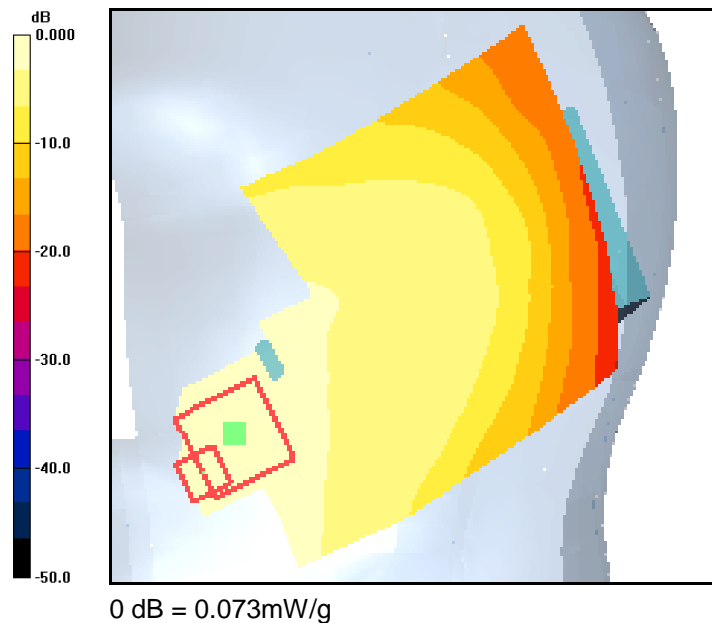



Applicant:	Kyocera
FCC ID:	V65S2150
Report #:	CT- S2150-9B1-0812-R0

Test Laboratory: Comptest/Kyocera

Date: 08/14/2012

FCC S2150 CDMA-800 BC-0 Jaw

Communication System: CDMA-800, Frequency: 836.52 MHz, Duty Cycle: 1:1

Medium: Head 835 MHz, Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.91$ mho/m; $\epsilon_r = 42.7$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Flat Section

DASY4 Configuration:

Probe: ES3DV3 - SN3035, ConvF(6.04, 6.04, 6.04), Calibrated: 2/22/2012

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE4 Sn530, Calibrated: 5/30/2012

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

Temperature:

Room T = 21.8 $\square\square\square$ 1 deg C, Liquid T = 22.0 $\square\square\square$ 1 deg C

CDMA-800 Ch384 Flat Jaw/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.272 mW/g


CDMA-800 Ch384 Flat Jaw/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.2 V/m; Power Drift = -0.083 dB

Peak SAR (extrapolated) = 0.494 W/kg

SAR(1 g) = 0.254 mW/g; SAR(10 g) = 0.159 mW/g


Maximum value of SAR (measured) = 0.285 mW/g

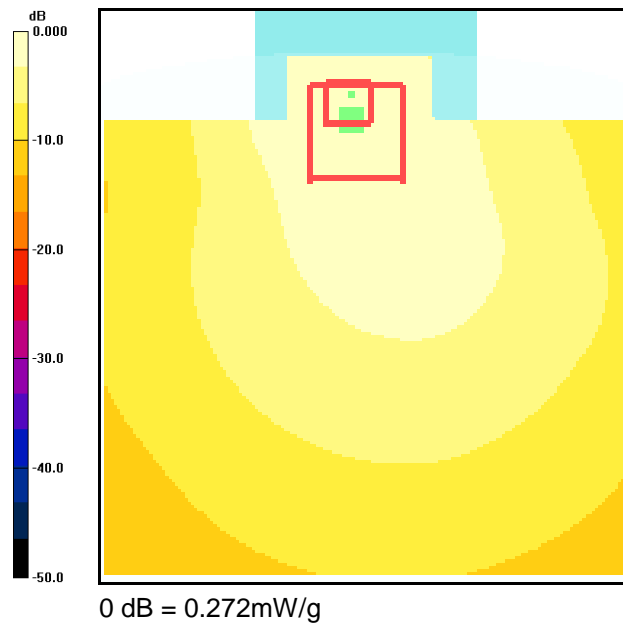



Applicant:	Kyocera
FCC ID:	V65S2150
Report #:	CT- S2150-9B1-0812-R0

Interpolated SAR(x,y,z,f0)
SAR: Z Scan: Value Along Z, X=0, Y=0

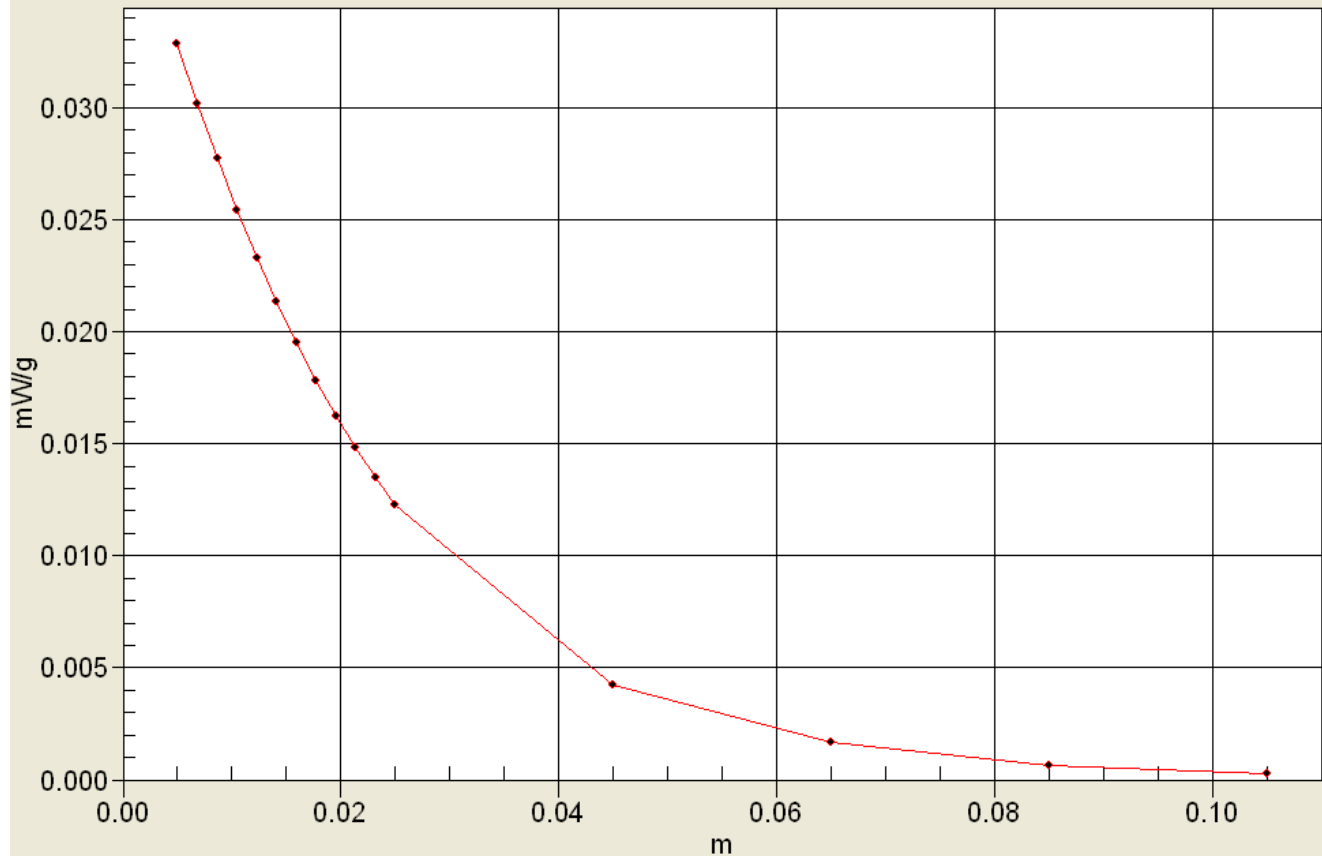

AWS



Applicant:	Kyocera
FCC ID:	V65S2150
Report #:	CT- S2150-9B1-0812-R0

Test Laboratory: Comptest/Kyocera

Date: 08/13/2012

FCC S2150 CDMA-1700 Left, Ch.450, Left Cheek

Communication System: AWS 1700, Frequency: 1732.5 MHz, Duty Cycle: 1:1

Medium: HSL1700, Medium parameters used: $f = 1732.5 \text{ MHz}$; $\sigma = 1.36 \text{ mho/m}$; $\epsilon_r = 38.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom: SAM 12, Phantom section: Left Section

DASY4 Configuration:

Probe: ES3DV3 - SN3078, ConvF(5.22, 5.22, 5.22), Calibrated: 7/19/2012

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE4 Sn675, Calibrated: 5/23/2012

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

Temperature:

Room T = 21.8 \pm 1 deg C, Liquid T = 22.0 \pm 1 deg C

CDMA-1700_CH450 LC/Area Scan (91x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.734 mW/g


CDMA-1700_CH450 LC/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.58 V/m; Power Drift = -0.054 dB

Peak SAR (extrapolated) = 0.983 W/kg

SAR(1 g) = 0.610 mW/g; SAR(10 g) = 0.347 mW/g

Maximum value of SAR (measured) = 0.675 mW/g

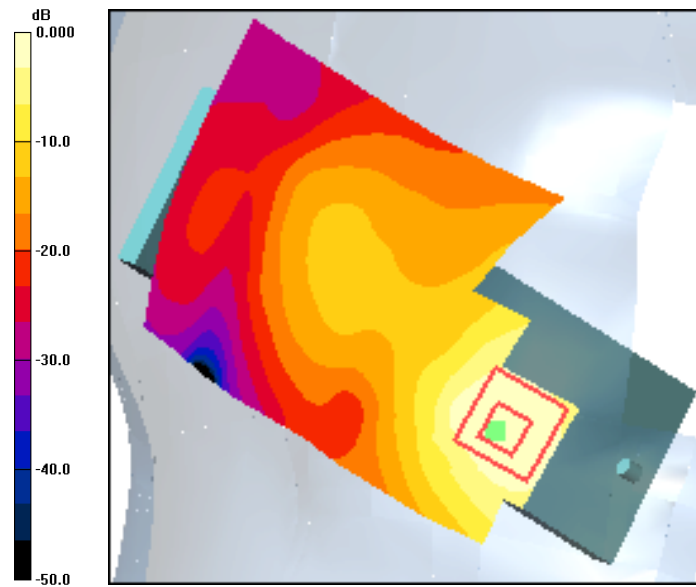


0 dB = 0.734mW/g



Applicant:	Kyocera
FCC ID:	V65S2150
Report #:	CT- S2150-9B1-0812-R0

Interpolated SAR(x,y,z,f0)

SAR: Z Scan: Value Along Z, X=0, Y=0

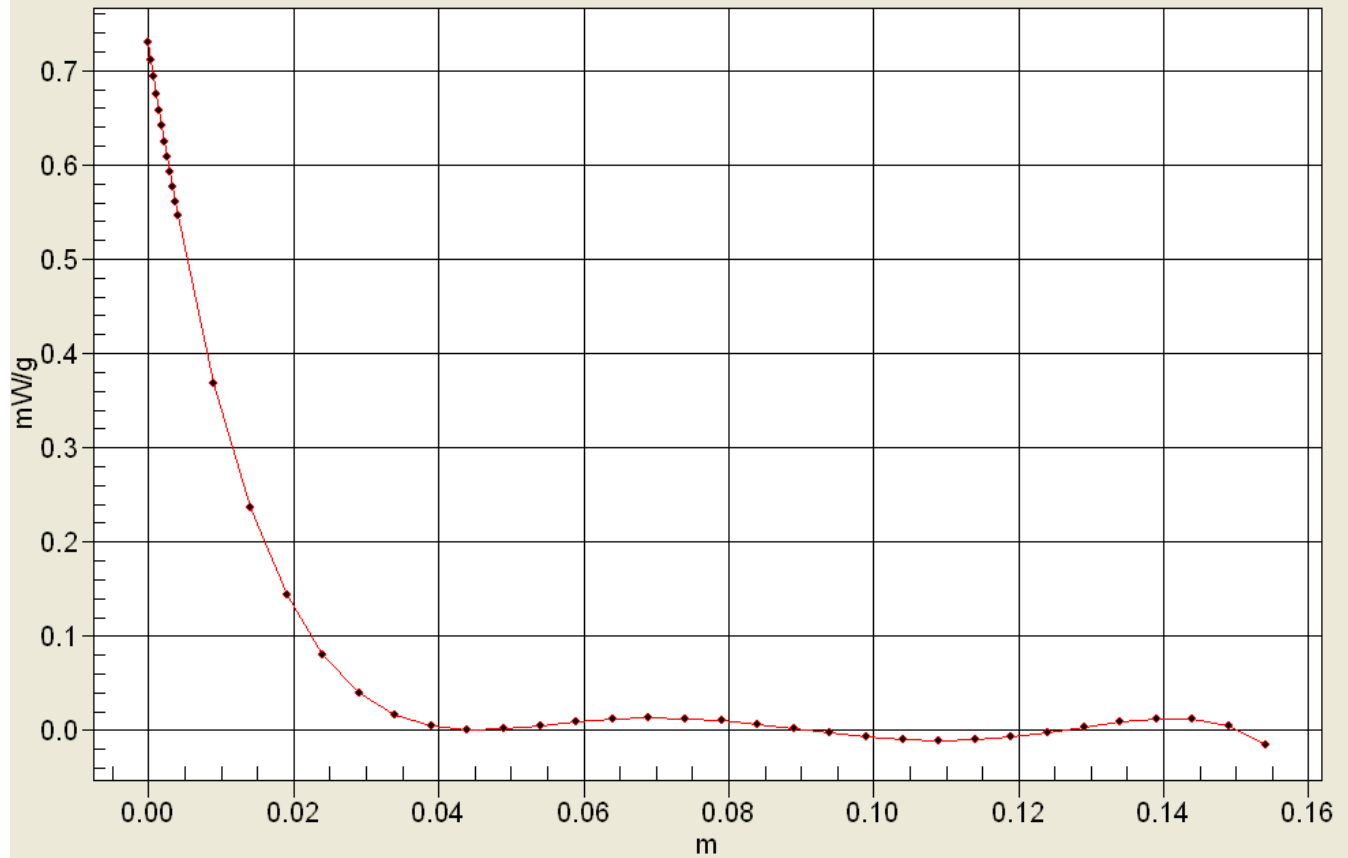



Applicant:	Kyocera
FCC ID:	V65S2150
Report #:	CT- S2150-9B1-0812-R0

Test Laboratory: Comptest/Kyocera

Date: 08/13/2012

FCC S2150 CDMA-1700 Left, Ch. 450, Left Tilt

Communication System: AWS 1700, Frequency: 1732.5 MHz, Duty Cycle: 1:1

Medium: HSL1700, Medium parameters used: $f = 1732.5 \text{ MHz}$; $\sigma = 1.36 \text{ mho/m}$; $\epsilon_r = 38.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom: SAM 12, Phantom section: Left Section

DASY4 Configuration:

Probe: ES3DV3 - SN3078, ConvF(5.22, 5.22, 5.22), Calibrated: 7/19/2012

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE4 Sn675, Calibrated: 5/23/2012

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

Temperature:

Room T = 21.8 $\square\square\square$ 1 deg C, Liquid T = 22.0 $\square\square\square$ 1 deg C

CDMA-1700_CH450 LT/Area Scan (91x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.090 mW/g


CDMA-1700_CH450 LT/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.74 V/m; Power Drift = 0.175 dB

Peak SAR (extrapolated) = 0.115 W/kg

SAR(1 g) = 0.076 mW/g; SAR(10 g) = 0.050 mW/g

Maximum value of SAR (measured) = 0.082 mW/g

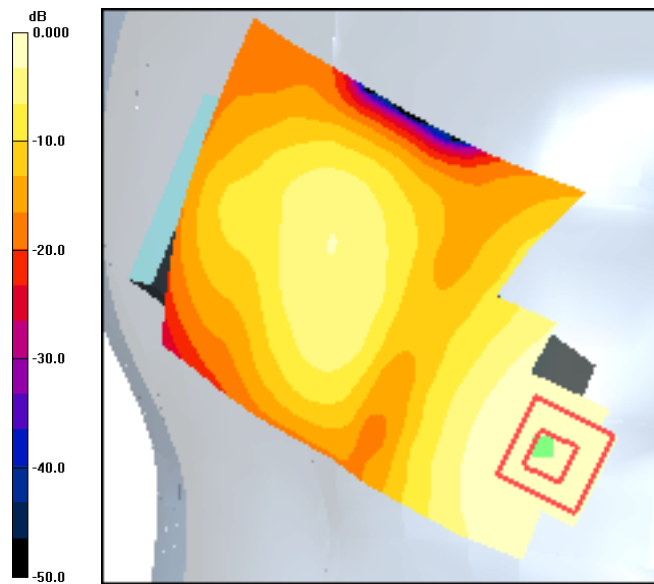

0 dB = 0.082mW/g



Applicant:	Kyocera
FCC ID:	V65S2150
Report #:	CT- S2150-9B1-0812-R0

Test Laboratory: Comptest/Kyocera

Date: 08/13/2012

FCC S2150 CDMA-1700 Right, Ch. 450, Right Cheek

Communication System: AWS 1700, Frequency: 1732.5 MHz, Duty Cycle: 1:1

Medium: HSL1700, Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 38.7$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Right Section

DASY4 Configuration:

Probe: ES3DV3 - SN3078, ConvF(5.22, 5.22, 5.22), Calibrated: 7/19/2012

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE4 Sn675, Calibrated: 5/23/2012

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

Temperature:

Room T = 21.8 °C ± 1 deg C, Liquid T = 22.0 °C ± 1 deg C

CDMA-1700 Ch450 RC/Area Scan (101x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.436 mW/g


CDMA-1700 Ch450 RC/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.62 V/m; Power Drift = 0.100 dB

Peak SAR (extrapolated) = 0.645 W/kg

SAR(1 g) = 0.432 mW/g; SAR(10 g) = n.a.


Maximum value of SAR (measured) = 0.466 mW/g

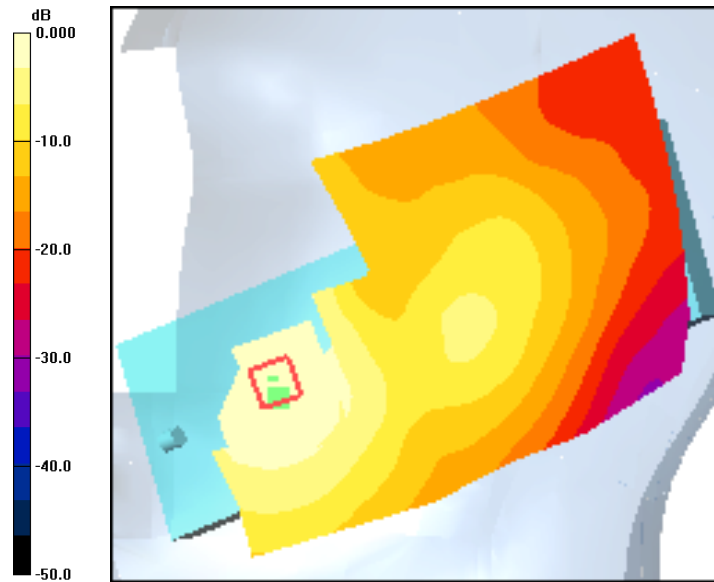

0 dB = 0.466mW/g



Applicant:	Kyocera
FCC ID:	V65S2150
Report #:	CT- S2150-9B1-0812-R0

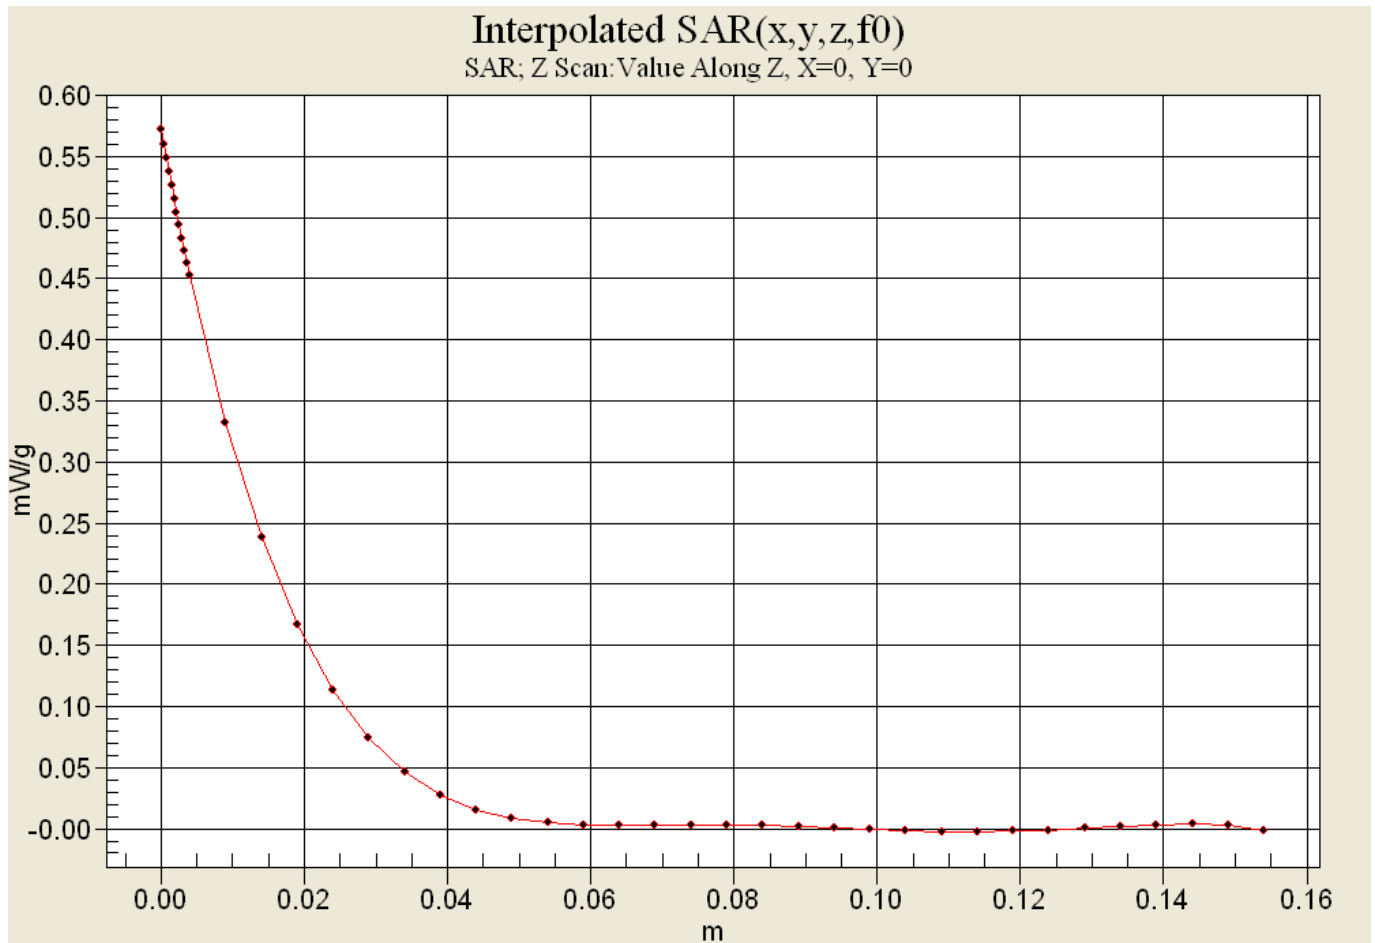



Applicant:	Kyocera
FCC ID:	V65S2150
Report #:	CT- S2150-9B1-0812-R0

Test Laboratory: Comptest/Kyocera

Date: 08/13/2012

FCC S2150 CDMA-1700 Right, Ch. 450, Right Tilt

Communication System: AWS 1700, Frequency: 1732.5 MHz, Duty Cycle: 1:1

Medium: HSL1700, Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 38.7$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Right Section

DASY4 Configuration:

Probe: ES3DV3 - SN3078, ConvF(5.22, 5.22, 5.22), Calibrated: 7/19/2012

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE4 Sn675, Calibrated: 5/23/2012

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

Temperature:

Room T = 21.8 °C ± 1 deg C, Liquid T = 22.0 °C ± 1 deg C

CDMA-1700 Ch450 RT/Area Scan (101x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.084 mW/g


CDMA-1700 Ch450 RT/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.71 V/m; Power Drift = 0.072 dB

Peak SAR (extrapolated) = 0.105 W/kg

SAR(1 g) = 0.074 mW/g; SAR(10 g) = 0.050 mW/g

Maximum value of SAR (measured) = 0.079 mW/g

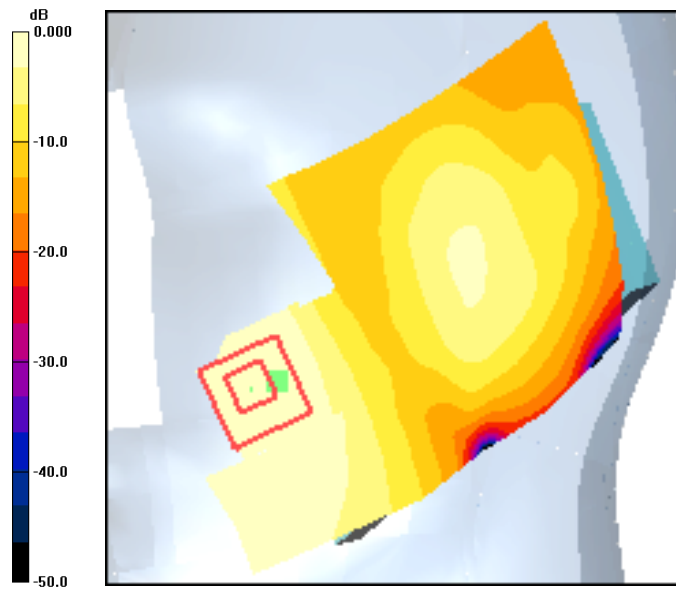

0 dB = 0.084mW/g



Applicant:	Kyocera
FCC ID:	V65S2150
Report #:	CT- S2150-9B1-0812-R0

Test Laboratory: Comptest/Kyocera

Date: 08/13/2012

FCC S2150 CDMA-1700 Jaw

Communication System: AWS 1700, Frequency: 1732.5 MHz, Duty Cycle: 1:1

Medium: HSL1700, Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 38.7$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Flat Section

DASY4 Configuration:

Probe: ES3DV3 - SN3078, ConvF(5.22, 5.22, 5.22), Calibrated: 7/19/2012

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE4 Sn675, Calibrated: 4/21/2010

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

Temperature:

Room T = 21.8 °C ± 1 deg C, Liquid T = 22.0 °C ± 1 deg C

CDMA-AWS FLAT Ch450/Area Scan (71x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.278 mW/g


CDMA-AWS FLAT Ch450/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.45 V/m; Power Drift = 0.032 dB

Peak SAR (extrapolated) = 0.420 W/kg

SAR(1 g) = 0.269 mW/g; SAR(10 g) = 0.161 mW/g

Maximum value of SAR (measured) = 0.296 mW/g

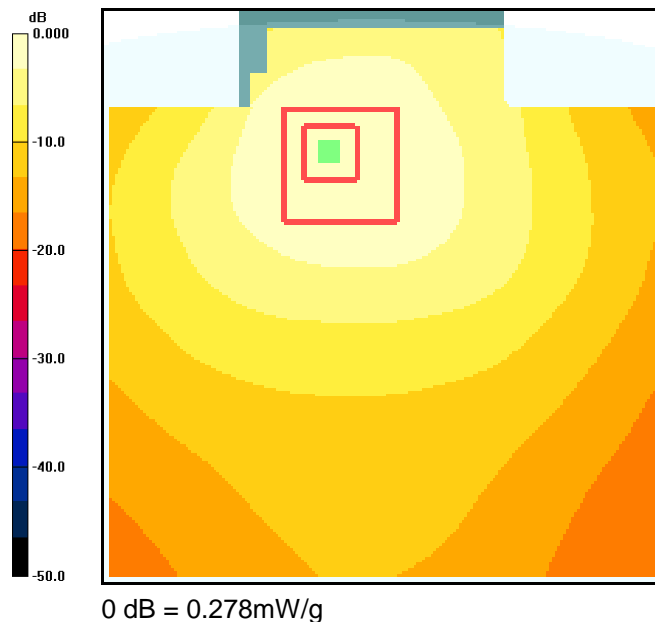



Applicant:	Kyocera
FCC ID:	V65S2150
Report #:	CT- S2150-9B1-0812-R0

PCS



Applicant:	Kyocera
FCC ID:	V65S2150
Report #:	CT- S2150-9B1-0812-R0

Test Laboratory: Comptest/Kyocera

Date: 08/09/2012

FCC S2150 CDMA-1900 Left, Ch. 1175, Left Cheek

Communication System: CDMA-1900, Frequency: 1908.75 MHz, Duty Cycle: 1:1

Medium: HSL1900, Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Left Section

DASY4 Configuration:

Probe: ES3DV3 - SN3078, ConvF(4.97, 4.97, 4.97), Calibrated: 7/19/2012

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE4 Sn675, Calibrated: 5/23/2012

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

Temperature:

Room T = 21.8 $\square\square\square$ 1 deg C, Liquid T = 22.0 $\square\square\square$ 1 deg C

CDMA-1900_Ch 1175 LC/Area Scan (101x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.209 mW/g


CDMA-1900_Ch 1175 LC/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.978 V/m; Power Drift = -0.116 dB

Peak SAR (extrapolated) = 0.291 W/kg


SAR(1 g) = 0.175 mW/g; SAR(10 g) = 0.095 mW/g

Maximum value of SAR (measured) = 0.196 mW/g

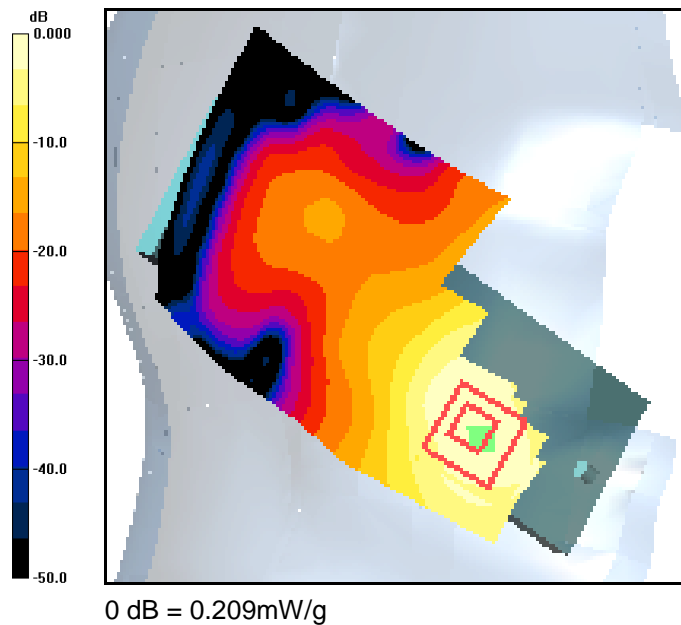



Interpolated SAR(x,y,z,f0)
SAR; Z Scan: Value Along Z, X=0, Y=0

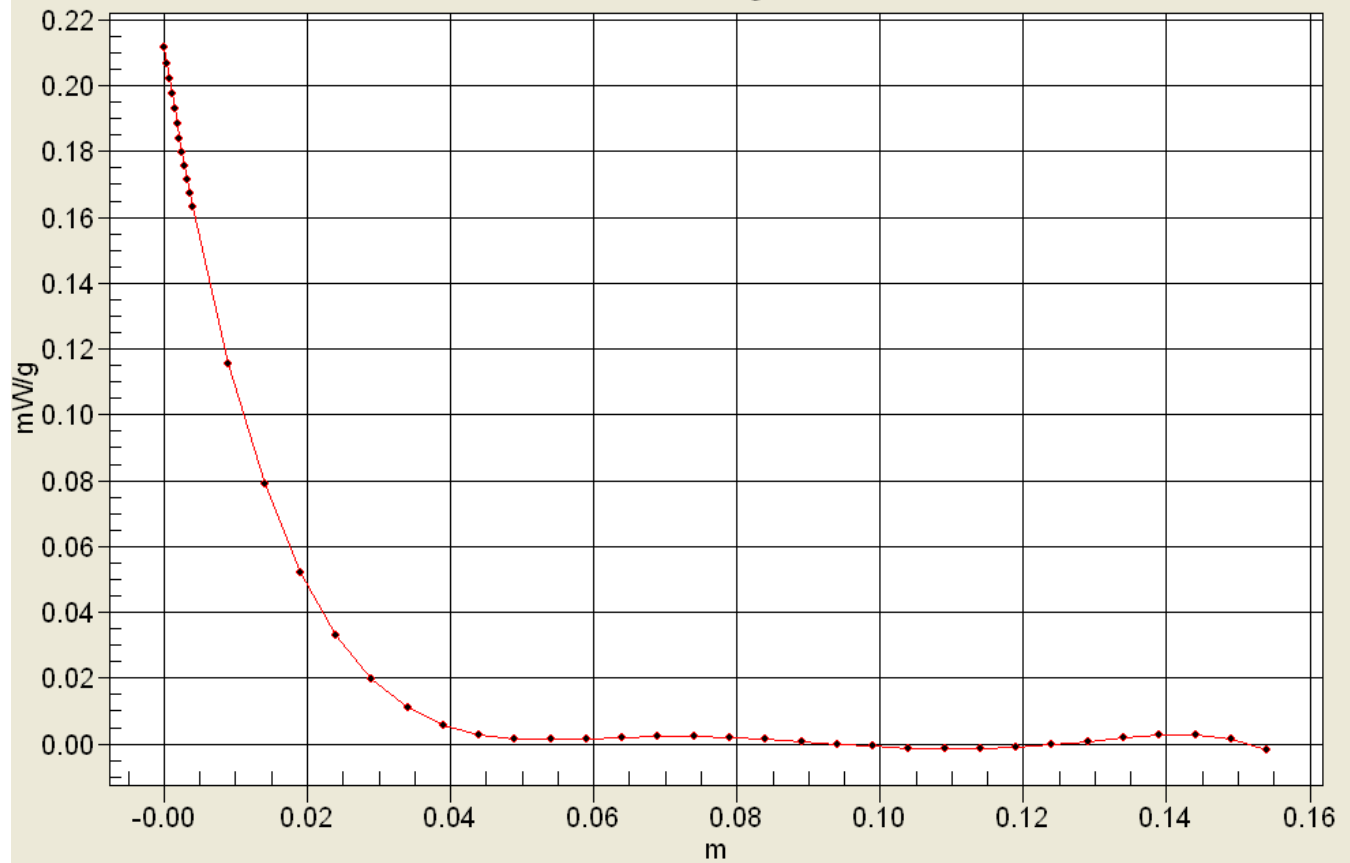



Applicant:	Kyocera
FCC ID:	V65S2150
Report #:	CT- S2150-9B1-0812-R0

Test Laboratory: Comptest/Kyocera

Date: 08/09/2012

FCC S2150 CDMA-1900 Left, Ch. 1175, Left Tilt

Communication System: CDMA-1900, Frequency: 1908.75 MHz, Duty Cycle: 1:1

Medium: HSL1900, Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Left Section

DASY4 Configuration:

Probe: ES3DV3 - SN3078, ConvF(4.97, 4.97, 4.97), Calibrated: 7/19/2012

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE4 Sn675, Calibrated: 5/23/2012

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

Temperature:

Room T = 21.8 °C ± 1 deg C, Liquid T = 22.0 °C ± 1 deg C

CDMA-1900_Ch 1175 LT/Area Scan (121x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.016 mW/g


CDMA-1900_Ch 1175 LT/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.84 V/m; Power Drift = 0.113 dB

Peak SAR (extrapolated) = 0.023 W/kg

SAR(1 g) = 0.015 mW/g; SAR(10 g) = 0.00982 mW/g

Maximum value of SAR (measured) = 0.016 mW/g

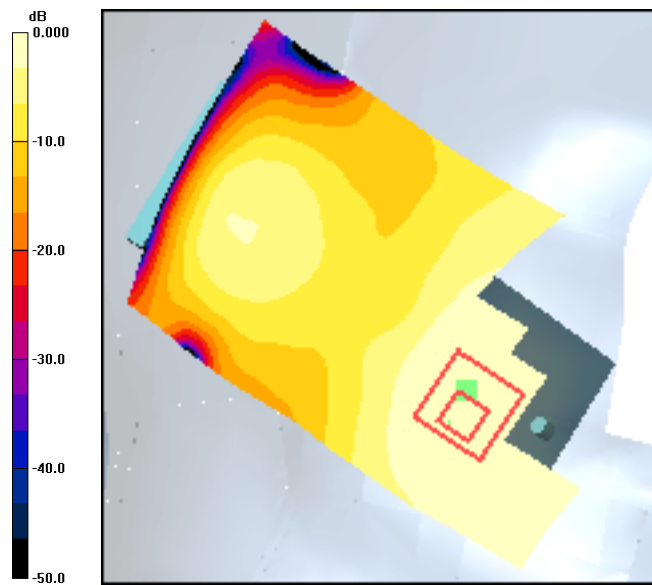

0 dB = 0.016mW/g



Applicant:	Kyocera
FCC ID:	V65S2150
Report #:	CT- S2150-9B1-0812-R0

Test Laboratory: Comptest/Kyocera

Date: 08/09/2012

FCC S2150 CDMA-1900 Right, Ch. 1175, Right Cheek

Communication System: CDMA-1900, Frequency: 1908.75 MHz, Duty Cycle: 1:1

Medium: HSL1900, Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Right Section

DASY4 Configuration:

Probe: ES3DV3 - SN3078, ConvF(4.97, 4.97, 4.97), Calibrated: 7/19/2012

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE4 Sn675, Calibrated: 5/23/2012

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

Temperature:

Room T = 21.8 \pm 1 deg C, Liquid T = 22.0 \pm 1 deg C

CDMA-1900 Ch1175 RC/Area Scan (111x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.181 mW/g


CDMA-1900 Ch1175 RC/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.51 V/m; Power Drift = 0.080 dB

Peak SAR (extrapolated) = 0.239 W/kg

SAR(1 g) = 0.159 mW/g; SAR(10 g) = 0.094 mW/g

Maximum value of SAR (measured) = 0.173 mW/g

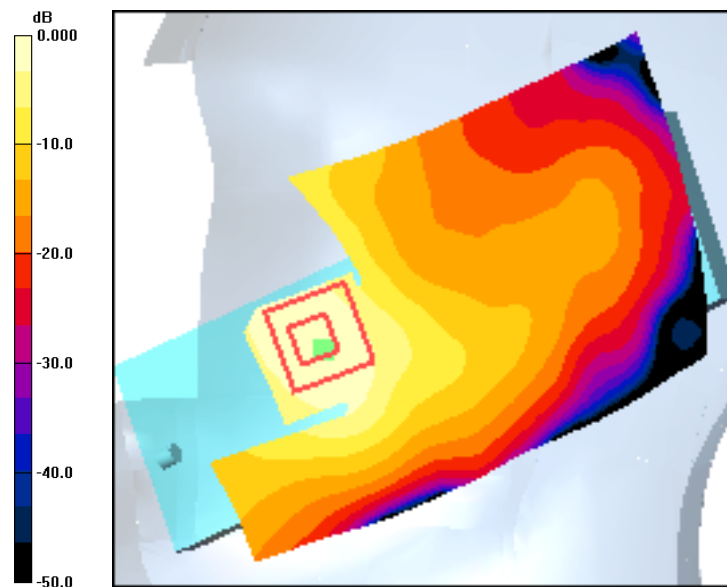


0 dB = 0.181mW/g



Applicant:	Kyocera
FCC ID:	V65S2150
Report #:	CT- S2150-9B1-0812-R0

Interpolated SAR(x,y,z,f0)
SAR; Z Scan: Value Along Z, X=0, Y=0

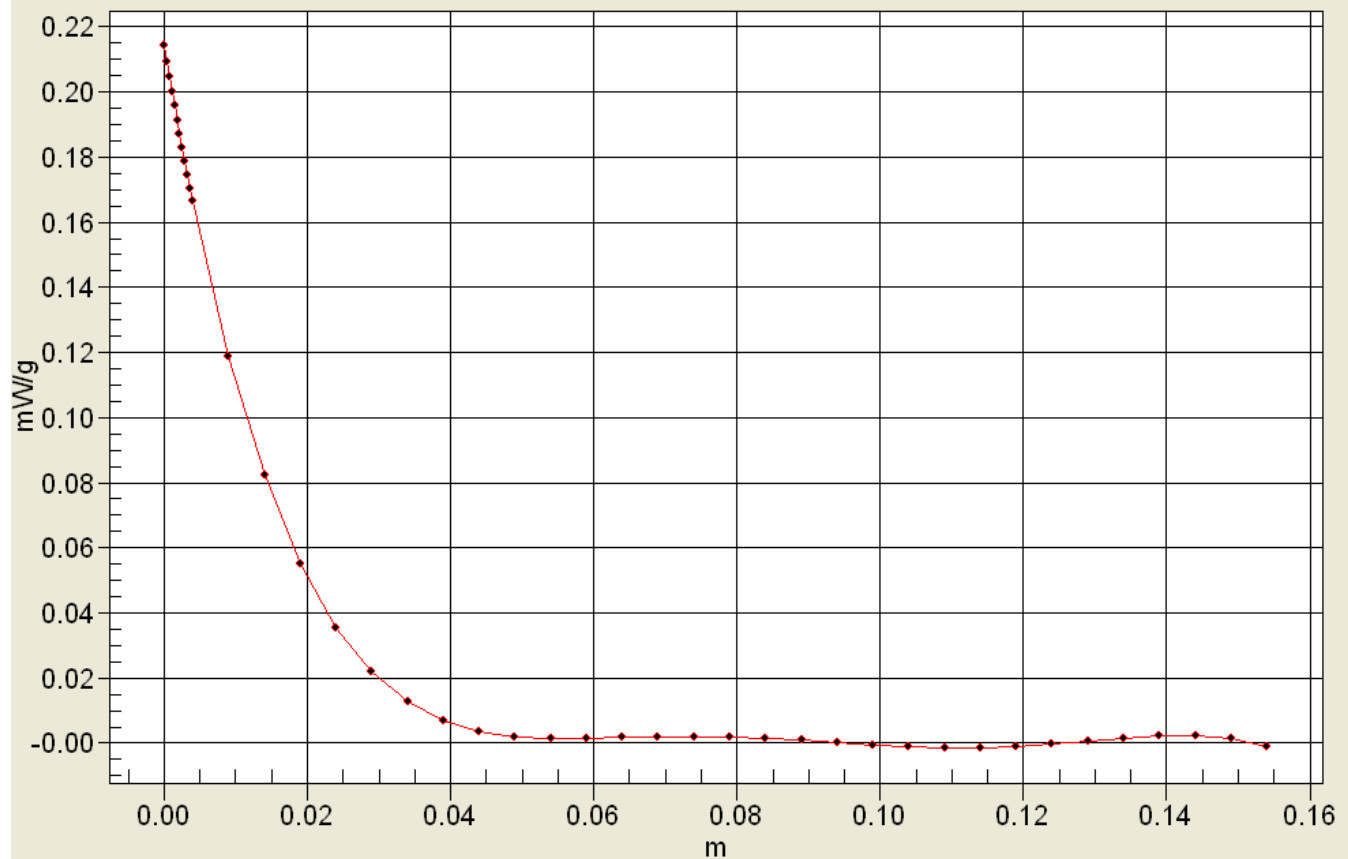



Applicant:	Kyocera
FCC ID:	V65S2150
Report #:	CT- S2150-9B1-0812-R0

Test Laboratory: Comptest/Kyocera

Date: 08/09/2012

FCC S2150 CDMA-1900 Right, Ch. 1175, Right Tilt

Communication System: CDMA-1900, Frequency: 1908.75 MHz, Duty Cycle: 1:1

Medium: HSL1900, Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Right Section

DASY4 Configuration:

Probe: ES3DV3 - SN3078, ConvF(4.97, 4.97, 4.97), Calibrated: 7/19/2012

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE4 Sn675, Calibrated: 5/23/2012

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

Temperature:

Room T = 21.8 $\square\square\square$ 1 deg C, Liquid T = 22.0 $\square\square\square$ 1 deg C

CDMA-1900 Ch1175 RT/Area Scan (111x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.038 mW/g

CDMA-1900 Ch1175 RT/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.08 V/m; Power Drift = -0.044 dB

Peak SAR (extrapolated) = 0.052 W/kg

SAR(1 g) = 0.035 mW/g; SAR(10 g) = 0.022 mW/g

Maximum value of SAR (measured) = 0.037 mW/g

