





# ISO/IEC17025 Accredited Lab.

Report No: FCC1001033 File reference No: 2010-01-22

Applicant: Guangzhou Chiyuan Electronics Co., Ltd.

Product: Stick Radio Control

Model No: N-6

Brand Name: xinyi

Test Standards: FCC Part 15 Subpart C, Paragraph 15.249

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4&FCC Part 15 Subpart C, Paragraph 15.249 regulations for the evaluation of

electromagnetic compatibility

Approved By

# Jack Chung

Jack Chung

Manager

Dated: Jan 22, 2010

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

# SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. CheGongMiao, FuTian District, Shenzhen, CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 1001033 Page 2 of 36

Date: 2010-01-22



# **Special Statement:**

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

#### **CNAS-LAB Code: L2292**

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

# FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

# IC- Registration No.: IC5205A-01

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-01.

Page 3 of 36

Report No: 1001033 Date: 2010-01-22



# Test Report Conclusion Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details.	4
1.3	Description of EUT	4
1.4	Submitted Sample.	4
1.5	Test Duration.	4
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment.	5
3.0	Technical Details	6
3.1	Summary of Test Results	6
3.2	Test Standards	6
4.0	EUT Modification.	6
5.0	Power Line Conducted Emission Test.	7
5.1	Schematics of the Test.	7
5.2	Test Method and Test Procedure.	7
5.3	Configuration of the EUT	7
5.4	EUT Operating Condition.	8
5.5	Conducted Emission Limit.	8
5.6	Test Result	8
6.0	Radiated Emission test.	11
6.1	Test Method and Test Procedure	11
6.2	Configuration of the EUT	11
6.3	EUT Operation Condition.	11
6.4	Radiated Emission Limit	12
6.5	Test Result.	13
7.0	Band Edge	20
7.1	Test Method and Test Procedure	20
7.2	Radiated Test Setup.	20
7.3	Configuration of the EUT	20
7.4	EUT Operating Condition.	20
7.5	Band Edge Limit.	20
7.6	Band Edge Test Result	21
8.0	Antenna Requirement	25
9.0	20dB bandwidth measurement	26
10.0	FCC ID Label	29
11.0	Photo of Test Setup and EUT View	30

Report No: 1001033 Page 4 of 36

Date: 2010-01-22



#### 1.0 General Details

#### 1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

Address: 5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-01

For 3m & 10 m OATS

#### 1.2 Applicant Details

Applicant: Guangzhou Chiyuan Electronics Co., Ltd.

Address: 2/F., No.1 Boyi Industrial Garden, 4th Gongye Rd. Zhicun Dashi Street, Panyu Dis.,

Guangzhou, China

Telephone: +86-20-34796226/34797226

Fax: +86-20-34796116

### 1.3 Description of EUT

Product: Stick Radio Control

Manufacturer: Guangzhou Chiyuan Electronics Co., Ltd.

Brand Name: xinyi Model Number: N-6

Additional Model Name N-2, N-3, N-4

Additional Trade Name N/A

Rating: DC12 (8pcs AAA batteries)

Modulation Type: DSSS

Operation Frequency 2403-2480MHz Antenna Designation Dipole Antenna

#### 1.4 Submitted Sample

1 Sample

#### 1.5 Test Duration

2010-01-08 to 2010-01-21

The report refers only to the sample tested and does not apply to the bulk.

Page 5 of 36

Report No: 1001033 Date: 2010-01-22



1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB Radiated Emissions Uncertainty =4.7dB

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

2.0		Test Equi	pments		
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	ROHDE&SCHWARZ	ESPI 3	100379	2009-12-05	2010-12-04
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100294	2009-12-05	2010-12-04
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100253	2009-12-05	2010-12-04
Ultra Broadband ANT	Schwarebeck	VULB9163	9163/340	2009-2-22	2010-02-21
ESDV Test Receiver	ROHDE&SCHWARZ	ESDV	100008	2009-03-30	2010-03-29
Impuls-Begrenzer	ROHDE&SCHWARZ	ESH3-Z2	100281	2009-02-18	2010-02-17
Power meter	Anritsu	ML2487A	6K00003613	2009-02-18	2010-02-17
Power sensor	Anritsu	MA2491A	32263	2009-02-8	2010-02-17
ESPI Test Receiver	ROHDE&SCHWARZ	ESI26	838786/013	2009-02-18	2010-02-17
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170265	2009-08-15	2010-08-14
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-631	2009-07-02	2010-07-01
Loop Antenna	EMCO	6507	102615	2009-04-26	2009-04-25

Page 6 of 36

Report No: 1001033 Date: 2010-01-22



#### 3.0 Technical Details

# 3.1 Summary of test results

The EUT has been tested according to the following specifications:				
Standard	Test Type	Result	Notes	
FCC Part 15, Paragraph 15.207	Conducted Emission Test	PASS	Complies	
FCC Part 15 Subpart C Paragraph 15.249(a) & 15.249(b) Limit	Field Strength of Fundamental	PASS	Complies	
FCC Part 15, Paragraph 15.209	Radiated Emission Test	PASS	Complies	
FCC Part 15 Subpart C Paragraph 15.249(d) Limit	Band Edge Test	PASS	Complies	

### 3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.249

#### 4.0 EUT Modification


No modification by Shenzhen Timeway Technology Consulting Co.,Ltd

Report No: 1001033 Date: 2010-01-22



#### 5. Power Line Conducted Emission Test

#### 5.1 Schematics of the test

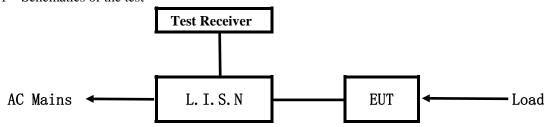


**EUT: Equipment Under Test** 

#### 5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 500hm/50uH as specified by section 5.1 of ANSI C63.4 –2003.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

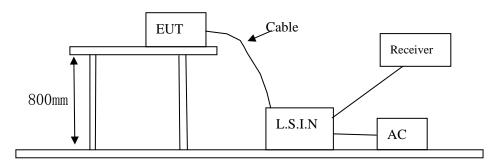

# 5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2003. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

One channels are provided to the EUT

#### A. EUT

Device	Manufacturer	Model	FCC ID
Stick Radio Control	Guangzhou Chiyuan Electronics Co., Ltd.	N-6	V6KN-6

## B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 1001033 Page 8 of 36

Date: 2010-01-22



# C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable
N/A				

#### 5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2003

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

				<u> </u>	
	Eraguanay (MHz)	Class A Lir	mits (dB \mu V)	Class B Lim	nits (dB µ V)
Frequency(MHz)		Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
	$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*
	$0.50 \sim 5.00$	73.0	60.0	56.0	46.0
	5.00 ~ 30.00	73.0	60.0	60.0	50.0

Notes:

- 1. \*Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

#### 5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2010-01-22

# A: Conducted Emission on Live Terminal (150kHz to 30MHz)

**EUT Operating Environment** 


Temperature: 25°C Humidity: 75%RH Atmospheric Pressure: 101 KPa

**EUT set Condition: Normal operation mode** 

**Equipment Level: Class B** 

**Results: Pass** 

Please refer to following diagram for individual

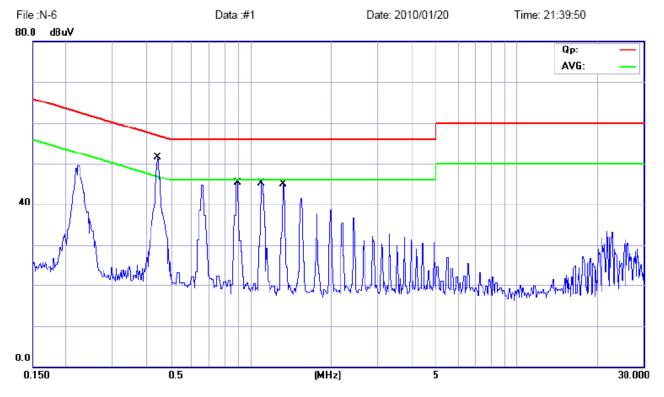

Frequency	Line	Reading(	dBμV)	Limit(	dBμV)
(MHz)	Line	Quasi-peak	Average	Quasi-peak	Average
0.4434	Live	47.98	37.44	57.00	47.00
0.8774	Live	39.41	29.80	56.00	46.00
1.0920	Live	43.05	24.03	56.00	46.00
1.3161	Live	46.00	26.17	56.00	46.00

Date: 2010-01-22

# B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

**EUT Operating Environment** 


Temperature: 25°C Humidity: 75%RH Atmospheric Pressure: 101 KPa

**EUT set Condition: Normal operation mode** 

**Equipment Level: Class B** 

**Results: Pass** 

Please refer to following diagram for individual

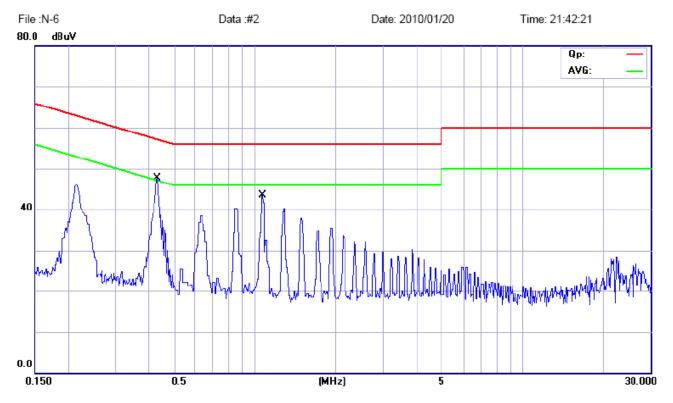

Frequency	Line	Reading(	dBμV)	Limit(	dBμV)
(MHz)	Line	Quasi-peak	Average	Quasi-peak	Average
0.4280	Neutral	45.29	40.44	57.29	47.29
1.0603	Neutral	41.14	37.82	56.00	46.00

Report No: 1001033 Page 11 of 36


Date: 2010-01-22



#### **6** Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.
- (3) The frequency spectrum from 30 MHz to 1 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) The antenna polarization: Vertical polarization and Horizontal polarization.

# **Block diagram of Test setup**

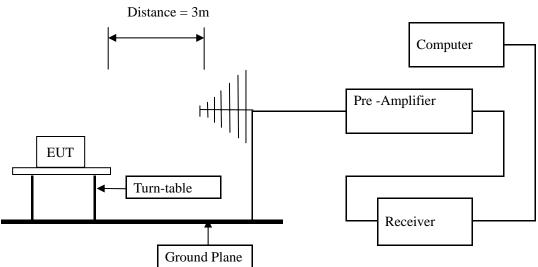


Page 12 of 36

Report No: 1001033 Date: 2010-01-22



Block diagram of Test setup for frequency below 30MHz

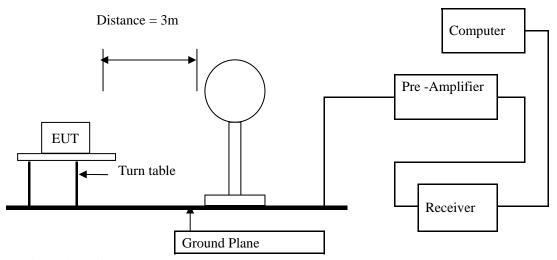

Configuration of The EUT Same as section 5.3 of this report

EUT Operating Condition
Same as section 5.4 of this report.

Report No: 1001033 Page 13 of 36

Date: 2010-01-22



#### 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

#### A FCC Part 15 Subpart C Paragraph 15.249(a) Limit

Fundamental Frequency	Field Stre	Field Strength of Fundamental (3m)			trength of Harmo	onics (3m)
(MHz)	mV/m	dBuV/m		uV/m	dBu	V/m
2400-2483.5	50	94 (Average)	114 (Peak)	500	54 (Average)	74 (Peak)

Note:

- 1. RF Field Strength  $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

### B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

_	_	8 1
Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
0.009-0.490	3	20log 2400/F (kHz) + 80
0.490-1.705	3	20log 24000/F (kHz) + 40
1.705-30	3	20log 30 + 40
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage  $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 5. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-25G, the final emission level got using PK and AV detector.
- 6. If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula Ld1 = Ld2 \* (d2/d1)

Report No: 1001033 Page 14 of 36

Date: 2010-01-22



#### 6.5 Test result

#### **Fundamental & Harmonics Radiated Emission Data** $\mathbf{A}$

Product:	Stick Radio Control	Test Mode:	Low Channel
Test Item:	Fundamental Radiated Emission Data	Temperature:	25℃
Test Voltage:	12VDC	Humidity:	56%
Test Result:	Pass		

Frequency	Emission PK/AV	Horiz /	Limits PK/AV	Margin
(MHz)	(dBuV/m)	Vert	(dBuV/m)	(dB)
2403	81.22 (PK)	Н	114/94	-12.78
2403	88.91 (PK)	V	114/94	-5.09
4806		H/V	74/54	
7209		H/V	74/54	
9612		H/V	74/54	
12015		H/V	74/54	
14418		H/V	74/54	
16821		H/V	74/54	
19224		H/V	74/54	
21627		H/V	74/54	
24030		H/V	74/54	

Page 15 of 36

Date: 2010-01-22

Report No: 1001033

Product:	Stick Radio Control	Test Mode:	Middle Channel
Test Item:	Fundamental Radiated Emission Data	Temperature:	25℃
Test Voltage:	12VDC	Humidity:	56%
Test Result:	Pass		

Frequency	Emission PK/AV	Horiz /	Limits PK/AV	Margin
(MHz)	(dBuV/m)	Vert	(dBuV/m)	(dB)
2441	83.46(PK)	Н	114/94	-10.54
2441	88.94(PK)	V	114/94	-5.06
4882		V	74/54	
4882		Н	74/54	
7323		H/V	74/54	
9764		H/V	74/54	
12205		H/V	74/54	
14646		H/V	74/54	
17087		H/V	74/54	
19528		H/V	74/54	
21969		H/V	74/54	
24410		H/V	74/54	

Page 16 of 36

Report No: 1001033 Date: 2010-01-22

Product:	Stick Radio Control	Test Mode:	High Channel
Test Item:	Fundamental Radiated Emission Data	Temperature:	25℃
Test Voltage:	12VDC	Humidity:	56%
Test Result:	Pass		

Frequency	Emission PK/AV	Horiz /	Limits PK/AV	Margin
(MHz)	(dBuV/m)	Vert	(dBuV/m)	(dB)
2480	85.51(PK)	Н	114/94	-8.49
2480	95.16(PK)/84.78(AV)	V	114/94	-18.84/-9.22
4960		V	74/54	
4960		Н	74/54	
7440		H/V	74/54	
9920		H/V	74/54	
12400		H/V	74/54	
14880		H/V	74/54	
17360		H/V	74/54	
19840		H/V	74/54	
22320		H/V	74/54	
24800		H/V	74/54	

Note: (1) PK= Peak, AV= Average

- (2) Emission Level = Reading Level + Probe Factor + Cable Loss.
- (3)Margin=Emission-Limits
- (4)According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (5) The measured PK value less than the AV limit.

Report No: 1001033 Date: 2010-01-22




# B. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep transmitting Mode: Low Channel

**Results:** Pass

Please refer to following diagram for individual

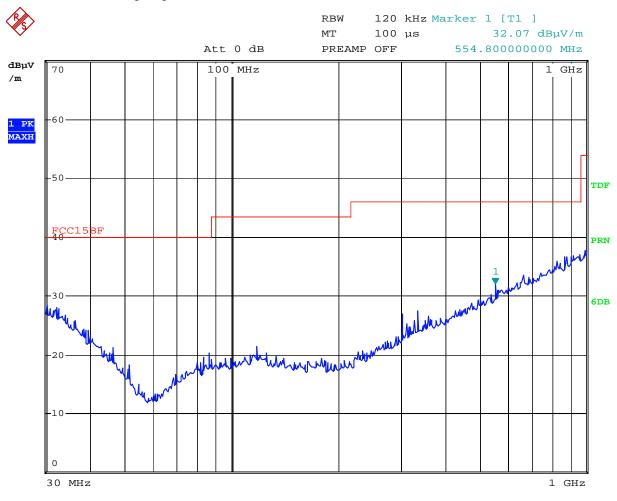

Date: 20.JAN.2010 20:17:13

Frequency (MHz)	Frequency (MHz) Level@3m (dB $\mu$ V/m)		Limit@3m (dB \u03b4 V/m)		
		Н			

Report No: 1001033 Page 18 of 36


Date: 2010-01-22



EUT set Condition: Keep transmitting Mode: Low Channel

**Results:** Pass

Please refer to following diagram for individual

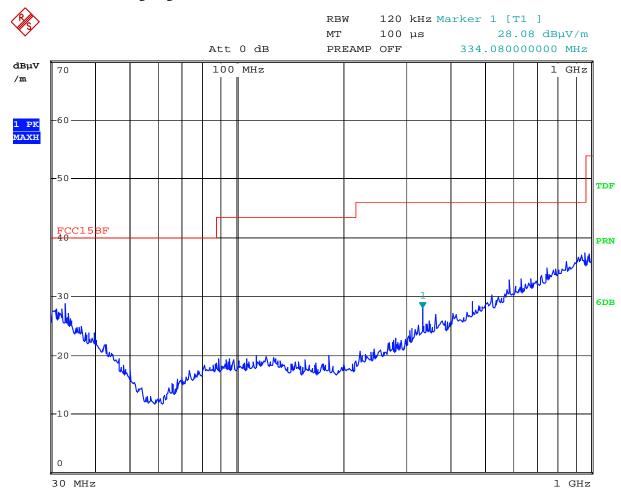

Date: 20.JAN.2010 20:18:05

Frequency (MHz)	Level@3m (dB $\mu$ V/m)	Antenna Polarity	Limit@3m (dB $\mu$ V/m)
		V	

Report No: 1001033 Page 19 of 36

Date: 2010-01-22




Radiated Emission from 0.009MHz-30MHz

EUT set Condition: Keep transmitting Mode: Low Channel

**Results:** Pass

Please refer to following diagram for individual

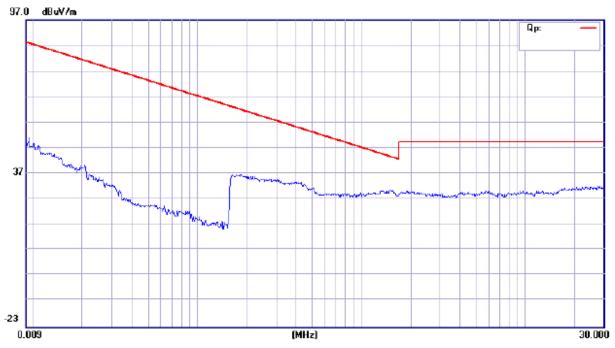

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \( \mu \) V/m)

Page 20 of 36

Report No: 1001033 Date: 2010-01-22




# 7. Band Edge

#### 7.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) Set Spectrum as RBW=VBW=100kHz and Peak detector used
- (3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (4) The antenna polarization: Vertical polarization and Horizontal polarization.

# 7. 2 Radiated Test Setup

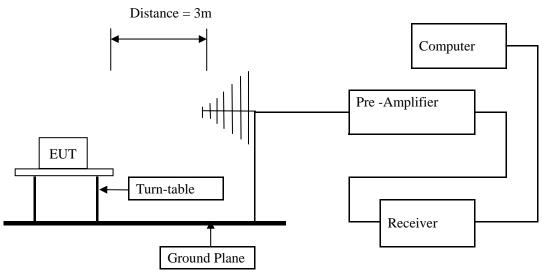

For the actual test configuration, please refer to the related items – Photos of Testing

## 7.3 Configuration of The EUT

Same as section 5.3 of this report

### 7.4 EUT Operating Condition

Same as section 5.4 of this report.

#### 7.5 Band Edge Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

The report refers only to the sample tested and does not apply to the bulk.

Page 21 of 36

Report No: 1001033 Date: 2010-01-22



#### 7.6 Test Result

Product:		Stick Ra	dio Cont	rol	Tes	t Mode:		Low Channel-Vertical		
Mode	Keeping Transmitting			Test	Voltage		DC12V			
Temperature		24	24 deg. C Humidity 5		56% RH			56% RH		
Test Result:		]	Pass		De	etector		P	K	
2390MHz	PK (	dBμV/m)	Less	s than 40	1	Limit		74(dB	μV/m)	
2390MHZ	AV(	dBμV/m)			1	-111111t		54(dB	$\mu V/m)$	
		Marker	1 [T1]		RBW	1 MI	Ηz	RF Att	0 dB	
Ref Lvl				0 dB $\mu$ V	VBW	1 MI				
$97 \text{ dB}\mu\text{V}$		2	.403026	05 GHz	SWT	5 m:	5	Unit	dBμV	
97						<b>▼</b> 1	[T1]	82	.90 dBμV	A
90						₩-		<del>2.4030</del> 2	2 <del>605 GHz</del>	
						∇2	[T1]		. <mark>22 dB<i>µ</i>V 3000 GHz</mark>	
80								2.33000	J000 011Z	
—D1 74 dE	μ٧									
70										
1MAX										1 M
60								+++		
50								+		
40								N /	Mum,	
when well me	~~~	ummun	~~www.	Luline	Muham	whom	Name	M	h	
30										
20										
10										
0										
-3 <b>L</b> Start 2.3	1 GHz	<u> </u>		11 1	1Hz/			Stop 2	2.42 GHz	
	JAN.2		18:27					1		

Note: Field Strength in restrict band measured in conventional manner

Page 22 of 36

Product:		Stick Ra	idio Conti	rol	Tes	t Mode:	L	ow Channe	el-Horizont	al
Mode	Keeping Transmitting			Test	Voltage		DC12V			
Temperature		24	deg. C			RH	RH			
Test Result:		]	Pass		De	etector		P	K	
2390MHz	PK (	dBμV/m)	Less	than 40	1	Limit		74(dB	μV/m)	
2390MHZ	AV(c	dBμV/m)			1	اااااال		54(dB	l(dBµV/m)	
		Marker	1 [T1]		RBW	1 MH	Hz R	KF Att	0 dB	
Ref Lvl				6 dB $\mu$ V	VBW	1 MH				
97 dBμV		2	.403026	05 GHz	SWT	5 m:	5 L	Jn i t	dB $\mu$ V	
90						<b>v</b> <sub>1</sub>	[T1]	73	.16 dBμV	Α
90						∇2	[T1]	32	.42 dBμV	
80								2.39000	000 GHz	
—D1 74 dE	! #\\/							<u>1</u>		
70 74 00	μν							A		
1MAX 60										1MA
50										
40									A	
Muhamah	while	hermalina	maham	wholm	harallhanner	halem	www.h	₩ V	W White	
30										
20										
10										
-3										
Start 2.3	1 GHz			11 ٢	1Hz/			Stop 2	2.42 GHz	
te: 08.	JAN.2	010 20:	22:40							

Page 23 of 36

Report No: 1001033

Date: 2010-01-22



#### Note: 1. Field Strength in restrict band measured in conventional manner

2. Emission Level = Reading Level + Probe Factor + Cable Loss.

Page 24 of 36

Report No: 1001033 Date: 2010-01-22

Product:	Stick Radio Control				Test	t Mode:	I	High Channel-Horizontal		
Mode	Keeping Transmitting			Test V	Test Voltage Humidity		DC	12V		
Temperature	24 deg. C,		Humic	56% RH						
Test Result:		I	Pass		De	etector		PK		
2483.5MHz	PK (dl	BμV/m)	3	35.83	1	imit		74(dB	μV/m)	
2465.5MITZ	$AV(dB\mu V/m)$ Limit		54(dB	μV/m)						
	~	larker 1	[T1]		RBW	1 M	Hz I	RF Att	0 dB	
Ref Lvl				6 dB $\mu$ V	VBW	1 M				
97 dB $\mu$ V		2.	. 479809	62 GHz	SWT	5 m	s l	Jn i t	dB $\mu$ V	
97						<b>▼</b> 1	[T1]	78.	.56 dBμV	Α
90						Πο.	F. T. A. 3	<del>2.47980</del>	962 6Hz	
	4					∇2	[T1]	42.	$31~\mathrm{dB}\mu\mathrm{V}$	
80		_						2.40330	JUUU UIIZ	
—D1 74 dB	μν/	$\rightarrow$								
70	$\overline{}$	$\rightarrow$								
1MAX	/	\								1MA
60	<del>'</del>	<del></del>								
50										
			2							
40			There	Mulum	. M. A. Maria a La	n Artik telepe	adu ar .	uluhum	1	
30				V 401	4		Acarbarti			
30										
20										
20										
10										
10										
-3 -3										
Start 2.4	75 GHz			2.5	MHz/			Stop	2.5 GHz	
Date: 08.	JAN.20	10 20:	26:02							

Note: 1. Field Strength in restrict band measured in conventional manner

2. Emission Level = Reading Level + Probe Factor + Cable Loss.

Report No: 1001033 Page 25 of 36

Date: 2010-01-22



# 8.0 Antenna Requirement


#### **Applicable Standard**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.


An RF cable connected to the reverse polarity SMA connector, and a dipole antenna connected to the reverse polarity SMA connector. The maximum Gain of the antennas is 3.0dBi.

Test Result: Pass


Page 26 of 36

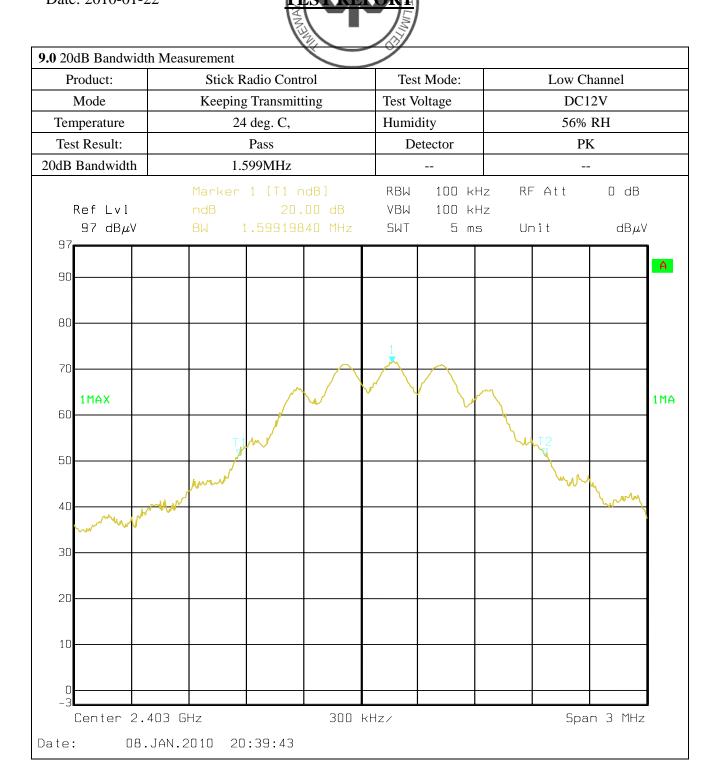

Page 27 of 36

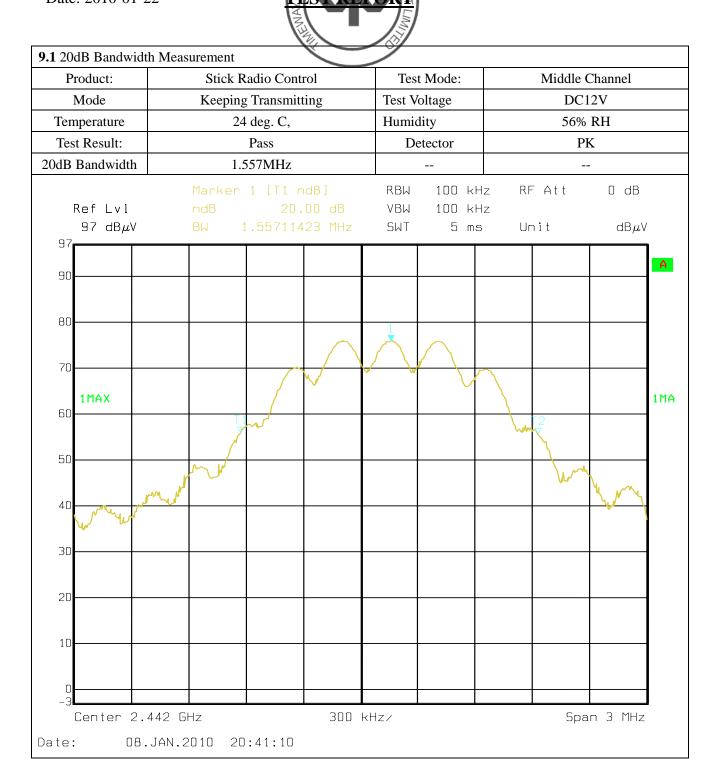

Page 28 of 36

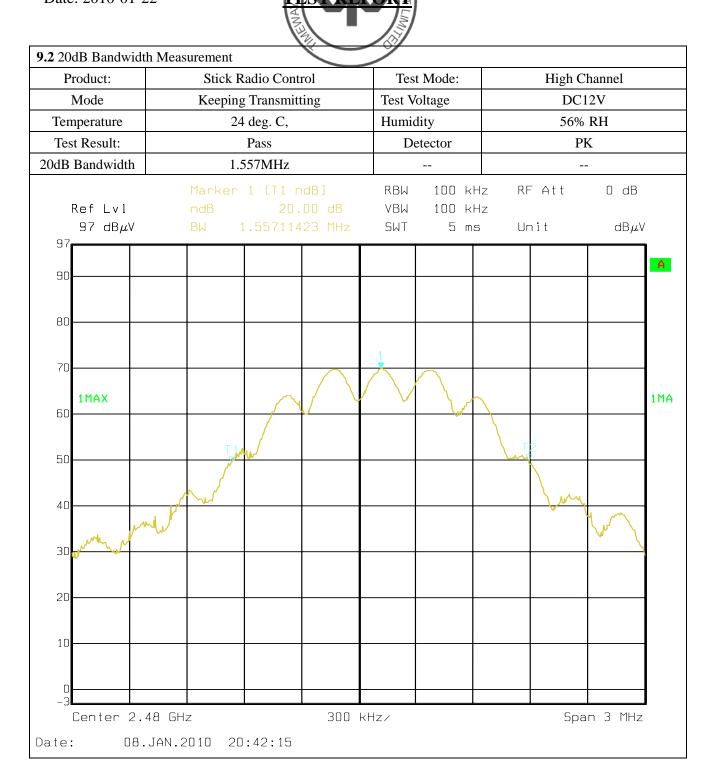

Page 29 of 36

Report No: 1001033 Date: 2010-01-22



#### 10.0 FCC ID Label

# FCC ID: V6KN-6

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

#### **Mark Location:**



Page 30 of 36

Report No: 1001033 Date: 2010-01-22



# 11.0 Photo of testing

#### 11.1 Conducted test View--



Page 31 of 36

Report No: 1001033 Date: 2010-01-22



#### 11.2 Radiated emission test view



Page 32 of 36

Report No: 1001033 Date: 2010-01-22



#### Photo for the EUT 11.3







The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Report No: 1001033 Date: 2010-01-22





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to


adopt any other remedies which may be appropriate.

Page 34 of 36

Report No: 1001033 Date: 2010-01-22





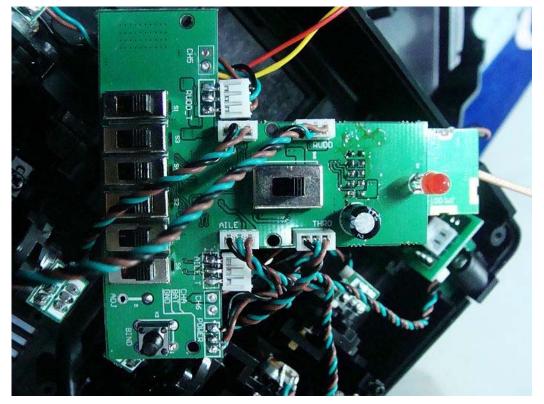

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 35 of 36

Report No: 1001033 Date: 2010-01-22



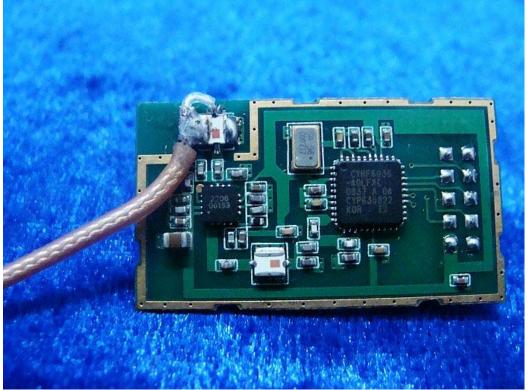

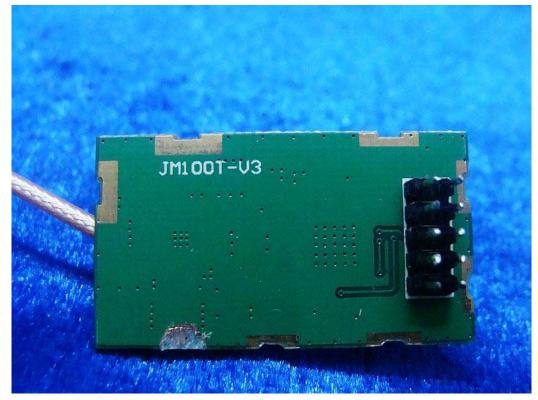

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 1001033 Page 36 of 36

Date: 2010-01-22



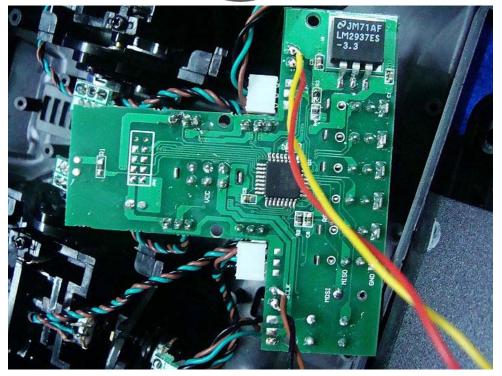

-- End of the report--