



Bundesnetzagentur

# Test report

AIN19a03

BNetzA-CAB-02/21-01

**Product / EUT:** RFID reader  
**Type designation:** URH 1LA - x/U/C/B/H/N/CS2  
**Tested type:** URH 1LA - x/U/C/B/H/N/CS2  
**EUT authorization:** ☒ Certification ☐ Declaration of Conformity  
☐ Verification  
**Production level:** 03/2016  
**S/N:** 3652  
**Manufacturer:** AEG Identifikationssysteme GmbH  
Hörvelsinger Weg 47  
89081 Ulm / Germany

**Test remit:** FCC Rules 47 CFR Part 15 – Subpart C – Intentional radiators  
in accordance with the procedures given in  
§15.207; 15.209

**The standards were:** ☒ kept\*  
☐ not kept\*


**\*Remark:** ☒ Validation covered by the accredited scope  
☐ Validation not covered by the accredited scope  
according: \_\_\_\_\_  
☐ Validation of the EMC-requirements partly proceeded

**Applicant:** AEG Identifikationssysteme GmbH  
Hörvelsinger Weg 47  
89081 Ulm / Germany

**EUT-**  
**Date of arrival:** 2016-03-21  
**Test ID:** PRN12\_05  
**Date(s) of test:** 2016-03-23 – 2016-04-25

Burgrieden, 2016-07-08

Released by:

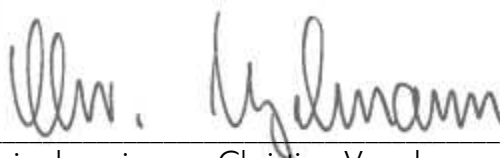

Principal engineer - Christian Vogelmann

**Test laboratory:** ☒ EMCE GmbH  
Ingenieurbüro für EMV-Prüfungen und Schaltungsentwicklung  
Untere Wiesen 1 / 88483 Burgrieden / Germany  
  
DAkkS-Registration No.: D-PL-12122-01-01  
CAB-Registration No.: BnetzA-CAB-02/21-01/1  
FCC-Registration No.: 219415

**Test procedure:** ANSI C63.10-2013

**Responsible inspector:** Mr. Hauser  
EMCE GmbH  
Ingenieurbüro für EMV-Prüfungen und Schaltungsentwicklung

**Contact person:** Mr. Köster / AEG Identifikationssysteme GmbH

EUT-

**Description:** Handheld LF-RFID reader.  
x = no front-label  
U = USB interface  
H = HID interface  
B = Bluetooth interface  
CSx = customer specific software, sequential number x  
C = real time clock  
N = external power supply

**Voltage supply:** 120V/60Hz

**Fundamental frequency:** 134kHz,  
**Frequency list:** 32.768kHz; 17.1776MHz; 20MHz; 48MHz

**Temperature range:** n/a

**Approximate size:** LxWxH / cm - 13.5x7.0x2.5

### Supplied / used equipment:

Designation	Type	Manufacturer	S/N
Laptop	Inspiron 5150	Dell	CN-0W0941-1296136J-2083
AC Adapter (Inspiron 5150)	PA-1131-02D	Dell	CN-9Y819-48010-360-0954
Bluetooth – USB Stick	USB Bluetooth Nano Stick	CSL Computer	Mod.No. - BSN23996
Laptop	Lifebook E8110	Fujitsu Siemens	YK2B046965
AC Adapter (Lifebook E8110)	ADP-80NB A	Fujitsu Siemens	CP293661-01
Power supply	VER05US090-JA	XP Power	n/a
Transponder (tag)	Tier ISO, 20mm disc	AEG ID	9990000000000000
Bluetooth module (EUT)	WT12	bluegiga	FCC ID: QOQWT12

### Configuration:

☒  
☐

As-delivered condition\*

Modified\*

\*

Cable designation	Type	Length	Remarks
USB cable	Shielded	0.5m	Stub
Mains cord	2 wire	1.5m	Stub
USB/power supply cable	Shielded	3.0m	n/a

### Remarks:

n/a

**State of revision:**

Source document	New Document	Date / Reviser	Modifications
AIN19_03	AIN19a03	2016-06-24 Chr. Vogelmann	List of valid equipment shrink to used equipment. Test conditions supplemented. Note for the use of RFID and Bluetooth at the same time. Environmental conditions recorded.

## Test equipment list of EMCE GmbH:

Inv.- No.	Designation	Type	Manufacturer	S/N	Calibration: Interval /valid until
001	Test receiver	ESS 5Hz - 1000MHz	Rohde & Schwarz	833776/008 Firmware: Main: 1.21 OTP: 02.01 GRA: 02.03	1 Year(s)/ 2016-10-05
003	LISN 1	ESH3-Z5	Rohde & Schwarz	835268/007	1 Year(s)/ 2016-08-31
004	LISN 2	ESH3-Z5	Rohde & Schwarz	835268/003	1 Year(s)/ 2016-11-30
008	Loop antenna 9kHz-30MHz	HFH2-Z2	Rohde & Schwarz	835776/0002	3 Year(s)/ 2016-11-22
009	Antenna 30-300MHz	VHBA9123 / BBA9106	Schwarzbeck	435	3 Year(s)/ 2018-10-27
010	Antenna 250-1200MHz	UHALP 9108A	Schwarzbeck	108	2 Year(s)/ 2016-09-05
011	Antenna 30-300MHz	VHBA9123 / BBA9106	Schwarzbeck	0403/94	2 Year(s)/ 2016-09-05
012	Antenna 250-1200MHz	UHALP 9108A	Schwarzbeck	166	3 Year(s)/ 2018-11-10
014	OATS	3m	EMCE GmbH		3 Year(s)/ 2017-10-31
015	OATS	10m	EMCE GmbH		3 Year(s)/ 2017-10-31
042	AC-Source/ Analyser/ Norm impedance	EMV D 5000/PAS	Spitzenberger+ Spies	A2747 00/0 0501 A2747 07/00501 (ARS16/3)	2 Year(s)/ 2017-08-31
058	Receiver	ESIB 40	Rohde & Schwarz	100200/ Firmware 4.35	1 Year(s)/ 2017-04-07
062	Semi anechoic chamber #2	13.0m x 7.0m x 5.0m	EMC-Technik & Consulting GmbH		1 Year(s)/ 2016-07-31
067	LISN	ESH2-Z5	Rohde&Schwarz	872460/043	1 Year(s)/ 2016-08-31
068	LISN	ESH2-Z5	Rohde&Schwarz	872460/042	1 Year(s)/ 2016-08-31
070	Pulse limiter + 10dB Attenuator	ESH3-Z2	Rohde&Schwarz	n/a	1 Year(s)/ 2016-08-31
175	EMI Test receiver	ESR7	Rohde & Schwarz	101108 Firmware:	1 Year(s)/ 2016-07-14

Inv.- No.	Designation	Type	Manufacturer	S/N	Calibration: Interval /valid until
				FW V2.26	
997	EMC Software	EMC32 Vers. 8.53.0	Rohde& Schwarz	n/a	



## Scope:

1	EMC-Test(s).....	8
1.1	Emission according 47 CFR Part 15 Subpart C - 04/2016 .....	8
1.1.1	Terminal voltage according 47 CFR Part 15 Subpart C - 04/2016 .....	8
1.1.1.1	Test set up .....	9
1.1.1.2	Test.....	11
1.1.2	Radio disturbances according 47 CFR Part 15 Subpart C - 04/2016 .....	21
1.1.2.1	Test set up .....	22
1.1.2.2	Test – Radiated emission fundamental.....	27
1.1.2.3	Test – Spurious emissions.....	29
1.1.2.4	Restricted bands of operation .....	45
1.1.2.5	Antenna requirement .....	48
2	Summary .....	49

## 1 EMC-Test(s)

### 1.1 Emission according 47 CFR Part 15 Subpart C - 04/2016

#### 1.1.1 Terminal voltage according 47 CFR Part 15 Subpart C - 04/2016

- ☒ Full compliance  
☐ Precompliance  
☐ Test not requested\*  
☐ Test not carried out\*

\*  
\_\_\_\_\_

#### Test location

<input checked="" type="checkbox"/>	Inv.-No.	Designation	Type (LxWxH)	Manufacturer	Location
<input checked="" type="checkbox"/>	588	Shielded room #2	8.3/5.8 x 5.5/2.9 x 3.4m	EMC-Technik & Consulting GmbH	EMCE GmbH Untere Wiesen 1 88483 Burgrieden
	584	Shielded room #3	3.6 x 3.6 x 2.5m	Siemens AG	EMCE GmbH Untere Wiesen 1 88483 Burgrieden
	678	Shielded room #4	4.0 x 4.0 x 3.5m	EMC-Technik & Consulting GmbH	EMCE GmbH Untere Wiesen 1 88483 Burgrieden
	062	Semi anechoic chamber #2	13.5 x 6.1 x 5.5m	EMC-Technik & Consulting GmbH	EMCE GmbH Untere Wiesen 1 88483 Burgrieden
	679	Full anechoic chamber #3	8.8 x 4.6 x 4.2m	Albatross Projects GmbH	EMCE GmbH Untere Wiesen 1 88483 Burgrieden
	014	Open area test site	10m	EMCE GmbH	EMCE GmbH Untere Wiesen 1 88483 Burgrieden
	015	Open area test site	3m	EMCE GmbH	EMCE GmbH Untere Wiesen 1 88483 Burgrieden
	042	Voltage- / current source test site	0-382VDC 0-270VAC 1x10kW / 3x5kW	Spitzenberger + Spies	EMCE GmbH Untere Wiesen 1 88483 Burgrieden
	n/a	Alternative test site	n/a	n/a	n/a



#### 1.1.1.1 Test set up

According ANSI C63.10-2013



## Used test equipment

<input checked="" type="checkbox"/>	Inv.-No.	Designation	Type	Manufacturer	S/N
<input checked="" type="checkbox"/>	001	Test receiver	ESS 5Hz - 1000 MHz	Rohde & Schwarz	833776/008
	002	Probe	ESH2-Z3	Rohde & Schwarz	
	003	LISN 1	ESH3-Z5	Rohde & Schwarz	835268/007
	004	LISN 2	ESH3-Z5	Rohde & Schwarz	835268/003
	005	LISN 3	NNB 4/32T	Rolf Heine HF-Technik	4/32T-96015
	006	LISN	NNBM 8125	Schwarzbeck	8125371
	007	Absorbing clamp	MDS 21	Schwarzbeck	942436
	025	Current clamp BCI	F-120-2	FCC	47
	026	Coupling device network	CDN 801-M3-25	FCC	92
	030	Coupling device network	CDN-S9	EMCE GmbH	
	031	Coupling device network	CDN-S9	EMCE GmbH	
	036	Coupling device network	CDN-M5-25	EMCE GmbH	
	037	Coupling device network	CDN-S1	EMCE GmbH	
<input checked="" type="checkbox"/>	042	AC-Source / Analyser / Norm impedance	EMV D5000/PAS	Spitzenberger + Spies	A274700/ 0 0501
	058	Test receiver	ESIB 40	Rohde & Schwarz	100200
	060	HF-coupling clamp	KEMA 801	Schaffner	20808
<input checked="" type="checkbox"/>	067	LISN 5	ESH2-Z5	Rohde & Schwarz	0872460/043
<input checked="" type="checkbox"/>	068	LISN 4	ESH2-Z5	Rohde & Schwarz	0872460/042
	073	Absorbing clamp	MDS 21	Schwarzbeck	881757

All used test equipment are checked resp. calibrated periodically.

☒ Test equipment was checked and complied to the requirements

## Test / Measurement uncertainty

The measurement uncertainty in the test met the guideline of CISPR16-4-2 or better.

Measurement uncertainty of the terminal voltage with an extended coverage factor of  $k=2$ :

Frequency	Measurement uncertainty
9kHz – 150kHz	4.0dB
150kHz – 30MHz	3.6dB

### 1.1.1.2 Test

#### Regulation

47 CFR Part 15 Subpart C - 04/2016

☐ 9kHz - 30MHz

☒ 150kHz - 30MHz

Mains supply  
Limits:

☒ Section 15.207

☐ \_\_

#### Operation mode

EUT arrangement:

☒ Tabletop

☐ Floor standing

Power supply:

☒ 120V/60Hz

☐ 240V/60Hz

Rated voltage variation:

☐ 85%

☐ 115%

Port #	Designation	Remarks
#1	AC power line - EUT	L1/N
#2	AC power line – Laptop	L1/N/PE
#3		

Continuous operation of the RFID reader, supplied with the plug-in power supply and connected to the laptop USB-port.

RFID tag placed at approx. of the half reading distance. The Bluetooth module was configured as "Master" and active. During the test the remote station was removed from the laptop and the Bluetooth module was polling for a BT device. RFID and Bluetooth module were active at the same time.

#### Environmental conditions

Temperature [10 - 40°C]:

20°C

Relative humidity [10 - 90%]:

48%

Environmental conditions during the test:

☒ kept

☐ not kept

## Test - / Measurement procedure

Measurements are made with a receiver according CISPR 16 guidelines. A pulse limiter and a 10dB attenuator at the receiver input is used to protect the receiver. The required frequency range is scanned in an automatically operation. When the EUT is arranged the frequency range is monitored. The setup of the equipment and the cables are manipulated within the range to produce the highest emission. Frequency steps of  $<0.5 \times$  receiver bandwidth and peak / average detectors are used. If the conducted emission is closer than 20dB to the limits or exceeds, the receiver will retest the emission with quasipeak or average detector. The identified frequency and amplitude of the six highest conducted emissions relative to the limit lines are listed for each current-carrying conductor. If less than six emission frequencies are within the 20dB of the limit, the noise level of the measuring instrument at representative frequencies are reported.

The reported test results are calculated with the following formula:

$$\text{Result (dB}\mu\text{V)} = \text{Reading (dB}\mu\text{V)} + \text{ATF (dB)} + \text{CF (dB)}$$

ATF = Correction factor for the pulse limiter / 10dB attenuator

CF = Correction factor for the cable loss

## Test result

Limits for continuous disturbances:

☒ kept  
☐ not kept

| Remarks: n/a

## Protocol scope

- ☒ Readings - continuous emanation
- ☒ Diagram - continuous emanation

## EMCE GmbH Ing\_buero fuer EMV\_Pruefungen

### Terminal voltage

23. Mar 16 13:34


EUT: URH 1LA  
Manuf: AEG ID GmbH  
Op Cond: Reading tag, half reading distance  
Operator: P. Hauser  
Test Spec: 47 CFR Part 15 Subpart C  
Test ID: PRN12\_05  
Comment: AIN12\_01, Phase L1 - EUT

#### Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	20ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV  
Meas Time: 1 s  
Subranges: 50  
Acc Margin: 6dB

Transducer No.	Start	Stop	Name
3	2	1Hz	1000M
20	9k	30M	Lim_#070

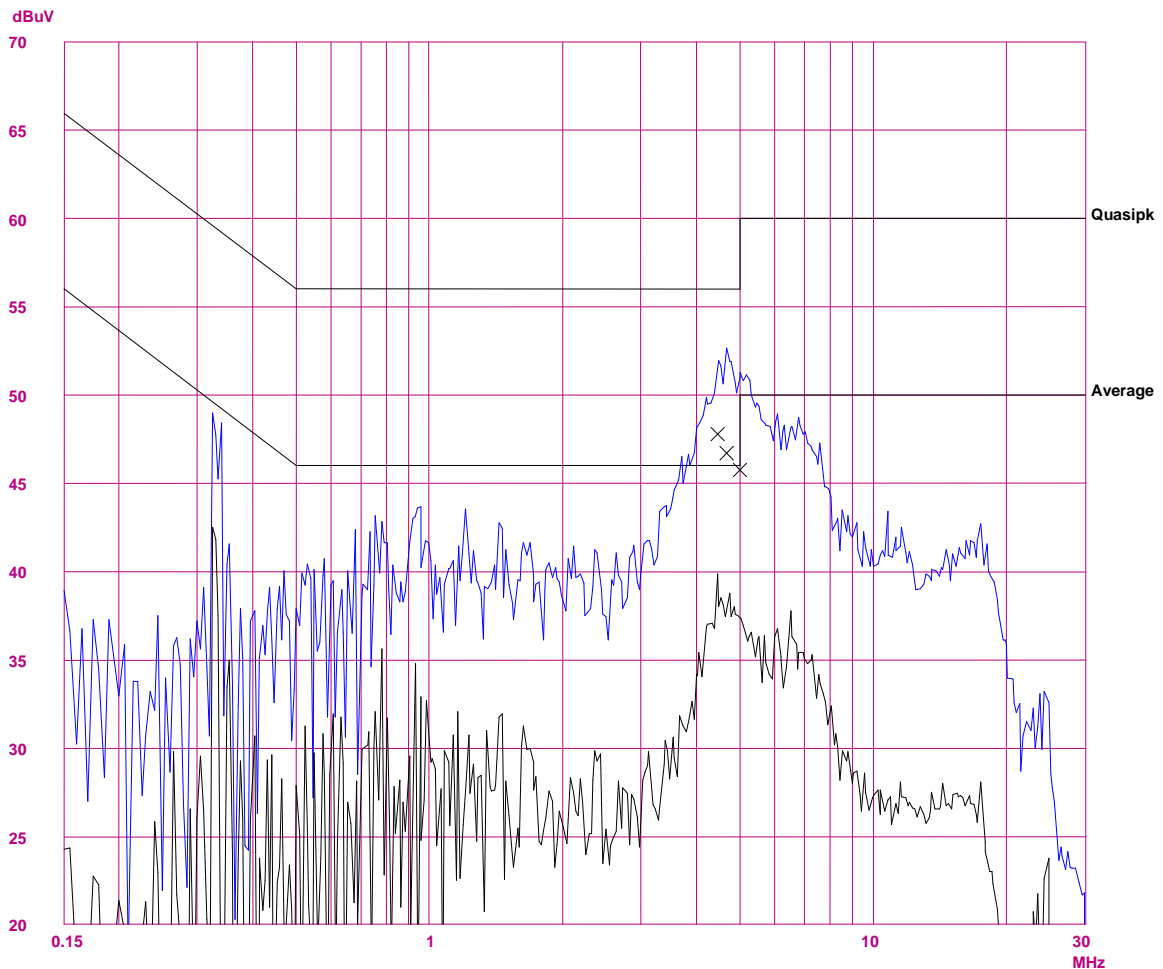



## EMCE GmbH Ing\_buero fuer EMV\_Pruefungen Terminal voltage

23. Mar 16 13:34

EUT: URH 1LA  
Manuf: AEG ID GmbH  
Op Cond: Reading tag, half reading distance  
Operator: P. Hauser  
Test Spec: 47 CFR Part 15 Subpart C  
Comment: Test\_ID PRN12\_05  
AIN12\_01, Phase L1 - EUT

### Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	20ms	AUTO	LN OFF	60dB

### Final Measurement Results:

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV
4.45000	47.7	56.0
4.67500	46.7	56.0
4.99500	45.7	56.0

Frequency	AV Level	AV Limit
MHz	dBuV	dBuV

no Results

\* limit exceeded



## EMCE GmbH Ing\_buero fuer EMV\_Pruefungen

### Terminal voltage

23. Mar 16 13:48


EUT: URH 1LA  
Manuf: AEG ID GmbH  
Op Cond: Reading tag, half reading distance  
Operator: P. Hauser  
Test Spec: 47 CFR Part 15 Subpart C  
Comment: Test\_ID PRN12\_05  
AIN12\_02, Phase N - EUT

#### Scan Settings (1 Range)

Frequencies				Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	30M	5k	10k	PK+AV	20ms	AUTO	LN OFF

Final Measurement: x QP / + AV  
Meas Time: 1 s  
Subranges: 50  
Acc Margin: 6dB

Transducer No.	Start	Stop	Name
3	2	1Hz	1000M Ca_#1006
20	9k	30M	Lim_#070

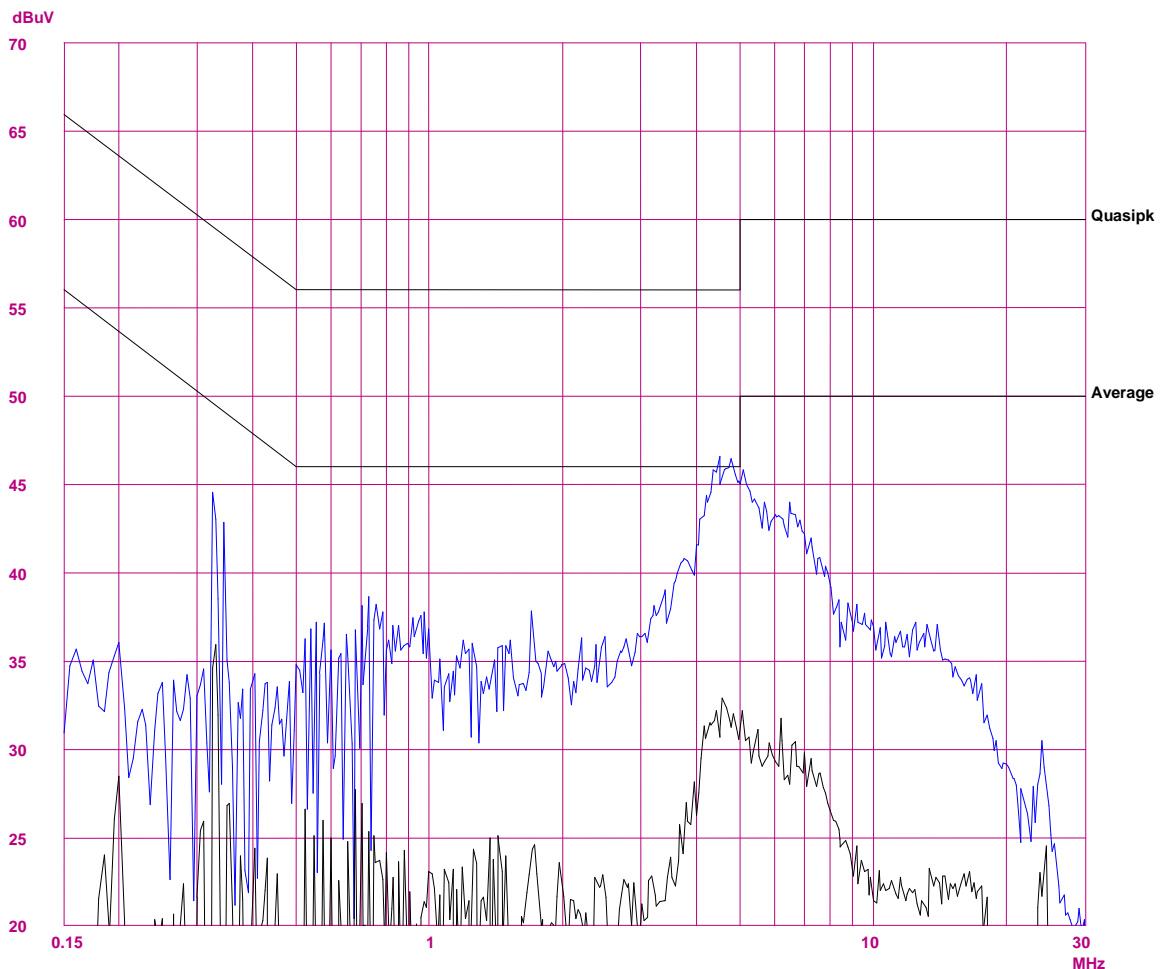

## EMCE GmbH Ing\_buero fuer EMV\_Pruefungen Terminal voltage

23. Mar 16 13:48

EUT: URH 1LA  
Manuf: AEG ID GmbH  
Op Cond: Reading tag, half reading distance  
Operator: P. Hauser  
Test Spec: 47 CFR Part 15 Subpart C  
Comment: Test\_ID PRN12\_05  
AIN12\_02, Phase N - EUT

### Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	20ms	AUTO	LN OFF	60dB

### Final Measurement Results:

no Results

## EMCE GmbH Ing\_buero fuer EMV\_Pruefungen Terminal voltage

23. Mar 16 15:13


EUT: URH 1LA  
Manuf: AEG ID GmbH  
Op Cond: Reading tag, half reading distance  
Operator: P. Hauser  
Test Spec: 47 CFR Part 15 Subpart C  
Comment: Test\_ID PRN12\_05  
AIN12\_03, Phase L1 - laptop

### Scan Settings (1 Range)

Frequencies				Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp OpRge
150k	30M	5k	10k	PK+AV	20ms	AUTO	LN OFF 60dB

Final Measurement: x QP / + AV  
Meas Time: 1 s  
Subranges: 50  
Acc Margin: 6dB

Transducer No.	Start	Stop	Name
3	2	1Hz	1000M Ca_#1006
20	9k	30M	Lim_#070

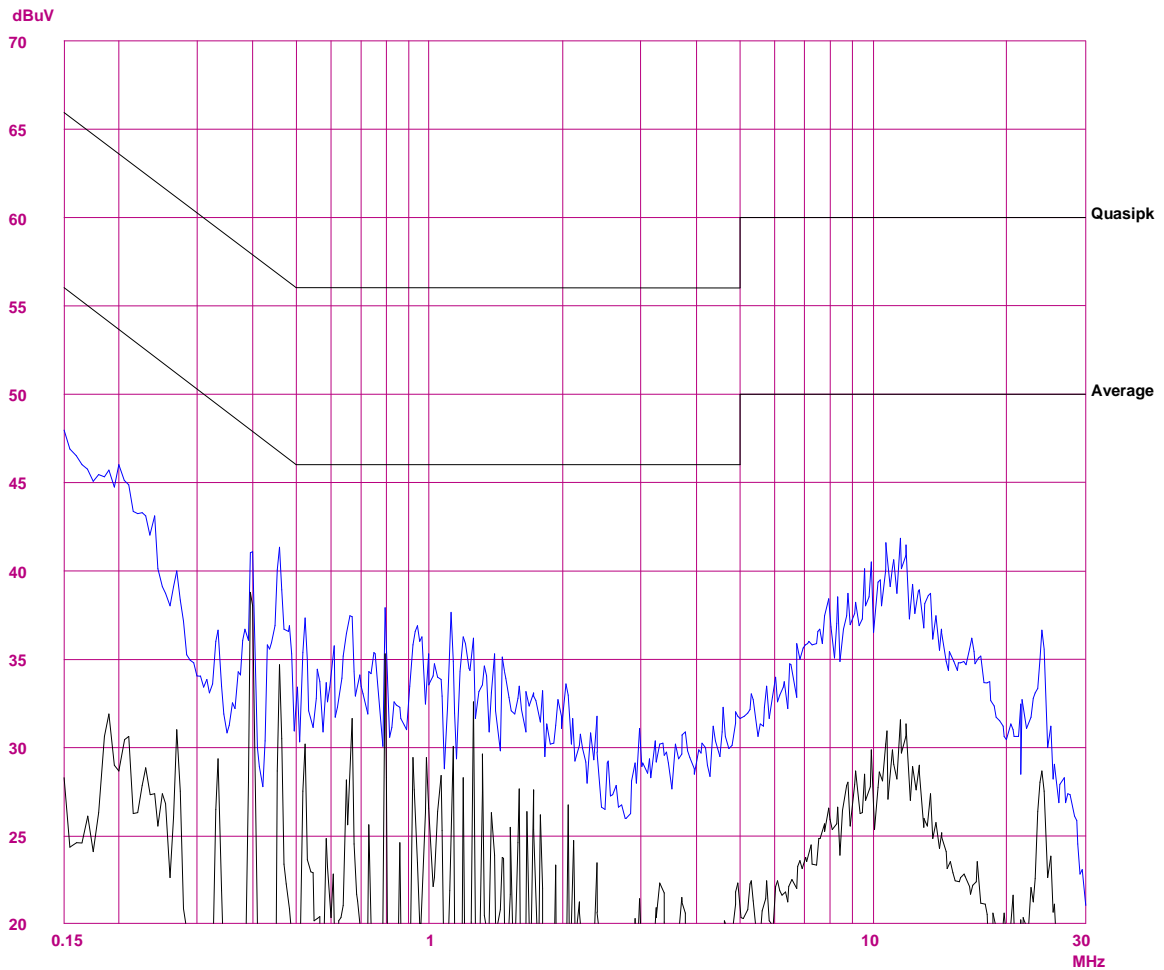

## EMCE GmbH Ing\_buero fuer EMV\_Pruefungen Terminal voltage

23. Mar 16 15:13

EUT: URH 1LA  
Manuf: AEG ID GmbH  
Op Cond: Reading tag, half reading distance  
Operator: P. Hauser  
Test Spec: 47 CFR Part 15 Subpart C  
Comment: Test\_ID PRN12\_05  
AIN12\_03, Phase L1 - laptop

### Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	20ms	AUTO	LN	OFF 60dB

### Final Measurement Results:

no Results

## EMCE GmbH Ing\_buero fuer EMV\_Pruefungen Terminal voltage

23. Mar 16 15:24


EUT: URH 1LA  
Manuf: AEG ID GmbH  
Op Cond: Reading tag, half reading distance  
Operator: P. Hauser  
Test Spec: 47 CFR Part 15 Subpart C  
Comment: Test\_ID PRN12\_05  
AIN12\_04, Phase N - laptop

### Scan Settings (1 Range)

Frequencies				Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp OpRge
150k	30M	5k	10k	PK+AV	20ms	AUTO	LN OFF 60dB

Final Measurement: x QP / + AV  
Meas Time: 1 s  
Subranges: 50  
Acc Margin: 6dB

Transducer No.	Start	Stop	Name
3	2	1Hz	1000M Ca_#1006
20	9k	30M	Lim_#070

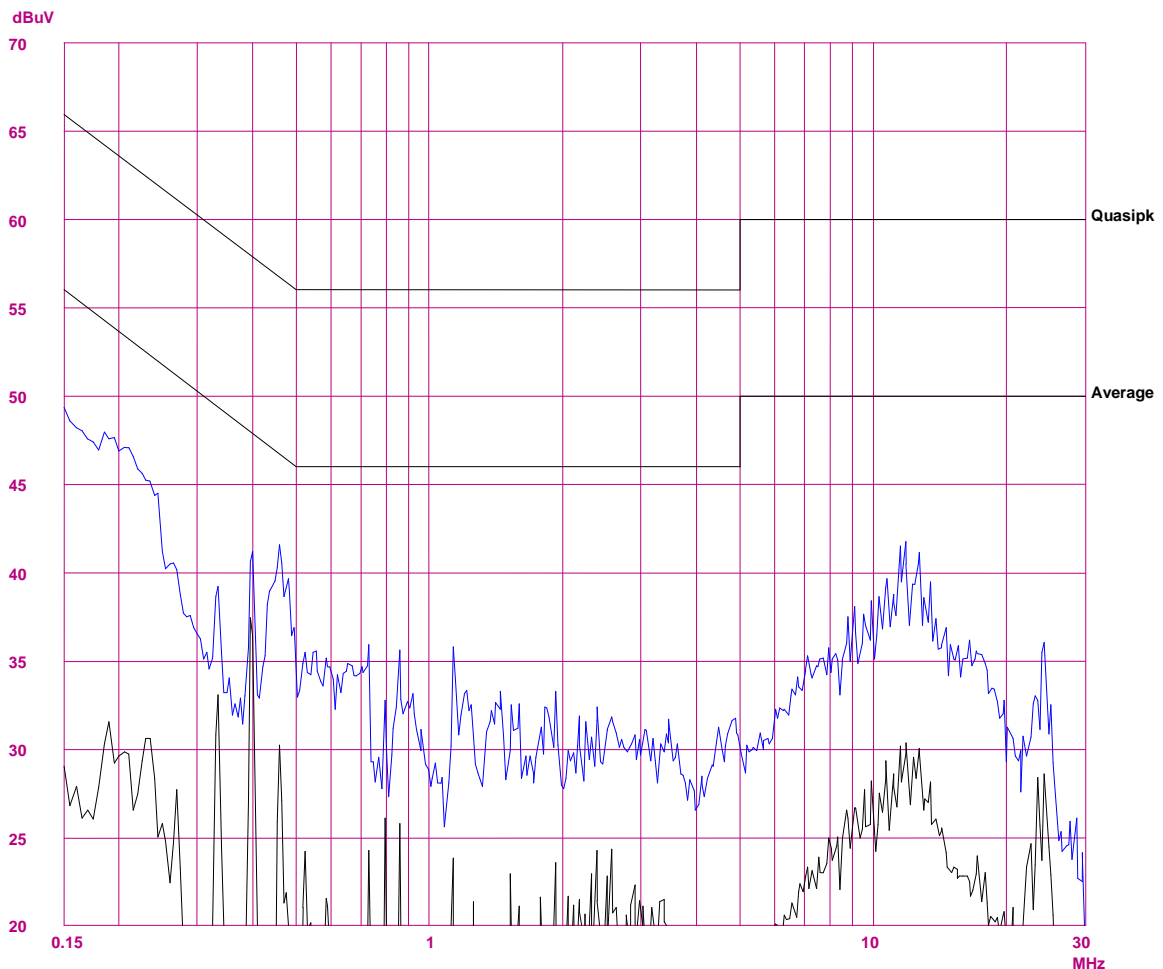

## EMCE GmbH Ing\_buero fuer EMV\_Pruefungen Terminal voltage

23. Mar 16 15:24

EUT: URH 1LA  
Manuf: AEG ID GmbH  
Op Cond: Reading tag, half reading distance  
Operator: P. Hauser  
Test Spec: 47 CFR Part 15 Subpart C  
Comment: Test\_ID PRN12\_05  
AIN12\_04, Phase N - laptop

### Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	20ms	AUTO	LN	OFF 60dB

### Final Measurement Results:

no Results



## 1.1.2 Radio disturbances according 47 CFR Part 15 Subpart C - 04/2016

- ☒ Full compliance  
☐ Precompliance  
☐ Test not requested\*  
☐ Test not carried out\*

\*

### Test location


<input checked="" type="checkbox"/>	Inv.-No.	Designation	Type (LxWxH)	Manufacturer	Location
	588	Shielded room #2	8.3/5.8 x 5.5/2.9 x 3.4m	EMC-Technik & Consulting GmbH	EMCE GmbH Untere Wiesen 1 88483 Burgrieden
	584	Shielded room #3	3.6 x 3.6 x 2.5m	Siemens AG	EMCE GmbH Untere Wiesen 1 88483 Burgrieden
	678	Shielded room #4	4.0 x 4.0 x 3.5m	EMC-Technik & Consulting GmbH	EMCE GmbH Untere Wiesen 1 88483 Burgrieden
<input checked="" type="checkbox"/>	062	Semi anechoic chamber #2	13.5 x 6.1 x 5.5m	EMC-Technik & Consulting GmbH	EMCE GmbH Untere Wiesen 1 88483 Burgrieden
	679	Full anechoic chamber #3	8.8 x 4.6 x 4.2m	Albatross Projects GmbH	EMCE GmbH Untere Wiesen 1 88483 Burgrieden
<input checked="" type="checkbox"/>	014	Open area test site	10m	EMCE GmbH	EMCE GmbH Untere Wiesen 1 88483 Burgrieden
<input checked="" type="checkbox"/>	015	Open area test site	3m	EMCE GmbH	EMCE GmbH Untere Wiesen 1 88483 Burgrieden
	042	Voltage- / current source test site	0-382VDC 0-270VAC 1x10kW / 3x5kW	Spitzenberger + Spies	EMCE GmbH Untere Wiesen 1 88483 Burgrieden
	n/a	Alternative test site	n/a	n/a	n/a

### 1.1.2.1 Test set up

According ANSI C63.10-2013





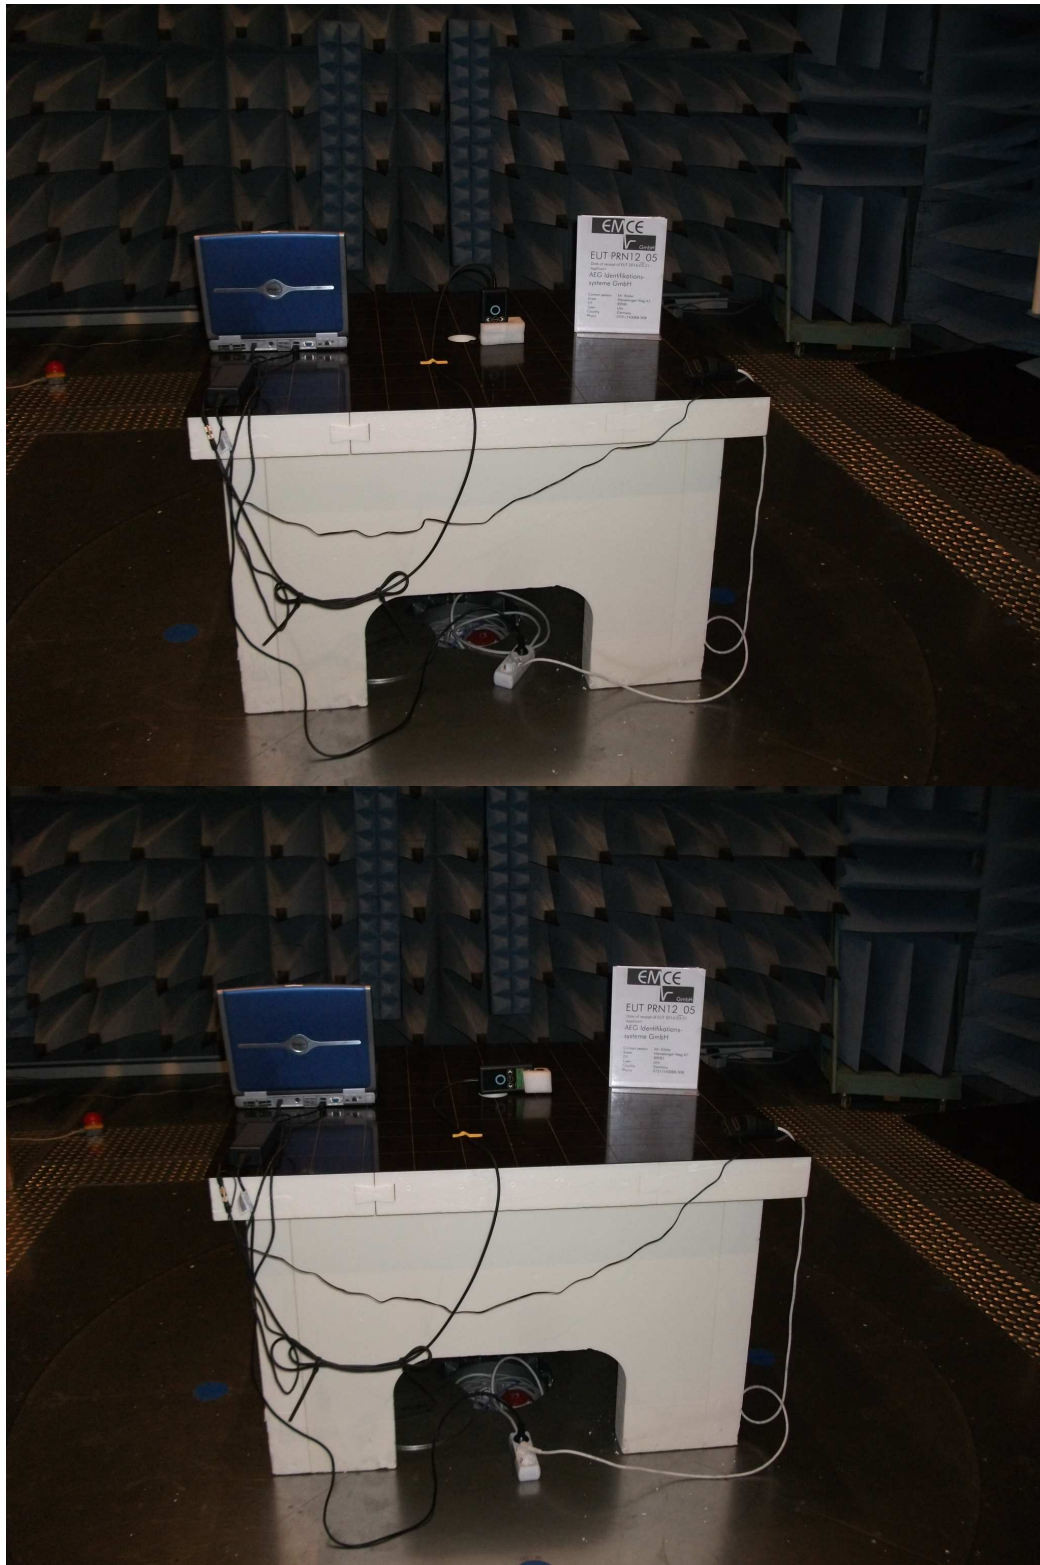



## Used test equipment

<input checked="" type="checkbox"/>	Inv.-No.	Designation	Type	Manufacturer	S/N
<input checked="" type="checkbox"/>	001	Test receiver	ESS 5Hz - 1000 MHz	Rohde & Schwarz	833776/008
	003	LISN 1	ESH3-Z5	Rohde & Schwarz	835268/007
	004	LISN 2	ESH3-Z5	Rohde & Schwarz	835268/003
	005	LISN 3	NNB 4/32T	Rolf Heine HF-Technik	4/32T-96015
	006	LISN	NNBM 8125	Schwarzbeck	8125371
	007	Absorbing clamp	MDS 21	Schwarzbeck	942436
<input checked="" type="checkbox"/>	008	Antenna 9kHz – 30MHz	HFH2-Z2	Rohde & Schwarz	835776/0002
<input checked="" type="checkbox"/>	009	Antenna 30 – 300MHz	VHBA9123 / BBA9106	Schwarzbeck	435
<input checked="" type="checkbox"/>	010	Antenna 250 -1200MHz	UHALP 9108A	Schwarzbeck	108
<input checked="" type="checkbox"/>	011	Antenna 30 – 300MHz	VHBA9123 / BBA9106	Schwarzbeck	0408/94
<input checked="" type="checkbox"/>	012	Antenna 250 -1200MHz	UHALP 9108A	Schwarzbeck	166
	013	Antenna 9kHz – 30 MHz	Loop antenna 1.5m Ø	EMCE GmbH	
	025	Current clamp BCI	F-120-2	FCC	47
	041	HZ-10	Shielded coil	Rohde & Schwarz	849788/020
	042	AC-Source / Analyser / Norm impedance	EMV D5000/PAS	Spitzenberger + Spies	A274700/ 0 0501
<input checked="" type="checkbox"/>	058	Test receiver	ESIB 40	Rohde & Schwarz	100200
	059	Logper. Antenna	HL050	Rohde & Schwarz	100006
	060	HF coupling clamp	KEMA 801	Schaffner	20808
	063	Logper. Antenna	HL023 A2	Rohde & Schwarz	
	067	LISN 5	ESH2-Z5	Rohde & Schwarz	0872460/043
	068	LISN 4	ESH2-Z5	Rohde & Schwarz	0872460/042
	073	Absorbing clamp	MDS 21	Schwarzbeck	881757
	116	Vertical rod antenna	VAMP 9243	Schwarzbeck	9243-205

All used test equipment are checked resp. calibrated periodically.

☒ Test equipment was checked and complied to the requirements



## Test / Measurement uncertainty

The measurement uncertainty in the test met the guideline of CISPR16-4-2 or better.

Measurement uncertainty of the radiated emission with an extended coverage factor of  $k=2$ :

Frequency	Measurement uncertainty
9kHz – 30MHz	on request
30MHz – 300MHz	4.4dB
300MHz – 1GHz	3.4dB
1GHz – 18GHz	on request



### 1.1.2.2 Test – Radiated emission fundamental

#### Regulation

47 CFR Part 15 Subpart C - 04/2016

- |  |  |
|--|--|
| <input checked="" type="checkbox"/> 9kHz - 30MHz | <input type="checkbox"/> 150kHz – 1GHz |
| <input type="checkbox"/> 30MHz - 1000MHz         | <input type="checkbox"/> 1 – 18GHz     |

Limits: ☒ Section 15.209\* ☐ Section 15.225\*

\* The limits for frequencies below 30MHz were corrected for a closer measuring distance by using an extrapolation factor of 40 dB/decade..

Test distance: ☐ 3m ☐ 5m  
☒ 10m ☐ 30m

#### Operation mode

EUT arrangement:	<input checked="" type="checkbox"/> Tabletop	<input type="checkbox"/> Floor standing
Power supply:	<input checked="" type="checkbox"/> 120V/60Hz	<input type="checkbox"/> 240V/60Hz
Rated voltage variation:	<input checked="" type="checkbox"/> 85%	<input checked="" type="checkbox"/> 115%

Continuous operation of the RFID reader supplied by a plug-in power supply and connected to the laptop USB-port.

The Bluetooth module was configured as “Master” and active. During the test the remote station was removed from the laptop and the Bluetooth module was polling for a BT device. RFID and Bluetooth module were active at the same time.

The emanation was maximized while placing the RFID tag inside the field or without tag.

#### Environmental conditions

Temperature [10 - 40°C]:	20°C
Relative humidity [10 - 90%]:	53%

Environmental conditions during the test: ☒ kept  
☐ not kept

## Test - / Measurement procedure

The test was performed at an antenna to EUT distance of 10m in the frequency range  $\leq 30\text{MHz}$  and at 3m distance for frequencies  $\geq 30\text{MHz}$ . Measurements were made with a CISPR receiver with quasi-peak. The average detector is used in the frequency bands 9-90kHz, 110-490kHz and above 1000MHz. For pulse modulated devices with a pulse repetition frequency of 20Hz or less, peak detector is used (15.35a Note). The frequency, the measured value, antenna information and the limit will be printed out.

The reported test results are calculated with the following formula:

$$\text{Field strength (dB}\mu\text{V/m)} = \text{Reading (dB}\mu\text{V)} + \text{AF (dB/m)} + \text{CF (dB)}$$

AF = Correction factor for the antenna

CF = Correction factor for the cable loss

$$\text{Limit}_{10\text{m}} \text{ (dB}\mu\text{V/m)} = \text{Limit (dB}\mu\text{V/m)} + \text{LCF}_{10\text{m}} \text{ (dB)}$$

Limit<sub>10m</sub> Limit calculated for 10m test distance

LCF<sub>10m</sub> = Limit Correction factor for 10m test distance

LCF<sub>10m</sub> for 30m antenna distance = 20dB

LCF<sub>10m</sub> for 100m antenna distance = 40dB

LCF<sub>10m</sub> for 300m antenna distance = 60dB

## Test result

Frequency	Field strength	Limit <sub>10m</sub>	Margin	Ant.-	Ant.-	Detector	Receiver	Supply voltage	Remarks
				Distance	Polar.	Peak /	6dB BW		
MHz	dB $\mu$ V/m	dB $\mu$ V/m	dB	m	H/V	QP / AV	kHz		
0.13422	62.2	85.0	22.8	10.0	V	AV	0.2	120V	
0.13422	62.2	85.0	22.8	10.0	V	AV	0.2	102V	
0.13422	62.2	85.0	22.8	10.0	V	AV	0.2	138V	

Limit<sub>10m</sub> Limit calculated for 10m test distance

Limits for radiated disturbances:

☒ kept

☐ not kept

Remarks: n/a

### 1.1.2.3 Test – Spurious emissions

#### Regulation

47 CFR Part 15 Subpart C - 04/2016

- |   |  |
|---|--|
| <input checked="" type="checkbox"/> 9kHz - 30MHz    | <input type="checkbox"/> 150kHz – 1GHz |
| <input checked="" type="checkbox"/> 30MHz - 1000MHz | <input type="checkbox"/> 1 – 18GHz     |

Limits: ☒ Section 15.209 ☐ \_\_

Test distance: ☒ 3m ☐ 5m  
☒ 10m ☐ 30m

#### Operation mode

EUT arrangement:	<input checked="" type="checkbox"/> Tabletop	<input type="checkbox"/> Floor standing
Power supply:	<input checked="" type="checkbox"/> 120V/60Hz	<input type="checkbox"/> 240V/60Hz
Rated voltage variation:	<input type="checkbox"/> 85%	<input type="checkbox"/> 115%

Continuous operation of the RFID reader supplied by a plug-in power supply and connected to the laptop USB-port.

RFID tag placed at approx. of the half reading distance. The Bluetooth module was configured as "Master" and active. During the test the remote station was removed from the laptop and the Bluetooth module was polling for a BT device. RFID and Bluetooth module were active at the same time.

#### Environmental conditions

Temperature [10 - 40°C]: 20°C  
Relative humidity [10 - 90%]: 53%

Environmental conditions during the test: ☒ kept  
☐ not kept

## Test - / Measurement procedure

The test was performed at an antenna to EUT distance of 10m in the frequency range  $\leq 30\text{MHz}$  and at 3m distance for frequencies  $\geq 30\text{MHz}$ . Measurements were made with a CISPR receiver with quasi-peak. The average detector is used in the frequency bands 9-90kHz, 110-490kHz and above 1000MHz. For pulse modulated devices with a pulse repetition frequency of 20Hz or less, peak detector is used (15.35a Note). The frequency, the measured value, antenna information and the limit will be printed out.

The reported test results are calculated with the following formula:

$$\text{Field strength (dB}\mu\text{V/m)} = \text{Reading (dB}\mu\text{V)} + \text{AF (dB/m)} + \text{CF (dB)}$$

AF = Correction factor for the antenna  
CF = Correction factor for the cable loss

$$\text{Limit}_{10\text{m}} (\text{dB}\mu\text{V/m}) = \text{Limit (dB}\mu\text{V/m)} + \text{LCF}_{10\text{m}} (\text{dB})$$

Limit<sub>10m</sub> = Limit calculated for 10m test distance  
LCF<sub>10m</sub> = Limit Correction factor for 10m test distance  
LCF<sub>10m</sub> for 30m antenna distance = 20dB  
LCF<sub>10m</sub> for 100m antenna distance = 40dB  
LCF<sub>10m</sub> for 300m antenna distance = 60dB

## Test result

Limits for intentional radiators:

☒ kept  
☐ not kept

Level of the fundamental > unwanted emission:

☒ kept  
☐ not kept

Remarks: Radio disturbances below the limit line with a margin > 10dB to the limit are generally not listed.

## Protocol scope

- ☒ Readings - Antenna horizontal polarized.
- ☒ Diagram - Antenna horizontal polarized.
- ☒ Readings - Antenna vertical polarized.
- ☒ Diagram - Antenna vertical polarized.
- ☐ Bandwidth plot – Frequency response vs. supply voltage
- ☒ Precompliance measurement(s) – 3 axis.

Readings - Antenna vertical polarized, Antenna loop lowest height 1 m

Frequency	Field strength	Limit <sub>10m</sub>	Margin	Ant.-	Ant.-	Detector	Receiver	Remarks
				Distance	Polar.	Peak /	6dB BW	
MHz	dB $\mu$ V/m	dB $\mu$ V/m	dB	m	H/V	QP / AV	kHz	
0.26844	42.0	79.0	37.0	10.0	V	AV	10	Increased ambient noise
0.40266	40.0	75.5	35.5	10.0	V	AV	10	Increased ambient noise
0.53688	34.6	53.0	18.4	10.0	V	QP	10	
0.67110	28.7	51.1	22.4	10.0	V	QP	10	
0.80532	26.6	49.5	22.9	10.0	V	QP	10	
0.93954	26.4	48.1	21.7	10.0	V	QP	10	
1.07376	25.9	47.0	21.1	10.0	V	QP	10	
1.20798	26.8	46.0	19.2	10.0	V	QP	10	
1.34220	26.1	45.0	18.9	10.0	V	QP	10	


Limit<sub>10m</sub> Limit calculated for 10m test distance



Diagram - Antenna vertical polarized

Limits according FCC Rules CFR 47 Part 15 – Subpart C


☒ Section 15.209 – Corrected to 10m distance EUT-Antenna

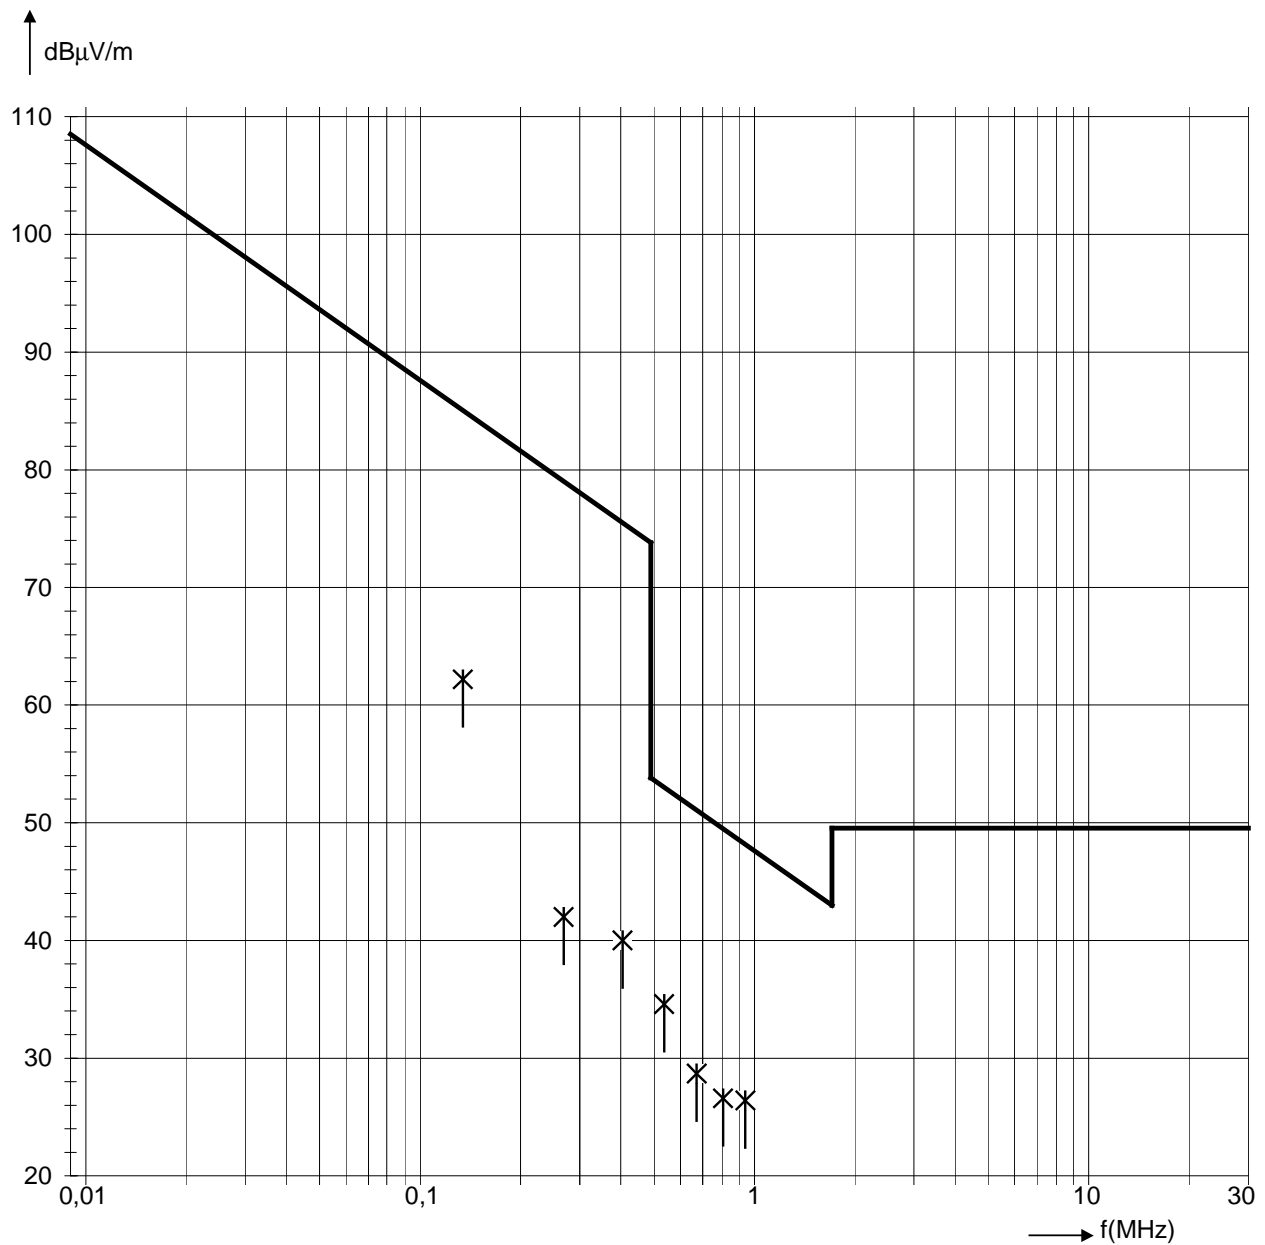

## EUT Information

EUT Name: URH 1LA – x/U/C/B/H/N/CS2  
Test\_ID: / SN: PRN12\_05  
Customer: AEG ID GmbH  
Operational condition: Field on, no tag in field  
Test specification: 47 CFR §15.209  
Antenna information: Distance EUT-Ant.: 3.0m / Polarisation: V / Ant.Height: 1.0m  
Operator: P. Hauser  
File #: AIN18\_08

Magnetic Field Strength dBμV/m with Sweep\_SAC2

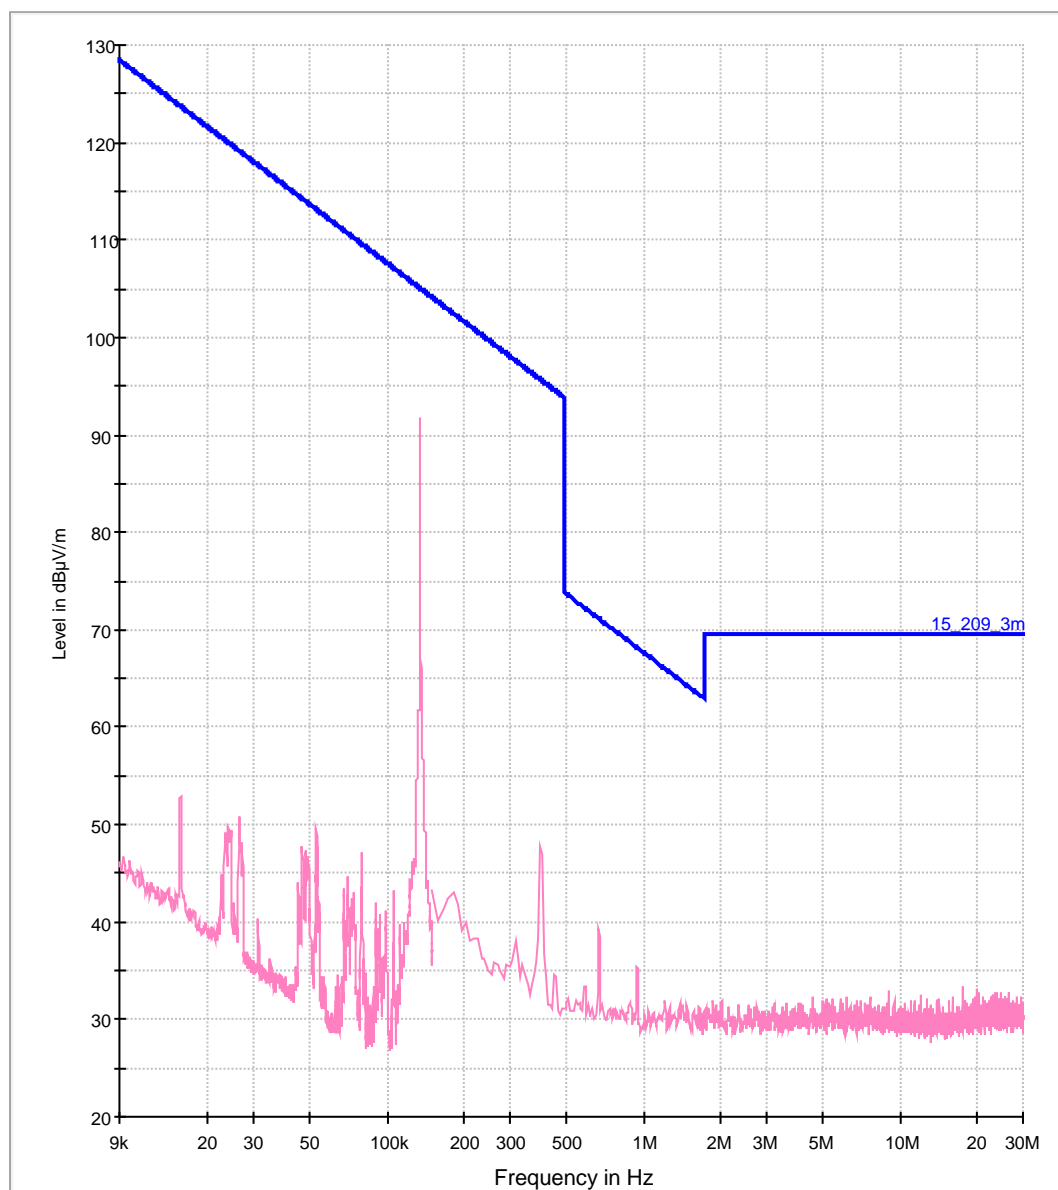


15\_209\_3m [..EMI radiated]  
MaxPeak-MaxHold [Preview Result 1V.Result:2]

# Readings - Antenna horizontal polarized

Frequency	Readings	+ AF Antenna correction factor	+ KF Cable correction factor	Field strength	Limit	Margin	Antenna- Height	Antenna- Polarization	Turntable position
MHz	dB $\mu$ V	dB/m	dB	dB $\mu$ V/m	dB $\mu$ V/m	dB	m	hor./ver.	deg.
60.660	17.1	8.4	1.2	26.7	40.0	13.3	2.3	H	170
65.220	9.5	8.5	1.3	19.2	40.0	20.8	2.3	H	170
192.000	6.6	14.7	2.2	23.5	43.5	20.0	2.0	H	190

Diagram radio disturbances – Antenna horizontal polarized

Limits: ☒ Section 15.209 ☐ \_\_

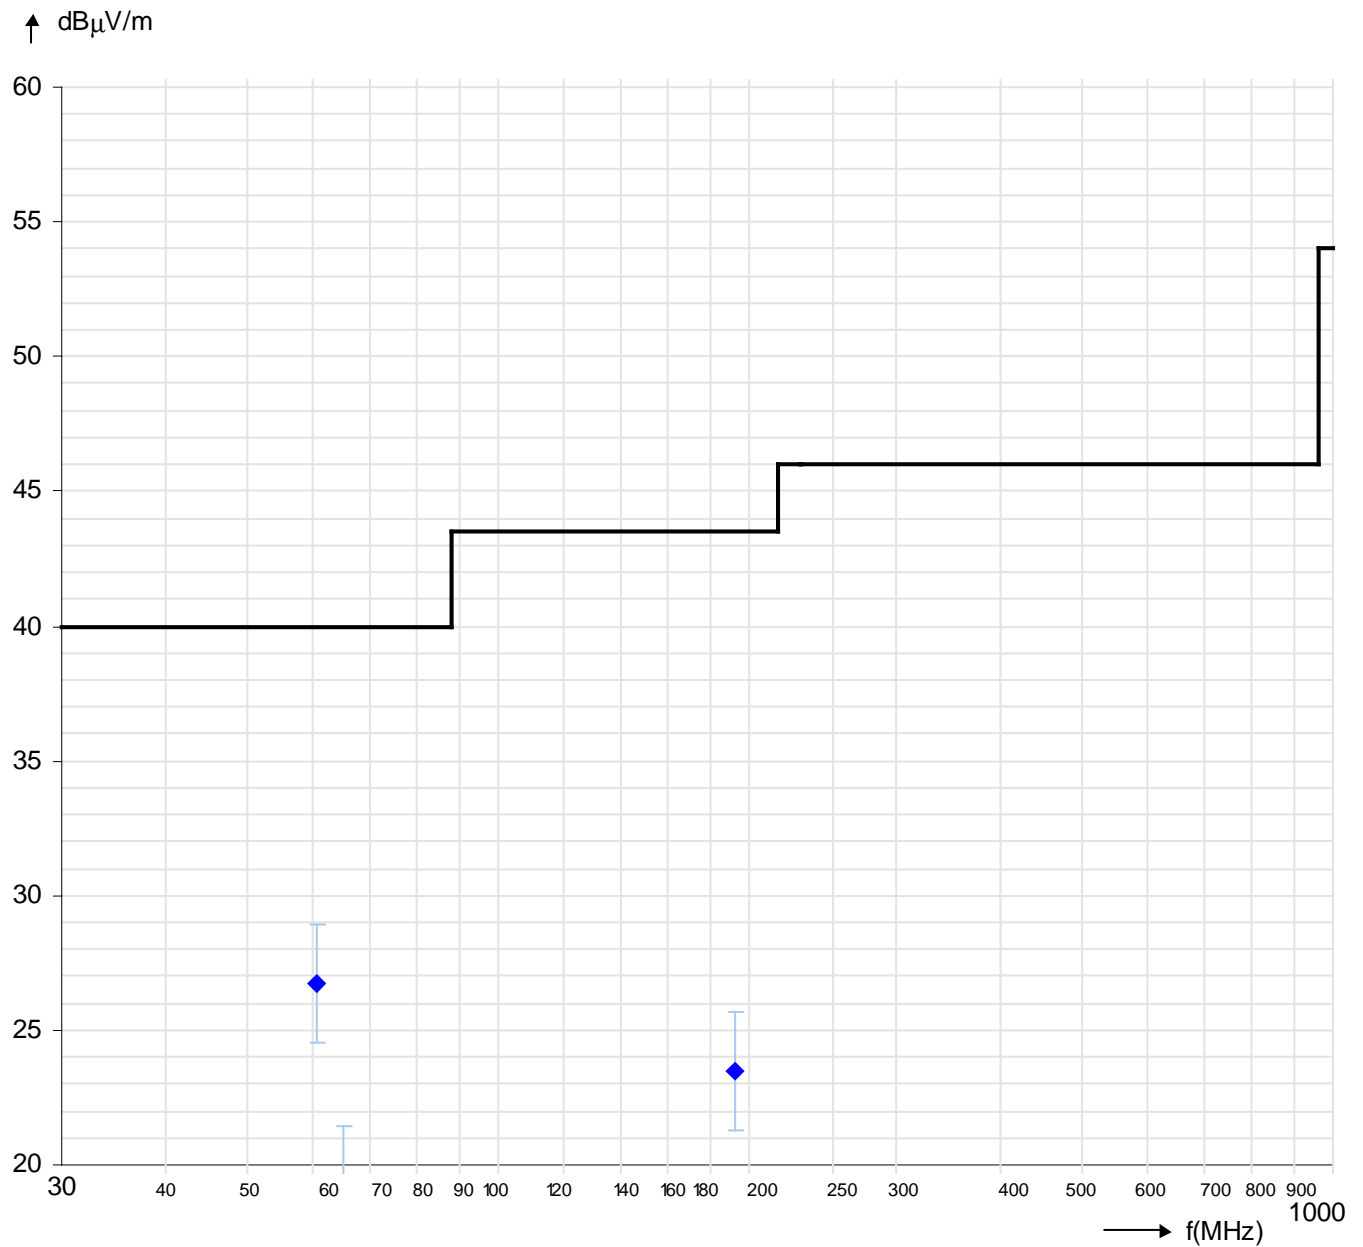


# Readings - Antenna vertical polarized

Frequency	Readings	+ AF Antenna correction factor	+ KF Cable correction factor	Field strength	Limit	Margin	Antenna- Height	Antenna- Polarization	Turntable position
MHz	dB $\mu$ V	dB/m	dB	dB $\mu$ V/m	dB $\mu$ V/m	dB	m	hor./ver.	deg.
68.710	18.1	8.5	1.3	27.9	40.0	12.1	1.0	V	195
69.250	16.5	8.5	1.3	26.3	40.0	13.7	1.0	V	195
70.320	15.2	8.5	1.3	25.0	40.0	15.0	1.0	V	195
79.990	10.8	8.7	1.4	20.9	40.0	19.1	1.0	V	195
106.040	16.4	9.6	1.6	27.6	43.5	15.9	1.0	V	190
189.770	4.0	14.5	2.2	20.7	43.5	22.8	1.0	V	178
192.000	7.8	14.7	2.2	24.7	43.5	18.8	1.0	V	178
666.140	18.0	19.8	4.3	42.0	46.0	4.0	1.0	V	145
696.300	12.7	20.3	4.4	37.4	46.0	8.6	1.0	V	145




Diagram radio disturbances – Antenna vertical polarized

Limits: ☒ Section 15.209 ☐ \_\_

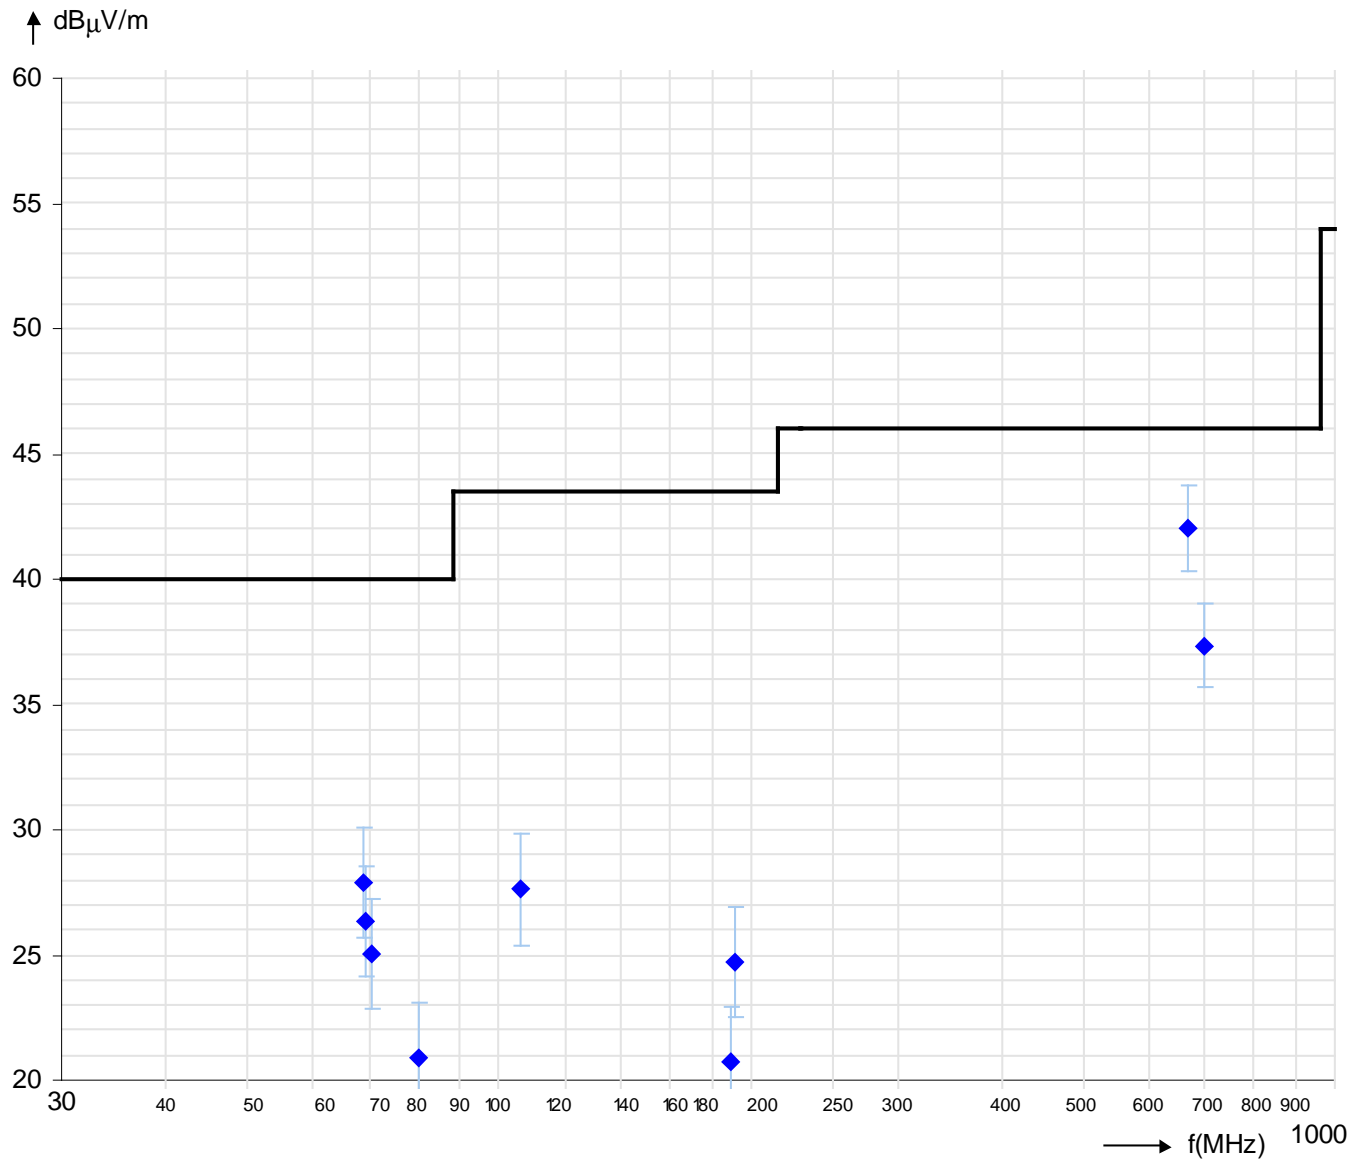

## EUT Information

EUT Name:	URH 1LA – x/U/C/B/H/N/CS2
Test_ID: / SN:	PRN12_05
Customer:	AEG ID GmbH
Operational condition:	Reading tag, half reading distance
Test specification:	FCC §15.209
Antenna information:	Distance EUT-Ant.: 3.0m / Polarisation: H/V / Ant.Height: 1.0-4.0m
Operator:	P. Hauser
File #:	AIN19_31
Comment #1:	X-axis

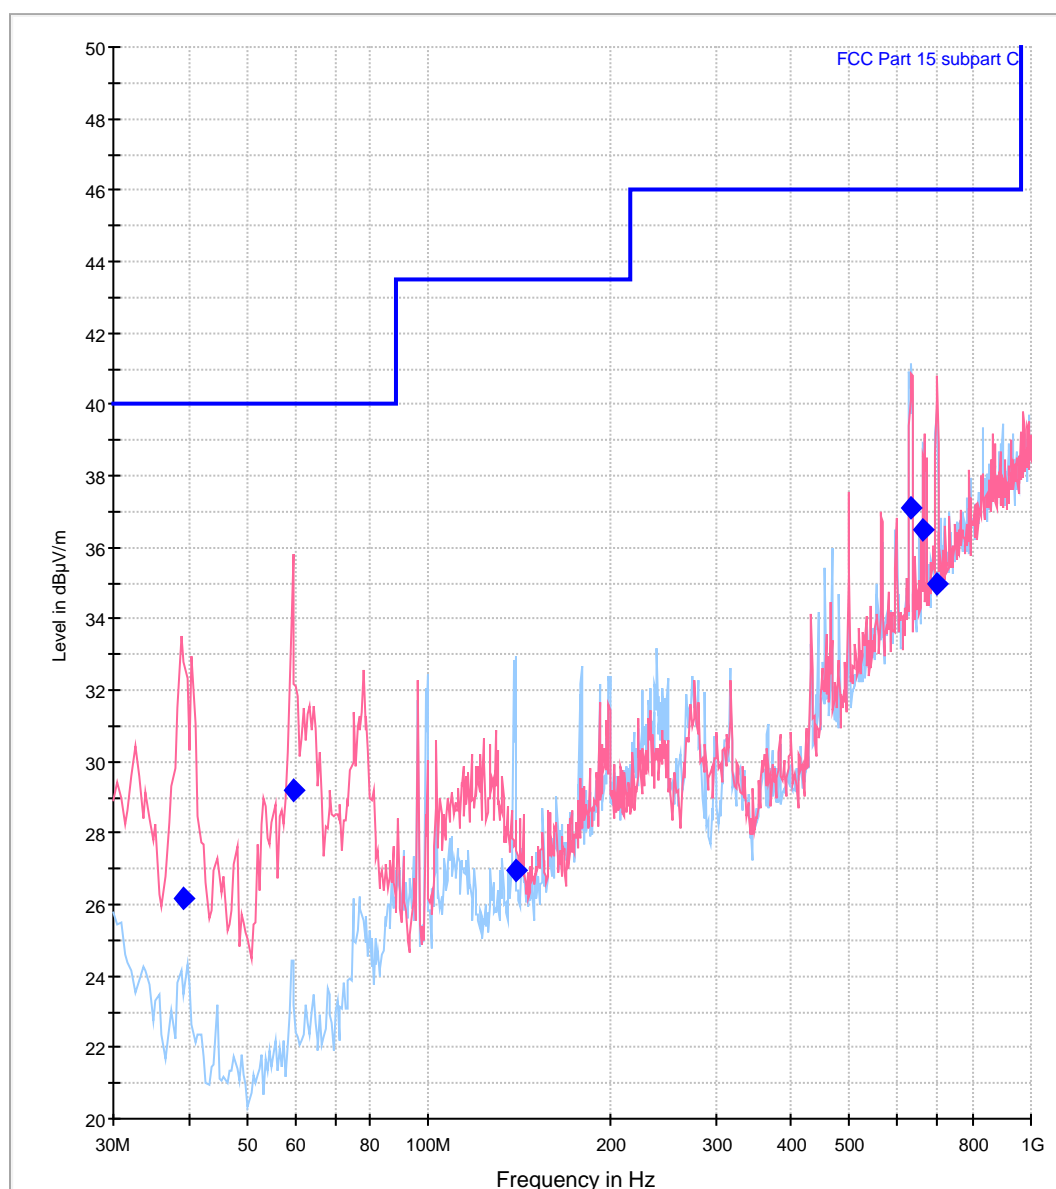

— FCC Part 15 subpart C [..EMI radiated]  
— Preview Result 1V-PK+ [Preview Result 1V.Result:2]


— Preview Result 1H-PK+ [Preview Result 1H.Result:2]  
◆ Final Result 1-QPK [Final Result 1.Result:1]

## Final Result 1

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB $\mu$ V/m)
39.310621	26.2	120.000	115.0	V	270.0	9.9	13.8	40.0
59.823647	29.2	120.000	172.0	V	290.0	8.7	10.8	40.0
139.374750	27.0	120.000	159.0	H	302.0	12.3	16.5	43.5
631.875751	37.1	120.000	169.0	H	299.0	20.6	8.9	46.0
661.543086	36.5	120.000	169.0	H	284.0	21.1	9.5	46.0
699.202405	35.0	120.000	169.0	V	226.0	21.8	11.0	46.0

## EUT Information

EUT Name:	URH 1LA – x/U/C/B/H/N/CS2
Test_ID: / SN:	PRN12_05
Customer:	AEG ID GmbH
Operational condition:	Reading tag, half reading distance
Test specification:	FCC §15.209
Antenna information:	Distance EUT-Ant.: 3.0m / Polarisation: H/V / Ant.Height: 1.0-4.0m
Operator:	P. Hauser
File #:	AIN19_32
Comment #1:	Y-axis

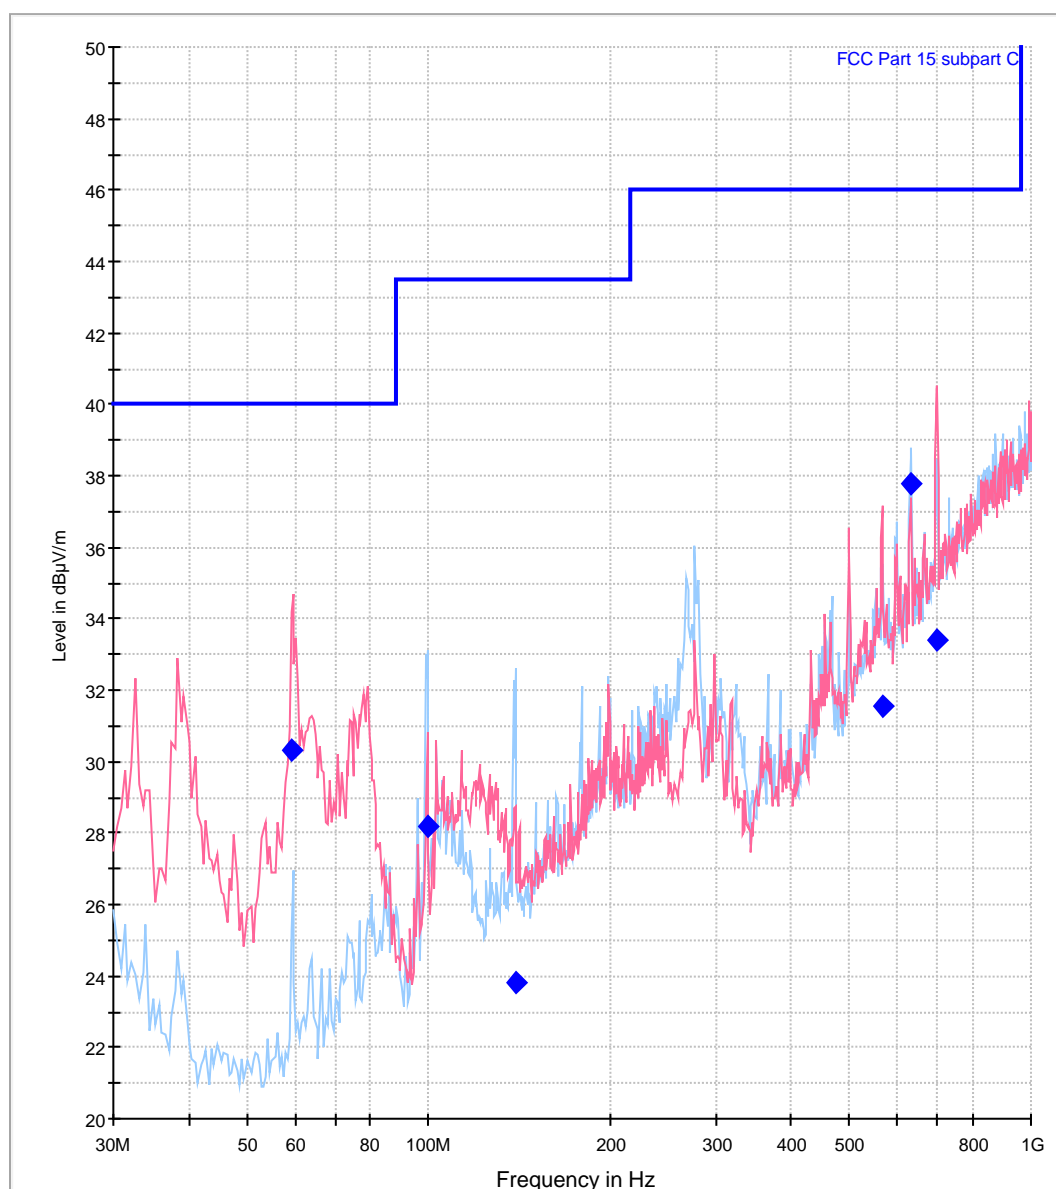

— FCC Part 15 subpart C [..EMI radiated]  
— Preview Result 1V-PK+ [Preview Result 1V.Result:2]

◆ Preview Result 1H-PK+ [Preview Result 1H.Result:2]  
◆ Final Result 1-QPK [Final Result 1.Result:1]


## Final Result 1

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
59.454910	30.3	120.000	220.0	V	300.0	8.7	9.7	40.0
99.470942	28.2	120.000	164.0	H	285.0	9.7	15.3	43.5
139.527054	23.8	120.000	220.0	H	227.0	12.3	19.7	43.5
565.739479	31.5	120.000	125.0	V	4.0	19.7	14.5	46.0
630.881763	37.8	120.000	169.0	H	306.0	20.5	8.2	46.0
698.601203	33.4	120.000	168.0	V	250.0	21.8	12.6	46.0



## EUT Information

EUT Name:	URH 1LA – x/U/C/B/H/N/CS2
Test_ID: / SN:	PRN12_05
Customer:	AEG ID GmbH
Operational condition:	Reading tag, half reading distance
Test specification:	FCC §15.209
Antenna information:	Distance EUT-Ant.: 3.0m / Polarisation: H/V / Ant.Height: 1.0-4.0m
Operator:	P. Hauser
File #:	AIN19_33
Comment #1:	Z-axis

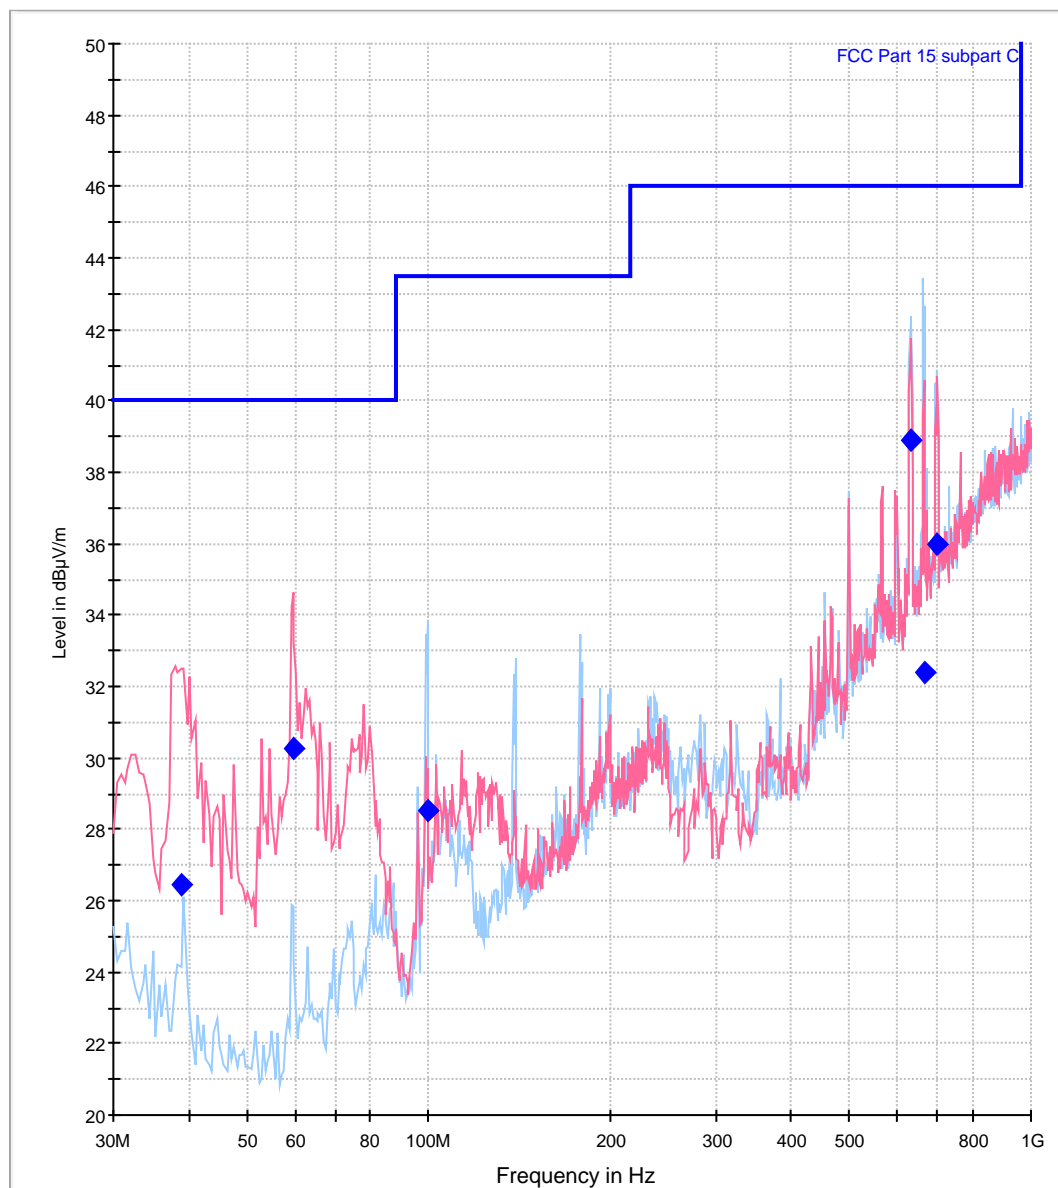

— FCC Part 15 subpart C [..EMI radiated]	— Preview Result 1H-PK+ [Preview Result 1H.Result:2]
— Preview Result 1V-PK+ [Preview Result 1V.Result:2]	◆ Final Result 1-QPK [Final Result 1.Result:1]

## Final Result 1

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
38.941883	26.5	120.000	167.0	V	178.0	10.0	13.5	40.0
59.799599	30.2	120.000	167.0	V	306.0	8.7	9.8	40.0
99.591182	28.5	120.000	167.0	H	269.0	9.7	15.0	43.5
630.020040	38.9	120.000	166.0	H	290.0	20.5	7.1	46.0
664.973948	32.4	120.000	166.0	H	245.0	21.1	13.6	46.0
699.675351	36.0	120.000	123.0	H	256.0	21.8	10.0	46.0

#### 1.1.2.4 Restricted bands of operation

##### Regulation

47 CFR Part 15 Subpart C - 04/2016

Requirement: ☒ Section 15.205(a)

Limit spurious emission: ☒ Section 15.209  
☒ CISPR quasi peak detector ( $f \leq 1\text{GHz}$ )  
☐ Average detector ( $f > 1\text{GHz}$ )

##### Operation mode

EUT arrangement:	<input checked="" type="checkbox"/> Tabletop	<input type="checkbox"/> Floor standing
Power supply:	<input checked="" type="checkbox"/> 120V/60Hz	<input type="checkbox"/> 240V/60Hz
Rated voltage variation:	<input type="checkbox"/> 85%	<input type="checkbox"/> 115%

Continuous operation of the RFID reader supplied by a plug-in power supply and connected to the laptop USB-port.

RFID tag placed at approx. of the half reading distance. The Bluetooth module was configured as "Master" and active. During the test the remote station was removed from the laptop and the Bluetooth module was polling for a BT device. RFID and Bluetooth module were active at the same time.

##### Environmental conditions

Temperature [10 - 40°C]:	22°C
Relative humidity [10 - 90%]:	46%

Environmental conditions during the test: ☒ kept  
☐ not kept

##### Test - / Measurement procedure

Position the EUT in front of the measuring antenna. The analyzer is set to peak detector and the trace mode to max. hold. Set the analyzer to the identified fundamental and the sweep is continued until the trace is stabilized. The frequencies of the maximum of the envelope and the outermost points attenuated by 20dB to the maximum are noted.

## Test result

Measured fundamental: 0.13422MHz  
20dB-Emission Bandwidth: 0.668kHz

Fundamental out  
of restricted bands:

☒ kept  
☐ not kept

Limit spurious emission:


☒ kept  
☐ not kept

Remarks: n/a

## Protocol scope

☒ Diagram – 20dB-Emission bandwidth.

Occupied bandwidth

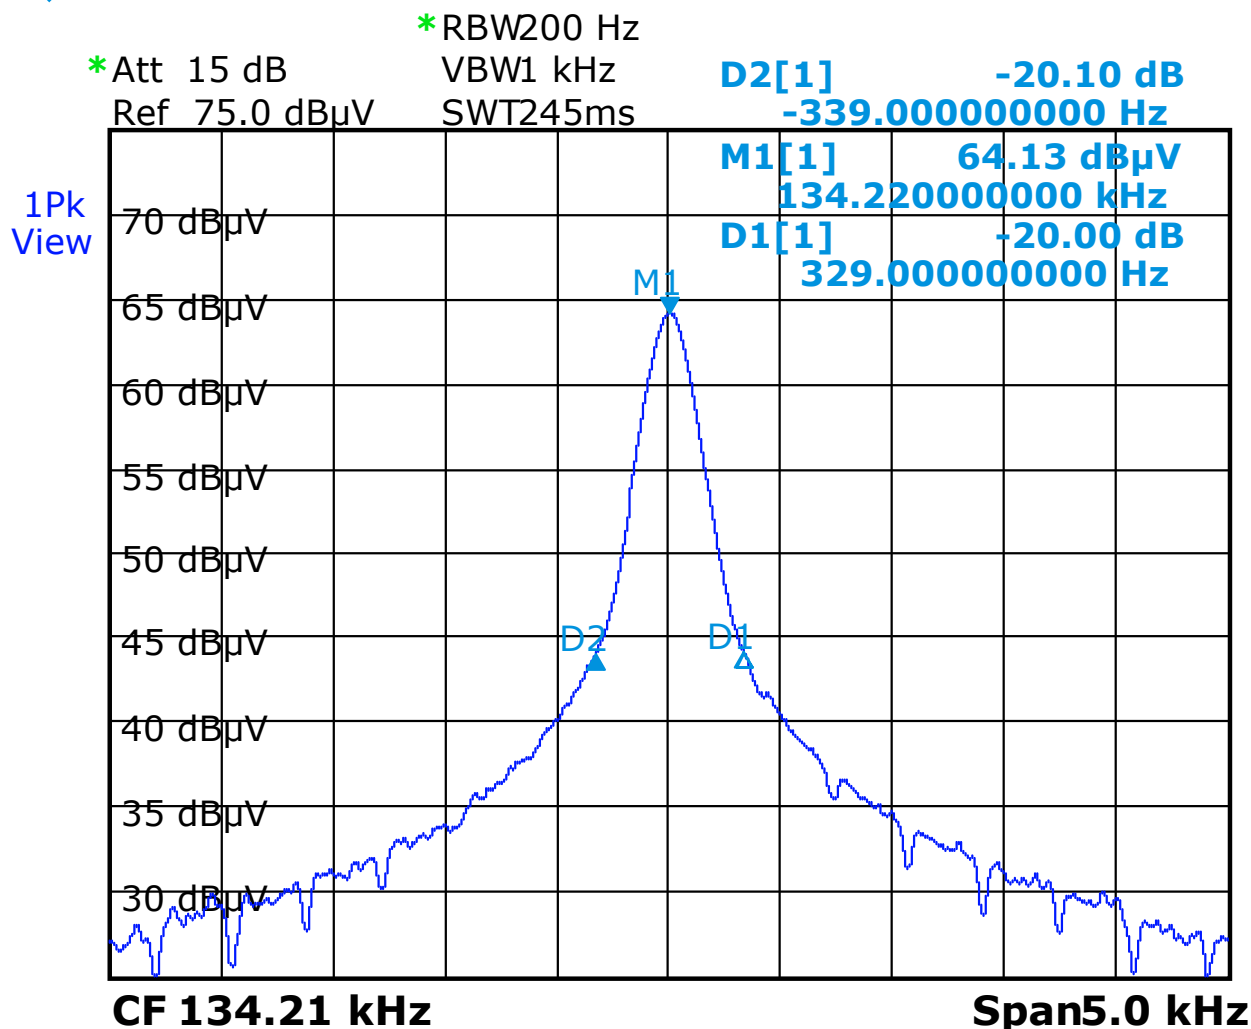

PRN12\_05, URH 1LA - x/U/C/B/H/N/CS2

Date: 23.MAR.2016 09:54:33

Occupied bandwidth BW = D1 - D2 = 0.339kHz - -0.329kHz=0.668kHz



#### 1.1.2.5 Antenna requirement

##### Regulation

47 CFR Part 15 Subpart C - 04/2016

Requirement: ☒ Section 15.203  
☒ Permanent attached  
☐ Unique coupling to the intentional radiator

##### Test result

Requirement: ☒ kept  
☐ not kept

Authorized antenna: ☐ Print antenna  
☒ Internal antenna  
☐ External antenna

| Remarks: n/a

## 2 Summary

Regulation	Class / Test level	Result	Remark(s)
<b>FCC Rules</b> 47 CFR Part 15 Subpart C			
Terminal voltage 0.15-30MHz	Section 15.207	Limits kept	
Radiated emissions 0.009-30MHz	Section 15.209	Limits kept	
Radiated emissions 30-1000MHz	Section 15.209	Limits kept	
Occupied bandwidth	Section 15.215(c)	n. r.	
Restricted bands	Section 15.205(a)	Requirement kept	
Antenna requirement	Section 15.203	Requirement kept	

n. r. – not relevant

Burgrieden, 2016-07-08

Report generated by:



Acceptance inspector – Peter Hauser