

FCC Part 15C

Measurement and Test Report



For

SHENZHEN TENDA TECHNOLOGY CO., LTD.

3F, MOSO INDUSTRIAL BUILDING, NO.1031, LIMING ROAD XILI TOWN,

NANSHAN DISTRICT, SHENZHEN, CHINA.

FCC ID: V7TW311R

Report Concerns: Original Report	Equipment Type: Wireless-N Broadband Router
Model:	<u>W311R</u>
Report No.:	<u>STR09088013I</u>
Test/Witness Engineer:	<u></u>
Test Date:	<u>2009-08-04 to 2009-08-10</u>
Issue Date:	<u>2009-08-15</u>
Prepared By:	SEM.Test Compliance Service Co., Ltd 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, P.R.C. (518101)
Approved & Authorized By:	<u></u> Jandy So / PSQ Manager

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by SEM.Test Compliance Service Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	4
1.3 RELATED SUBMITTAL(S)/GRANT(S)	4
1.4 TEST METHODOLOGY	5
1.5 TEST FACILITY	5
1.6 EUT EXERCISE SOFTWARE	5
1.7 ACCESSORIES EQUIPMENT LIST AND DETAILS	5
1.8 EUT CABLE LIST AND DETAILS	5
2. SUMMARY OF TEST RESULTS	6
3. CONDUCTED EMISSIONS	7
3.1 MEASUREMENT UNCERTAINTY	7
3.2 TEST EQUIPMENT LIST AND DETAILS	7
3.3 TEST PROCEDURE.....	7
3.4 BASIC TEST SETUP BLOCK DIAGRAM.....	7
3.5 ENVIRONMENTAL CONDITIONS	8
3.6 SUMMARY OF TEST RESULTS/PLOTS	8
3.7 CONDUCTED EMISSIONS TEST DATA.....	8
4. §15.203 - ANTENNA REQUIREMENT.....	11
4.1 STANDARD APPLICABLE.....	11
4.2 TEST RESULT.....	11
5. MAXIMUM PERMISSIBLE EXPOSURE (MPE)	12
5.1 STANDARD APPLICABLE.....	12
5.2 MPE CALCULATION METHOD.....	12
5.3 MPE CALCULATION RESULT.....	13
6. POWER SPECTRAL DENSITY	14
6.1 STANDARD APPLICABLE.....	14
6.2 TEST EQUIPMENT LIST AND DETAILS	14
6.3 TEST PROCEDURE.....	14
6.4 ENVIRONMENTAL CONDITIONS	14
6.5 SUMMARY OF TEST RESULTS/PLOTS	15
7. 6-DB BANDWIDTH.....	22
7.1 STANDARD APPLICABLE.....	22
7.2 TEST EQUIPMENT LIST AND DETAILS	22
7.3 TEST PROCEDURE.....	22
7.4 ENVIRONMENTAL CONDITIONS	22
7.5 SUMMARY OF TEST RESULTS/PLOTS	22
8. POWER OUTPUT.....	30
8.1 STANDARD APPLICABLE.....	30
8.2 TEST EQUIPMENT LIST AND DETAILS	30
8.3 TEST PROCEDURE.....	30
8.4 ENVIRONMENTAL CONDITIONS	30
8.5 SUMMARY OF TEST RESULTS/PLOTS	30
9. FIELD STRENGTH OF SPURIOUS EMISSIONS	38
9.1 MEASUREMENT UNCERTAINTY	38
9.2 STANDARD APPLICABLE.....	38
9.3 TEST EQUIPMENT LIST AND DETAILS	38
9.4 TEST PROCEDURE.....	38
9.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	39
9.6 ENVIRONMENTAL CONDITIONS	39
9.7 SUMMARY OF TEST RESULTS/PLOTS	39
10. OUT OF BAND EMISSIONS.....	68
10.1 STANDARD APPLICABLE.....	68
10.2 TEST EQUIPMENT LIST AND DETAILS	68

10.3 TEST PROCEDURE.....68

10.4 ENVIRONMENTAL CONDITIONS68

10.5 SUMMARY OF TEST RESULTS/PLOTS69

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: SHENZHEN TENDA TECHNOLOGY CO., LTD.
Address of applicant: 3F, MOSO INDUSTRIAL BUILDING, NO.1301, LIMING ROAD XILI TOWN, NANSHAN DISTRICT, SHENZHEN, CHINA.

Manufacturer: SHENZHEN TENDA TECHNOLOGY CO., LTD.
Address of manufacturer: 3F, MOSO INDUSTRIAL BUILDING, NO.1301, LIMING ROAD XILI TOWN, NANSHAN DISTRICT, SHENZHEN, CHINA.

General Description of E.U.T

Items	Description
EUT Description:	Wireless-N Broadband Router
Trade Name:	Tenda
Model No.:	W311R
Rated Voltage:	DC 9
Max. Output Power	19dBm
Antenna Gain:	5dBi
Frequency range:	2412~2462MHz / 2422~2452MHz
Number of channels:	11 / 7
Channel Separation:	5MHz
Type of Antenna:	Integral Antenna
Size:	16.1x10.2x3.3 cm

Note: The test data gathered are from a production sample provided by the manufacturer.

1.2 Test Standards

The following report is prepared on behalf of the SHENZHEN TENDA TECHNOLOGY CO., LTD. in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Related Submittal(s)/Grant(s)

No Related Submittal(s).

1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted with Low Channel, Middle Channel and High Channel, accordingly in reference to the Operating Instructions.

1.5 Test Facility

- **FCC – Registration No.: 994117**

SEM.Test Compliance Services Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 994117.

- **Industry Canada (IC) Registration No.: 7673A**

The 3m Semi-anechoic chamber of SEM.Test Compliance Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 7673A.

1.6 EUT Exercise Software

The EUT exercise program used during the testing was designed to exercise the system components.

1.7 Accessories Equipment List and Details

Manufacturer	Description	Model	Serial Number
IBM	Notebook	T22	LV14893
Gi-Link	Router	RG2415	/
Lenovo	Printer	3110	OD65133711480

1.8 EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
DC Power Cable	1.8	Unshielded	Without Core

2. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§ 15.203; § 15.247(c)(1)(i)	Antenna Requirement	Compliant
§ 1.1307(b)	Maximum Permissible Exposure	Compliant
§ 15.207	Conducted Emission	Compliant
§ 15.247(e)	Power Spectral Density	Compliant
§ 15.247(a)(2)	6 dB Bandwidth	Compliant
§ 15.247(b)(3)	Power Output	Compliant
§ 15.209(a)(d)	Radiated Emission	Compliant
§ 15.247(d)	Band edge	Compliant

3. CONDUCTED EMISSIONS

3.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is ± 0.5 dB.

3.2 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2009-07-08	2010-07-07
Puls Limiter	Rohde & Schwarz	ESH3-Z2	100911	2009-07-08	2010-07-07
L.I.S.N.	SCHWARZBECK	NSLK8126	8126-224	2009-07-08	2010-07-07
L.I.S.N.	EMCO	3825/2	11967C	2009-07-08	2010-07-07

Statement of Traceability: All calibrations have been performed per the NVLAP requirements traceable to the NIST.

3.3 Test Procedure

Test is conducting under the description of ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

3.4 Basic Test Setup Block Diagram

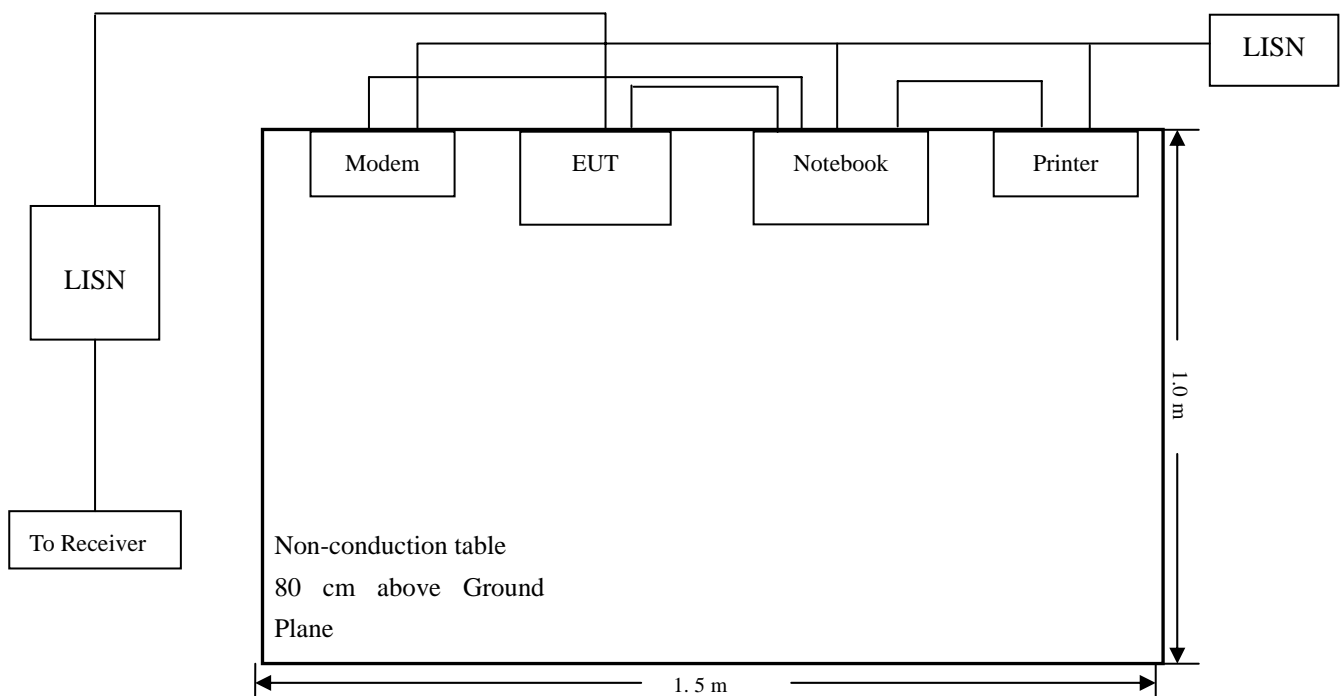

3.5 Environmental Conditions

Temperature:	20° C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

3.6 Summary of Test Results/Plots

According to the data in section 3.7, the EUT complied with the FCC 15.207 Conducted margin for a Class B device, with the *worst* margin reading of:

-13.35 dB μ V at 0.42 MHz in the Line Peak Detector, 0.15-30MHz


3.7 Conducted Emissions Test Data

LINE CONDUCTED EMISSIONS				FCC 15.207	
Frequency	Amplitude	Detector	Phase	Limit	Margin
MHz	dB μ V	QP/Ave/Pk	Line/Neutral	dB μ V	dB
0.42	44.10	Pk	Line	57.45	-13.35
0.33	45.96	Pk	Line	59.45	-13.49
0.25	46.07	Pk	Neutral	61.76	-15.69
0.39	41.66	Pk	Neutral	58.06	-16.40
17.69	32.42	Pk	Neutral	50	-17.58
21.66	31.33	Pk	Line	50	-18.67

Note: Emission attenuated more than 20dB of the limit is not reported.

Plot of Conducted Emissions Test Data*Conducted Disturbance**EUT: Wireless-N Broadband Router**M/N: W311R**Operating Condition: Operating**Test Specification: N**Comment: AC 120V/60Hz Adapter DC 9V*RBW 9 kHz
MT 5 ms


Att 10 dB AUTO

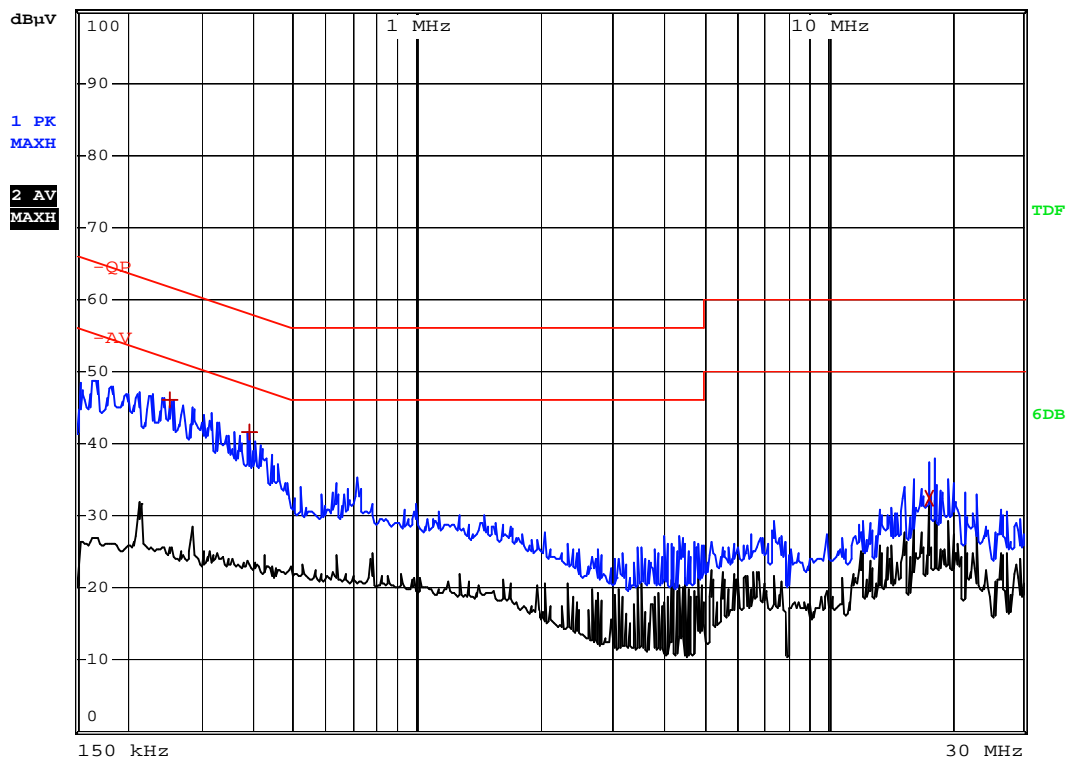

Date: 4.AUG.2009 10:43:32

Plot of Conducted Emissions Test Data*Conducted Disturbance**EUT: Wireless-N Broadband Router**M/N: W311R**Operating Condition: Operating**Test Specification: L**Comment: AC 120V/60Hz Adapter DC 9V*RBW 9 kHz
MT 5 ms

Att 10 dB AUTO

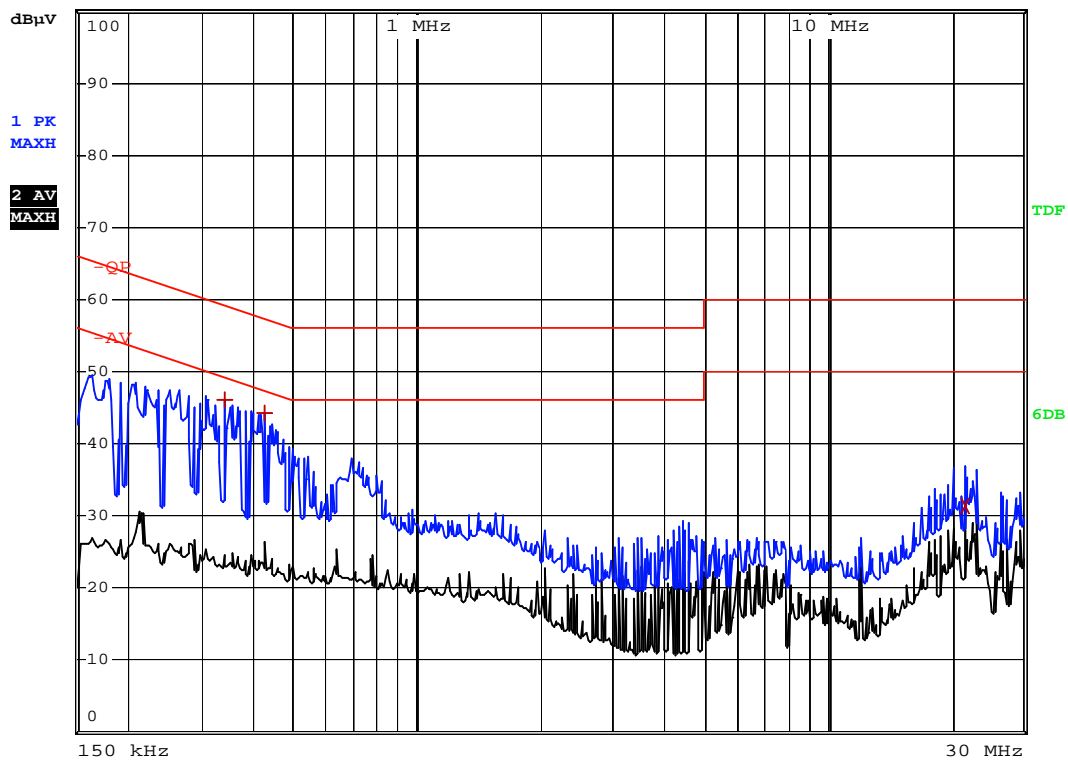

Date: 4.AUG.2009 10:44:44

4. §15.203 - ANTENNA REQUIREMENT

4.1 Standard Applicable

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Test Result

This product has a unique and integral antenna, fulfill the requirement of this section.

5. MAXIMUM PERMISSIBLE EXPOSURE (MPE)

5.1 Standard Applicable

According to § 1.1307(b)(1), system operating under the provisions of this section shall be operating in a manner that the public is not exposed to radio frequency energy level in excess limit for maximum permissible exposure.

(a) Limits for Occupational / Controlled Exposure

Frequency range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Times E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842/f	4.89/f	(900/f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100000			5	6

(b) Limits for General Population / Uncontrolled Exposure

Frequency range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Times E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100000			1	30

Note: f = frequency in MHz: * = Plane-wave equivalents power density

5.2 MPE Calculation Method

$$S = (P \cdot G) / (4 \cdot \pi \cdot R^2)$$

S = power density (in appropriate units, e.g., mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW)

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor is normally numeric gain.

R = distance to the center of radiation of the antenna (in appropriate units, e.g., cm)

5.3 MPE Calculation Result

Maximum peak output power at antenna input terminal: 18.35(dBm)

Maximum peak output power at antenna input terminal: 68.391165(mW)

Prediction distance: 20 (cm)

Prediction frequency: 2437 (MHz)

Antenna gain (typical): 5 (dBi)

Antenna gain (numeric): 3.162278 (numeric)

The worst case is power density at prediction frequency at 20cm: 0.043026 (mw/cm²)

MPE limit for general population exposure at prediction frequency: 1 (mw/cm²)

$$0.043026 \text{ (mw/cm}^2\text{)} < 1 \text{ (mw/cm}^2\text{)}$$

Result: Pass

6. POWER SPECTRAL DENSITY

6.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

6.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2009-07-08	2010-07-07
RF Limiter	Agilent	11867A	MY42241685	2009-07-08	2010-07-07
RMS/PEAK Voltmeter	Rohde & Schwarz	URE3	826135/008	2009-07-08	2010-07-07

Statement of Traceability: All calibrations have been performed per the NVLAP requirements traceable to the NIST.

6.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW, VBW=3KHz, Span = 20MHz.
4. Repeat above procedures until all frequency measured was complete.

6.4 Environmental Conditions


Temperature:	20° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

6.5 Summary of Test Results/Plots


Test mode	Test channel	Reading dBm/3kHz	Limit dBm/3kHz
802.11b	Low channel (2412MHz)	-10.31	8
	Middle channel (2437MHz)	-10.02	8
	High channel (2462MHz)	-11.03	8
802.11g	Low channel (2412MHz)	-16.84	8
	Middle channel (2437MHz)	-15.20	8
	High channel (2462MHz)	-16.31	8
802.11n HT20	Low channel (2412MHz)	-17.15	8
	Middle channel (2437MHz)	-15.82	8
	High channel (2462MHz)	-16.66	8
802.11n HT40	Low channel (2422MHz)	-19.00	8
	Middle channel (2437MHz)	-18.33	8
	High channel (2452MHz)	-20.89	8

For 802.11b


Low Channel:

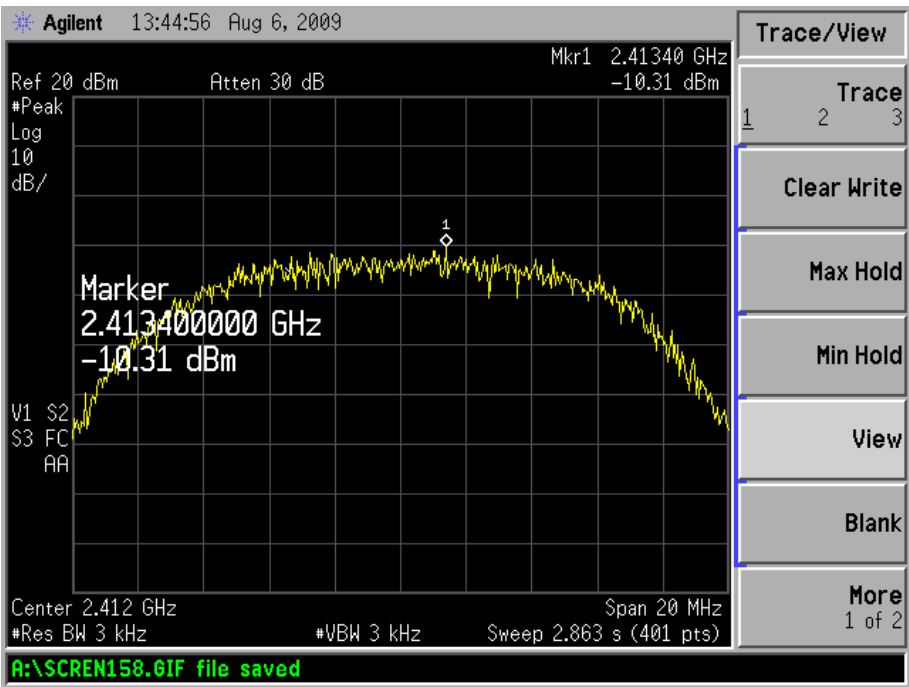

Middle Channel:

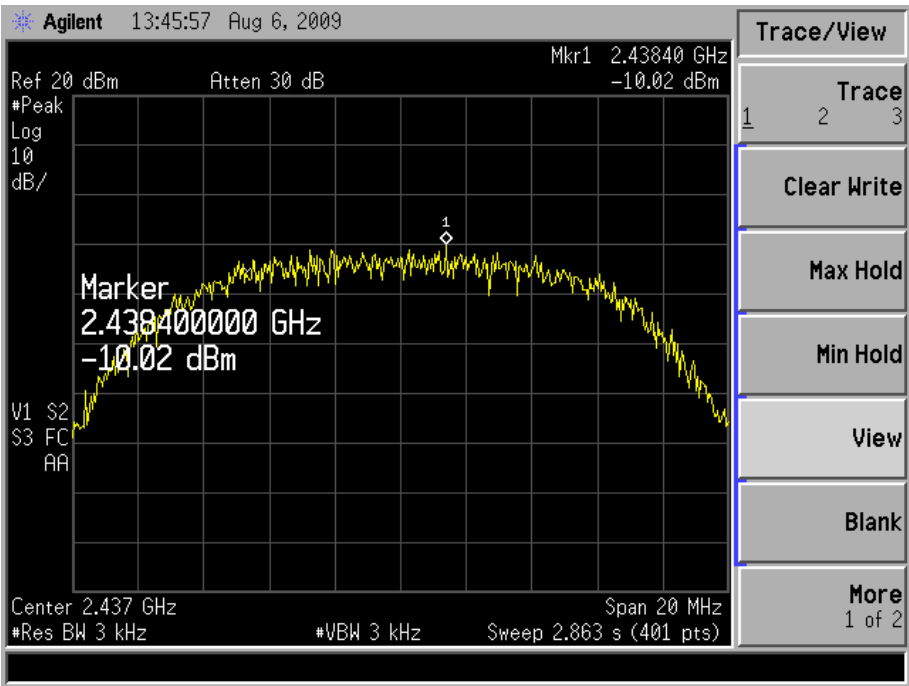


High Channel:

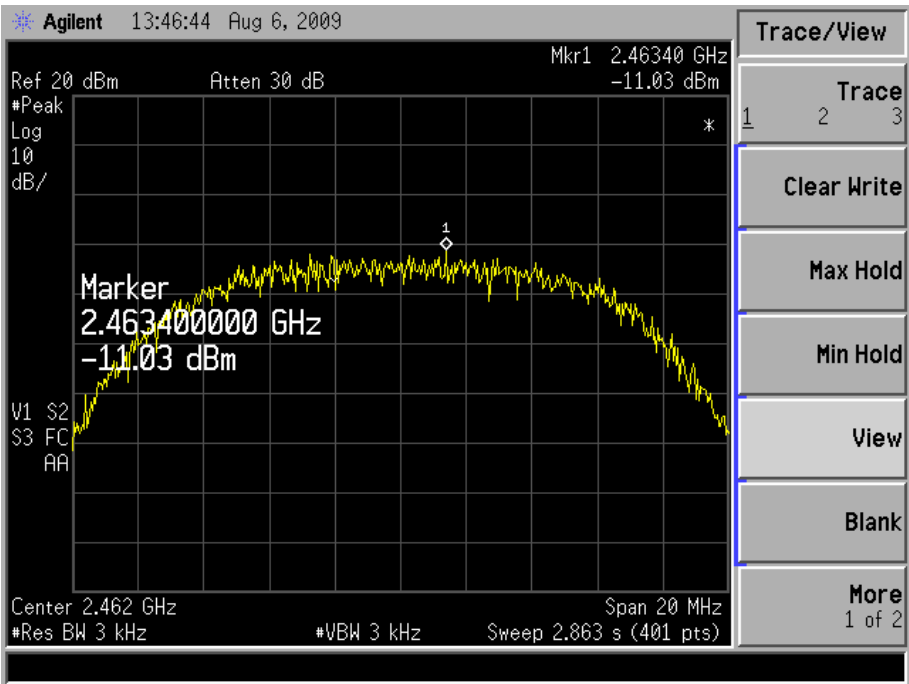


For 802.11g


Low Channel:

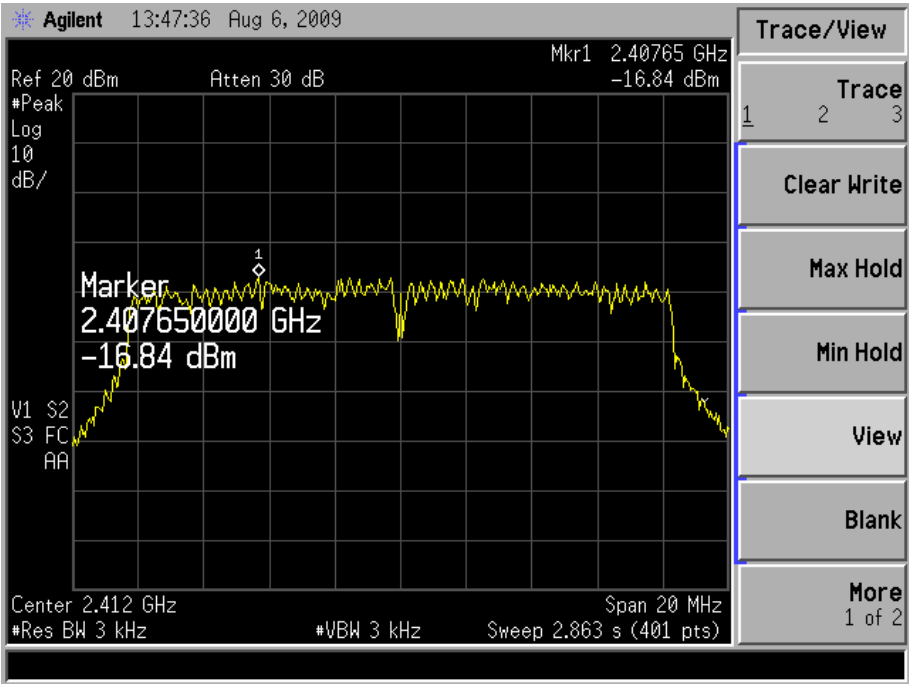

Middle Channel:

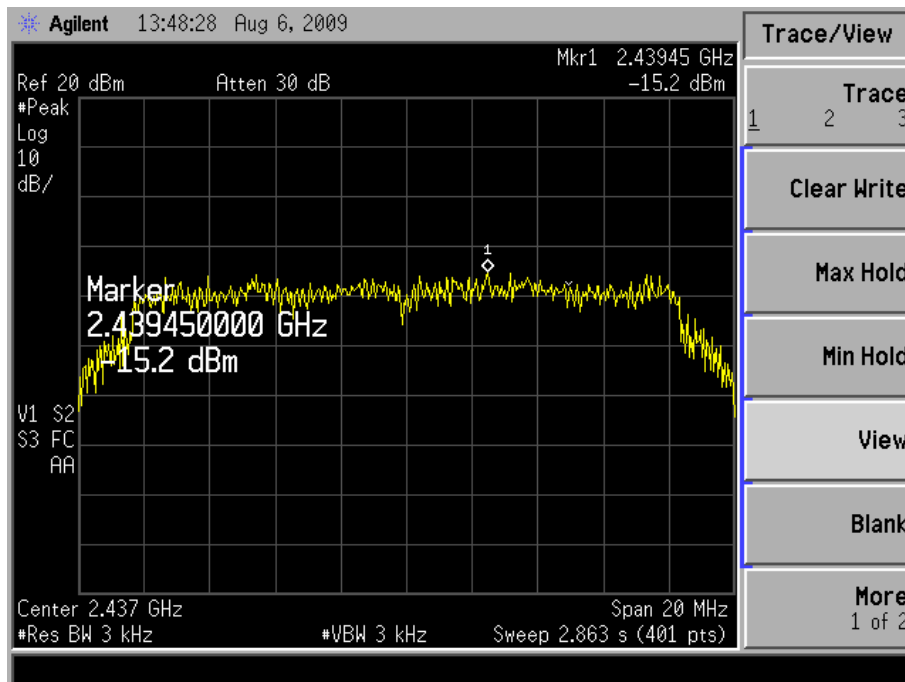


High Channel:

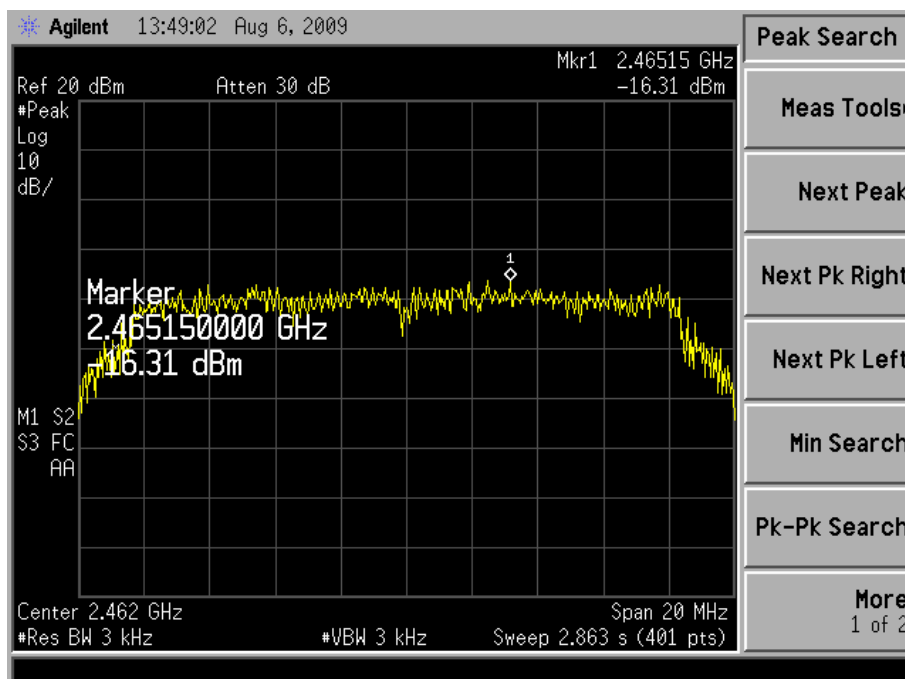


For 802.11n HT20


Low Channel:

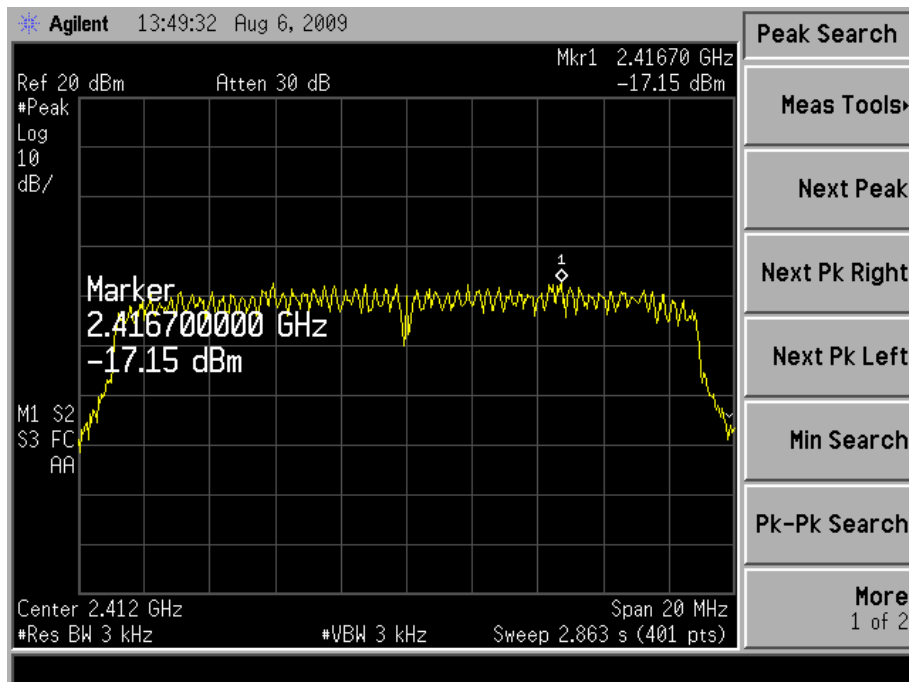

Middle Channel:

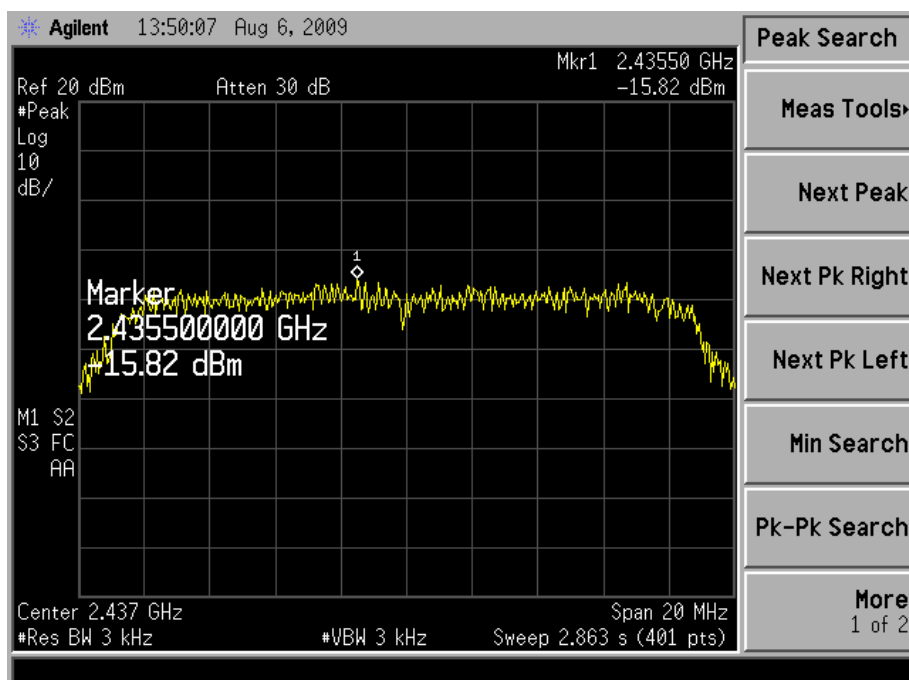


High Channel:

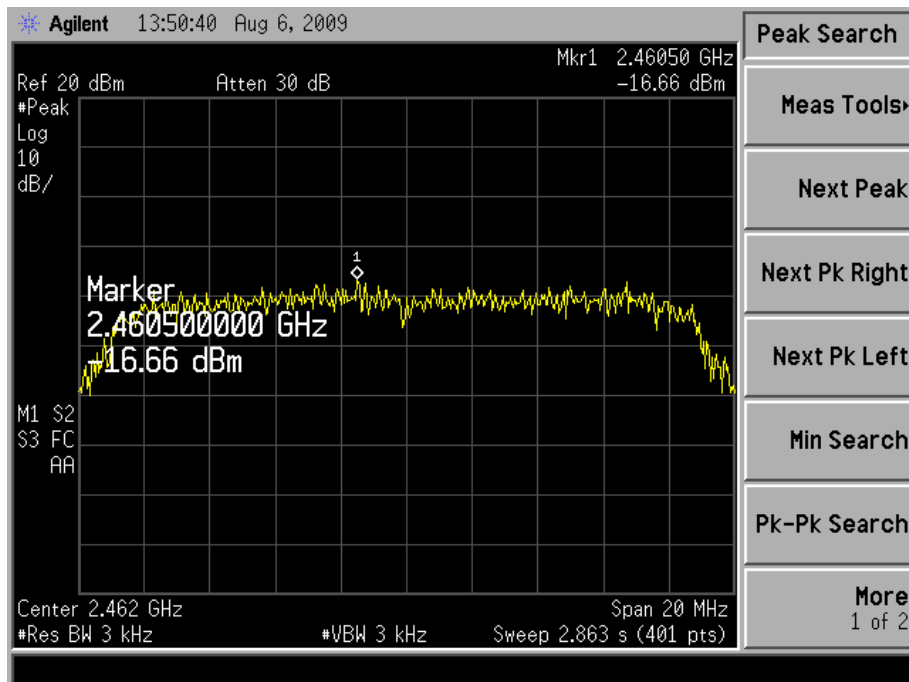


For 802.11n HT40


Low Channel:

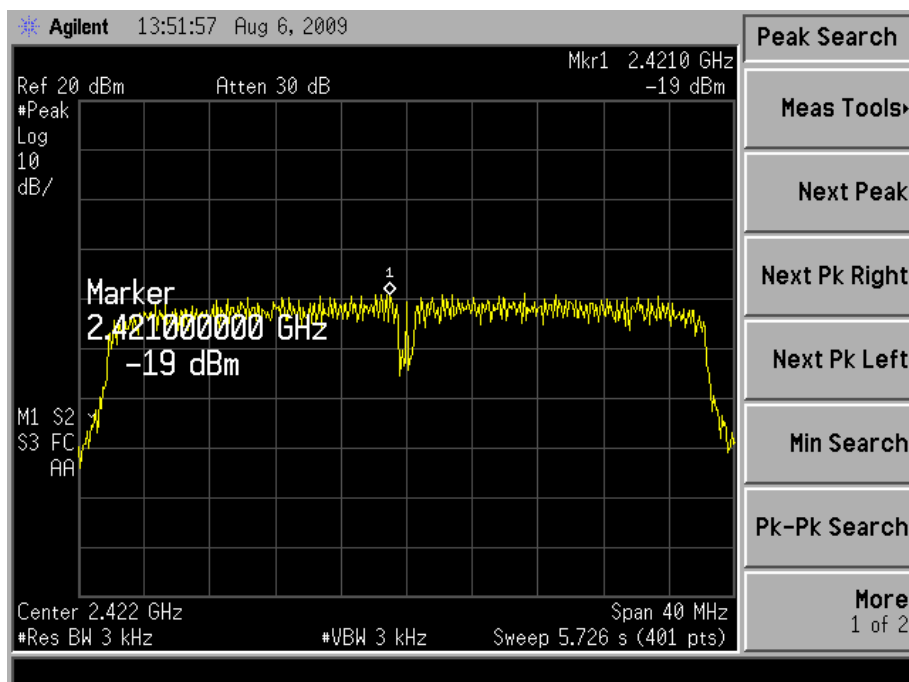

Middle Channel:

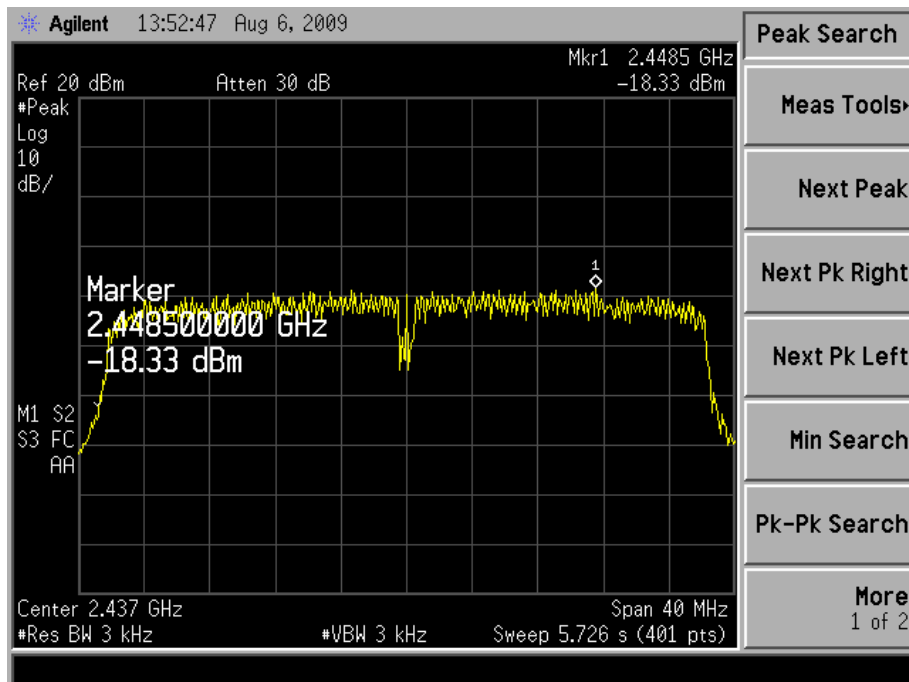

High Channel:

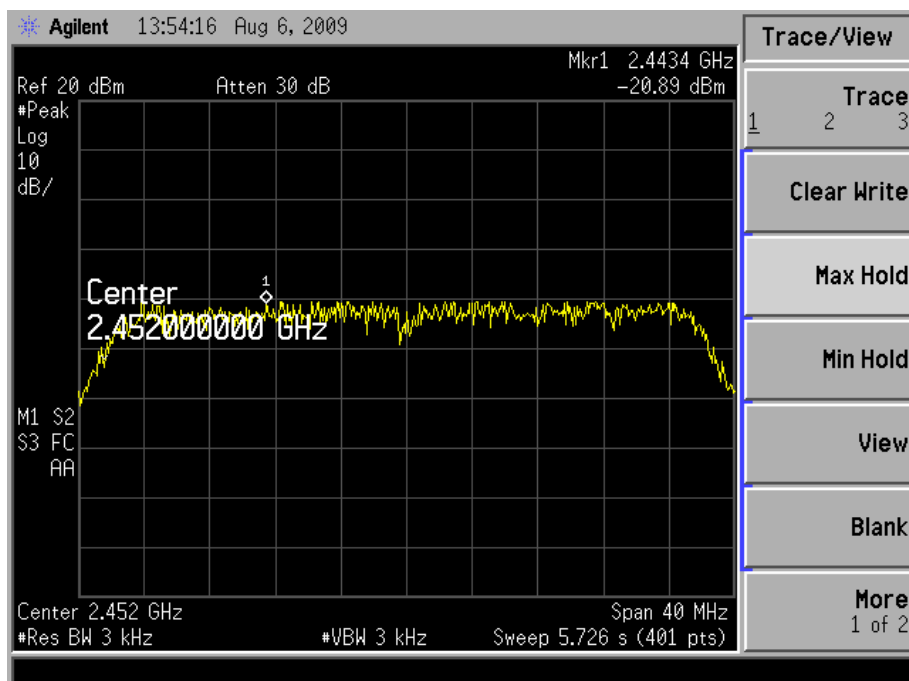

7. 6-dB BANDWIDTH

7.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

7.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2009-07-08	2010-07-07
RF Limiter	Agilent	11867A	MY42241685	2009-07-08	2010-07-07

Statement of Traceability: All calibrations have been performed per the NVLAP requirements traceable to the NIST.

7.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set center frequency of spectrum analyzer = operating frequency.
3. The spectrum analyzer as RBW=300KHz (1 % of Bandwidth.), Sweep=auto
4. Mark the peak frequency and –6dB (upper and lower) frequency.

7.4 Environmental Conditions

Temperature:	24° C
Relative Humidity:	53%
ATM Pressure:	1018 mbar


7.5 Summary of Test Results/Plots

Test mode	Frequency MHz	6 dB Bandwidth kHz	Limit kHz
802.11b	2412	10798.0	500
	2437	10630.0	500
	2462	11049.0	500
802.11g	2412	16525.0	500
	2437	16528.0	500
	2462	16533.0	500


Test mode	Frequency MHz	6 dB Bandwidth kHz	Limit kHz
802.11n HT20	2412	17149.0	500
	2437	17567.0	500
	2462	17101.0	500
802.11n HT40	2422	35155.0	500
	2437	35752.0	500
	2452	35130.0	500

For 802.11b


Low Channel:

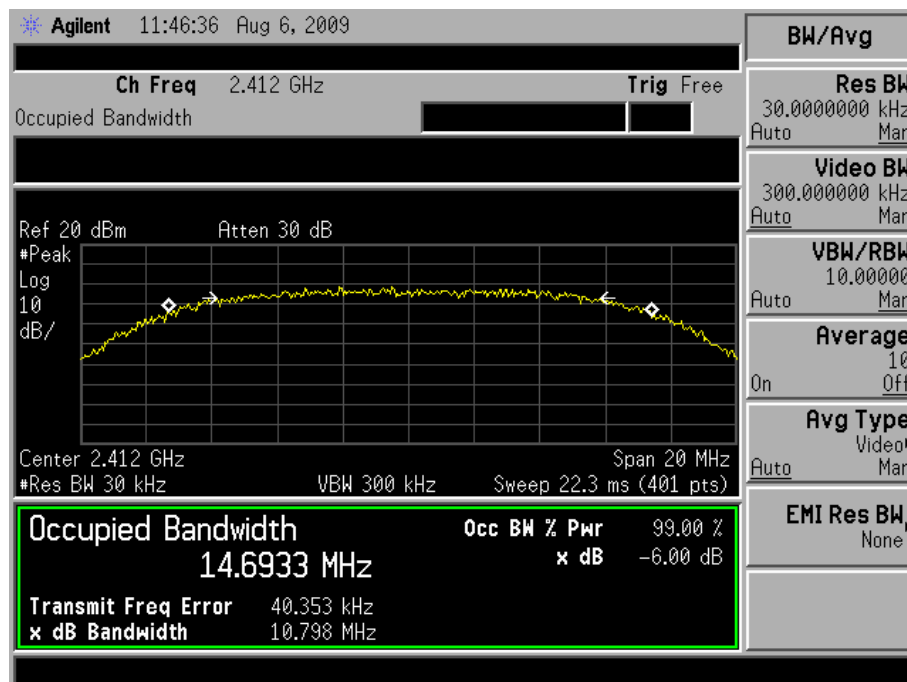


Mid Channel:

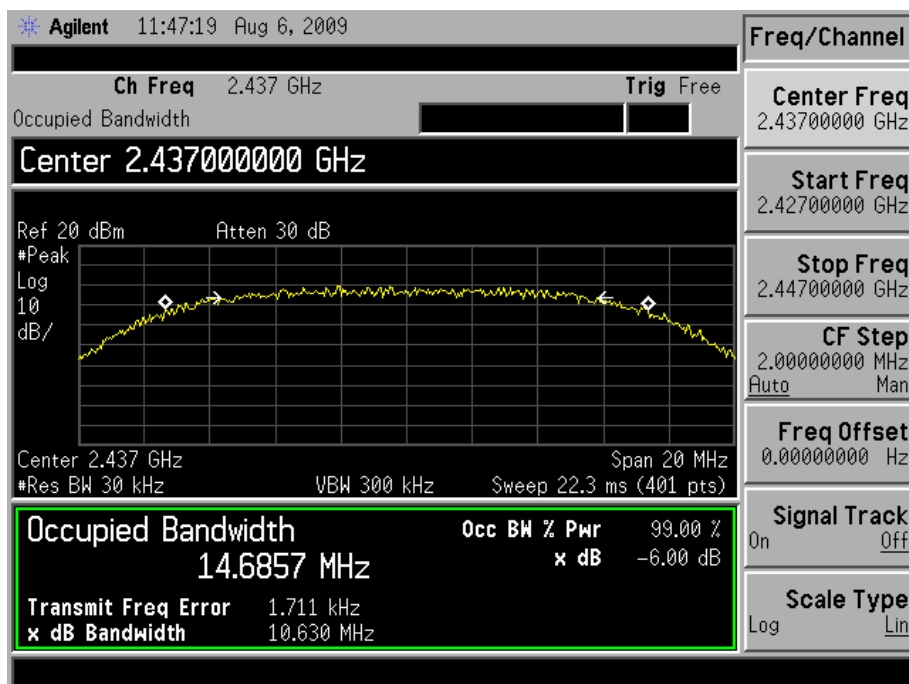


High Channel:

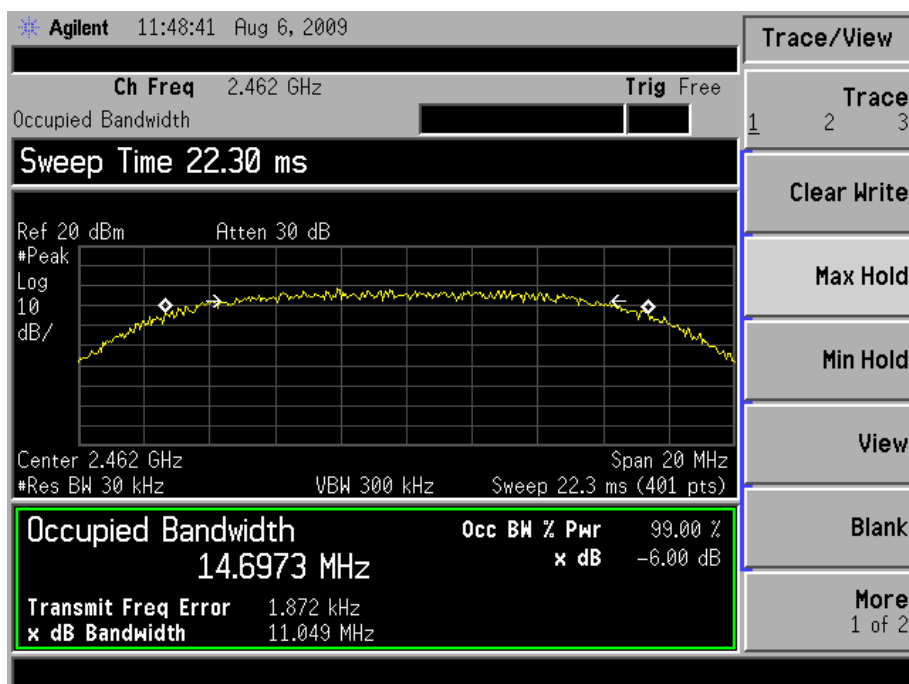


For 802.11g
Low Channel:

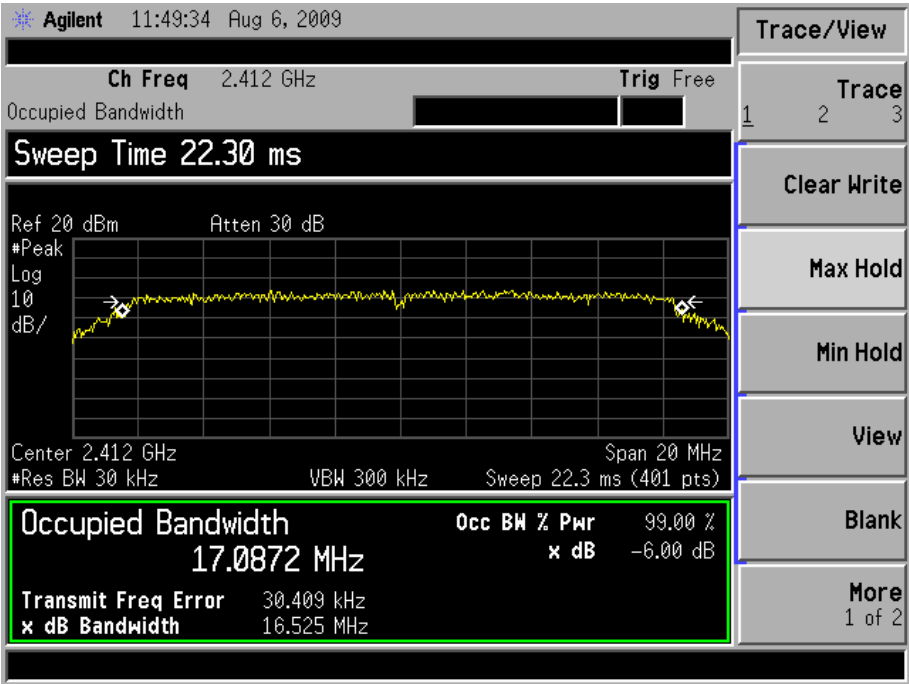

Mid Channel:

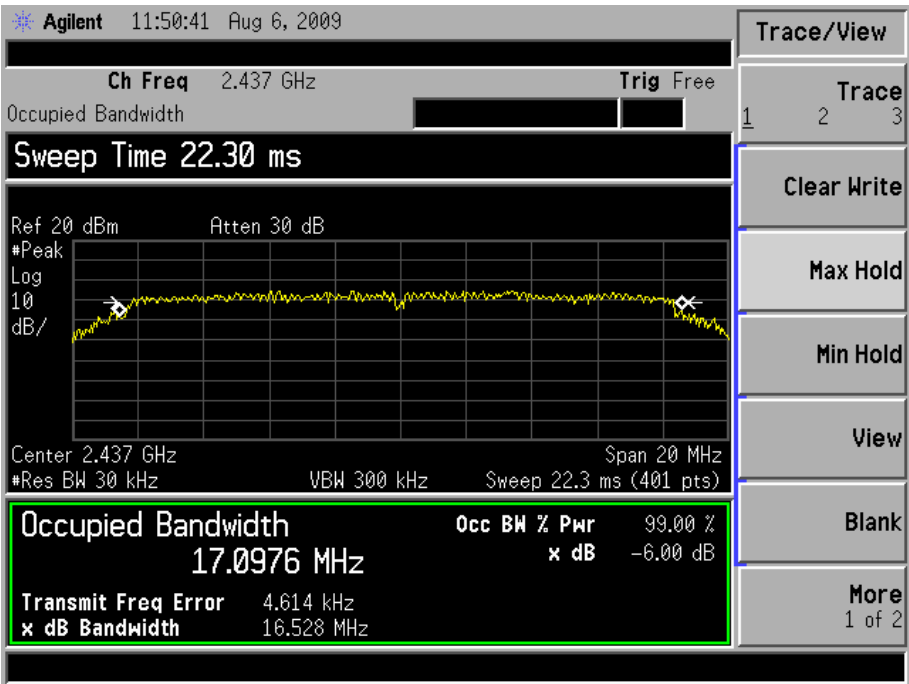


High Channel:

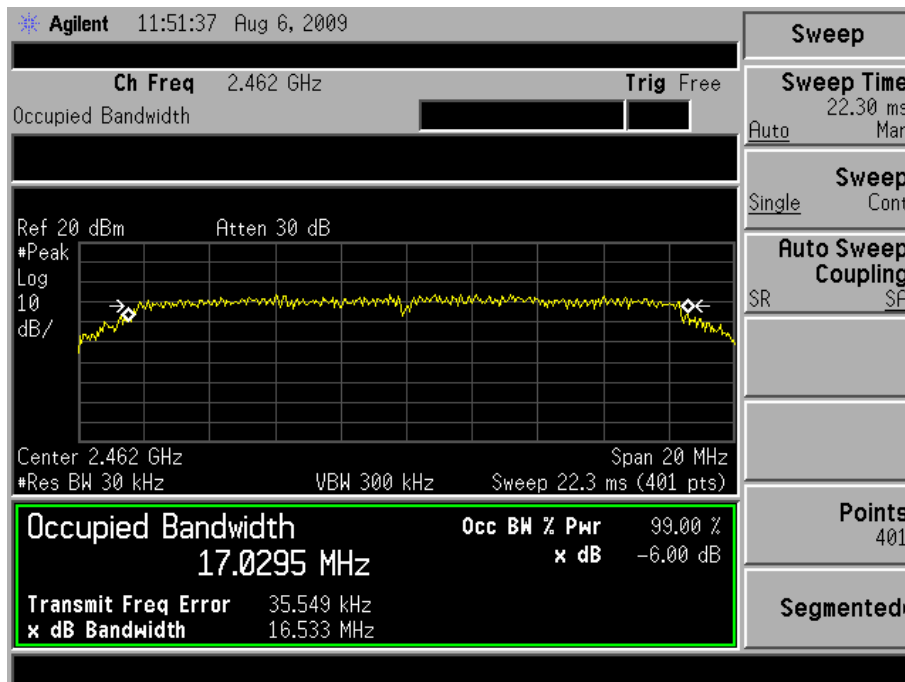


For 802.11n HT20


Low Channel:

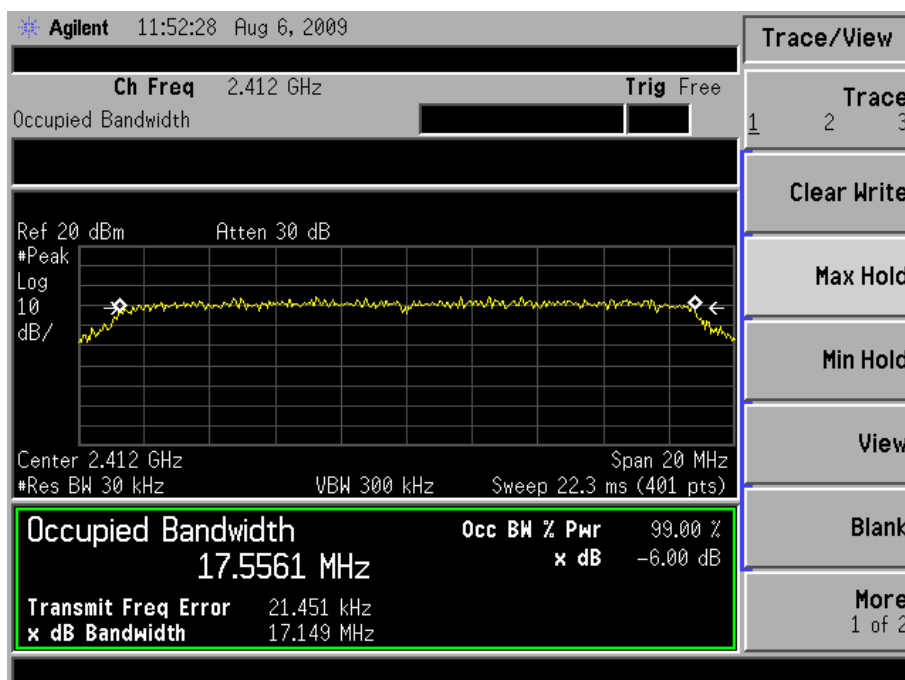

Mid Channel:

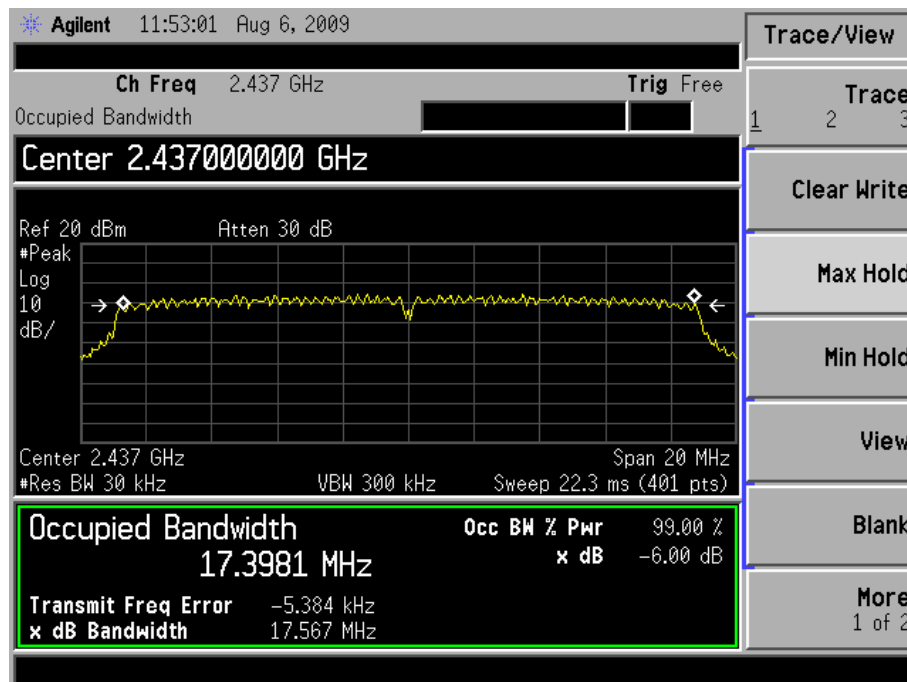


High Channel:

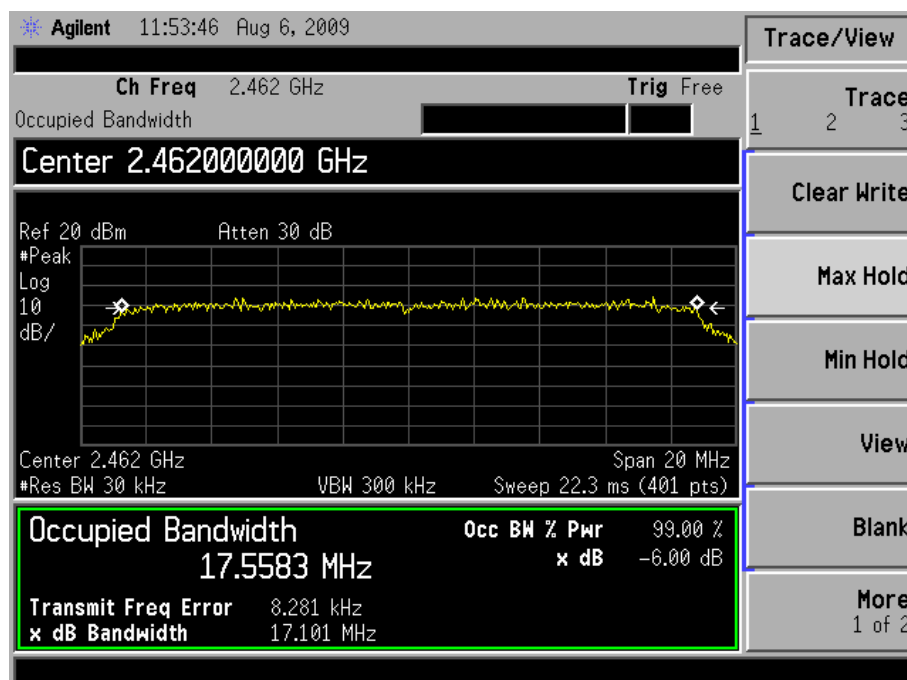


For 802.11n HT40


Low Channel:

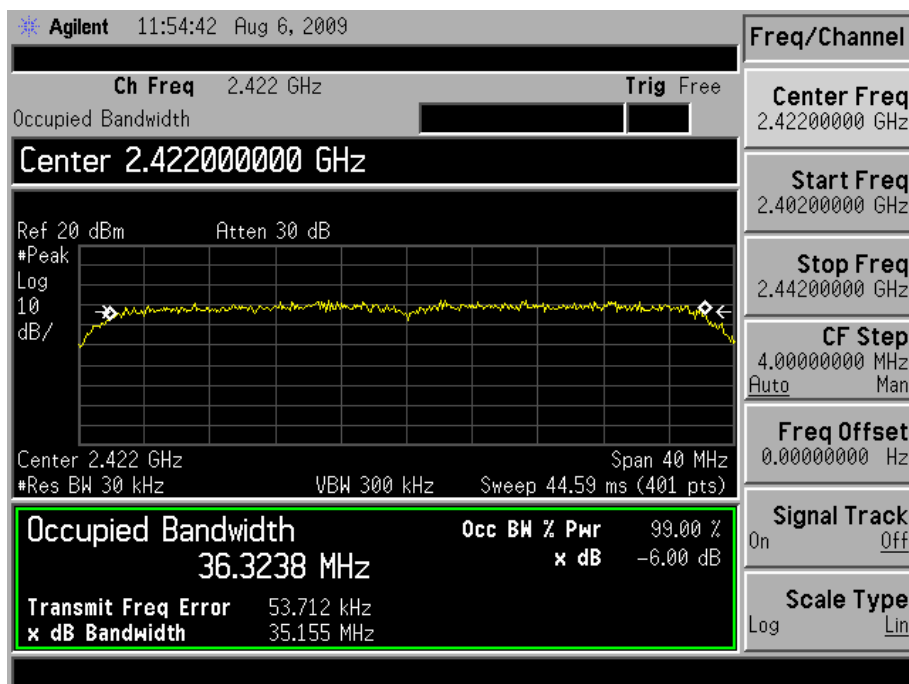

Mid Channel:

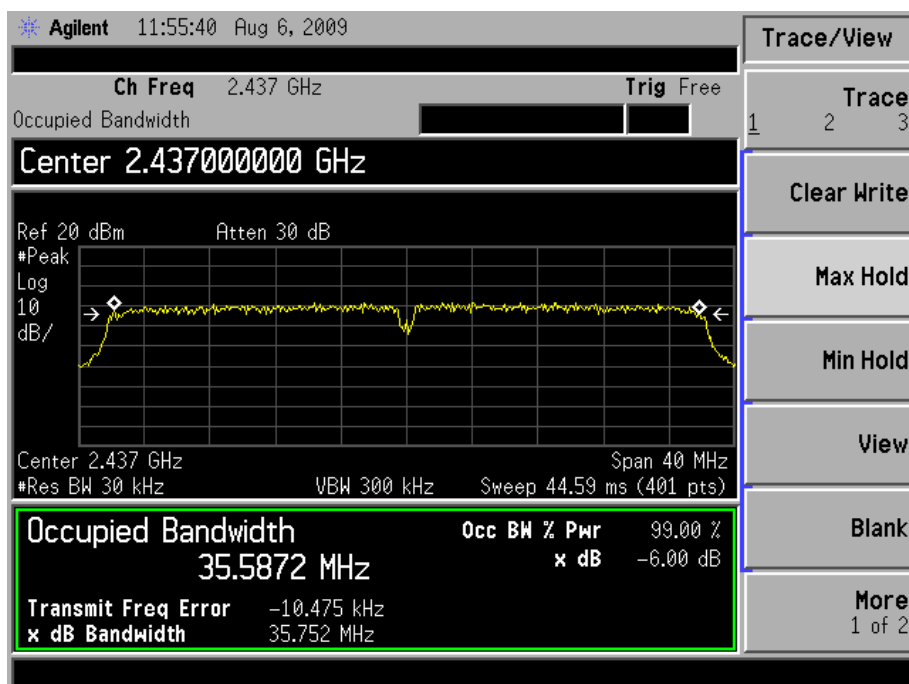

High Channel:

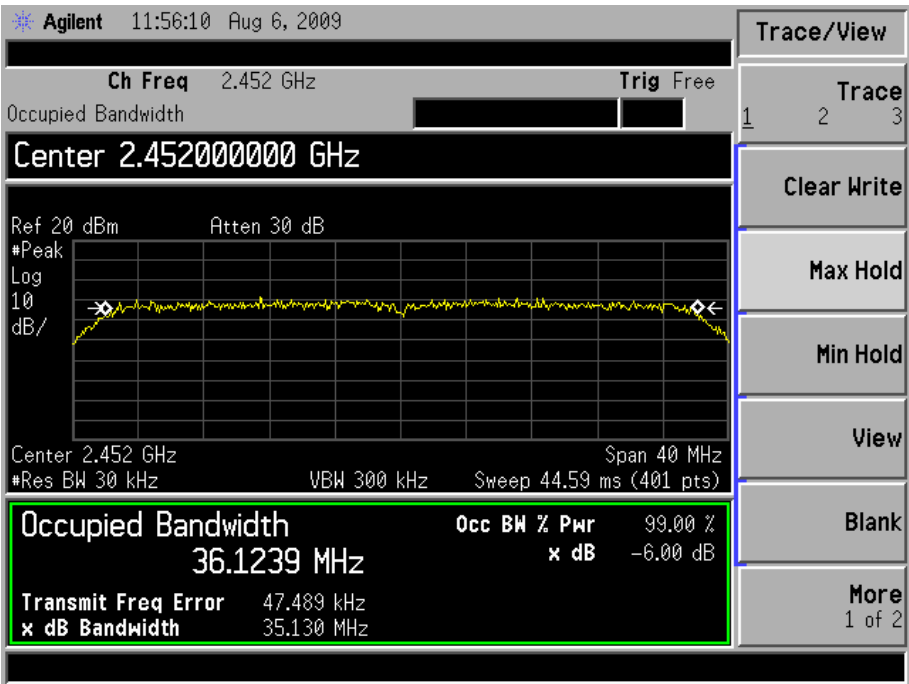

8. POWER OUTPUT

8.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

8.2 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2009-07-08	2010-07-07
RF Limiter	Agilent	11867A	MY42241685	2009-07-08	2010-07-07

Statement of Traceability: All calibrations have been performed per the NVLAP requirements traceable to the NIST.

8.3 Test Procedure

The device under test has an integral antenna and the power was measured on a radiated basis.

8.4 Environmental Conditions

Temperature:	21° C
Relative Humidity:	55%
ATM Pressure:	1011 mbar


8.5 Summary of Test Results/Plots

Test mode	Frequency MHz	Reading dBm	Output power W	Limit W
802.11b	2412	17.79	0.060117	1
	2437	18.35	0.068391	1
	2462	17.20	0.052481	1
802.11g	2412	14.21	0.026363	1
	2437	15.19	0.033037	1
	2462	14.23	0.026485	1


Test mode	Frequency MHz	Reading dBm	Output power W	Limit W
802.11n HT20	2412	14.50	0.028184	1
	2437	15.05	0.031989	1
	2462	13.81	0.024044	1
802.11n HT40	2422	14.53	0.028379	1
	2437	15.18	0.032961	1
	2452	13.92	0.024660	1

For 802.11b


Low Channel:

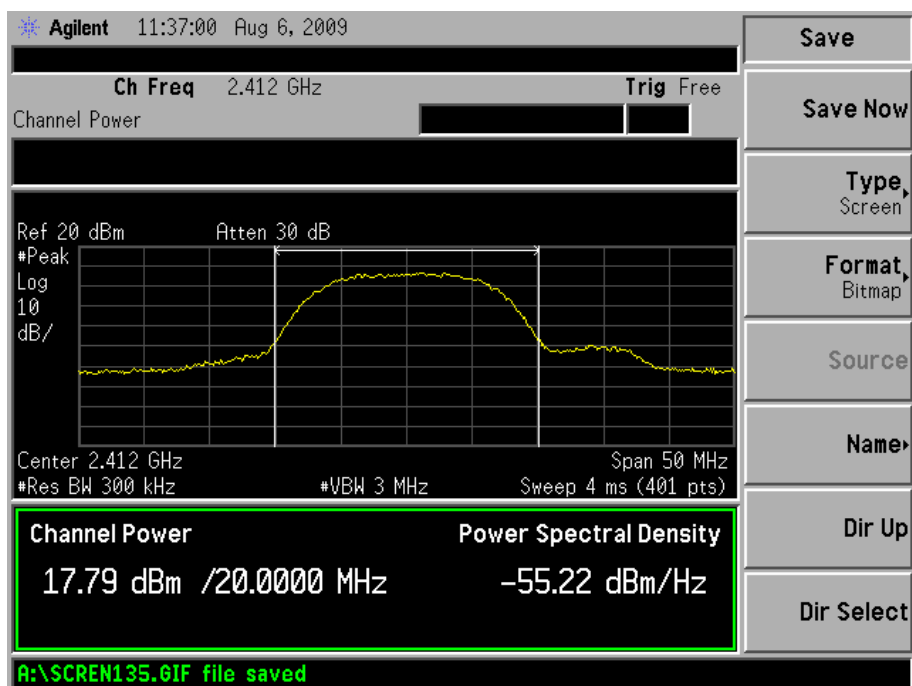

Middle Channel:

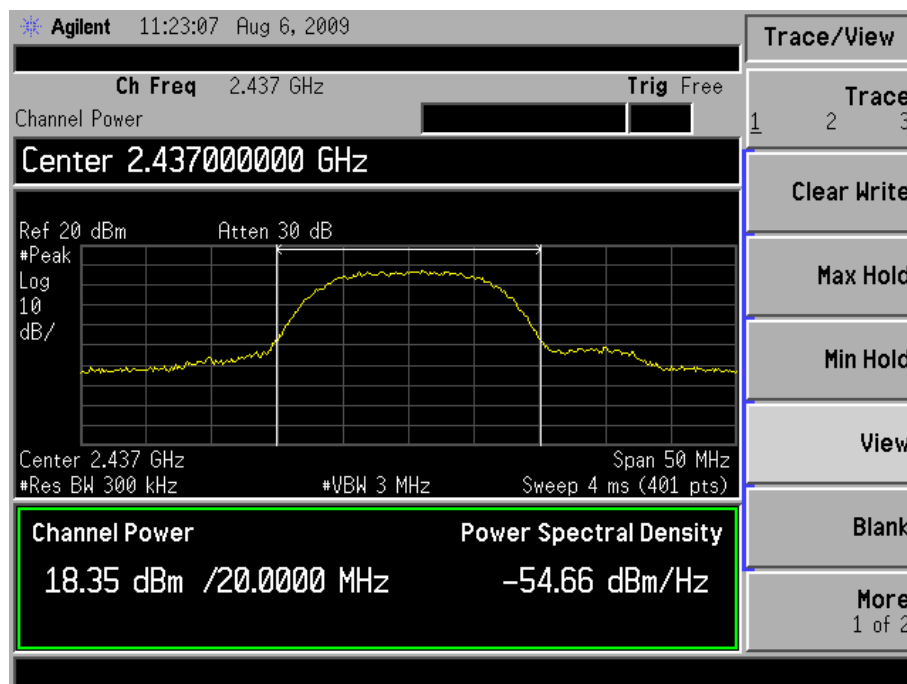


High Channel:

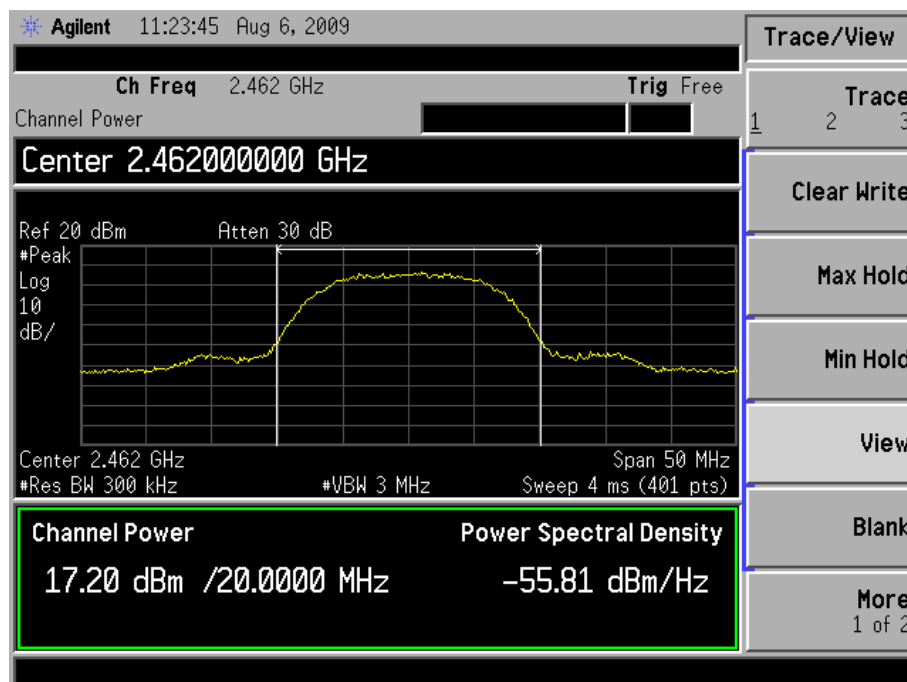


For 802.11g


Low Channel:

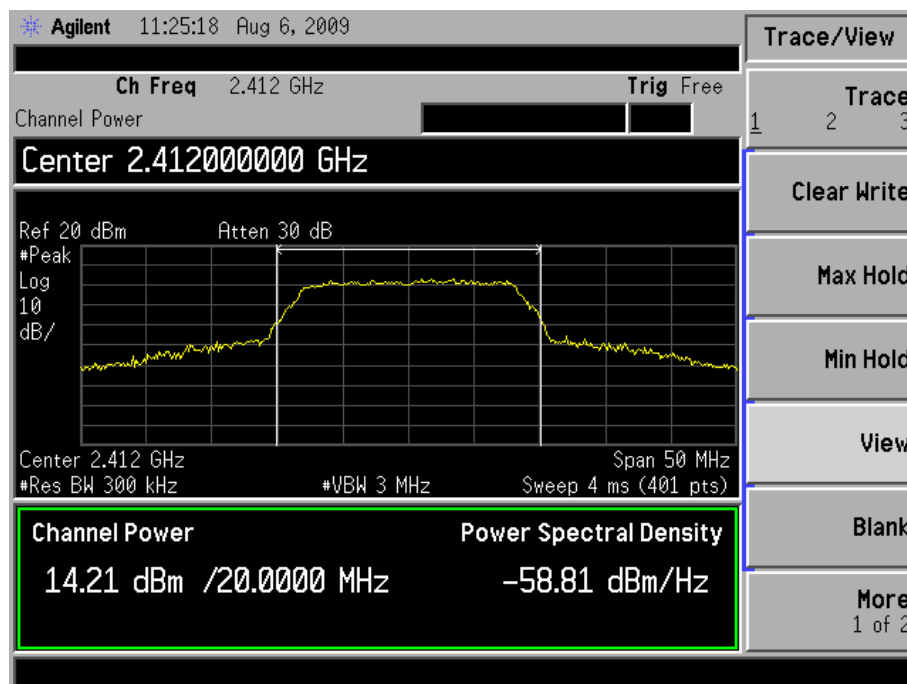

Middle Channel:

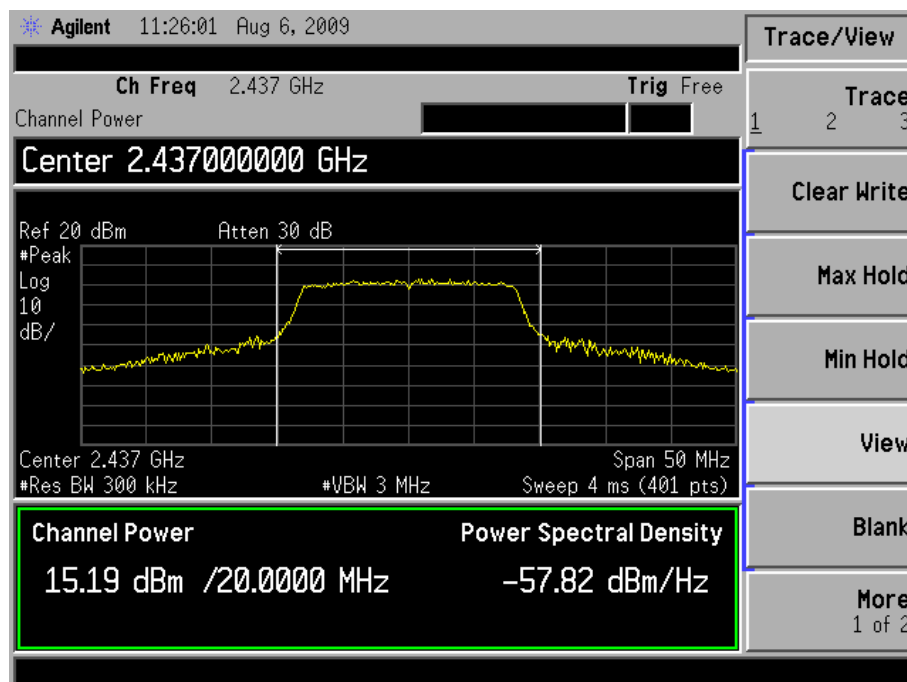


High Channel:

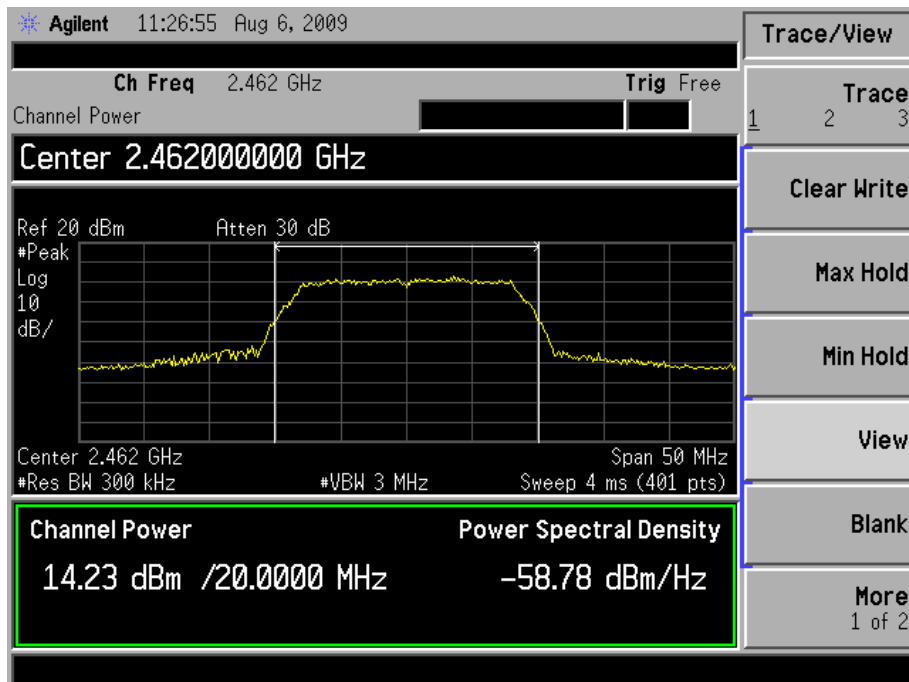


For 802.11n HT20


Low Channel:

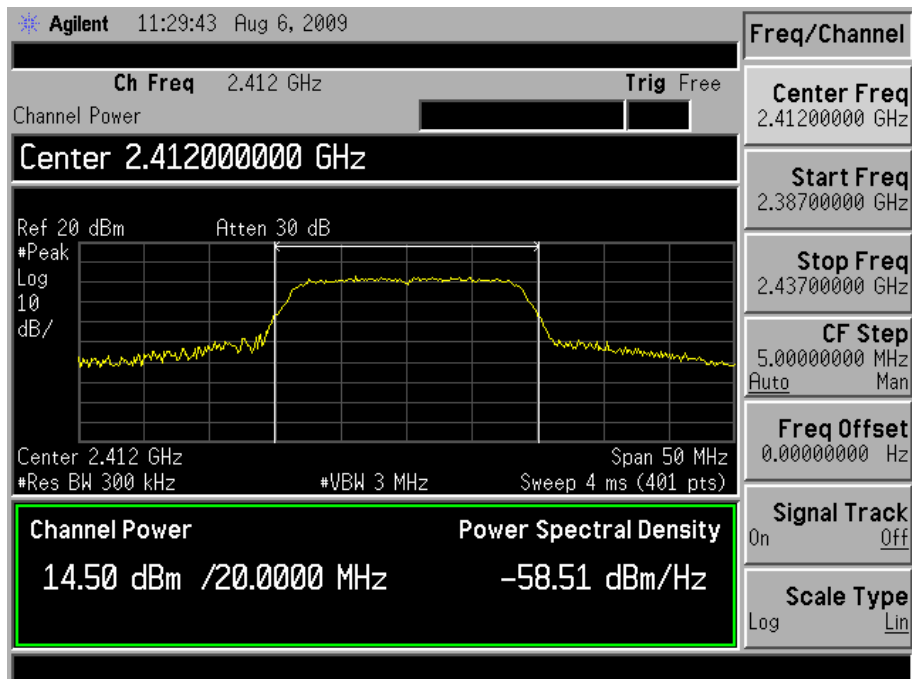

Middle Channel:

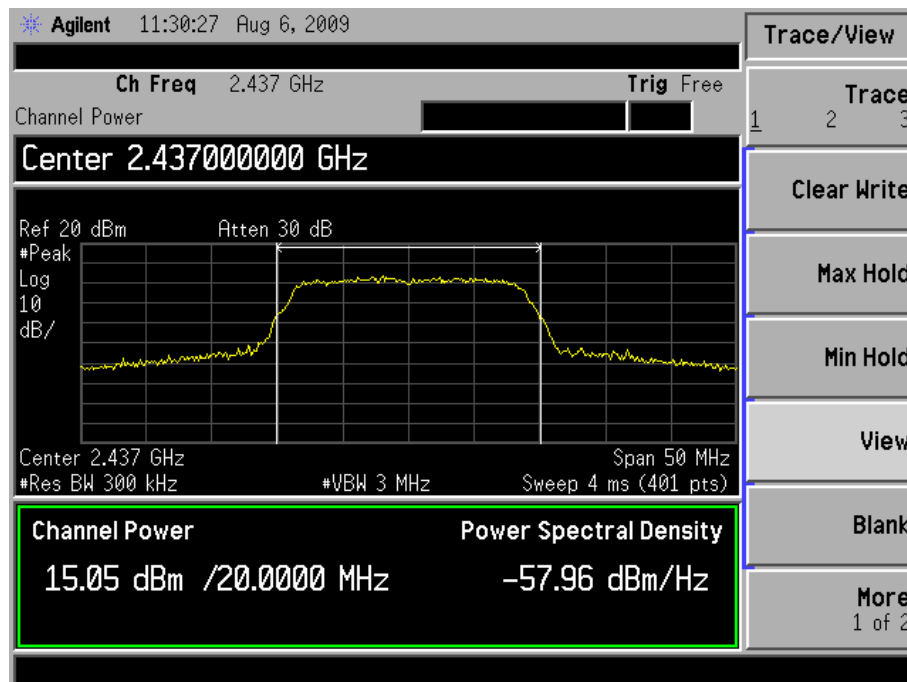


High Channel:

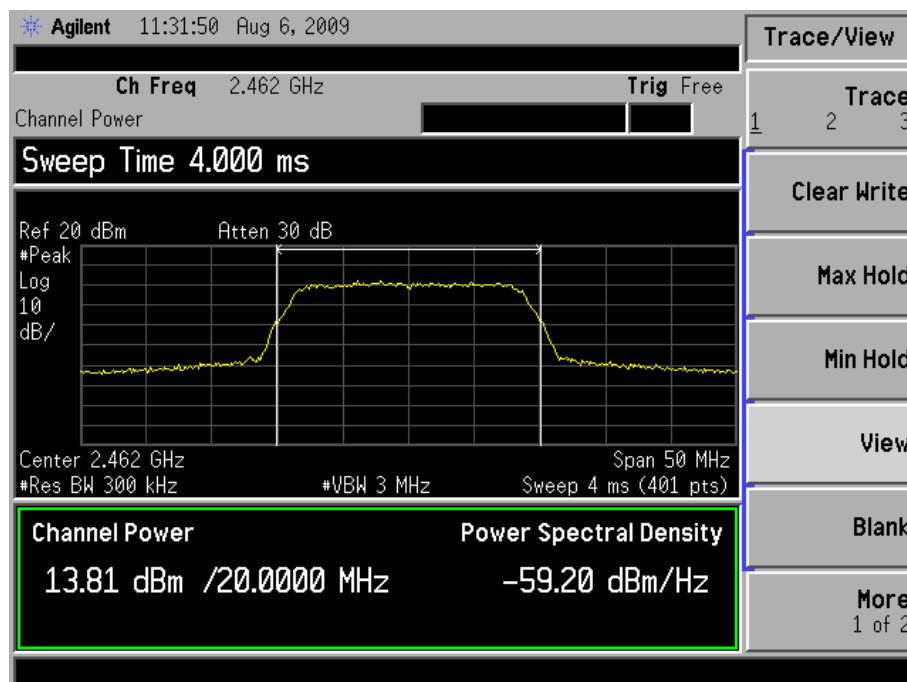


For 802.11n HT40


Low Channel:

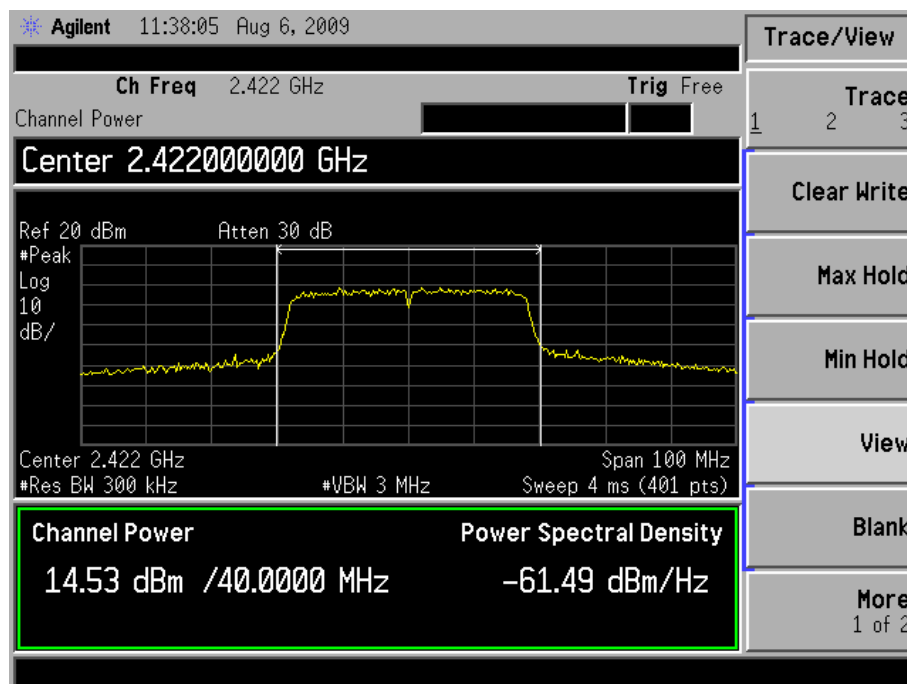

Middle Channel:

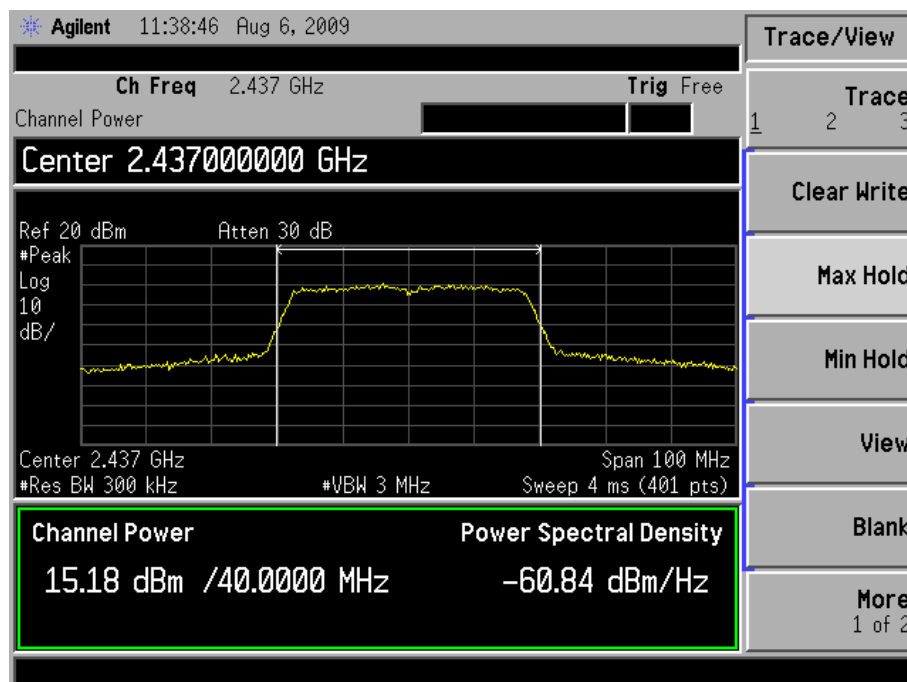

High Channel:

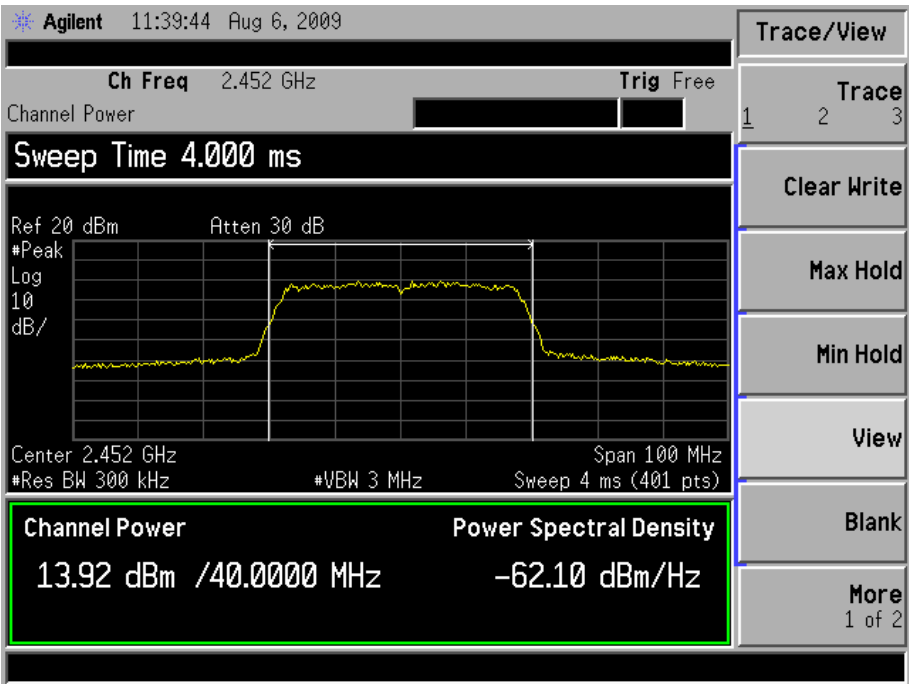

9. FIELD STRENGTH OF SPURIOUS EMISSIONS

9.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is ± 3.0 dB.

9.2 Standard Applicable

According to §15.247(c), 15.205 15.209(b) & 15.35 (b), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Section 15.209:

30 - 88 MHz 40 dBuV/m @3M

88 -216 MHz 43.5 dBuV/m @3M

216 -960 MHz 46 dBuV/m @3M

Above 960 MHz 54dBuV/m @3M

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.

Emissions that fall in the restricted bands (15.205) must be less than 54dBuV/m otherwise the spurious and harmonics must be attenuated by at least 20dB.

9.3 Test Equipment List and Details


Manufacturer	Description	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	ROHDE&SCHWARZ	FSEA20	DE25181	2009-07-08	2010-07-07
Positioning Controller	C&C	CC-C-1F	N/A	2009-07-08	2010-07-07
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2009-07-08	2010-07-07
Horn Antenna	SCHWARZBECK	BBHX 9120	9120-426	2009-07-08	2010-07-07
RF Switch	EM	EMSW18	SW060023	2009-07-08	2010-07-07
Amplifier	Agilent	8447F	3113A06717	2009-07-08	2010-07-07
Coaxial Cable	SCHWARZBECK	AK9513	9513-10	2009-07-08	2010-07-07
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	25498514	2009-07-08	2010-07-07

9.4 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

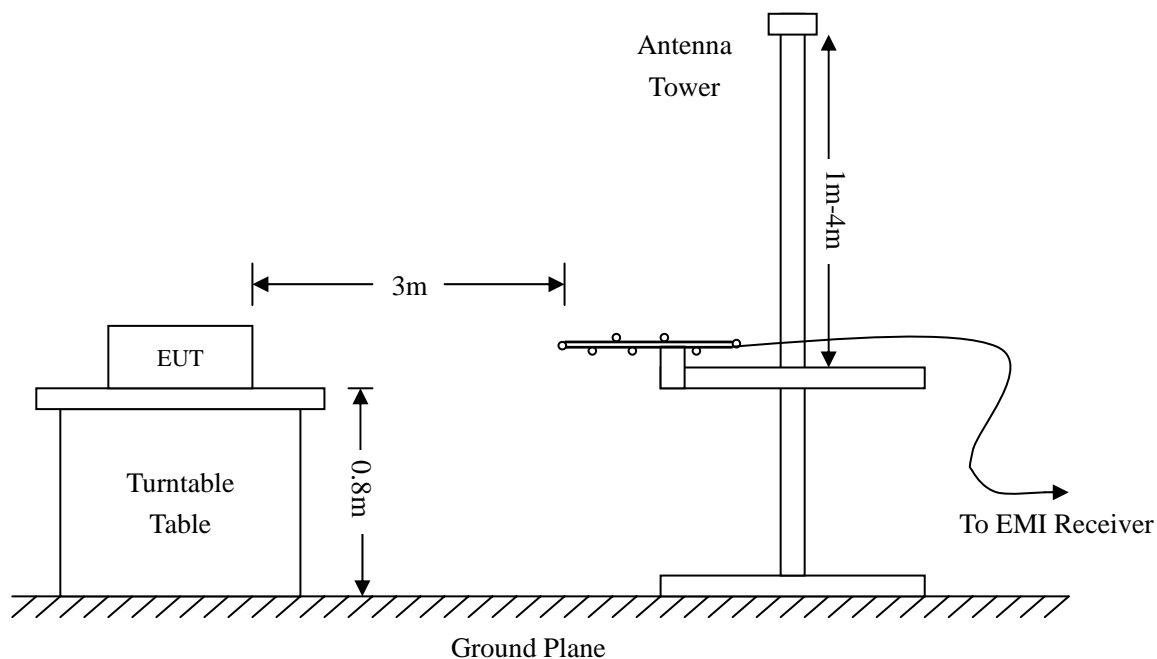

9.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$


9.6 Environmental Conditions

Temperature:	22° C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

9.7 Summary of Test Results/Plots


According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst margin of:

-1.33 dBμV at 899.9577 MHz in the Horizontal polarization, Transmitting 802.11b Low Channel test mode, 30 MHz to 25 GHz, 3Meters

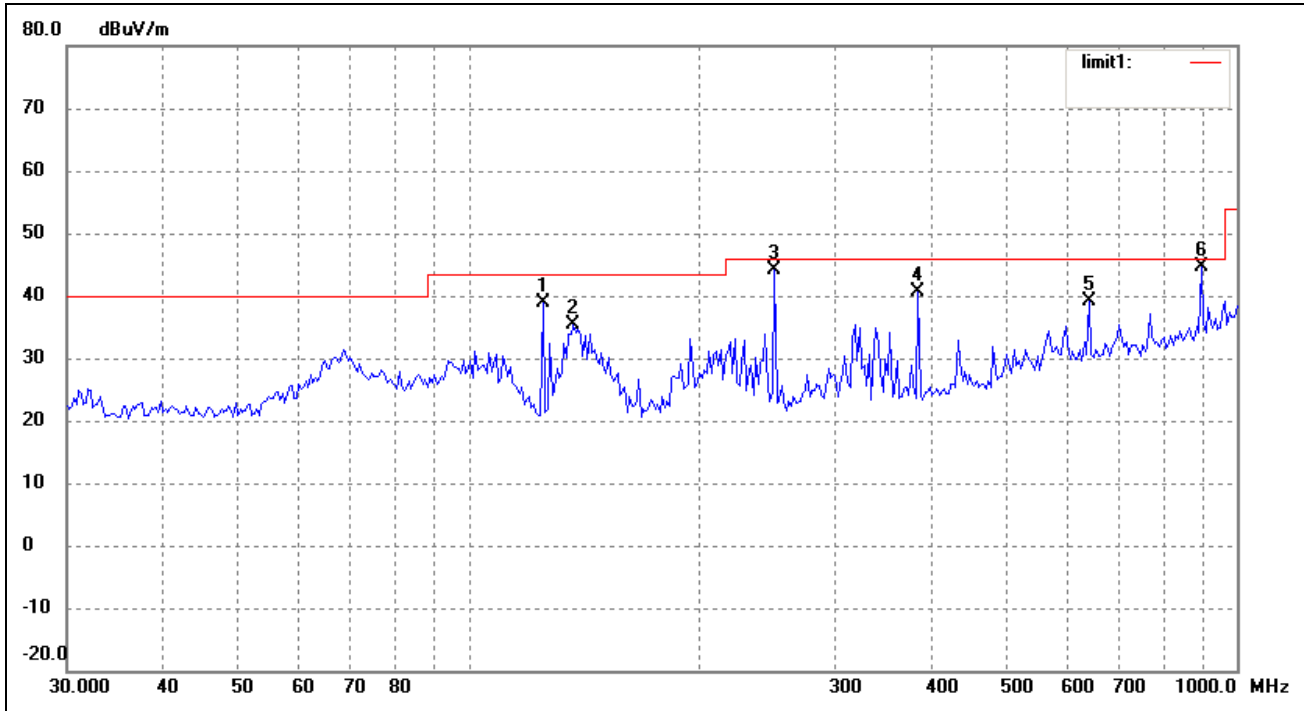
*Test Result/Plots:**Spurious Emission From 30 MHz to 1 GHz**Test mode: Transmitting (802.11b)**Comment: Low Channel**Horizontal*

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	124.9249	34.37	4.57	38.94	43.50	-4.56	65	100	QP
2	136.8747	31.89	3.42	35.31	43.50	-8.19	10	100	peak
3	250.4859	36.35	7.69	44.04	46.00	-1.96	15	100	QP
4	384.5447	30.72	9.96	40.68	46.00	-5.32	20	100	QP
5	642.2923	23.78	15.31	39.09	46.00	-6.91	12	100	peak
6	899.9577	25.87	18.80	44.67	46.00	-1.33	15	100	QP

Vertical

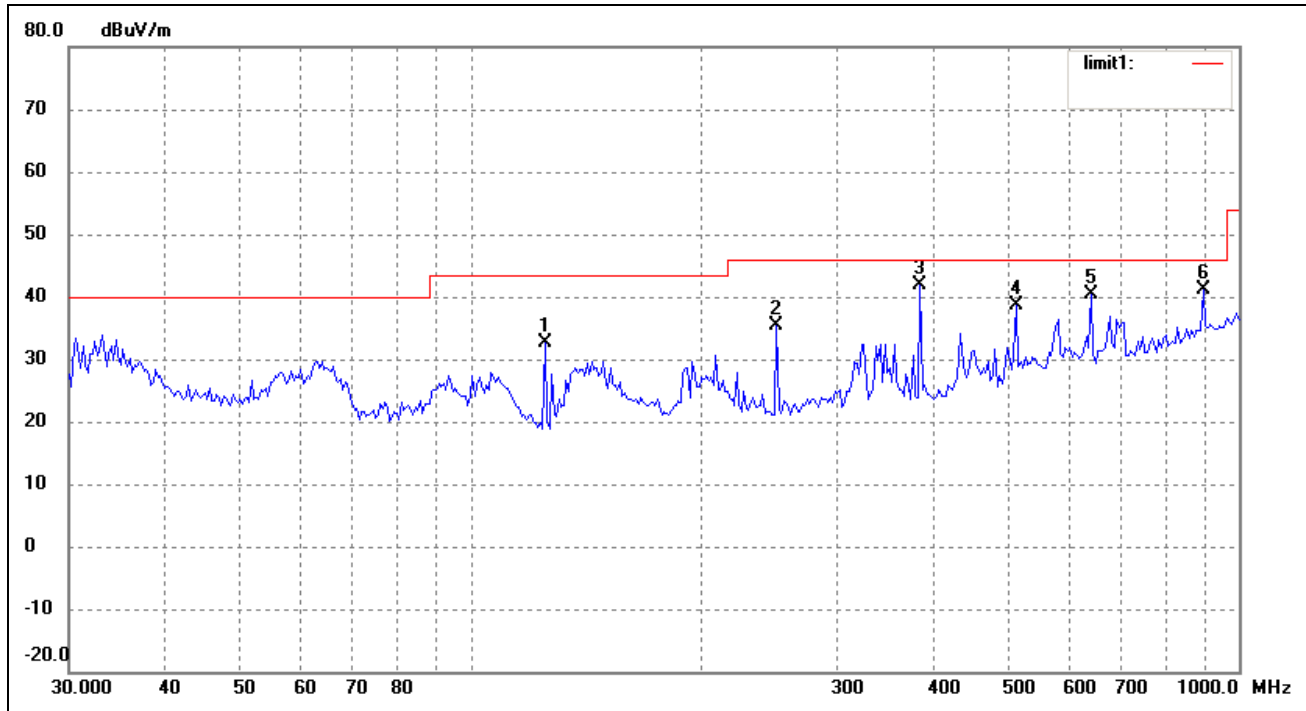


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	124.9249	27.95	4.57	32.52	43.50	-10.98	10	100	peak
2	250.4859	27.76	7.69	35.45	46.00	-10.55	36	100	peak
3	384.5447	31.80	9.96	41.76	46.00	-4.24	45	100	QP
4	512.9477	25.42	13.20	38.62	46.00	-7.38	59	100	QP
5	642.2923	25.09	15.31	40.40	46.00	-5.60	360	100	QP
6	899.9577	22.24	18.80	41.04	46.00	-4.96	0	100	QP

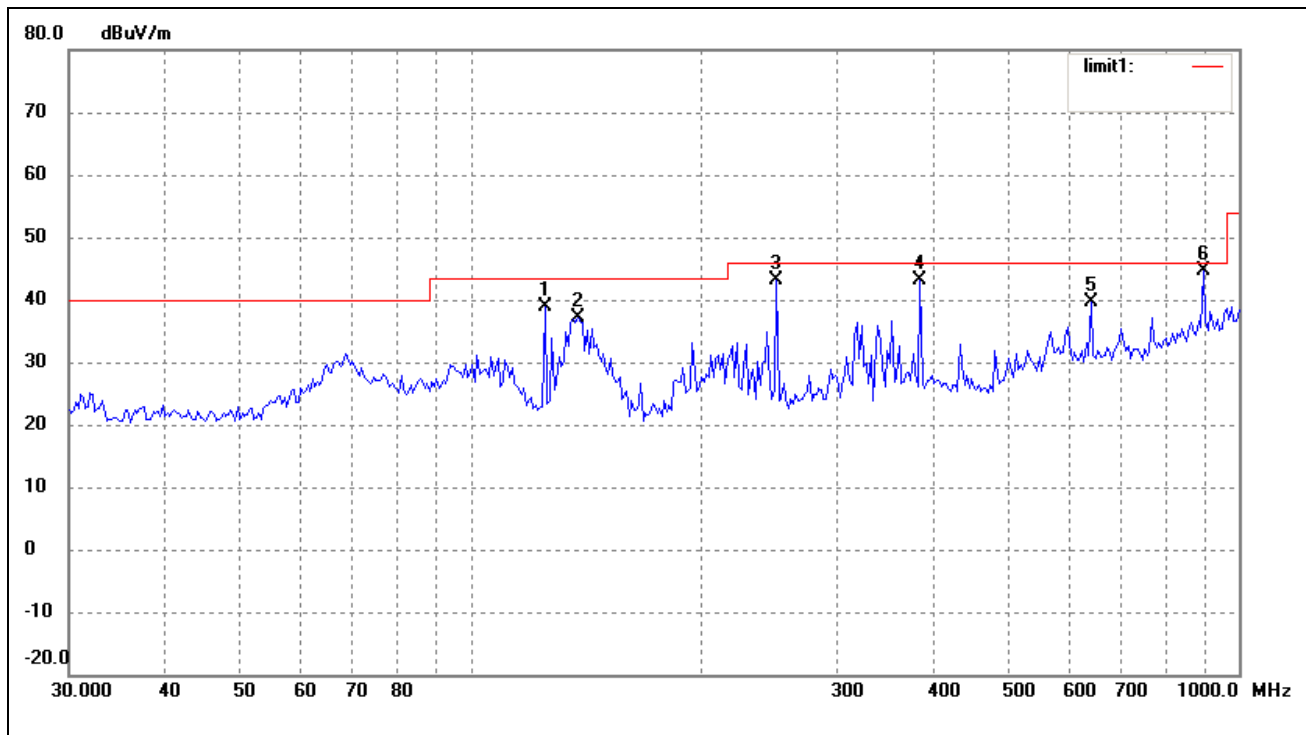
*Test Result/Plots:**Spurious Emission From 30 MHz to 1 GHz**Test mode: Transmitting (802.11b)**Comment: Middle Channel**Horizontal*

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	124.9248	34.37	4.57	38.94	43.50	-4.56	15	100	QP
2	137.8400	33.66	3.36	37.02	43.50	-6.48	100	100	peak
3	250.4858	35.35	7.69	43.04	46.00	-2.96	1	100	QP
4	384.5446	33.22	9.96	43.18	46.00	-2.82	210	100	QP
5	642.2922	24.28	15.31	39.59	46.00	-6.41	112	100	peak
6	899.9577	25.87	18.80	44.67	46.00	-1.33	360	100	QP

Vertical

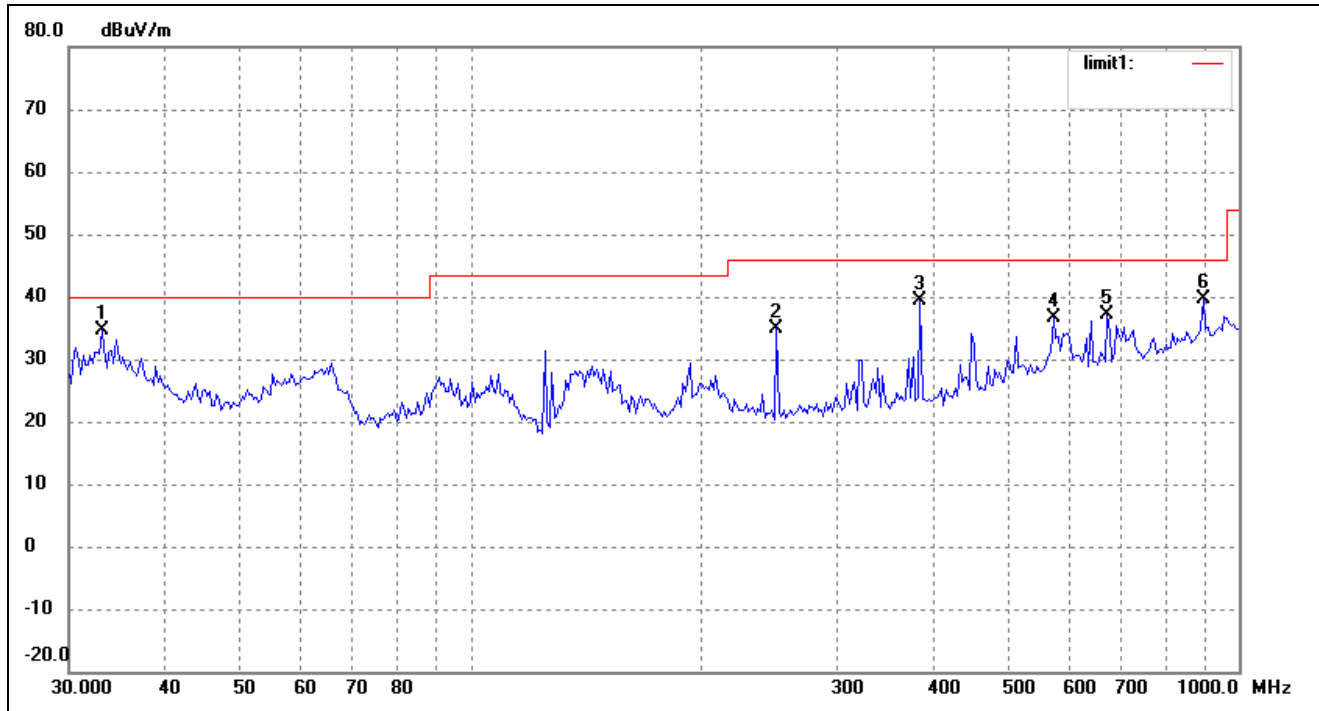


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	33.1015	27.92	6.61	34.53	40.00	-5.47	10	100	peak
2	250.4859	27.23	7.69	34.92	46.00	-11.08	36	100	peak
3	384.5447	29.46	9.96	39.42	46.00	-6.58	45	100	QP
4	573.9882	22.15	14.48	36.63	46.00	-9.37	59	100	QP
5	674.6768	21.56	15.53	37.09	46.00	-8.91	360	100	QP
6	899.9577	20.76	18.80	39.56	46.00	-6.44	0	100	QP

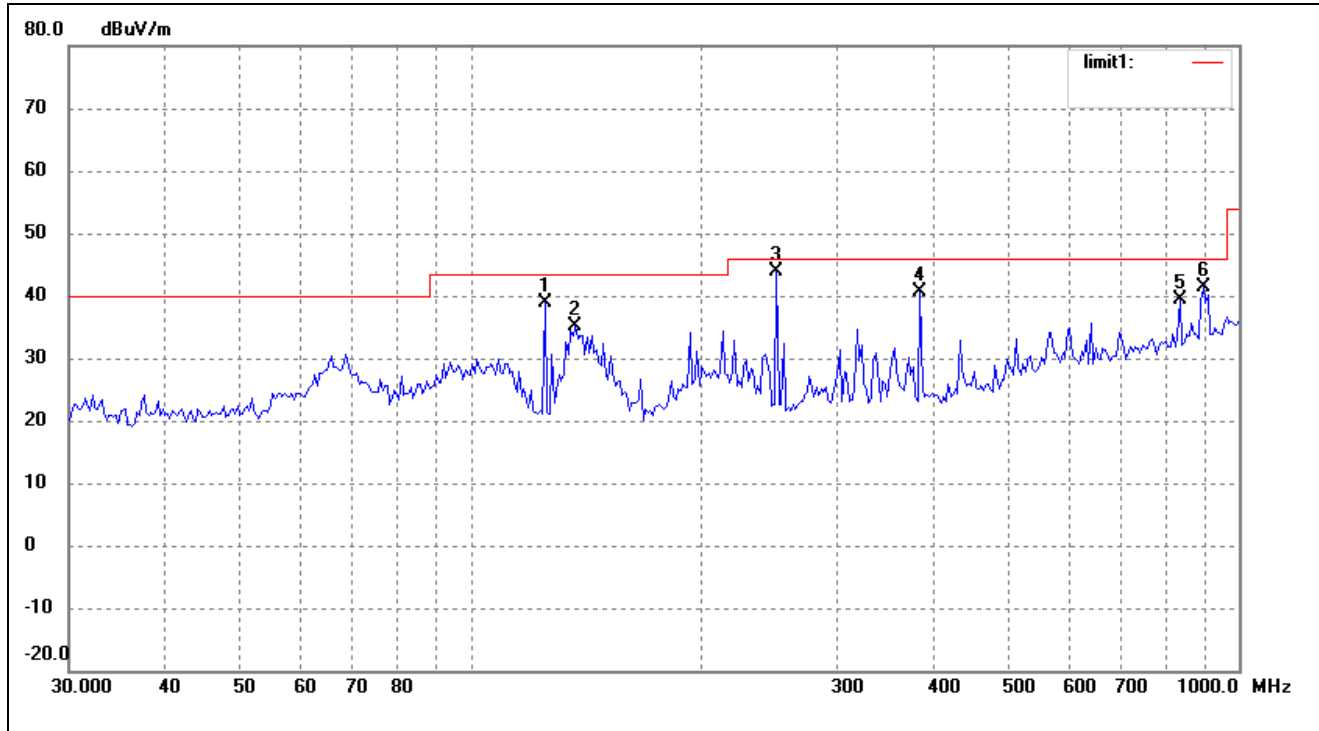*Test Result/Plots:**Spurious Emission From 30 MHz to 1 GHz**Test mode: Transmitting (802.11b)**Comment: High Channel**Horizontal*

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	124.9249	34.39	4.57	38.96	43.50	-4.54	23	100	QP
2	136.8747	31.80	3.42	35.22	43.50	-8.28	25	100	peak
3	250.4859	36.23	7.69	43.92	46.00	-2.08	69	100	QP
4	384.5447	30.59	9.96	40.55	46.00	-5.45	55	100	QP
5	838.8870	21.70	17.73	39.43	46.00	-6.57	46	100	peak
6	899.9577	22.59	18.80	41.39	46.00	-4.61	3	100	QP

Vertical

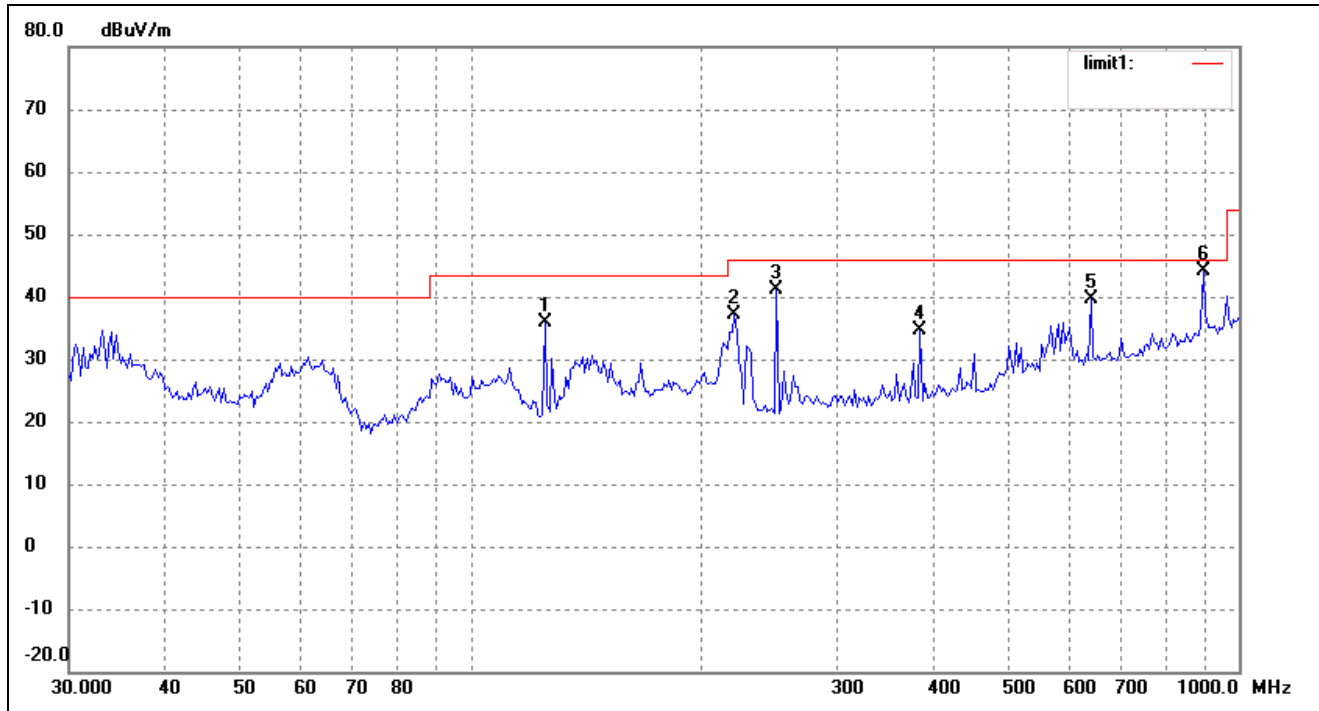


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	124.9249	31.37	4.57	35.94	43.50	-7.56	15	100	peak
2	220.7240	30.86	6.38	37.24	46.00	-8.76	54	100	peak
3	250.4859	33.40	7.69	41.09	46.00	-4.91	65	100	QP
4	384.5447	24.67	9.96	34.63	46.00	-11.37	41	100	QP
5	642.2923	24.27	15.31	39.58	46.00	-6.42	263	100	QP
6	899.9577	25.31	18.80	44.11	46.00	-1.89	360	100	QP

Spurious Emission From 30 MHz to 1 GHz

Test mode: Transmitting (802.11g)


Comment: Low Channel

Horizontal

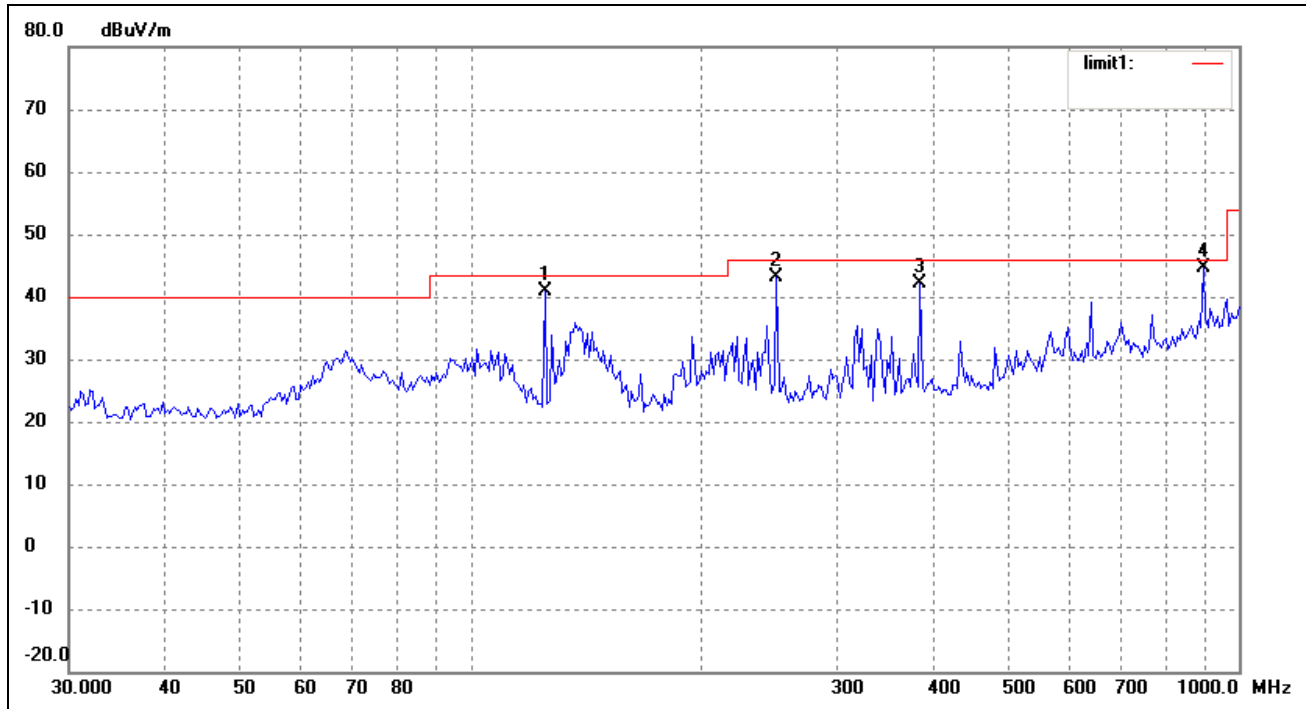

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	124.9248	36.37	4.57	40.94	43.50	-2.56	10	100	QP
2	250.4858	35.35	7.69	43.04	46.00	-2.96	28	100	QP
3	384.5446	32.22	9.96	42.18	46.00	-3.82	45	100	QP
4	899.9577	25.87	18.80	44.67	46.00	-1.33	200	100	QP

Vertical

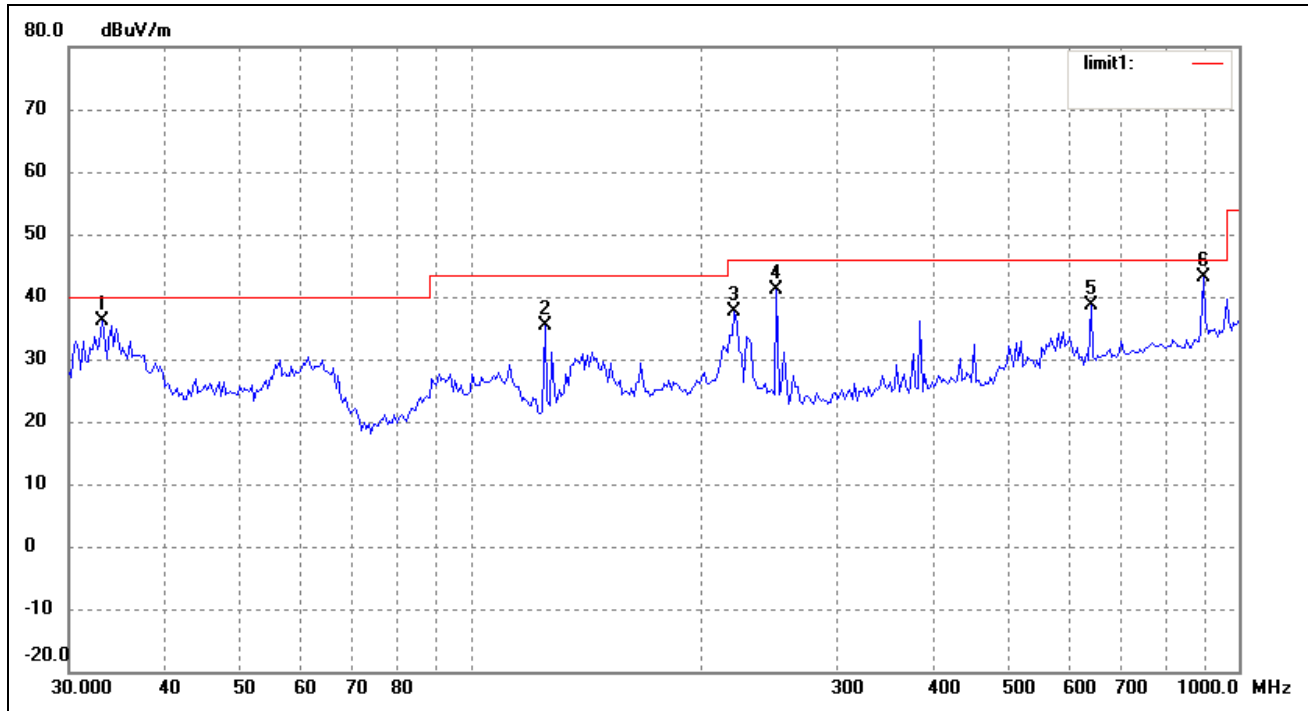


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	33.1015	29.63	6.61	36.24	40.00	-3.76	250	100	QP
2	124.9248	30.87	4.57	35.44	43.50	-8.06	63	100	peak
3	220.7239	31.36	6.38	37.74	46.00	-8.26	320	100	peak
4	250.4858	33.40	7.69	41.09	46.00	-4.91	122	100	QP
5	642.2921	23.27	15.31	38.58	46.00	-7.42	52	100	QP
6	899.9577	24.31	18.80	43.11	46.00	-2.89	136	100	QP

Spurious Emission From 30 MHz to 1 GHz

Test mode: Transmitting (802.11g)


Comment: Middle Channel

Horizontal

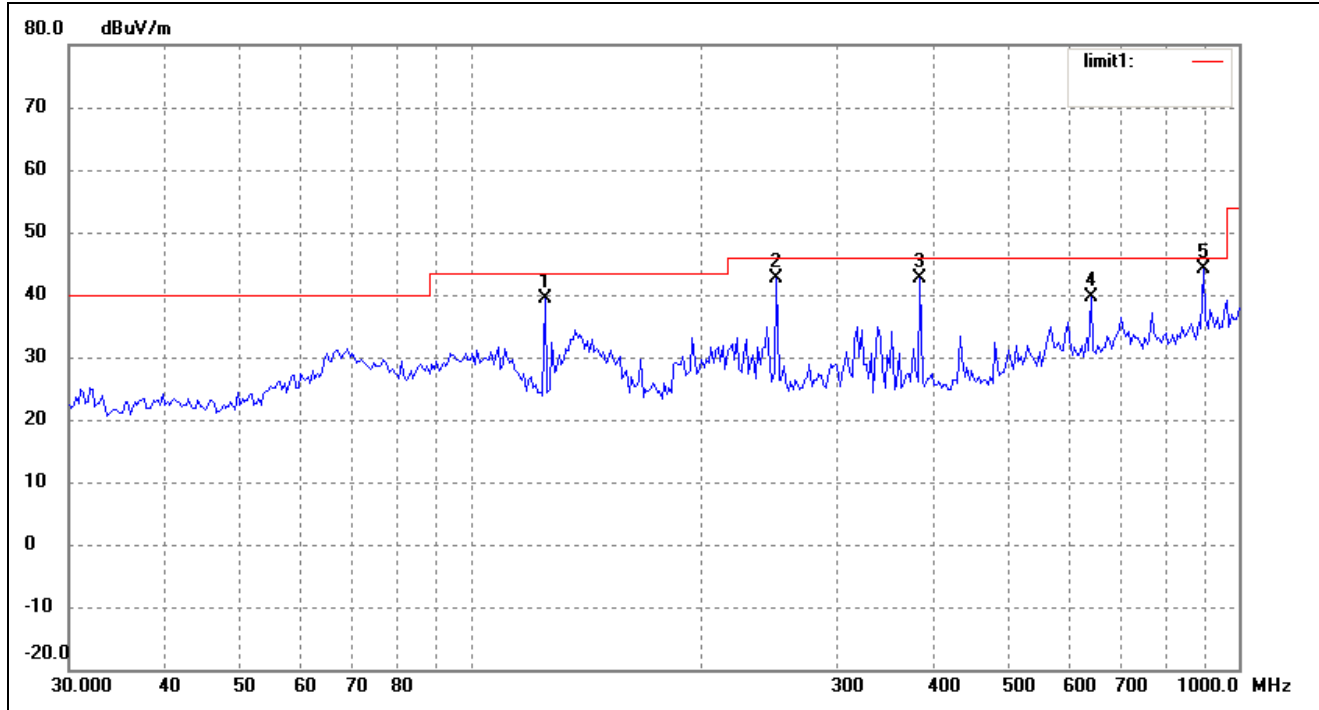

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	124.9248	34.87	4.57	39.44	43.50	-4.06	10	100	QP
2	250.4858	34.85	7.69	42.54	46.00	-3.46	28	100	QP
3	384.5446	32.72	9.96	42.68	46.00	-3.32	45	100	QP
4	642.2922	24.28	15.31	39.59	46.00	-6.41	200	100	QP
5	899.9577	25.37	18.80	44.17	46.00	-1.83	25	100	QP

Vertical

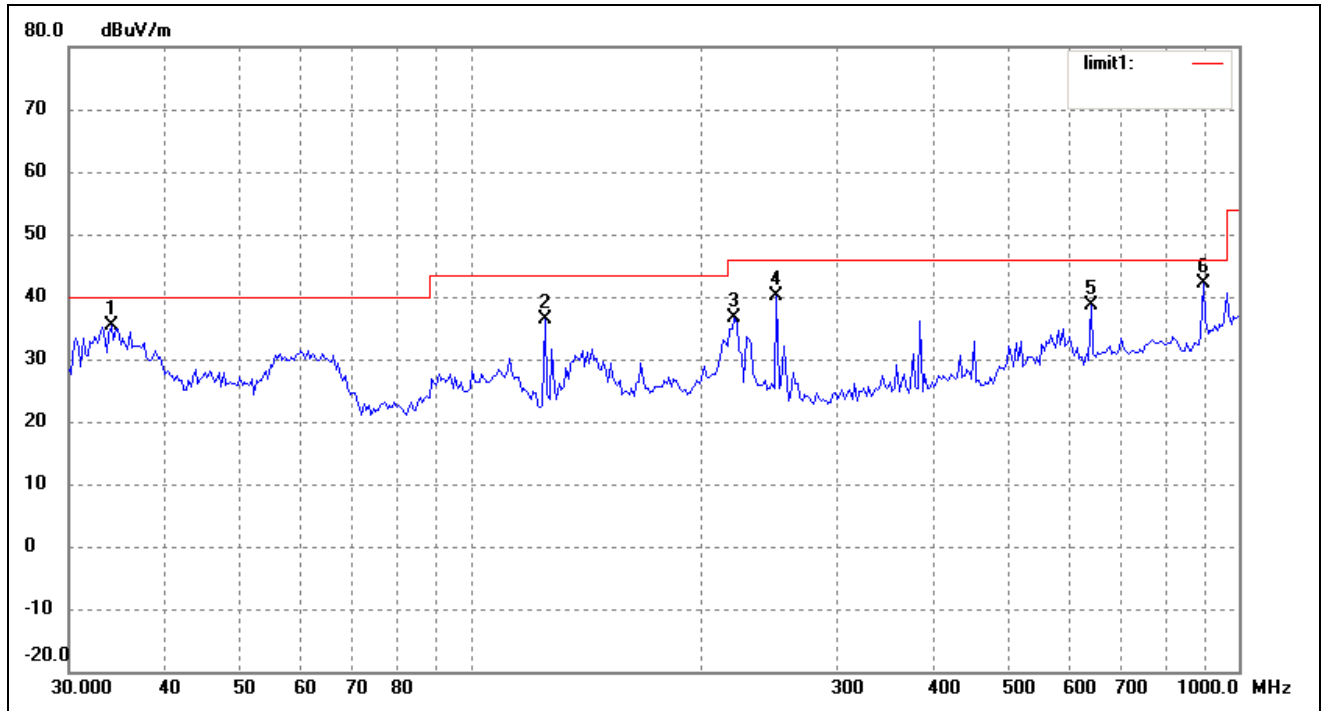


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	34.0450	28.87	6.61	35.48	40.00	-4.52	50	100	QP
2	124.9248	31.87	4.57	36.44	43.50	-7.06	263	100	peak
3	220.7239	30.36	6.38	36.74	46.00	-9.26	30	100	peak
4	250.4858	32.40	7.69	40.09	46.00	-5.91	12	100	QP
5	642.2921	23.27	15.31	38.58	46.00	-7.42	12	100	QP
6	899.9577	23.31	18.80	42.11	46.00	-3.89	360	100	QP

Spurious Emission From 30 MHz to 1 GHz

Test mode: Transmitting (802.11g)


Comment: High Channel

Horizontal

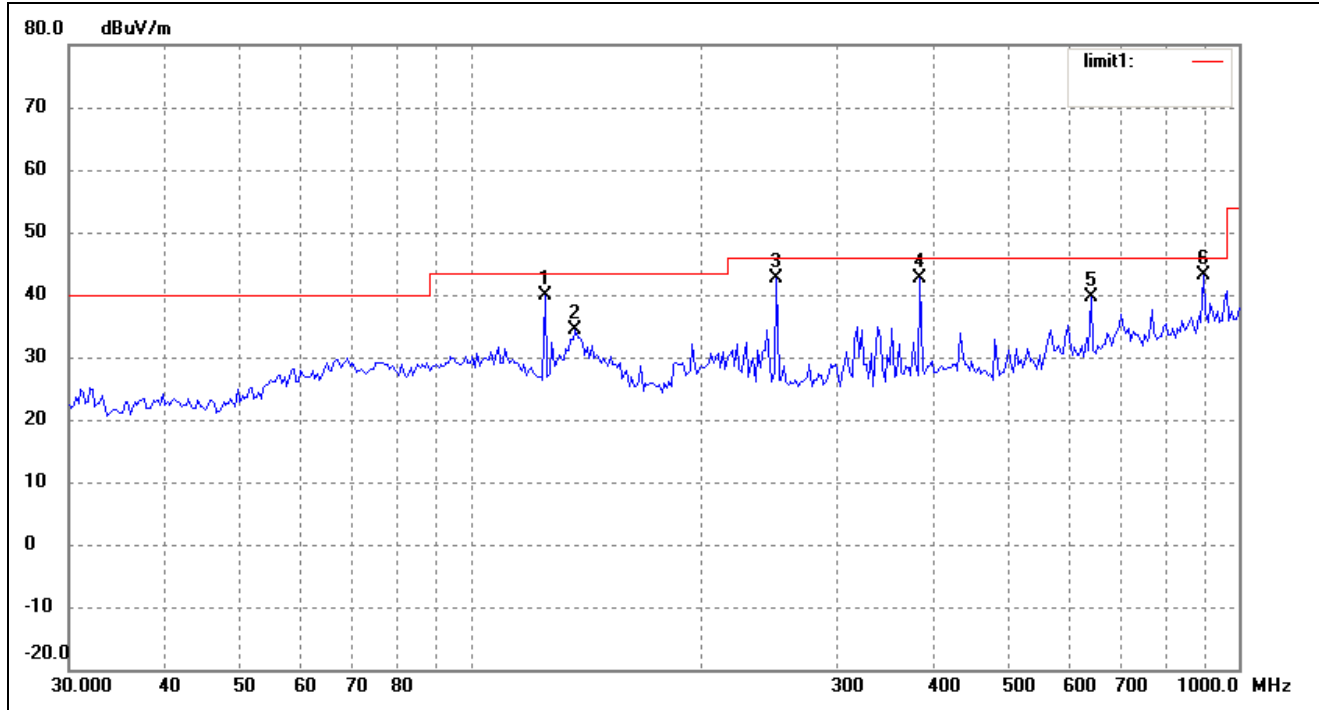

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	124.9248	35.37	4.57	39.94	43.50	-3.56	10	100	QP
2	136.8746	30.89	3.42	34.31	43.50	-9.19	28	100	Peak
3	250.4858	34.85	7.69	42.54	46.00	-3.46	45	100	QP
4	384.5446	32.72	9.96	42.68	46.00	-3.32	200	100	QP
5	642.2922	24.28	15.31	39.59	46.00	-6.41	25	100	QP
6	899.9577	24.37	18.80	43.17	46.00	-2.83	150	100	QP

Vertical

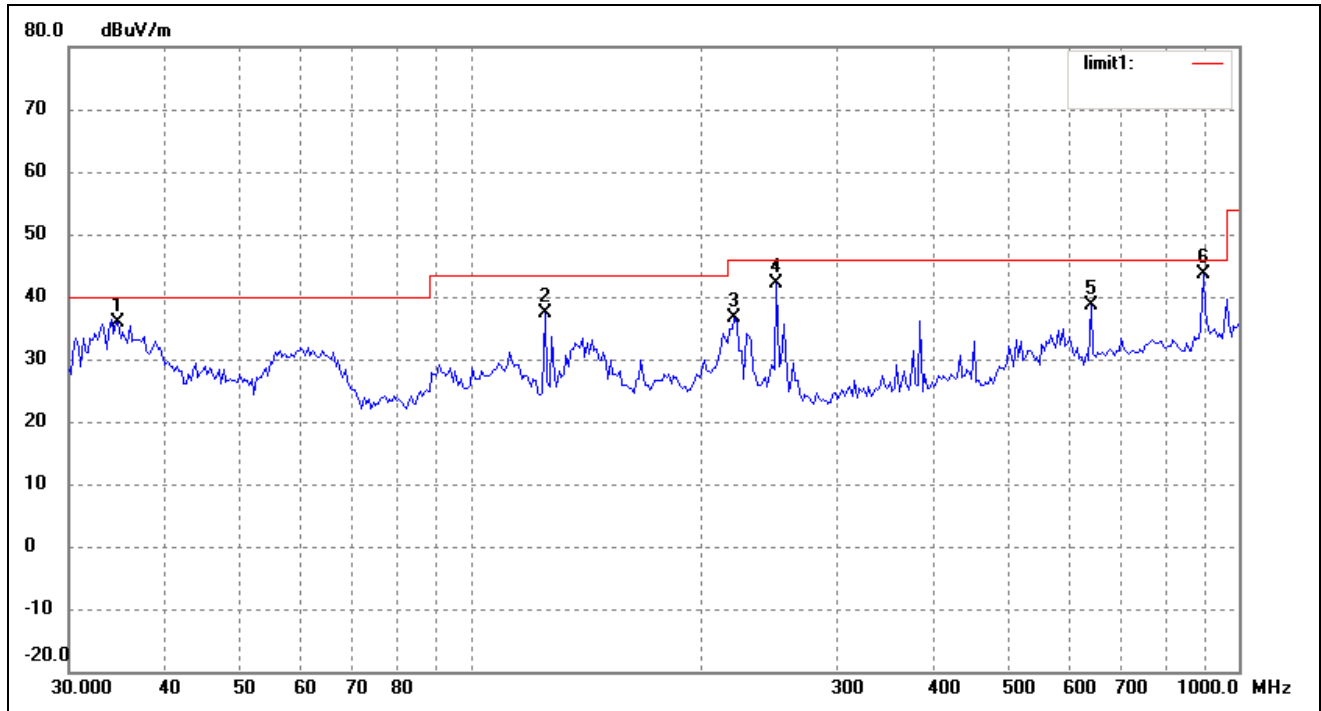


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	34.7704	29.39	6.60	35.99	40.00	-4.01	50	100	QP
2	124.9248	32.87	4.57	37.44	43.50	-6.06	263	100	peak
3	220.7239	30.36	6.38	36.74	46.00	-9.26	30	100	peak
4	250.4858	34.40	7.69	42.09	46.00	-3.91	12	100	QP
5	642.2921	23.27	15.31	38.58	46.00	-7.42	12	100	QP
6	899.9577	24.81	18.80	43.61	46.00	-2.39	360	100	QP

Spurious Emission From 30 MHz to 1 GHz

Test mode: Transmitting (802.11n HT20)


Comment: Low Channel

Horizontal

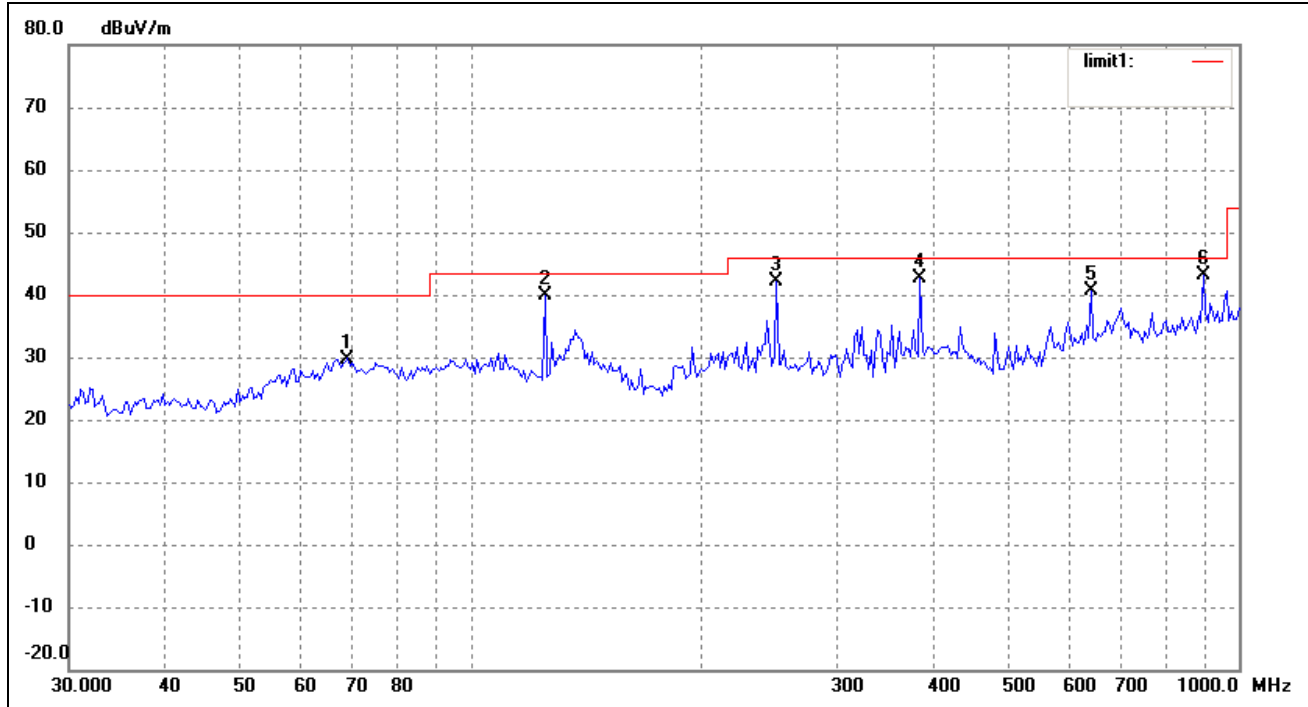

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	69.2296	26.24	3.51	29.75	40.00	-10.25	180	100	peak
2	124.9248	35.37	4.57	39.94	43.50	-3.56	360	100	QP
3	250.4858	34.35	7.69	42.04	46.00	-3.96	5	100	QP
4	384.5446	32.72	9.96	42.68	46.00	-3.32	356	100	QP
5	642.2922	25.28	15.31	40.59	46.00	-5.41	350	100	QP
6	899.9577	24.37	18.80	43.17	46.00	-2.83	100	100	QP

Vertical

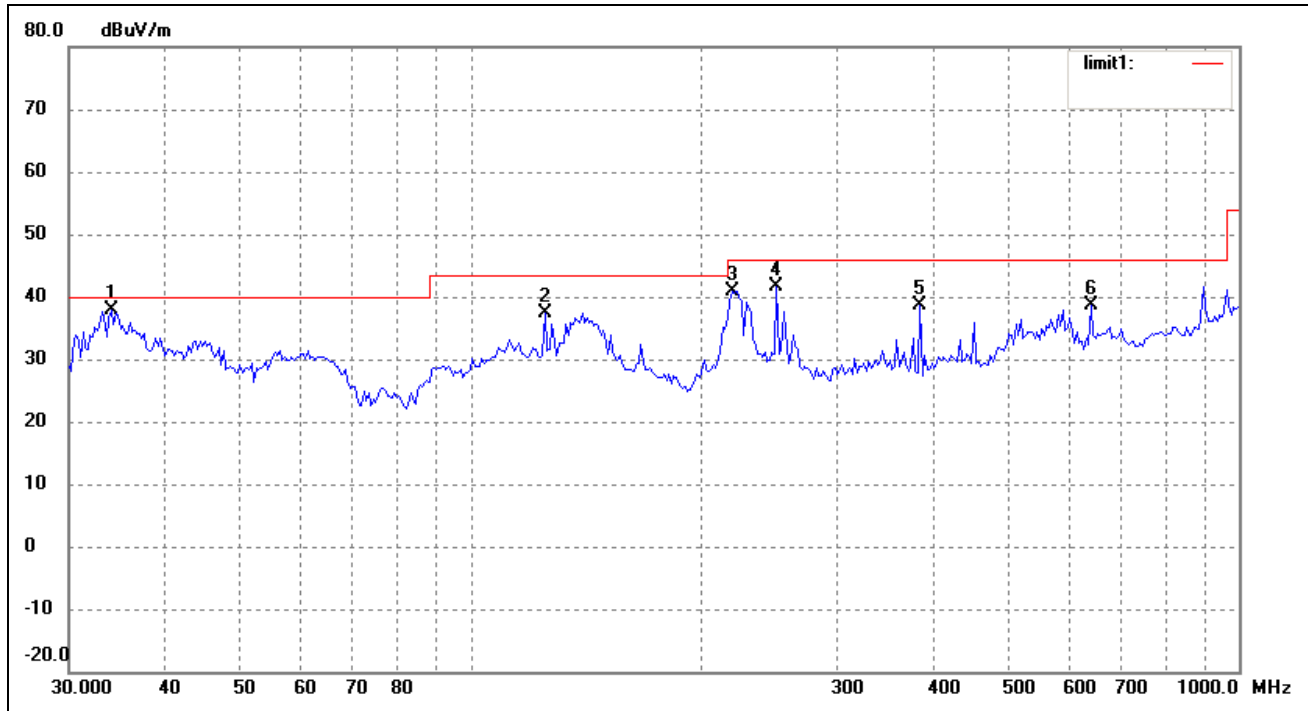


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	34.0450	31.37	6.61	37.98	40.00	-2.02	270	100	QP
2	124.9248	32.87	4.57	37.44	43.50	-6.06	100	100	QP
3	219.1785	34.64	6.31	40.95	46.00	-5.05	15	100	QP
4	250.4858	33.90	7.69	41.59	46.00	-4.41	222	100	QP
5	384.5446	28.67	9.96	38.63	46.00	-7.37	358	100	peak
6	642.2921	23.27	15.31	38.58	46.00	-7.42	265	100	peak

Spurious Emission From 30 MHz to 1 GHz

Test mode: Transmitting (802.11n HT20)


Comment: Middle Channel

Horizontal

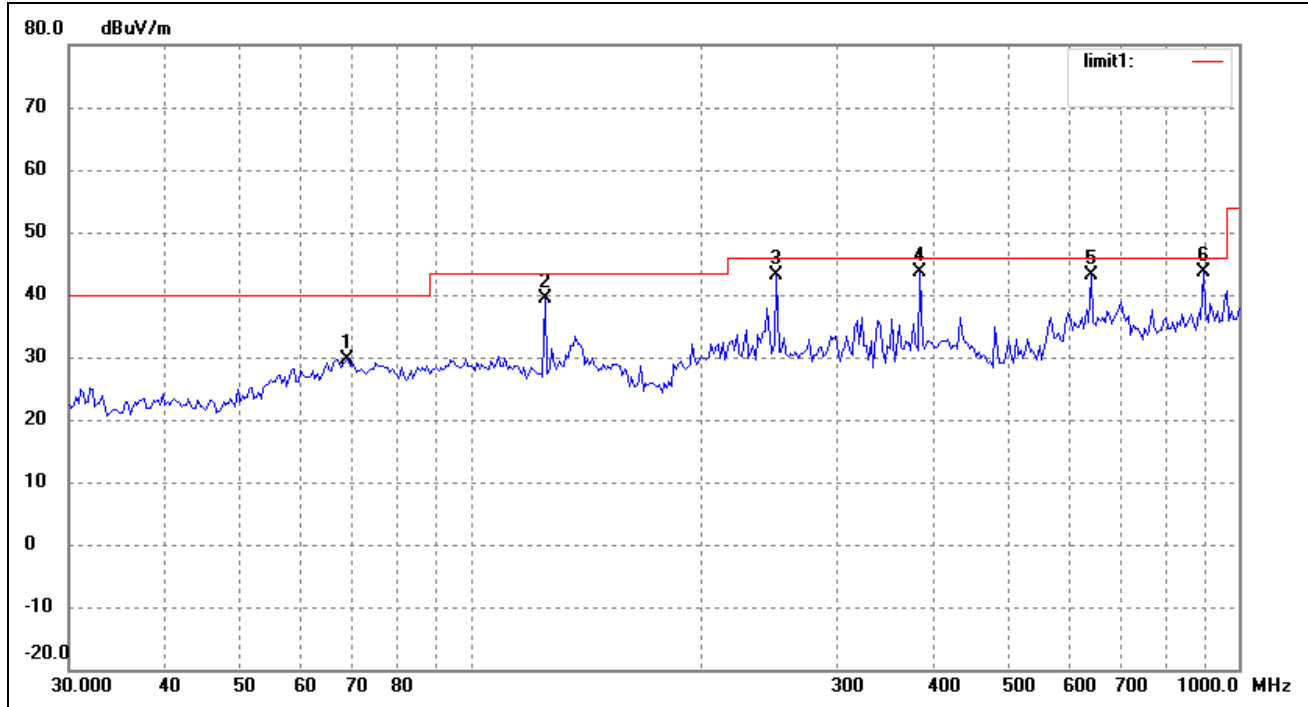

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	69.2296	26.24	3.51	29.75	40.00	-10.25	210	100	peak
2	124.9248	34.87	4.57	39.44	43.50	-4.06	125	100	QP
3	250.4858	35.35	7.69	43.04	46.00	-2.96	0	100	QP
4	384.5446	33.72	9.96	43.68	46.00	-2.32	45	100	QP
5	642.2922	27.78	15.31	43.09	46.00	-2.91	360	100	QP
6	899.9577	24.87	18.80	43.67	46.00	-2.33	101	100	QP

Vertical

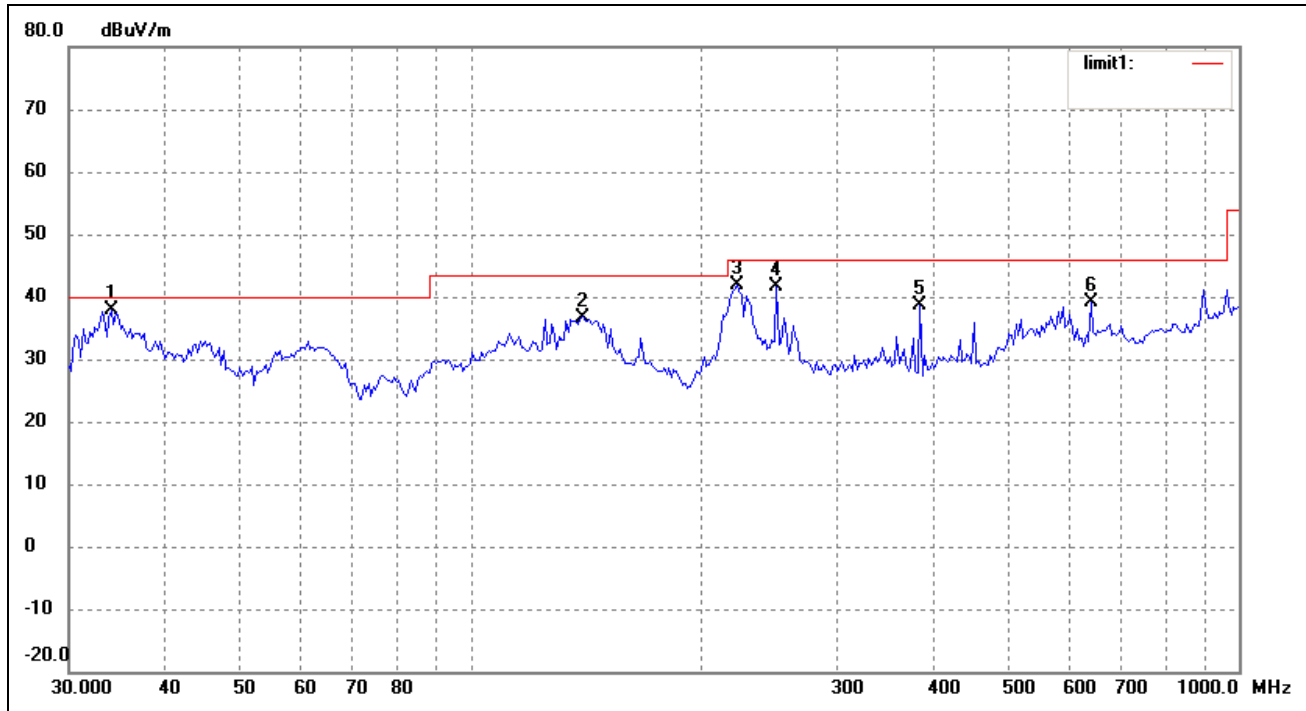


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	34.0450	31.37	6.61	37.98	40.00	-2.02	358	100	QP
2	139.7906	33.51	3.24	36.75	43.50	-6.75	180	100	QP
3	222.2803	35.33	6.46	41.79	46.00	-4.21	245	100	QP
4	250.4858	33.90	7.69	41.59	46.00	-4.41	87	100	QP
5	384.5446	28.67	9.96	38.63	46.00	-7.37	334	100	QP
6	642.2921	23.77	15.31	39.08	46.00	-6.92	0	100	QP

Spurious Emission From 30 MHz to 1 GHz

Test mode: Transmitting (802.11n HT20)


Comment: High Channel

Horizontal

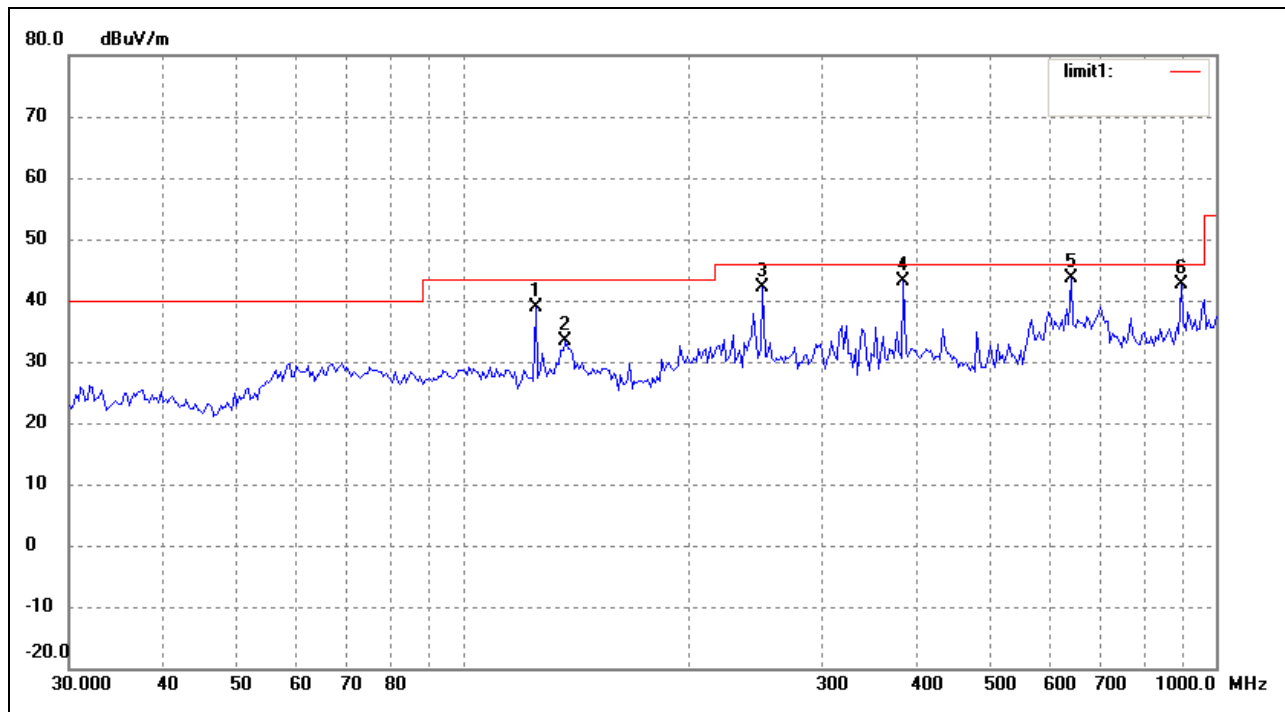

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	124.9248	34.37	4.57	38.94	43.50	-4.56	180	100	peak
2	136.8746	29.89	3.42	33.31	43.50	-10.19	360	100	QP
3	250.4858	34.35	7.69	42.04	46.00	-3.96	5	100	QP
4	384.5446	33.22	9.96	43.18	46.00	-2.82	356	100	QP
5	642.2922	28.28	15.31	43.59	46.00	-2.41	350	100	QP
6	899.9577	23.87	18.80	42.67	46.00	-3.33	100	100	QP

Vertical

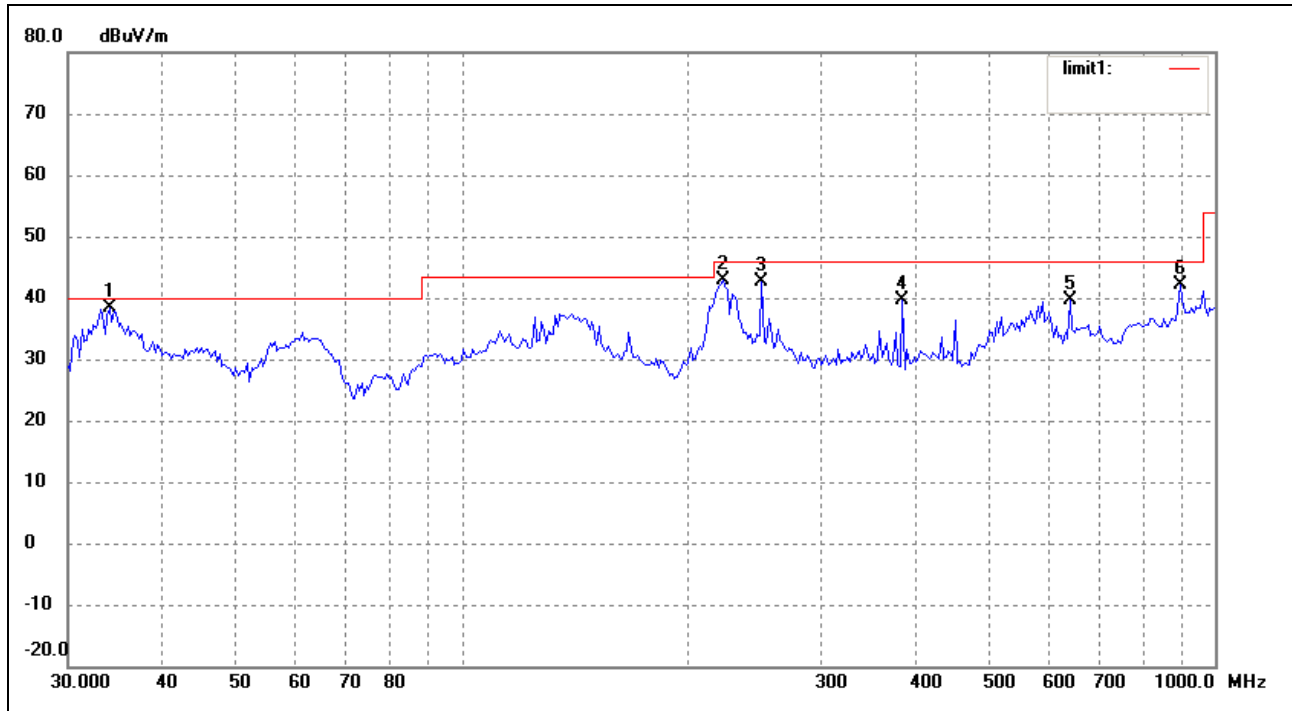


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	34.0450	31.87	6.61	38.48	40.00	-1.52	270	100	QP
2	222.2803	36.33	6.46	42.79	46.00	-3.21	100	100	QP
3	250.4858	34.90	7.69	42.59	46.00	-3.41	15	100	QP
4	384.5446	29.67	9.96	39.63	46.00	-6.37	222	100	QP
5	642.2921	24.27	15.31	39.58	46.00	-6.42	358	100	QP
6	899.9577	23.31	18.80	42.11	46.00	-3.89	265	100	QP

Spurious Emission From 30 MHz to 1 GHz

Test mode: Transmitting (802.11n HT40)


Comment: Low Channel

Horizontal

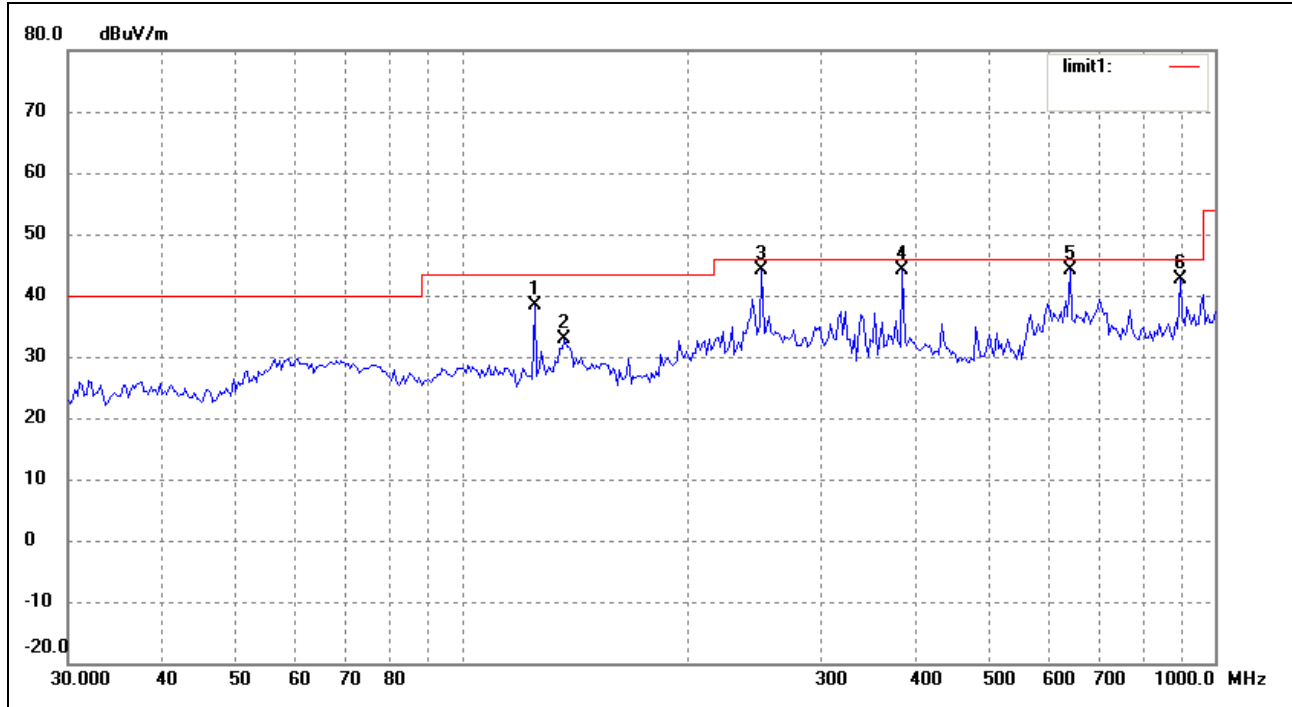

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	124.9248	33.87	4.57	38.44	43.50	-5.06	180	100	peak
2	136.8746	29.39	3.42	32.81	43.50	-10.69	360	100	QP
3	250.4858	36.35	7.69	44.04	46.00	-1.96	5	100	QP
4	384.5446	34.22	9.96	44.18	46.00	-1.82	356	100	QP
5	642.2922	28.78	15.31	44.09	46.00	-1.91	350	100	QP
6	899.9577	23.87	18.80	42.67	46.00	-3.33	100	100	QP

Vertical

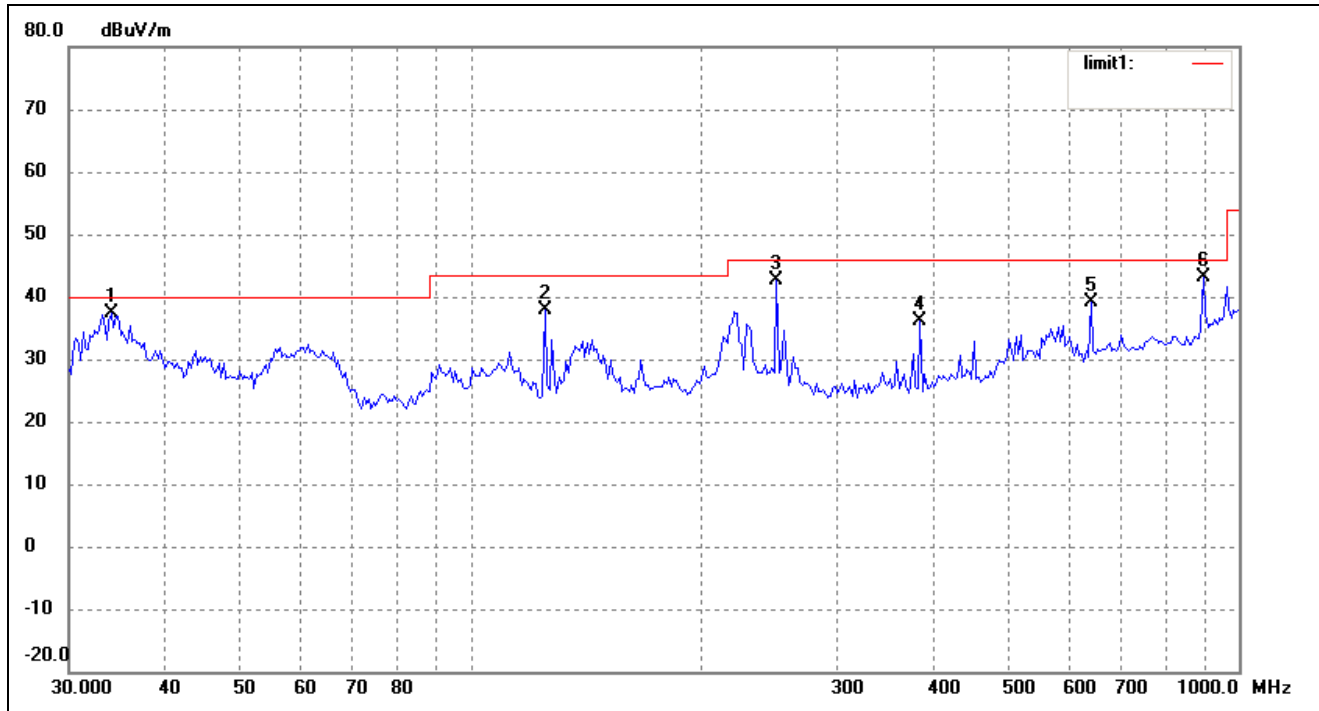


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	34.0450	30.87	6.61	37.48	40.00	-2.52	270	100	QP
2	124.9248	33.37	4.57	37.94	43.50	-5.56	100	100	QP
3	250.4858	34.90	7.69	42.59	46.00	-3.41	15	100	QP
4	384.5446	26.17	9.96	36.13	46.00	-9.87	222	100	QP
5	642.2921	23.77	15.31	39.08	46.00	-6.92	358	100	peak
6	899.9577	24.31	18.80	43.11	46.00	-2.89	265	100	peak

Spurious Emission From 30 MHz to 1 GHz

Test mode: Transmitting (802.11n HT40)


Comment: Middle Channel

Horizontal

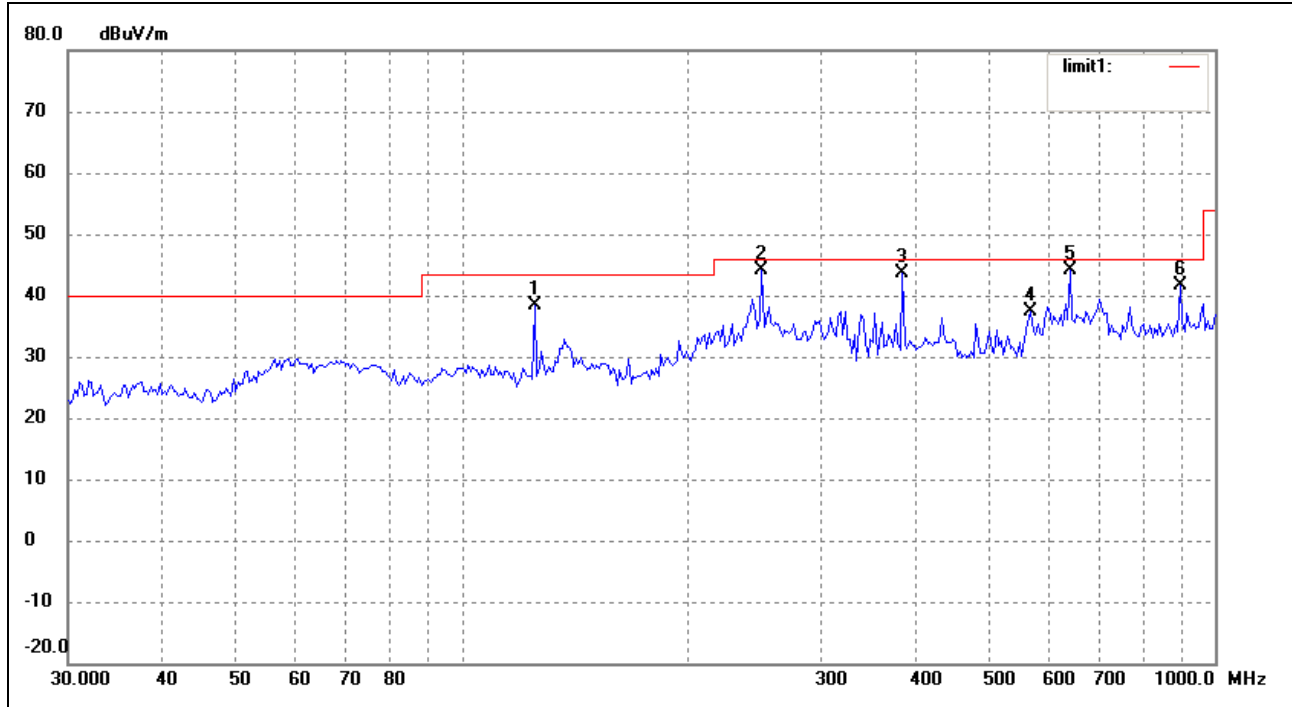

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	124.9248	33.87	4.57	38.44	43.50	-5.06	210	100	peak
2	250.4858	36.35	7.69	44.04	46.00	-1.96	125	100	QP
3	384.5446	33.72	9.96	43.68	46.00	-2.32	0	100	QP
4	569.9687	23.07	14.39	37.46	46.00	-8.54	45	100	QP
5	642.2922	28.78	15.31	44.09	46.00	-1.91	360	100	QP
6	899.9577	22.87	18.80	41.67	46.00	-4.33	101	100	QP

Vertical

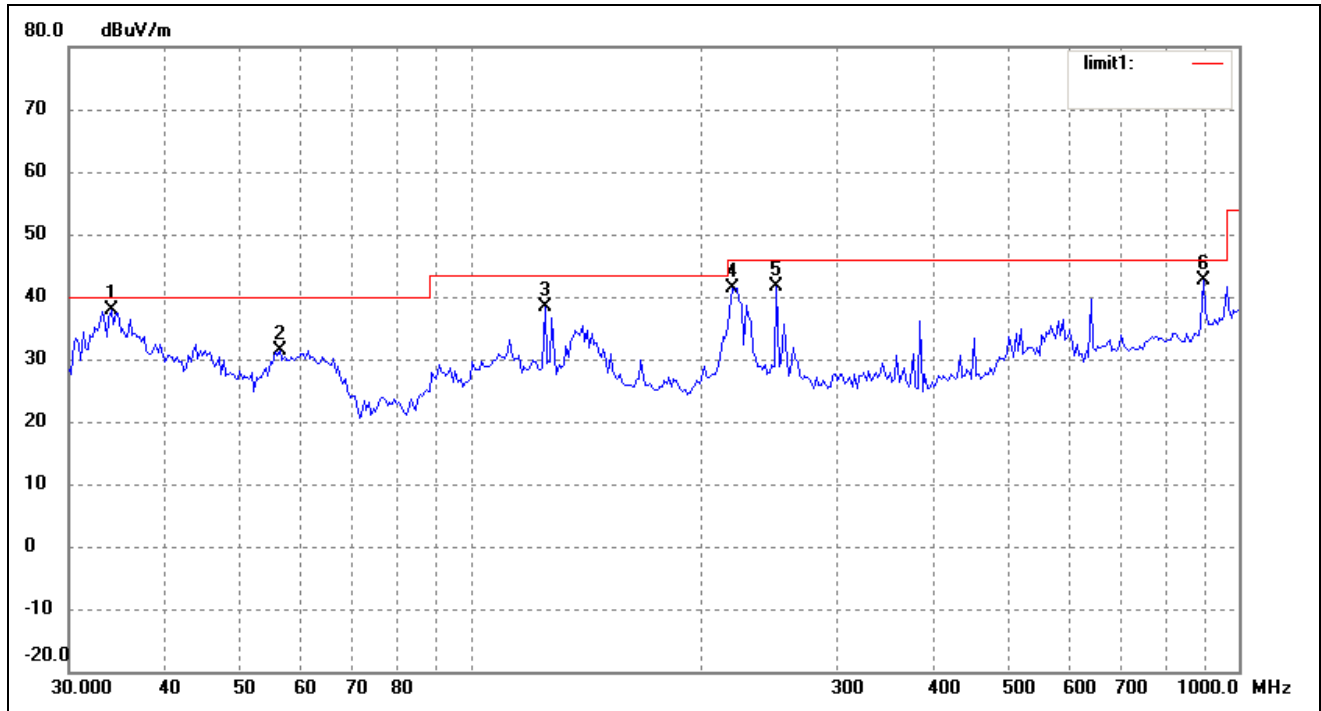


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	34.0450	31.37	6.61	37.98	40.00	-2.02	358	100	QP
2	56.4662	24.05	7.38	31.43	40.00	-8.57	180	100	QP
3	124.9248	33.87	4.57	38.44	43.50	-5.06	245	100	QP
4	219.1785	35.14	6.31	41.45	46.00	-4.55	87	100	QP
5	250.4858	33.90	7.69	41.59	46.00	-4.41	334	100	QP
6	899.9577	23.81	18.80	42.61	46.00	-3.39	0	100	QP

Spurious Emission From 30 MHz to 1 GHz

Test mode: Transmitting (802.11n HT40)


Comment: High Channel

Horizontal

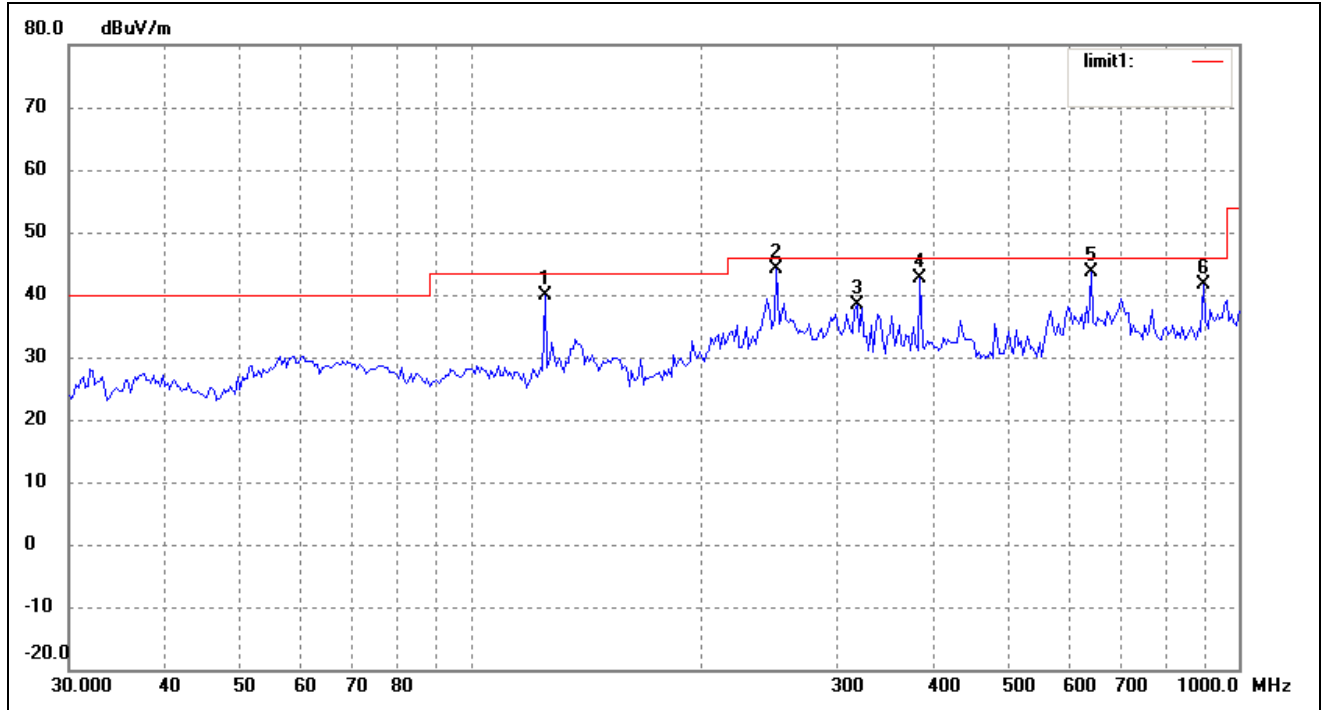

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	124.9248	35.37	4.57	39.94	43.50	-3.56	180	100	peak
2	250.4858	36.35	7.69	44.04	46.00	-1.96	360	100	QP
3	318.0874	29.66	8.81	38.47	46.00	-7.53	5	100	QP
4	384.5446	32.72	9.96	42.68	46.00	-3.32	356	100	QP
5	642.2922	28.28	15.31	43.59	46.00	-2.41	350	100	QP
6	899.9577	22.87	18.80	41.67	46.00	-4.33	100	100	QP

Vertical

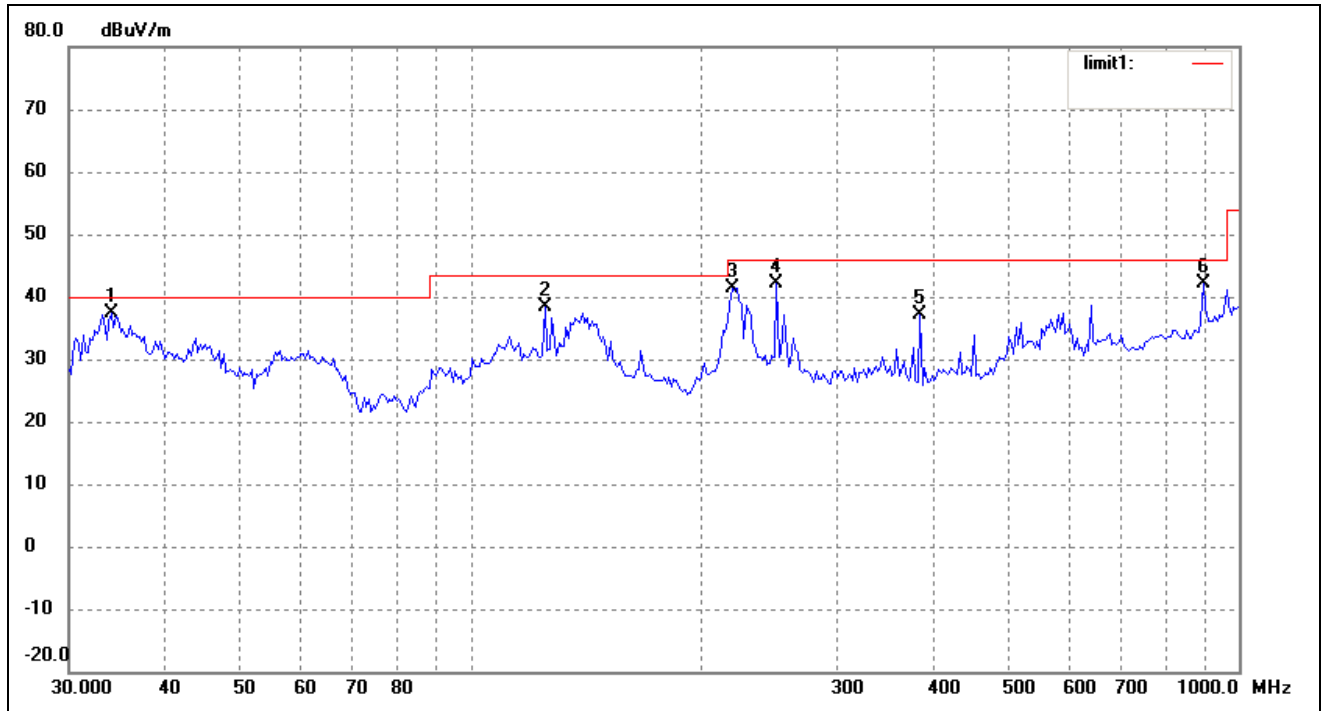

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	34.0450	30.87	6.61	37.48	40.00	-2.52	270	100	QP
2	124.9248	33.87	4.57	38.44	43.50	-5.06	100	100	QP
3	219.1785	35.14	6.31	41.45	46.00	-4.55	15	100	QP
4	250.4858	34.40	7.69	42.09	46.00	-3.91	222	100	QP
5	384.5446	27.17	9.96	37.13	46.00	-8.87	358	100	QP
6	899.9577	23.31	18.80	42.11	46.00	-3.89	265	100	QP

*Spurious Emission Above 1GHz**Test Mode: Transmitting (802.11b)*

Frequency MHz	Detector	Meter Reading dBuV	Direction Degree	Polar H / V	Antenna Loss dB	Cable loss dB	Amplifier dB	Correction Amplitude dBuV/m	Limit dBuV/m	Margin dB
Low Channel (1G to 25GHz)										
4824.0	PK	55.1	90	V	34.1	5.2	33.0	61.4	74	-12.6
7236.0	PK	51.2	270	V	37.4	6.1	33.5	61.2	74	-12.8
7236.0	PK	50	180	H	37.4	6.1	33.5	60.0	74	-14.0
4824.0	PK	54.4	45	H	34.1	5.2	33.0	60.7	74	-13.3
4824.0	AV	45.7	270	V	34.1	5.2	33.0	52.0	54	-2.0
7236.0	AV	41.4	90	V	37.4	6.1	33.5	51.4	54	-2.6
7236.0	AV	40.2	45	H	37.4	6.1	33.5	50.2	54	-3.8
4824.0	AV	44.4	60	H	34.1	5.2	33.0	50.7	54	-3.3
Middle Channel (1G to 25GHz)										
7311.0	PK	51.8	45	V	37.4	6.1	33.5	61.8	74	-12.2
4874.0	PK	54.0	270	V	34.1	5.2	33.0	60.3	74	-13.7
7311.0	PK	49.5	45	H	37.4	6.1	33.5	59.5	74	-14.5
4874.0	PK	53.9	180	H	34.1	5.2	33.0	60.2	74	-13.8
7311.0	AV	42.6	270	V	37.4	6.1	33.5	52.6	54	-1.4
4874.0	AV	45.5	90	V	34.1	5.2	33.0	51.8	54	-2.2
7311.0	AV	40.2	60	H	37.4	6.1	33.5	50.2	54	-3.8
4874.0	AV	42.4	45	H	34.1	5.2	33.0	48.7	54	-5.3
High Channel (1G to 25GHz)										
4924.0	PK	55.4	270	V	34.1	5.2	33.0	61.7	74	-12.3
7386.0	PK	51.5	45	V	37.4	6.1	33.5	61.5	74	-12.5
4924.0	PK	53.8	180	H	34.1	5.2	33.0	60.1	74	-13.9
7386.0	PK	49.7	45	H	37.4	6.1	33.5	59.7	74	-14.3
4924.0	AV	46.4	90	V	34.1	5.2	33.0	52.7	54	-1.3
7386.0	AV	41.8	270	V	37.4	6.1	33.5	51.8	54	-2.2
4924.0	AV	45.0	60	H	34.1	5.2	33.0	51.3	54	-2.7
7386.0	AV	40.6	60	H	37.4	6.1	33.5	50.6	54	-3.4

Note: Testing is carried out with frequency rang 30MHz to the tenth harmonics, which above 5th Harmonics is close to the noise base even antenna close up to 1meter distance according the measurement of ANSI C63.4.

*Spurious Emission Above 1GHz**Test Mode: Transmitting (802.11g)*

Frequency MHz	Detector	Meter Reading dBuV	Direction Degree	Polar H / V	Antenna Loss dB	Cable loss dB	Amplifier dB	Correction Amplitude dBuV/m	Limit dBuV/m	Margin dB
Low Channel (1G to 25GHz)										
4824.0	PK	56.0	90	V	34.1	5.2	33.0	62.3	74	-11.7
7236.0	PK	51.8	270	V	37.4	6.1	33.5	61.8	74	-12.2
7236.0	PK	50.5	180	H	37.4	6.1	33.5	60.5	74	-13.5
4824.0	PK	56.2	45	H	34.1	5.2	33.0	62.5	74	-11.5
4824.0	AV	46.3	270	V	34.1	5.2	33.0	52.6	54	-1.4
7236.0	AV	41.8	90	V	37.4	6.1	33.5	51.8	54	-2.2
7236.0	AV	40.9	45	H	37.4	6.1	33.5	50.9	54	-3.1
4824.0	AV	45.1	60	H	34.1	5.2	33.0	51.4	54	-2.6
Middle Channel (1G to 25GHz)										
7311.0	PK	52.6	45	V	37.4	6.1	33.5	62.6	74	-11.4
4874.0	PK	55.2	270	V	34.1	5.2	33.0	61.5	74	-12.5
7311.0	PK	50.5	45	H	37.4	6.1	33.5	60.5	74	-13.5
4874.0	PK	54.8	180	H	34.1	5.2	33.0	61.1	74	-12.9
7311.0	AV	42.4	270	V	37.4	6.1	33.5	52.4	54	-1.6
4874.0	AV	45.2	90	V	34.1	5.2	33.0	51.5	54	-2.5
7311.0	AV	40.7	60	H	37.4	6.1	33.5	50.7	54	-3.3
4874.0	AV	43.3	45	H	34.1	5.2	33.0	49.6	54	-4.4
High Channel (1G to 25GHz)										
4924.0	PK	55.6	270	V	34.1	5.2	33.0	61.9	74	-12.1
7386.0	PK	51.7	45	V	37.4	6.1	33.5	61.7	74	-12.3
4924.0	PK	54.5	180	H	34.1	5.2	33.0	60.8	74	-13.2
7386.0	PK	50.5	45	H	37.4	6.1	33.5	60.5	74	-13.5
4924.0	AV	46.0	90	V	34.1	5.2	33.0	52.3	54	-1.7
7386.0	AV	41.4	270	V	37.4	6.1	33.5	51.4	54	-2.6
4924.0	AV	44.9	60	H	34.1	5.2	33.0	51.2	54	-2.8
7386.0	AV	40.3	60	H	37.4	6.1	33.5	50.3	54	-3.7

Note: Testing is carried out with frequency rang 30MHz to the tenth harmonics, which above 5th Harmonics is close to the noise base even antenna close up to 1meter distance according the measurement of ANSI C63.4.

*Spurious Emission Above 1GHz**Test Mode: Transmitting (802.11n HT20)*

Frequency MHz	Detector	Meter Reading dBuV	Direction Degree	Polar H / V	Antenna Loss dB	Cable loss dB	Amplifier dB	Correction Amplitude dBuV/m	Limit dBuV/m	Margin dB
Low Channel (1G to 25GHz)										
4824.0	PK	55.3	90	V	34.1	5.2	33	61.6	74	-12.4
7236.0	PK	50.6	270	V	37.4	6.1	33.5	60.6	74	-13.4
7236.0	PK	43.6	180	H	37.4	6.1	33.5	53.6	74	-20.4
4824.0	PK	52.3	45	H	34.1	5.2	33	58.6	74	-15.4
4824.0	AV	43.6	270	V	34.1	5.2	33	49.9	54	-4.1
7236.0	AV	39.2	90	V	37.4	6.1	33.5	49.2	54	-4.8
7236.0	AV	30.4	45	H	37.4	6.1	33.5	40.4	54	-13.6
4824.0	AV	40.1	60	H	34.1	5.2	33	46.4	54	-7.6
Middle Channel (1G to 25GHz)										
7311.0	PK	52.2	45	V	37.4	6.1	33.5	62.2	74	-11.8
4874.0	PK	53.4	270	V	34.1	5.2	33	59.7	74	-14.3
7311.0	PK	49.5	45	H	37.4	6.1	33.5	59.5	74	-14.5
4874.0	PK	51.2	180	H	34.1	5.2	33	57.5	74	-16.5
7311.0	AV	40.1	270	V	37.4	6.1	33.5	50.1	54	-3.9
4874.0	AV	42.2	90	V	34.1	5.2	33	48.5	54	-5.5
7311.0	AV	37.9	60	H	37.4	6.1	33.5	47.9	54	-6.1
4874.0	AV	39.8	45	H	34.1	5.2	33	46.1	54	-7.9
High Channel (1G to 25GHz)										
4924.0	PK	54.6	270	V	34.1	5.2	33	60.9	74	-13.1
7386.0	PK	51.2	45	V	37.4	6.1	33.5	61.2	74	-12.8
4924.0	PK	51.6	180	H	34.1	5.2	33	57.9	74	-16.1
7386.0	PK	48.2	45	H	37.4	6.1	33.5	58.2	74	-15.8
4924.0	AV	43.1	90	V	34.1	5.2	33	49.4	54	-4.6
7386.0	AV	39.7	270	V	37.4	6.1	33.5	49.7	54	-4.3
4924.0	AV	42.1	60	H	34.1	5.2	33	48.4	54	-5.6
7386.0	AV	37.5	60	H	37.4	6.1	33.5	47.5	54	-6.5

Note: Testing is carried out with frequency rang 30MHz to the tenth harmonics, which above 5th Harmonics is close to the noise base even antenna close up to 1meter distance according the measurement of ANSI C63.4.

*Spurious Emission Above 1GHz**Test Mode: Transmitting (802.11n HT40)*

Frequency MHz	Detector	Meter Reading dBuV	Direction Degree	Polar H / V	Antenna Loss dB	Cable loss dB	Amplifier dB	Correction Amplitude dBuV/m	Limit dBuV/m	Margin dB
Low Channel (1G to 25GHz)										
4844	PK	52.3	90	v	34.1	5.2	33	62.3	74	-11.7
7236	PK	50.4	270	V	37.4	6.1	33.5	60.4	74	-13.6
7236	PK	43.6	180	H	37.4	6.1	33.5	53.6	74	-20.4
4824	PK	48.6	45	H	34.1	5.2	33	58.6	74	-15.4
4824	AV	39.9	270	V	34.1	5.2	33	49.9	54	-4.1
7236	AV	39.3	90	V	37.4	6.1	33.5	49.3	54	-4.7
7236	AV	29.5	45	H	37.4	6.1	33.5	39.5	54	-14.5
4824	AV	37.1	60	H	34.1	5.2	33	47.1	54	-6.9
Middle Channel (1G to 25GHz)										
7311	PK	51.9	45	V	37.4	6.1	33.5	61.9	74	-12.1
4874	PK	48.4	270	V	34.1	5.2	33	58.4	74	-15.6
7311	PK	47.3	45	H	37.4	6.1	33.5	57.3	74	-16.7
4874	PK	46.8	180	H	34.1	5.2	33	56.8	74	-17.2
7311	AV	40.1	270	V	37.4	6.1	33.5	50.1	54	-3.9
4874	AV	37.3	90	V	34.1	5.2	33	47.3	54	-6.7
7311	AV	36.8	60	H	37.4	6.1	33.5	46.8	54	-7.2
4874	AV	36.2	45	H	34.1	5.2	33	46.2	54	-7.8
High Channel (1G to 25GHz)										
4904	PK	49.1	270	V	33.9	5.2	33	59.1	74	-14.9
7356	PK	50.6	45	V	37	6.1	33.5	60.6	74	-13.4
4904	PK	46.3	180	H	34.1	5.2	33	56.3	74	-17.7
7356	PK	47.5	45	H	37.4	6.1	33.5	57.5	74	-16.5
4904	AV	38.8	90	V	34.1	5.2	33	48.8	54	-5.2
7356	AV	39.2	270	V	37.4	6.1	33.5	49.2	54	-4.8
4904	AV	37.8	60	H	34.1	5.2	33	47.8	54	-6.2
7356	AV	37.1	60	H	37.4	6.1	33.5	47.1	54	-6.9

Note: Testing is carried out with frequency rang 30MHz to the tenth harmonics, which above 5th Harmonics is close to the noise base even antenna close up to 1meter distance according the measurement of ANSI C63.4.

10. OUT OF BAND EMISSIONS

10.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

10.2 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Date	Due. Date
Agilent	Spectrum Analyzer	E4402B	US41192821	2009-07-08	2010-07-07
Spectrum Analyzer	ROHDE&SCHWARZ	FSEA20	DE25181	2009-07-08	2010-07-07
Positioning Controller	C&C	CC-C-1F	N/A	2009-07-08	2010-07-07
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2009-07-08	2010-07-07
Horn Antenna	SCHWARZBECK	BBHX 9120	9120-426	2009-07-08	2010-07-07
RF Switch	EM	EMSW18	SW060023	2009-07-08	2010-07-07
Amplifier	Agilent	8447F	3113A06717	2009-07-08	2010-07-07
Coaxial Cable	SCHWARZBECK	AK9513	9513-10	2009-07-08	2010-07-07
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	25498514	2009-07-08	2010-07-07

10.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW, VBW=100KHz, Span=50MHz, Sweep = auto
3. Set the Lowest and Highest Transmitting Channel, observed the outside band of 2400MHz to 2438.5MHz, then mark the higher-level emission for comparing with the FCC rules.


10.4 Environmental Conditions

Temperature:	21° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

10.5 Summary of Test Results/Plots


Test mode	Frequency MHz	Limit dBuV /dB	Result
802.11b	2390.00	<54dBuv	Pass
	2400.00	>20dB	Pass
	2483.50	<54dBuv	Pass
802.11g	2390.00	<54dBuv	Pass
	2400.00	>20dB	Pass
	2483.50	<54dBuv	Pass
802.11n HT20	2390.00	<54dBuv	Pass
	2400.00	>20dB	Pass
	2483.50	<54dBuv	Pass
802.11n HT40	2390.00	<54dBuv	Pass
	2400.00	>20dB	Pass
	2483.50	<54dBuv	Pass

For 802.11b
Lowest Bandedge

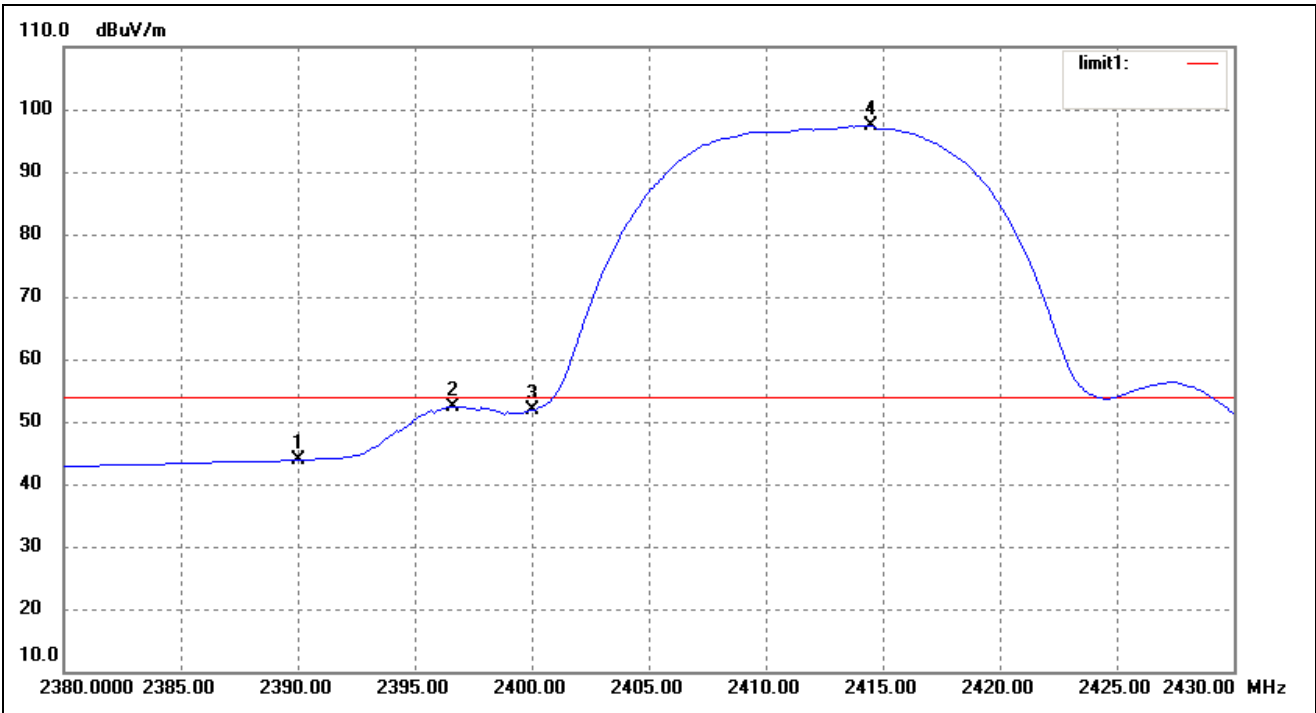


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	2390.000	8.31	35.59	43.90	54.00	-10.10	224	149	Ave
	2390.000	20.31	35.59	55.90	74.00	-18.10	224	149	peak
2	2396.633	16.74	35.65	52.39	54.00	-1.61	159	126	Ave
3	2400.000	16.17	35.68	51.85	54.00	-2.15	98	120	Ave
4	2414.369	61.66	35.73	97.39	/	/	/	/	Ave

Highest Bandedge

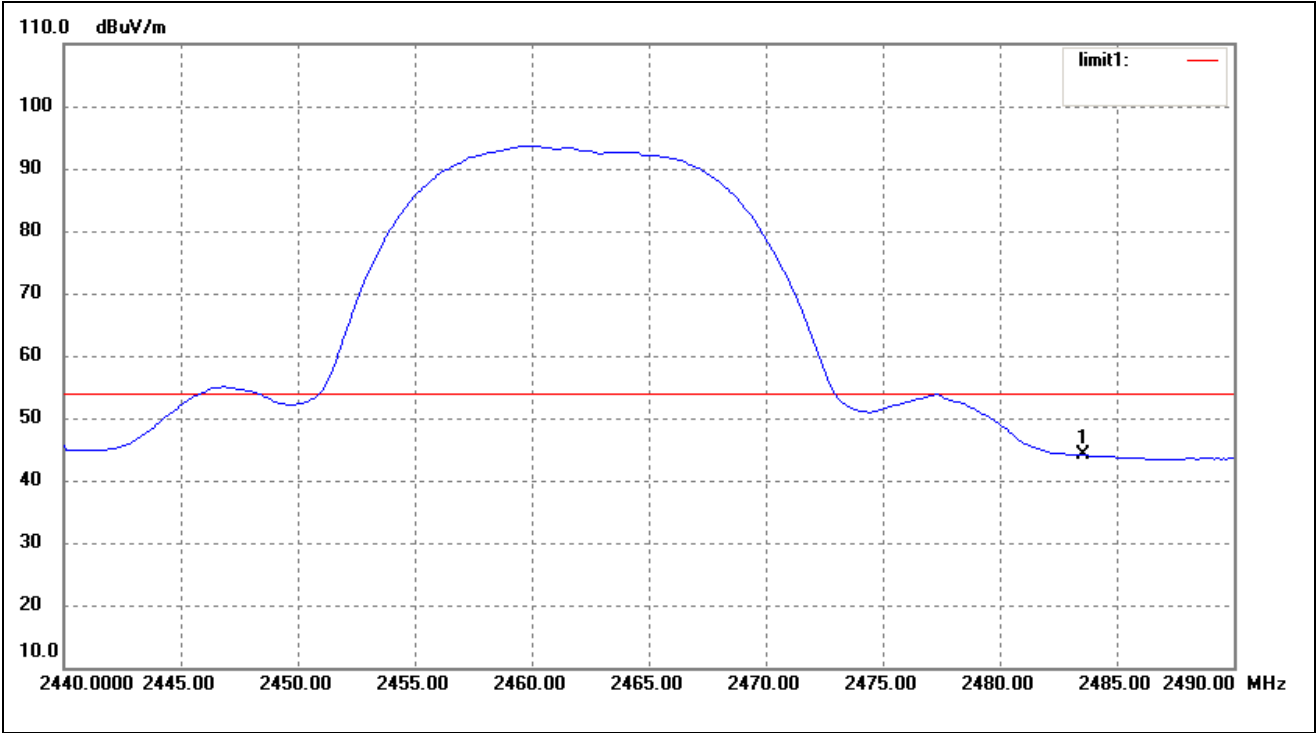


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	2483.500	8.11	35.97	44.08	54.00	-9.92	100	144	Ave
	2483.500	21.01	35.97	56.98	74.00	-17.02	100	144	peak

For 802.11g
Lowest Bandedge

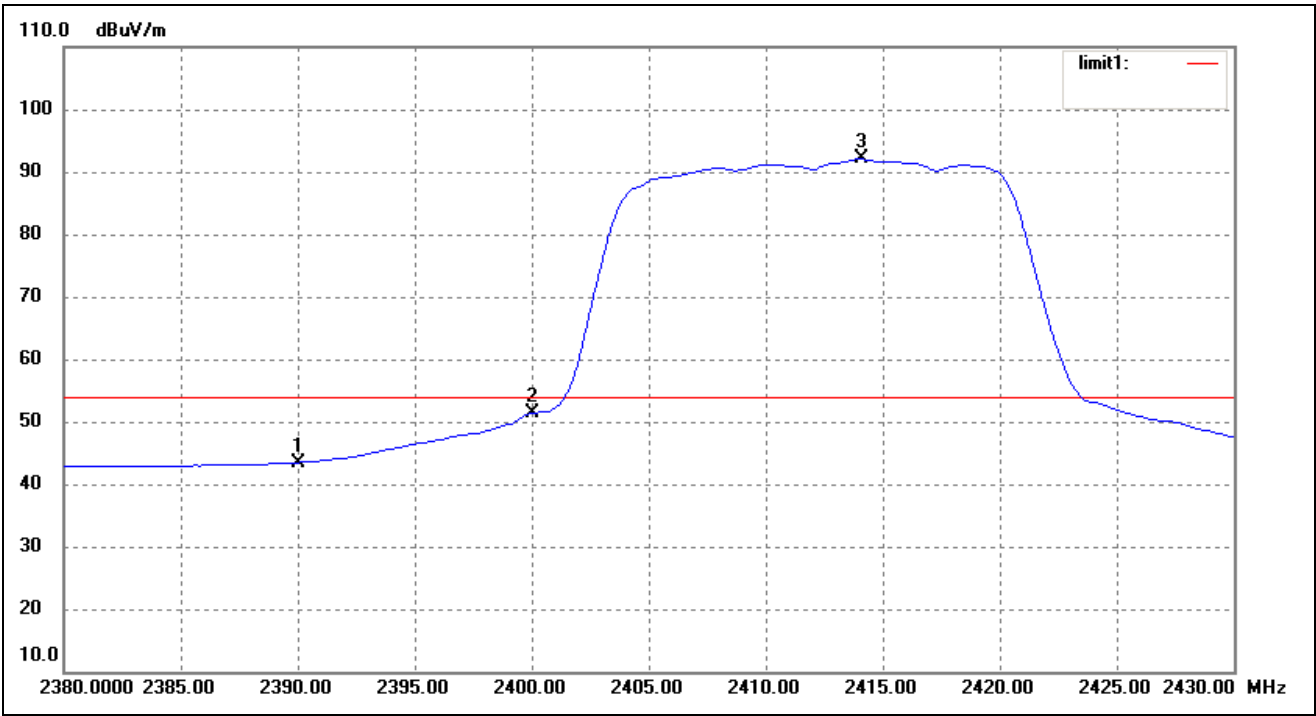

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	2390.000	7.90	35.59	43.49	54.00	-10.51	134	110	Ave
	2390.000	18.91	35.59	54.50	74.00	-19.5	159	120	peak
2	2400.000	15.77	35.68	51.45	54.00	-2.55	222	110	Ave
3	2413.968	56.30	35.73	92.03	/	/	/	/	Ave


Highest Bandedge

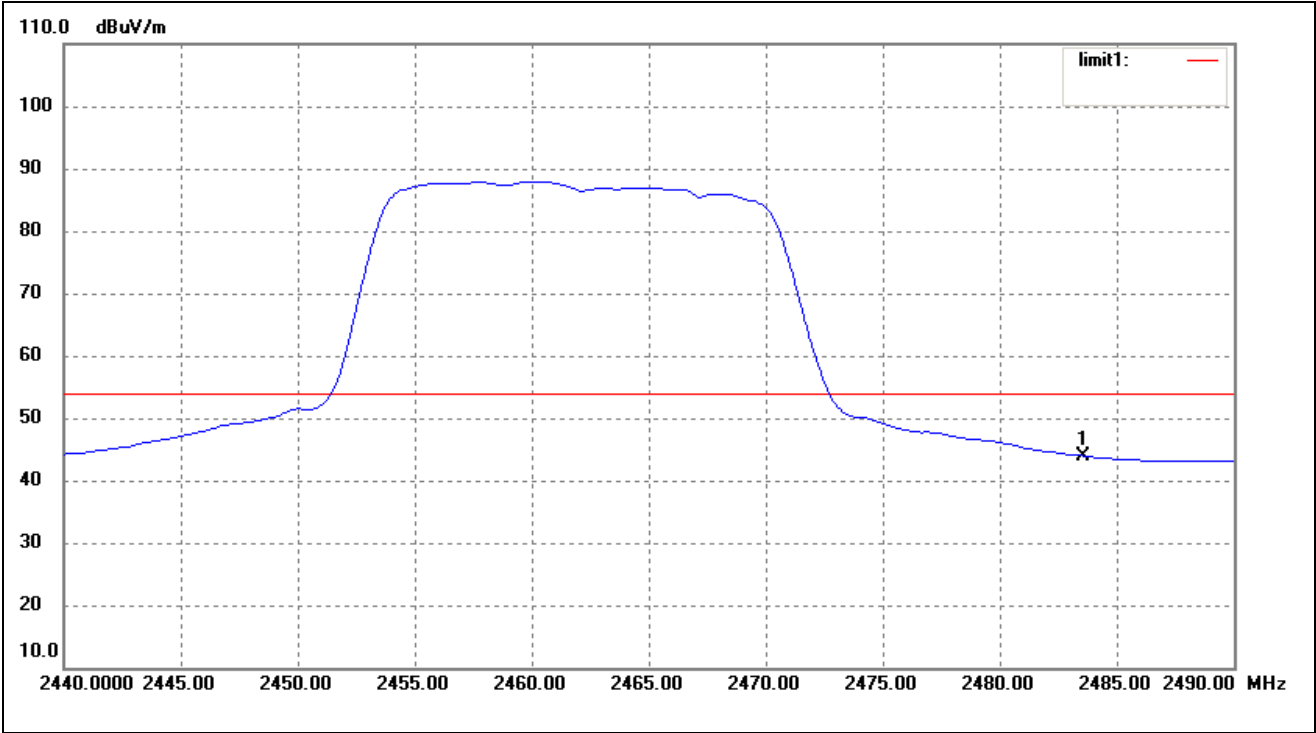

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	2483.500	7.98	35.97	43.95	54.00	-10.05	147	150	Ave
	2483.500	19.25	35.97	55.22	74.00	-18.78	147	150	peak


For 802.11n HT20

Lowest Bandedge

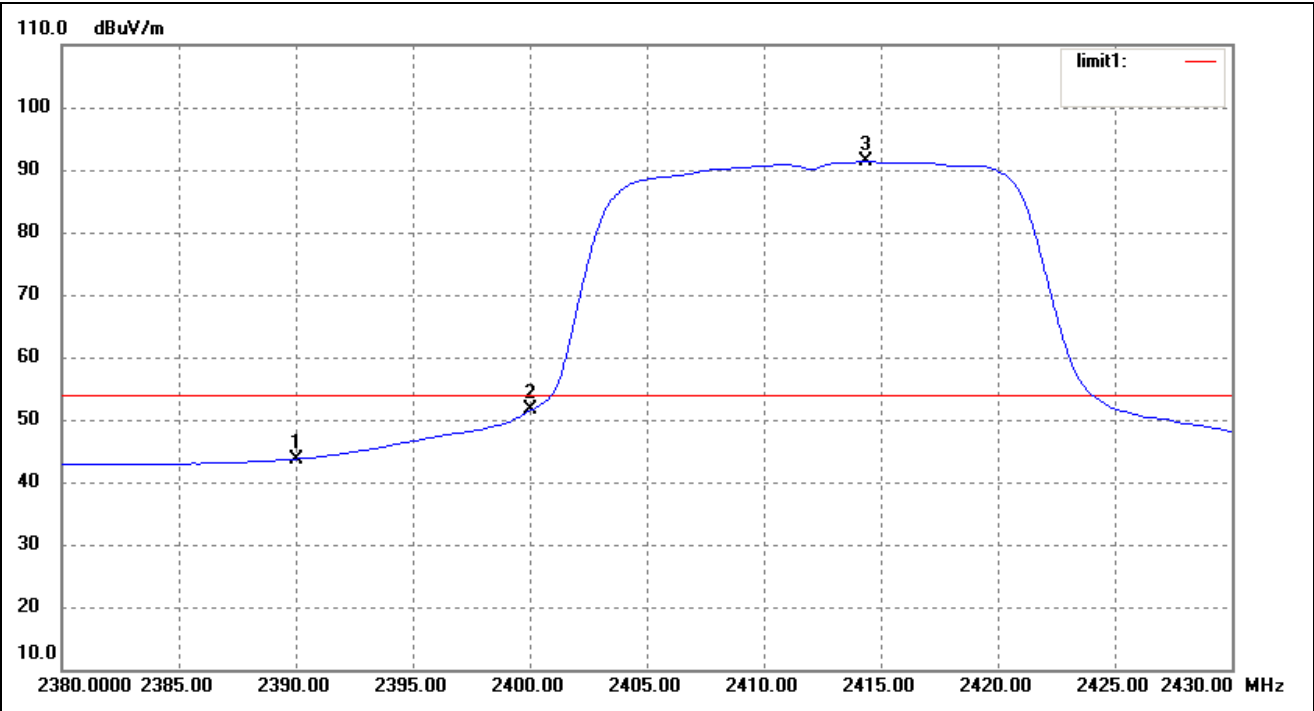

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	2390.000	8.13	35.59	43.72	54.00	-10.28	136	120	Ave
	2390.000	20.01	35.59	55.60	74.00	-18.40	136	120	peak
2	2400.000	15.85	35.68	51.53	54.00	-2.47	115	110	Ave
3	2414.269	55.63	35.73	91.36	/	/	/	/	Ave


Highest Bandedge

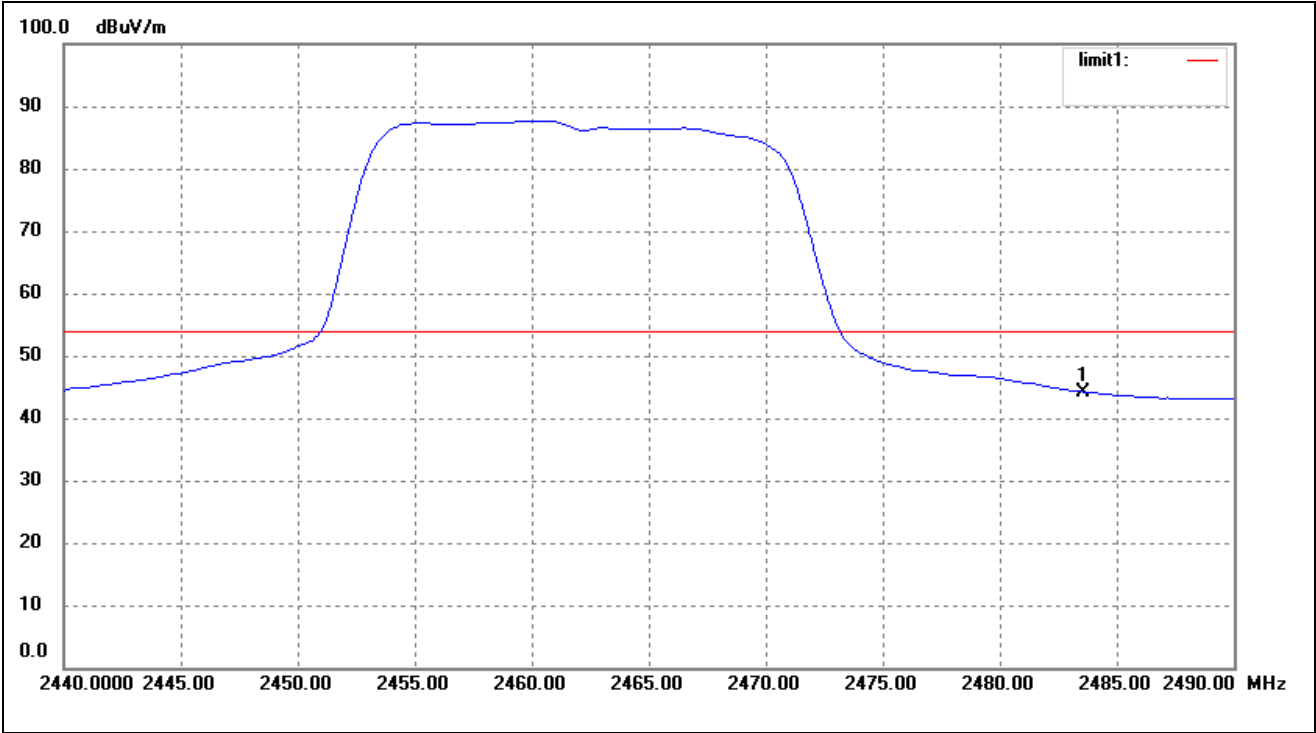

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	2483.500	8.26	35.97	44.23	54.00	-9.77	100	124	Ave
	2483.500	20.65	35.97	56.62	74.00	-17.38	100	124	peak


For 802.11n HT 40

Lowest Bandedge

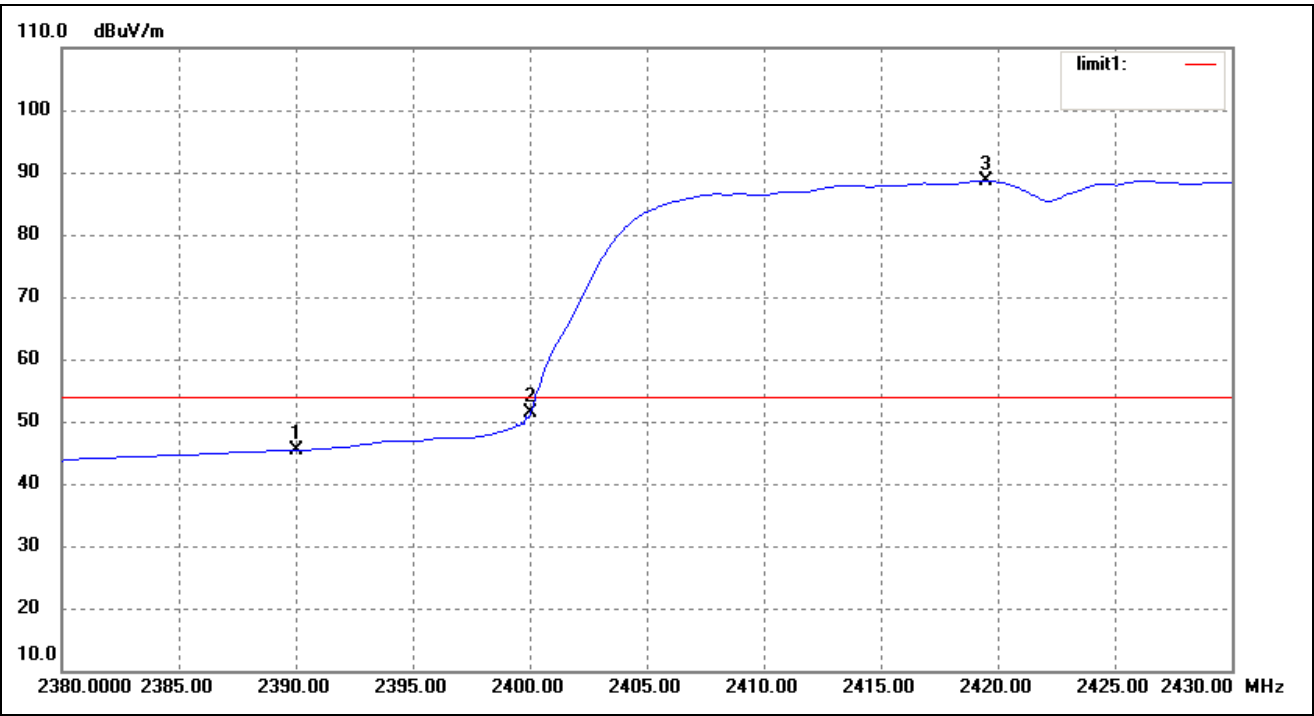

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	2390.000	9.89	35.59	45.48	54.00	-8.52	104	100	Ave
	2390.000	21.65	35.59	57.33	74.00	-16.67	100	100	peak
2	2400.000	15.68	35.68	51.36	54.00	-2.64	221	140	Ave
3	2419.479	52.84	35.75	88.59	/	/	/	/	Ave

Highest Bandedge

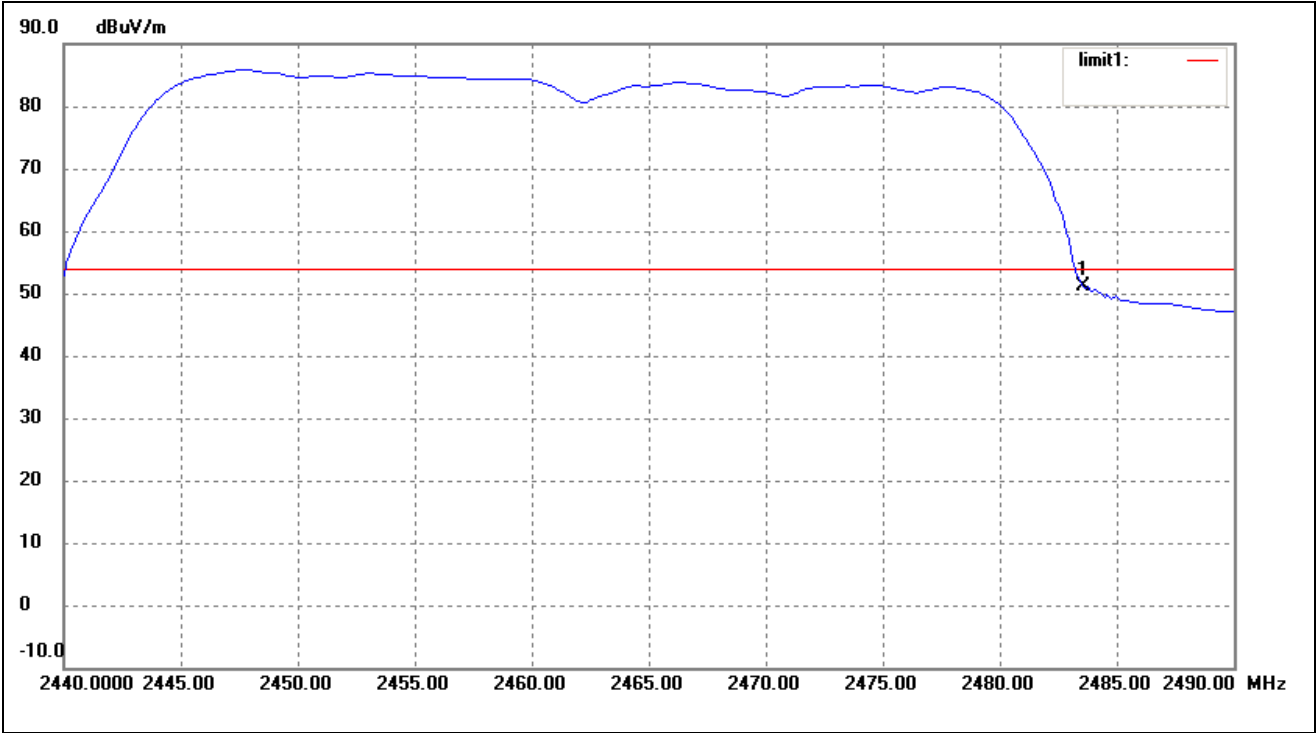

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	2483.500	15.26	35.97	51.23	54.00	-2.77	147	150	Ave
	2483.500	28.02	36.69	63.81	74.00	-10.19	147	150	peak