


Date: 10.NOV.2017 14:25:44



Date: 10.NOV.2017 14:26:27




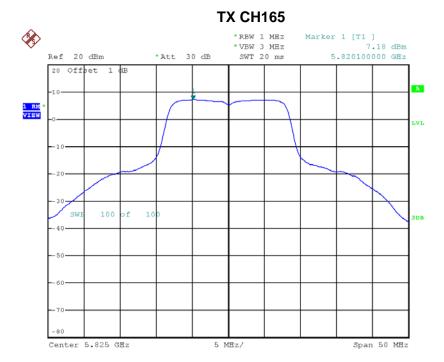

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	2.96	0.00	2.96	30.00
CH157	5785	2.74	0.00	2.74	30.00
CH165	5825	3.03	0.00	3.03	30.00

TX CH149

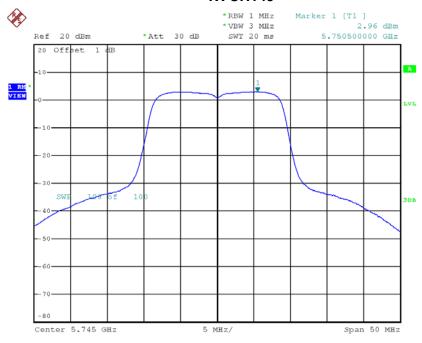

Date: 10.NOV.2017 14:30:25


Report No.: BTL-FCCP-2-1710C164 Page 237 of 262







Date: 10.NOV.2017 14:31:10

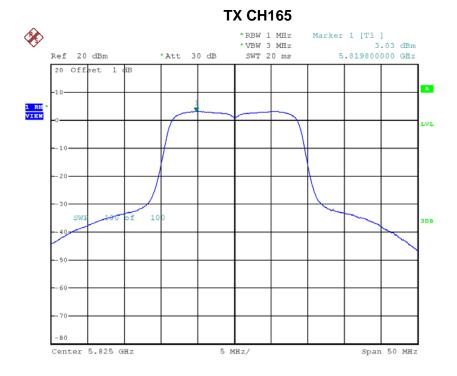

Date: 10.NOV.2017 14:32:09






Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	2.06	0.00	2.06	30.00
CH157	5785	2.03	0.00	2.03	30.00
CH165	5825	2.28	0.00	2.28	30.00

TX CH149

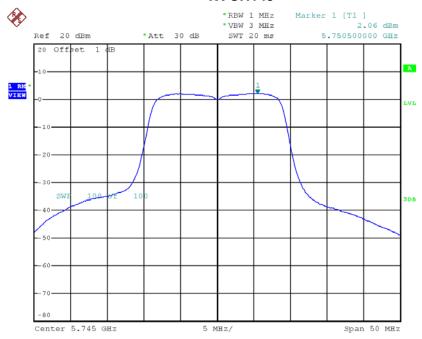


Date: 10.NOV.2017 14:54:19

Report No.: BTL-FCCP-2-1710C164 Page 239 of 262





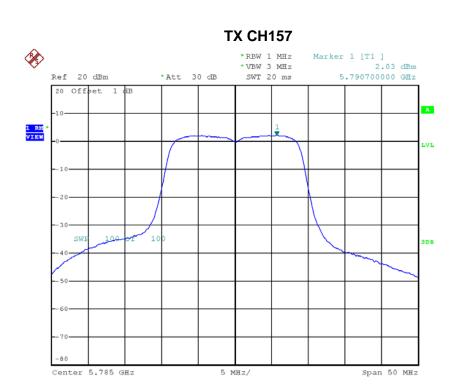

Date: 10.NOV.2017 14:55:05



Date: 10.NOV.2017 14:55:56





Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	5.54	30.00
CH157	5785	5.41	30.00
CH165	5825	5.68	30.00

Report No.: BTL-FCCP-2-1710C164 Page 241 of 262






Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	1.54	0.00	1.54	30.00
CH159	5795	1.43	0.00	1.43	30.00

Report No.: BTL-FCCP-2-1710C164 Page 242 of 262





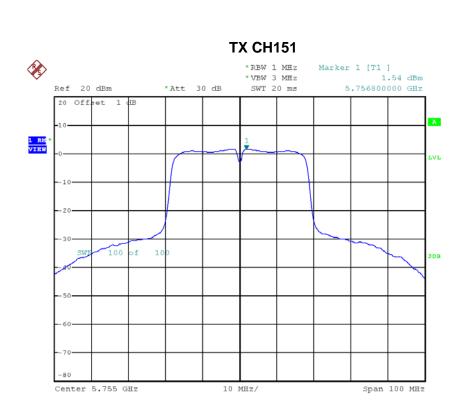

Date: 10.NOV.2017 14:42:02



Date: 10.NOV.2017 14:43:08






Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	0.70	0.00	0.70	30.00
CH159	5795	0.65	0.00	0.65	30.00


Report No.: BTL-FCCP-2-1710C164 Page 244 of 262





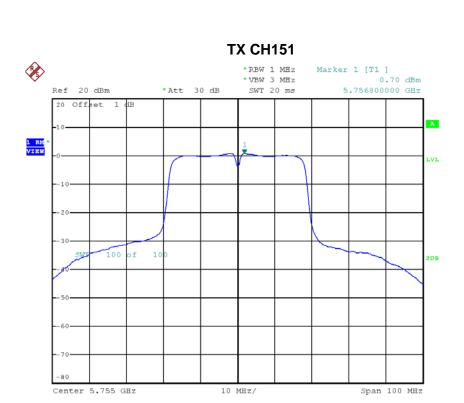

Date: 10.NOV.2017 15:21:57

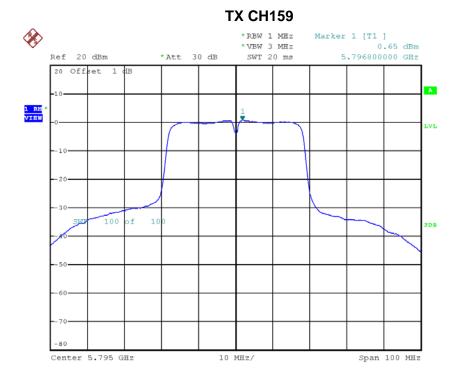

Date: 10.NOV.2017 15:23:10





Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	4.15	30.00
CH159	5795	4.07	30.00

Report No.: BTL-FCCP-2-1710C164 Page 246 of 262






Test Mode: UNII-3/ TX AC20 Mode_CH149/CH157/CH165_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	1.78	0.00	1.78	30.00
CH157	5785	2.53	0.00	2.53	30.00
CH165	5825	2.41	0.00	2.41	30.00

TX CH149

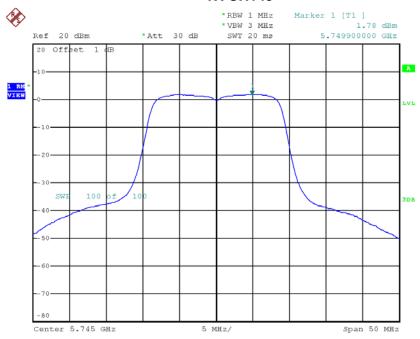


Date: 10.NOV.2017 14:37:17


Report No.: BTL-FCCP-2-1710C164 Page 247 of 262





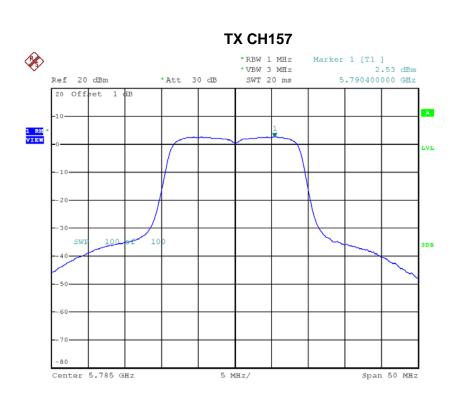

Date: 10.NOV.2017 14:38:08

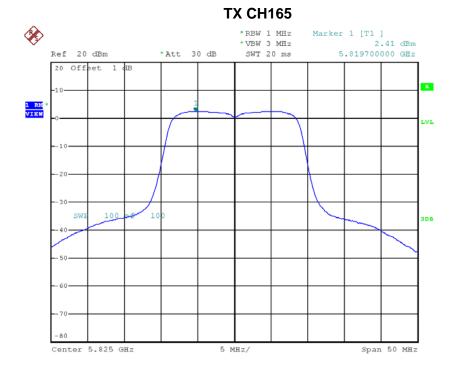

Date: 10.NOV.2017 14:38:59






Test Mode: UNII-3/ TX AC20 Mode_CH149/CH157/CH165_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	1.24	0.00	1.24	30.00
CH157	5785	2.02	0.00	2.02	30.00
CH165	5825	1.49	0.00	1.49	30.00

TX CH149

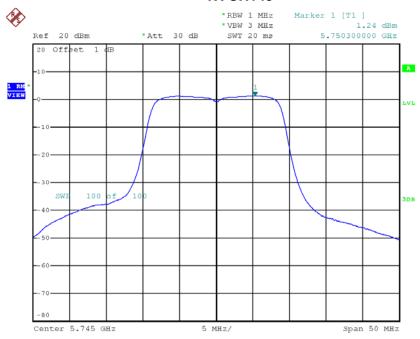


Date: 10.NOV.2017 14:59:43


Report No.: BTL-FCCP-2-1710C164 Page 249 of 262





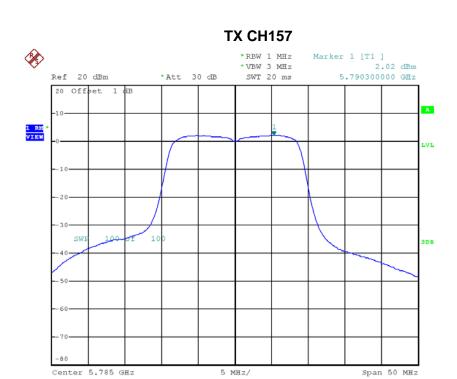

Date: 10.NOV.2017 15:00:55

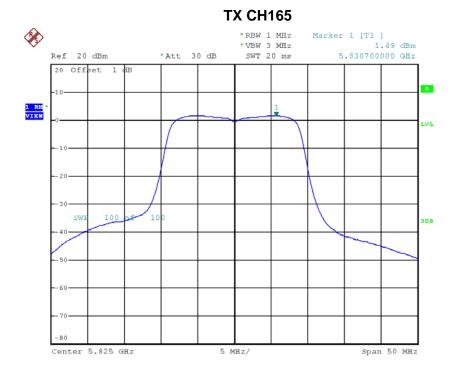

Date: 10.NOV.2017 15:18:20





Test Mode: UNII-3/ TX AC20 Mode_CH149/CH157/CH165_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	4.53	30.00
CH157	5785	5.29	30.00
CH165	5825	4.98	30.00

Report No.: BTL-FCCP-2-1710C164 Page 251 of 262






Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	1.46	0.00	1.46	30.00
CH159	5795	1.04	0.00	1.04	30.00


Report No.: BTL-FCCP-2-1710C164 Page 252 of 262





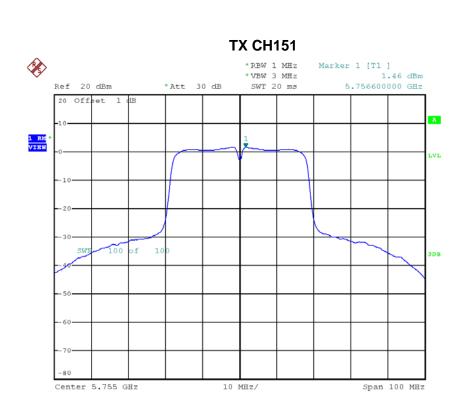

Date: 10.NOV.2017 14:45:48

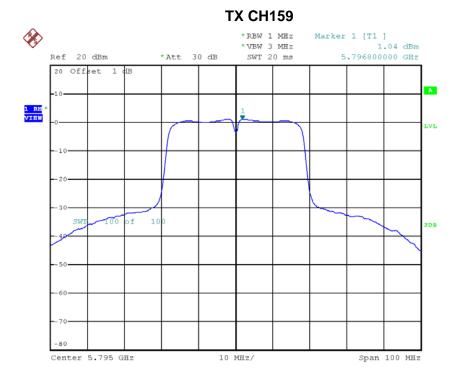

Date: 10.NOV.2017 14:46:42






Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	0.66	0.00	0.66	30.00
CH159	5795	0.31	0.00	0.31	30.00


Report No.: BTL-FCCP-2-1710C164 Page 254 of 262





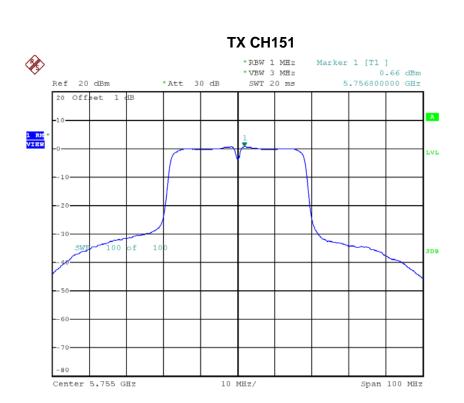

Date: 10.NOV.2017 15:26:26

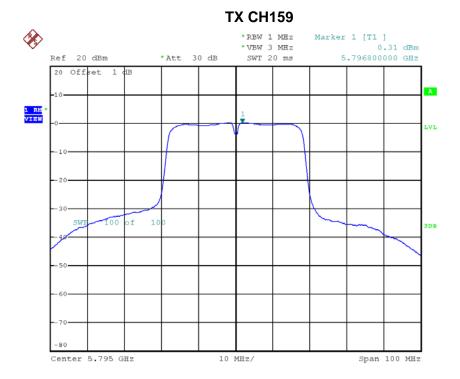

Date: 10.NOV.2017 15:27:20





Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	4.09	30.00
CH159	5795	3.70	30.00

Report No.: BTL-FCCP-2-1710C164 Page 256 of 262






Test Mode: UNII-3/ TX AC80 Mode_CH155_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH155	5775	0.10	0.00	0.10	30.00

TX CH155

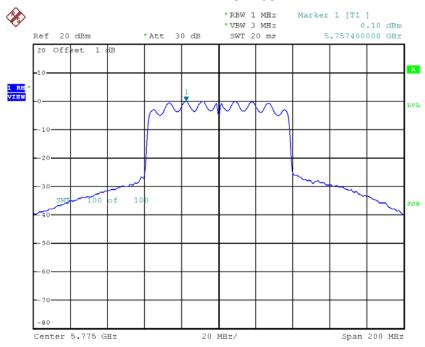

Date: 10.NOV.2017 14:49:00

Report No.: BTL-FCCP-2-1710C164 Page 257 of 262






Test Mode: UNII-3/ TX AC80 Mode_CH155_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH155	5775	-0.84	0.00	-0.84	30.00

TX CH155

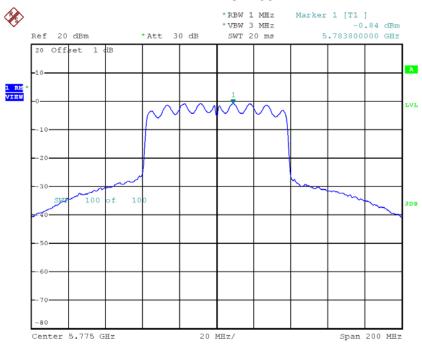

Date: 10.NOV.2017 15:30:07

Report No.: BTL-FCCP-2-1710C164 Page 258 of 262





Test Mode: UNII-3/ TX AC80 Mode_CH155_Total

Channel	Frequency	Power Density	Limit
	(MHz)	(dBm/500kHz)	(dBm/500kHz)
CH155	5775	2.67	30.00

Report No.: BTL-FCCP-2-1710C164 Page 259 of 262





	ADDENDIV LE EDECLIENCY CTADILITY	
	APPENDIX H - FREQUENCY STABILITY	
1		

Report No.: BTL-FCCP-2-1710C164 Page 260 of 262





Test Mode: UNII-1

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5180.0000
132	5180.0368
120	5180.0356
108	5180.0344
Max. Deviation (MHz)	0.0368
Max. Deviation (ppm)	7.1042

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(℃)	5180.0000
-5	5180.0340
5	5180.0332
15	5180.0328
25	5180.0324
35	5180.0320
45	5180.0316
50	5180.0308
Max. Deviation (MHz)	0.0340
Max. Deviation (ppm)	6.5637

Report No.: BTL-FCCP-2-1710C164 Page 261 of 262





Test Mode: UNII-3

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
voltage	ivicasurement i requency (ivii iz)
(V)	5745.0000
132	5745.0304
120	5745.0300
108	5745.0296
Max. Deviation (MHz)	0.0304
Max. Deviation (ppm)	5.2916

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(℃)	5745.0000
-5	5745.0288
5	5745.0288
15	5745.0284
25	5745.0284
35	5745.0284
45	5745.0284
50	5745.0280
Max. Deviation (MHz)	0.0288
Max. Deviation (ppm)	5.0131

Report No.: BTL-FCCP-2-1710C164 Page 262 of 262