

FCC TEST REPORT

REPORT NO.: RF980519H05A

MODEL NO.: WG6205

RECEIVED: May 19, 2009

TESTED: May 19 to July 09, 2009

ISSUED: July 16, 2009

APPLICANT: Accton Wireless Broadband Corp.

ADDRESS: 3F, No. 1 Creation Rd. III, Science-based Industrial
Park Hsinchu 30077, Taiwan, R.O.C.

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.)
Ltd., Taoyuan Branch Hsin Chu Laboratory

ADDRESS: No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

This test report consists of 101 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





TABLE OF CONTENTS

1.	CERTIFICATION	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	5
3.	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	8
3.2.1	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	9
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	12
3.4	DESCRIPTION OF SUPPORT UNITS	13
3.5	CONFIGURATION OF SYSTEM UNDER TEST	14
4.	TEST TYPES AND RESULTS	15
4.1	CONDUCTED EMISSION MEASUREMENT	15
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	15
4.1.2	TEST INSTRUMENTS	15
4.1.3	TEST PROCEDURES	16
4.1.4	DEVIATION FROM TEST STANDARD	16
4.1.5	TEST SETUP	17
4.1.6	EUT OPERATING CONDITIONS	17
4.1.7	TEST RESULTS	18
4.2	RADIATED EMISSION MEASUREMENT	20
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	20
4.2.2	TEST INSTRUMENTS	21
4.2.3	TEST PROCEDURES	22
4.2.4	DEVIATION FROM TEST STANDARD	22
4.2.5	TEST SETUP	23
4.2.6	EUT OPERATING CONDITIONS	23
4.2.7	TEST RESULTS – Below 1GHz	24
4.2.8	TEST RESULTS – Above 1GHz	25
4.3	6dB BANDWIDTH MEASUREMENT	53
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	53
4.3.2	TEST INSTRUMENTS	53
4.3.3	TEST PROCEDURE	53
4.3.4	DEVIATION FROM TEST STANDARD	53
4.3.5	TEST SETUP	54
4.3.6	EUT OPERATING CONDITIONS	54
4.3.7	TEST RESULTS	55
4.4	MAXIMUM PEAK OUTPUT POWER	67



A D T

4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	67
4.4.2	INSTRUMENTS	67
4.4.3	TEST PROCEDURES	67
4.4.4	DEVIATION FROM TEST STANDARD	67
4.4.5	TEST SETUP	68
4.4.6	EUT OPERATING CONDITIONS.....	68
4.4.7	TEST RESULTS	69
4.5	POWER SPECTRAL DENSITY MEASUREMENT	71
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	71
4.5.2	TEST INSTRUMENTS	71
4.5.3	TEST PROCEDURE	71
4.5.4	DEVIATION FROM TEST STANDARD	71
4.5.5	TEST SETUP	72
4.5.6	EUT OPERATING CONDITION	72
4.5.7	TEST RESULTS	73
4.6	CONDUCTED OUT-BAND EMISSION MEASUREMENT	85
4.6.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT ..	85
4.6.2	TEST INSTRUMENTS	85
4.6.3	TEST PROCEDURE	85
4.6.4	DEVIATION FROM TEST STANDARD	86
4.6.5	EUT OPERATING CONDITION	86
4.6.6	TEST RESULTS	86
4.7	ANTENNA REQUIREMENT	99
4.7.1	STANDARD APPLICABLE	99
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	99
5.	INFORMATION ON THE TESTING LABORATORIES	100
6.	APPENDIX - A MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	101



A D T

1. CERTIFICATION

PRODUCT : Draft 11n Wireless Broadband Router
BRAND : AWB
MODEL NO.: WG6205
APPLICANT : Accton Wireless Broadband Corp.
TESTED : May 19 to July 09, 2009
TEST SAMPLE : R&D SAMPLE
STANDARDS : FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment (Model: WG6205) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Midoli Peng , **DATE:** July 16, 2009
(Midoli Peng, Specialist)

TECHNICAL ACCEPTANCE : Hank Chung , **DATE:** July 16, 2009
Responsible for RF (Hank Chung, Deputy Manager)

APPROVED BY : May Chen , **DATE:** July 16, 2009
(May Chen, Deputy Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -10.75dB at 0.466MHz.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit : min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -0.56dB at 2489.90MHz.
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Conducted Out-Band Emission Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions	2.45 dB
Radiated emissions (30MHz-1GHz)	3.94 dB
Radiated emissions (1GHz -18GHz)	2.49 dB
Radiated emissions (18GHz -40GHz)	2.70 dB

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Draft 11n Wireless Broadband Router
MODEL NO.	WG6205
FCC ID	V8YFIU176205000W
POWER SUPPLY	DC 5V from switching adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/ 5.5/ 2/ 1Mbps 802.11g: 54/ 48/ 36/ 24/ 18/ 12/ 9/ 6Mbps Draft 802.11n (20MHz, 400ns GI): 144.4 / 130 / 115.6 / 86.7 / 72.2 / 65 / 57.8 / 43.3 / 28.9 / 21.7 / 14.4 / 7.2Mbps Draft 802.11n (40MHz, 400ns GI): 300 / 270 / 240 / 180 / 150 / 135 / 120 / 90 / 60 / 45 / 30 / 15Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11 for 802.11b, 802.11g, draft 802.11n (20MHz) 7 for draft 802.11n (40MHz)
MAXIMUM OUTPUT POWER	802.11b: 74.131mW 802.11g: 323.594mW draft 802.11n (20MHz): 399.158mW draft 802.11n (40MHz): 447.863mW
ANTENNA TYPE	Please see note 1
DATA CABLE	NA
I/O PORT	WAN Port x 1, Ethernet Port x 4
ASSOCIATED DEVICES	Adapter x 1

NOTE:

1. There are two antennas provided to this EUT, please refer to the following table:

No.	Brand	Model	Gain (dBi)	Antenna Type	Connector Type	Frequency range (MHz to MHz)	Diversity Function
1	AWB	ES6602113033-150	2	Omni	UFL	2400~2500	Yes
2	AWB	ES6602113033-190	2	Omni	UFL	2400~2500	Yes

2. The EUT must be supplied with a power adapter and as following:

Brand:	N.A.
Model No.:	PSA15-1U
Input power :	AC100-240V, 0.5A, 50-60Hz
Output power :	DC 5V, 2A DC output cable (Unshielded, 1.6m)

3. The EUT was pre-tested under the following modes:

Test Mode	Description
Mode A	Level-set
Mode B	Tower-set

From the above modes, the worst cases were found in Mode B. Therefore only the test data of the modes were recorded in this report.

4. The EUT incorporates a MIMO function with draft 802.11n. Physically, the EUT provides two completed transmit and two completed receivers.
5. The EUT is 2 * 2 spatial MIMO without beam forming function. The antenna configuration is two transmitter antenna and two receiver antenna, as there are 2 Omin antennas. Spatial multiplexing modes for simultaneous transmission using 2 antennas, and for simultaneous receiver using 2 antennas. The 11b/g legacy mode is limited to single transmitter only.
6. When the EUT operating in draft 802.11n, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 15.
7. The EUT complies with draft 802.11n standards and backwards compatible with 802.11b, 802.11g products.
8. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided for 802.11b, 802.11g, draft 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

Seven channels are provided for draft 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2422MHz	5	2442MHz
2	2427MHz	6	2447MHz
3	2432MHz	7	2452MHz
4	2437MHz		

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	
-	√	√	√	√	-

Where **PLC**: Power Line Conducted Emission

RE < 1G: Radiated Emission below 1GHz

RE ≥ 1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

ANTENNA COMBINATION MODE:

COMBINATION MODE	OPERATION MODE	TX CHAIN(0)	TX CHAIN(1)
A	802.11b	√	
B	802.11b		√
C	802.11g	√	
D	802.11g		√
E	DRAFT 802.11n(20MHz) for MCS 0~7	√	√
F	DRAFT 802.11n(20MHz) for MCS 8~15	√	√
G	DRAFT 802.11n(40MHz) for MCS 0~7	√	√
H	DRAFT 802.11n(40MHz) for MCS 8~15	√	√

Note:

- The above information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.
- Antenna 1~2 are Omni antennas.
- Mode A, C, E, G the worst modes, were selected as representative mode for the report.

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	EUT CONFIGURE MODE
802.11b	1 to 11	1	DSSS	DBPSK	1	A

RADIATED EMISSION TEST (BELOW 1 GHZ):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	EUT CONFIGURE MODE
802.11b	1 to 11	1	DSSS	DBPSK	1	A

RADIATED EMISSION TEST (ABOVE 1 GHZ):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	EUT CONFIGURE MODE
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1	A
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	C
Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	7.2	E
Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	15	G

BANDEDGE MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	EUT CONFIGURE MODE
802.11b	1 to 11	1, 11	DSSS	DBPSK	1	A
802.11g	1 to 11	1, 11	OFDM	BPSK	6	C
Draft 802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	7.2	E
Draft 802.11n (40MHz)	1 to 7	1, 7	OFDM	BPSK	15	G

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	EUT CONFIGURE MODE
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1	A
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	C
Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	7.2	E
Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	15	G

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is an RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP18L	6976685584	FCC DoC
2	NOTEBOOK COMPUTER	DELL	PP19L	CN-OHC416-701 66-5CA-0448	PIW63250051661 0
3	HUB	ZyXEL	ES-116P	S060H02000215	FCC DoC

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	UTP cable (Unshielded, 10m)
2	UTP cable (Unshielded, 10m)
3	UTP cable (Unshielded, 10m)

NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

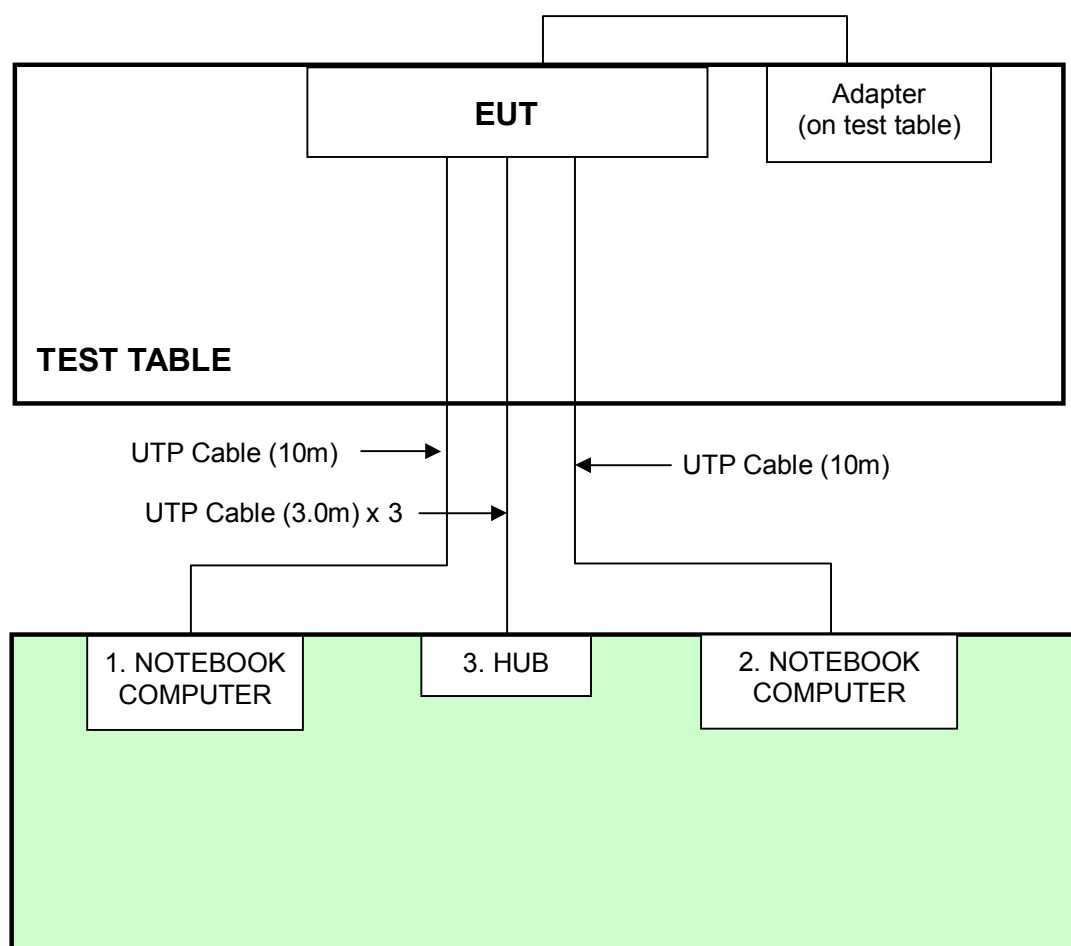

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	100287	Mar. 05, 2009	Mar. 04, 2010
Line-Impedance Stabilization Network (for EUT)	KNW-407	8-1395-12	May 04, 2009	May 03, 2010
Line-Impedance Stabilization Network (for Peripheral)	ENV-216	100072	June 08, 2009	June 07, 2010
RF Cable (JYEBAO)	5DFB	COACAB-001	Dec 15, 2008	Dec 14, 2009
50 ohms Terminator	50	3	Nov. 05, 2008	Nov. 04, 2009
Software	BV ADT_Cond_V7.3.7	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.



A D T


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

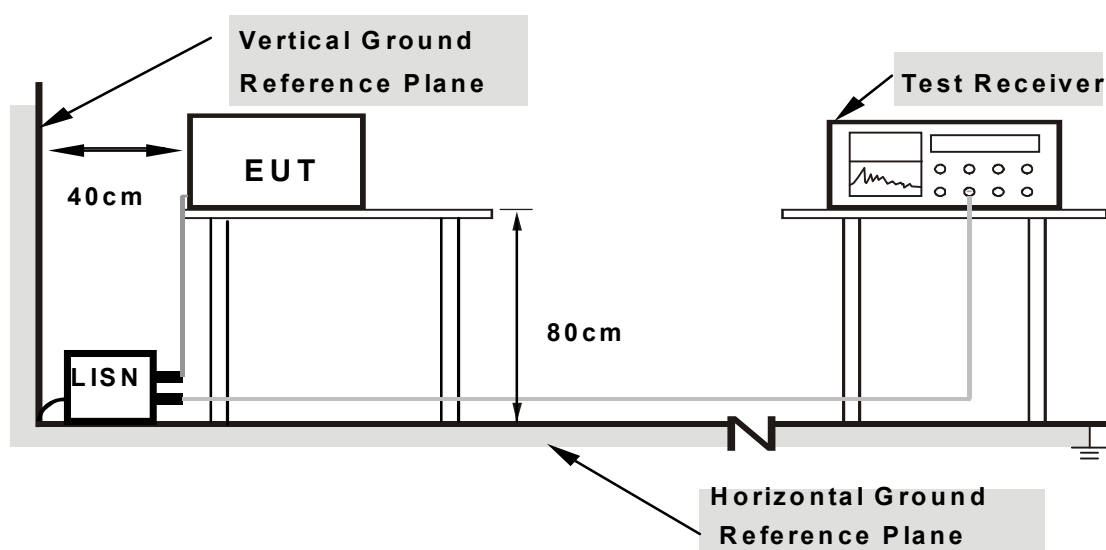

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

1. Placed the EUT on testing table.
2. Prepared other computer systems (support units 1 ~ 2) to act as communication partners and placed them outside of testing area.
3. The communication partners run test program “QA_RT3052-V1.0.0.2” to enable EUT under transmission/receiving condition continuously at specific channel frequency.


4.1.7 TEST RESULTS

802.11b DSSS MODULATION:

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line (L)
MODULATION TYPE	DBPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	1Mbps	INPUT POWER	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 66%RH, 965hPa	TESTED BY	Andy Ho

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.175	0.56	44.67	-	45.23	-	64.71	54.71	-19.47	-
2	0.401	0.41	41.22	-	41.63	-	57.82	47.82	-16.20	-
+3	0.462	0.41	44.93	-	45.34	-	56.66	46.66	-11.32	-
4	0.591	0.40	35.60	-	36.00	-	56.00	46.00	-20.00	-
5	0.896	0.39	35.10	-	35.49	-	56.00	46.00	-20.51	-
6	3.973	0.45	33.70	-	34.15	-	56.00	46.00	-21.85	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

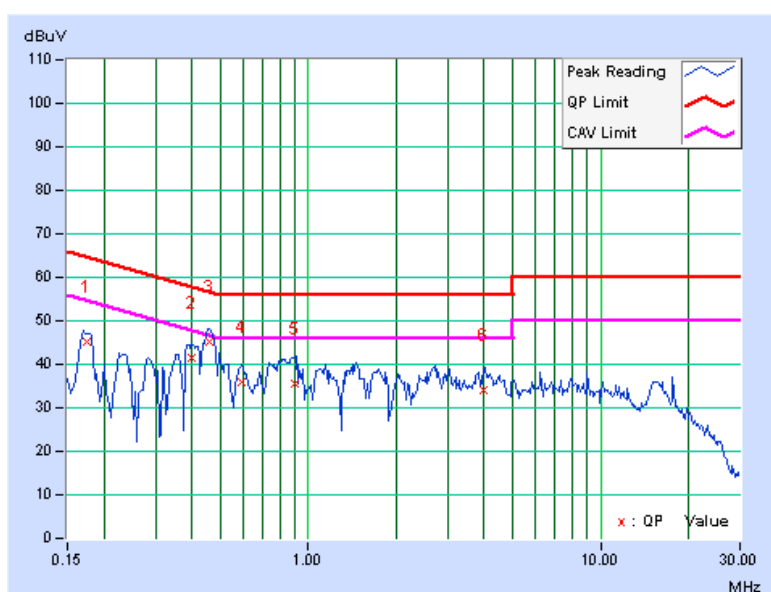

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line (L)
MODULATION TYPE	DBPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	1Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 66%RH, 965hPa	TESTED BY	Andy Ho

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.175	0.31	45.09	-	45.40	-	64.74	54.74	-19.34	-
2	0.356	0.20	41.29	-	41.49	-	58.83	48.83	-17.34	-
3	0.392	0.18	41.12	-	41.30	-	58.02	48.02	-16.71	-
+4	0.466	0.18	45.66	-	45.84	-	56.59	46.59	-10.75	-
5	0.607	0.17	31.87	-	32.04	-	56.00	46.00	-23.96	-
6	3.711	0.22	35.56	-	35.78	-	56.00	46.00	-20.22	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

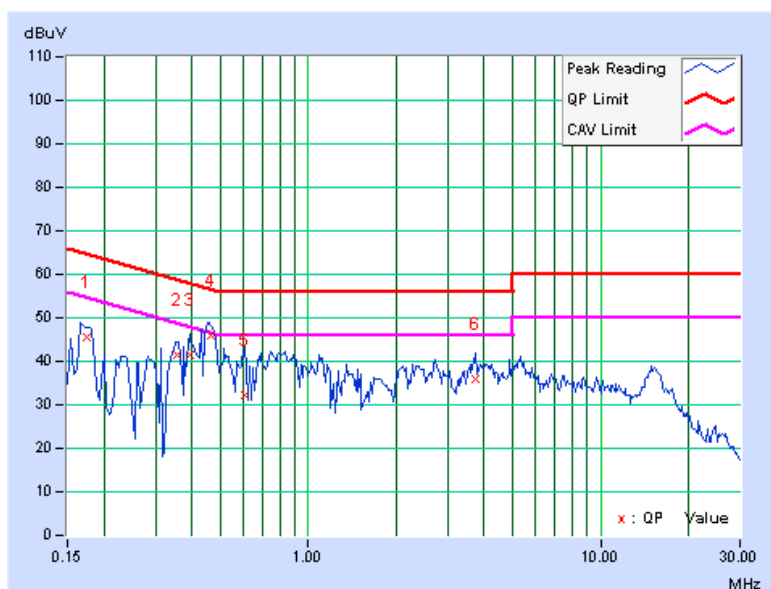

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400 / F(kHz)	300
0.490 ~ 1.705	24000 / F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

**A D T**

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Spectrum Analyzer	FSP40	100036	Dec. 9, 2008	Dec. 8, 2009
HP Pre_Amplifier	8449B	3008A01923	Nov. 10, 2008	Nov. 9, 2009
ROHDE & SCHWARZ Test Receiver	ESCS30	847124/029	Sep. 9, 2008	Sep. 8, 2009
SCHWARZBECK TRILOG Broadband Antenna	VULB 9168	138	April 29, 2009	April 28, 2010
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 09, 2008	Dec. 08, 2009
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 22, 2009	Jan. 21, 2010
RF Switches	EMH-011	08009	Oct. 07, 2008	Oct. 06, 2009
RF CABLE (Chaintek)	Sucoflex 106	28077	Aug. 15, 2008	Aug. 14, 2009
RF Cable	8DFB	STCCAB-30M-1GHz	Oct. 07, 2008	Oct. 06, 2009
Software	ADT_Radiated_V7.6.15.9.2	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna, HP preamplifier (model: 8449B) and Spectrum Analyzer (model: FSP40) are used only for the measurement of emission frequency above 1GHz if tested.

3. The test was performed in Open Site No. C.

4. The FCC Site Registration No. is 656396.

5. The VCCI Site Registration No. is R-1626.

6. The CANADA Site Registration No. is IC 7450G-3.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

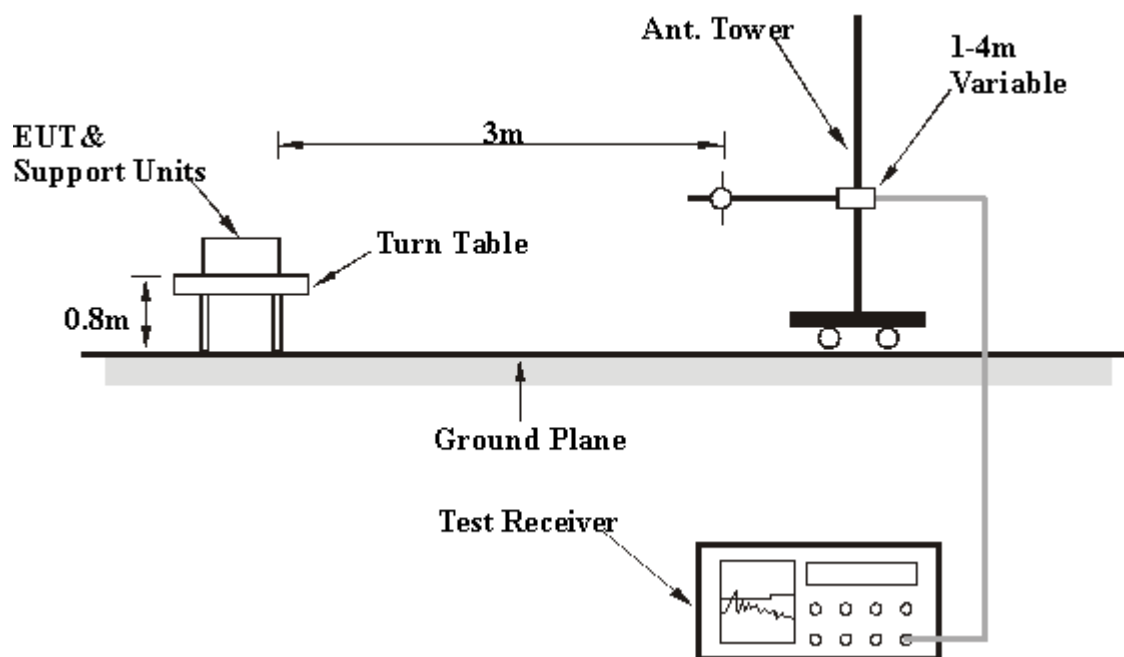

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

Below 1GHz Test Data

4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA : 802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25.0deg. C, 64.0%RH 965hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	125.00	33.92 QP	43.50	-9.58	1.43 H	147	20.85	13.07
2	128.00	32.55 QP	43.50	-10.95	1.54 H	256	19.18	13.37
3	250.00	45.03 QP	46.00	-0.97	1.00 H	302	30.78	14.25
4	400.00	37.10 QP	46.00	-8.90	1.00 H	320	17.60	19.50
5	500.00	32.55 QP	46.00	-13.45	1.82 H	324	10.06	22.49
6	640.00	43.02 QP	46.00	-2.98	1.12 H	185	17.59	25.43
7	756.04	34.32 QP	46.00	-11.68	1.15 H	165	7.29	27.03
8	800.00	32.66 QP	46.00	-13.34	1.26 H	174	4.79	27.87
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	69.02	39.41 QP	40.00	-0.59	1.00 V	133	26.04	13.37
2	125.00	41.72 QP	43.50	-1.78	1.00 V	12	28.65	13.07
3	128.00	38.07 QP	43.50	-5.43	1.00 V	0	24.70	13.37
4	250.00	41.60 QP	46.00	-4.40	1.00 V	34	27.35	14.25
5	500.00	34.65 QP	46.00	-11.35	1.26 V	108	12.16	22.49
6	640.00	35.87 QP	46.00	-10.13	1.00 V	255	10.44	25.43

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

Above 1GHz Test Data

4.2.8 TEST RESULTS

802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25.0deg. C, 63.0%RH 965hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2330.00	55.02 PK	74.00	-18.98	1.54 H	167	25.19	29.83
2	2330.00	45.65 AV	54.00	-8.35	1.54 H	167	15.82	29.83
3	*2412.00	101.20 PK			1.56 H	145	71.05	30.15
4	*2412.00	97.10 AV			1.56 H	145	66.95	30.15
5	2483.50	51.92 PK	74.00	-22.08	1.54 H	167	21.49	30.43
6	2483.50	43.22 AV	54.00	-10.78	1.54 H	167	12.79	30.43
7	4824.00	54.94 PK	74.00	-19.06	1.24 H	192	19.48	35.46
8	4824.00	51.24 AV	54.00	-2.76	1.24 H	192	15.78	35.46
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2375.12	60.07 PK	74.00	-13.93	1.00 V	196	30.07	30.00
2	2375.12	52.87 AV	54.00	-1.13	1.00 V	196	22.87	30.00
3	*2412.00	106.87 PK			1.27 V	48	76.72	30.15
4	*2412.00	102.90 AV			1.27 V	48	72.75	30.15
5	2494.95	60.55 PK	74.00	-13.45	1.16 V	136	30.08	30.47
6	2494.95	52.61 AV	54.00	-1.39	1.16 V	136	22.14	30.47
7	4824.00	53.02 PK	74.00	-20.98	1.27 V	90	17.56	35.46
8	4824.00	46.78 AV	54.00	-7.22	1.27 V	90	11.32	35.46

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25.0deg. C, 62.0%RH 965hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	100.70 PK			1.54 H	139	70.46	30.24
2	*2437.00	96.80 AV			1.54 H	139	66.56	30.24
3	4874.00	55.76 PK	74.00	-18.24	1.26 H	356	20.21	35.55
4	4874.00	51.89 AV	54.00	-2.11	1.26 H	356	16.34	35.55
5	7311.00	60.52 PK	74.00	-13.48	1.42 H	15	18.48	42.04
6	7311.00	52.75 AV	54.00	-1.25	1.42 H	15	10.71	42.04
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2310.00	60.90 PK	74.00	-13.10	1.04 V	317	31.15	29.75
2	2310.00	53.43 AV	54.00	-0.57	1.04 V	317	23.68	29.75
3	*2437.00	106.10 PK			1.14 V	193	75.86	30.24
4	*2437.00	102.30 AV			1.14 V	193	72.06	30.24
5	4874.00	52.29 PK	74.00	-21.71	1.39 V	57	16.74	35.55
6	4874.00	46.16 AV	54.00	-7.84	1.39 V	57	10.61	35.55
7	7311.00	60.70 PK	74.00	-13.30	1.41 V	340	18.66	42.04
8	7311.00	52.88 AV	54.00	-1.12	1.41 V	340	10.84	42.04

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25.0deg. C, 62.0%RH 965hPa	TESTED BY	Frank Liu



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2332.88	56.13 PK	74.00	-17.87	1.54 H	148	26.29	29.84
2	2332.88	44.39 AV	54.00	-9.61	1.54 H	148	14.55	29.84
3	*2462.00	100.30 PK			1.56 H	132	69.96	30.34
4	*2462.00	96.20 AV			1.56 H	132	65.86	30.34
5	2499.90	54.31 PK	74.00	-19.69	1.54 H	148	23.82	30.49
6	2499.90	44.93 AV	54.00	-9.07	1.54 H	148	14.44	30.49
7	4924.00	55.10 PK	74.00	-18.90	1.36 H	195	19.47	35.63
8	4924.00	51.04 AV	54.00	-2.96	1.36 H	195	15.41	35.63
9	7386.00	60.75 PK	74.00	-13.25	1.21 H	155	18.52	42.23
10	7386.00	53.17 AV	54.00	-0.83	1.21 H	155	10.94	42.23
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2334.80	64.68 PK	74.00	-9.32	1.63 V	283	34.83	29.85
2	2334.80	53.42 AV	54.00	-0.58	1.63 V	283	23.57	29.85
3	*2462.00	107.40 PK			1.13 V	144	77.06	30.34
4	*2462.00	103.30 AV			1.13 V	144	72.96	30.34
5	2483.50	60.07 PK	74.00	-13.93	1.17 V	344	29.64	30.43
6	2483.50	48.95 AV	54.00	-5.05	1.17 V	344	18.52	30.43
7	4924.00	51.94 PK	74.00	-22.06	1.36 V	62	16.31	35.63
8	4924.00	44.82 AV	54.00	-9.18	1.36 V	62	9.19	35.63
9	7386.00	60.58 PK	74.00	-13.42	1.42 V	338	18.35	42.23
10	7386.00	52.78 AV	54.00	-1.22	1.42 V	338	10.55	42.23

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.





A D T

RESTRICTED BANDEDGE (802.11b MODE,CH1, HORIZONTAL)

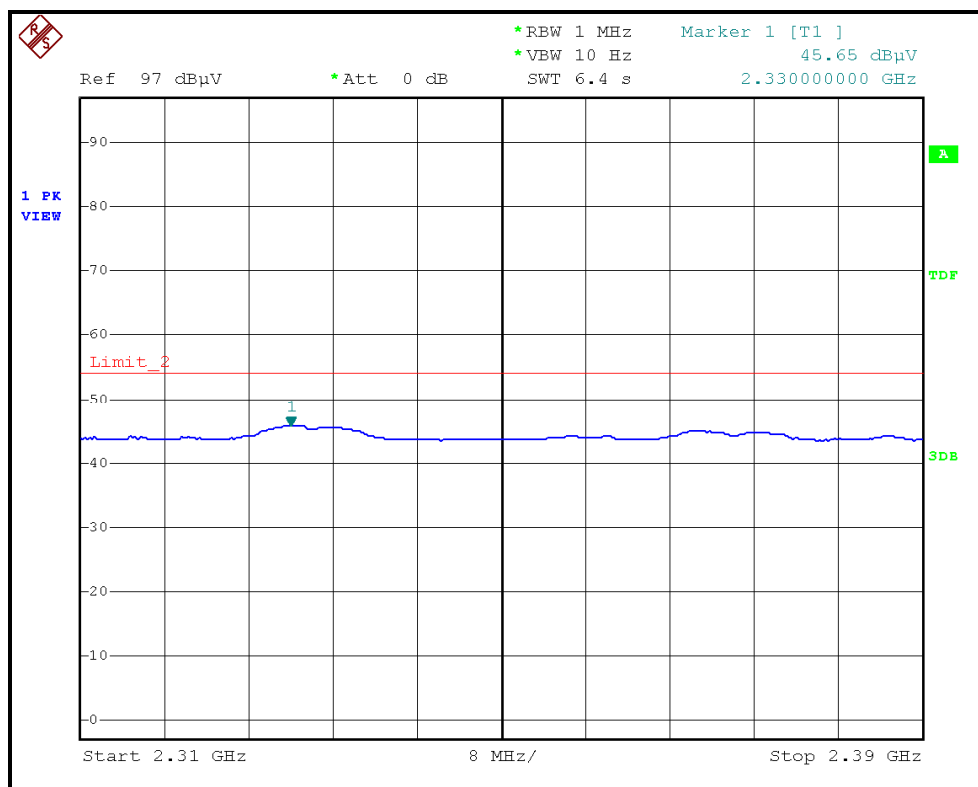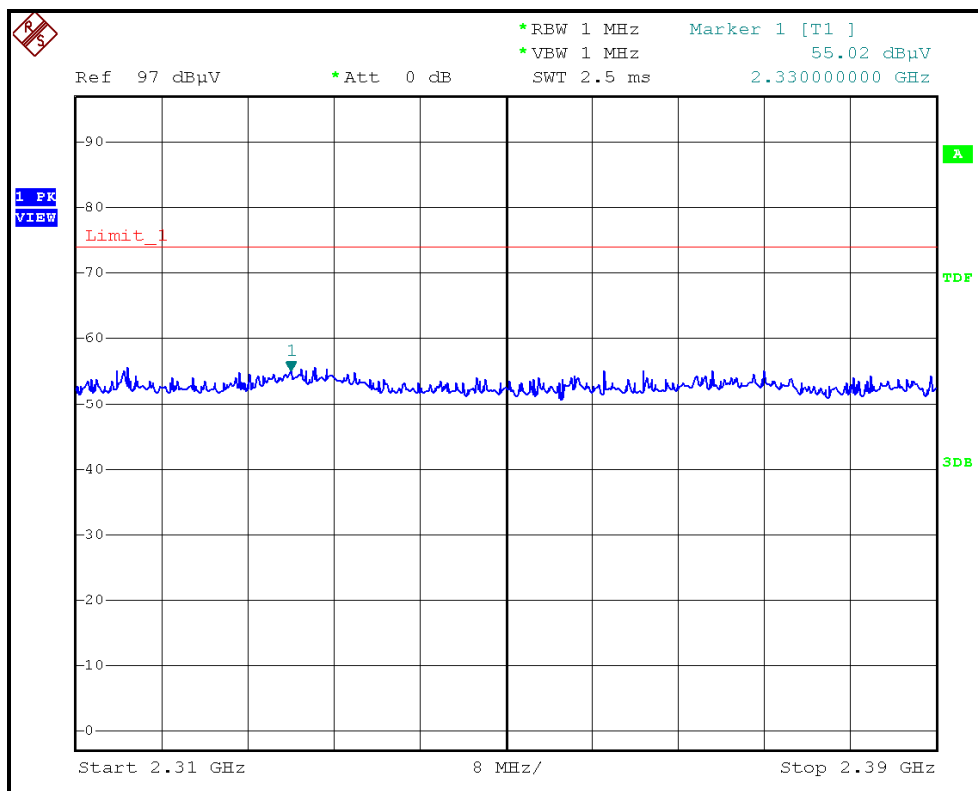



RESTRICTED BANDEDGE (802.11b MODE,CH1, VERTICAL)

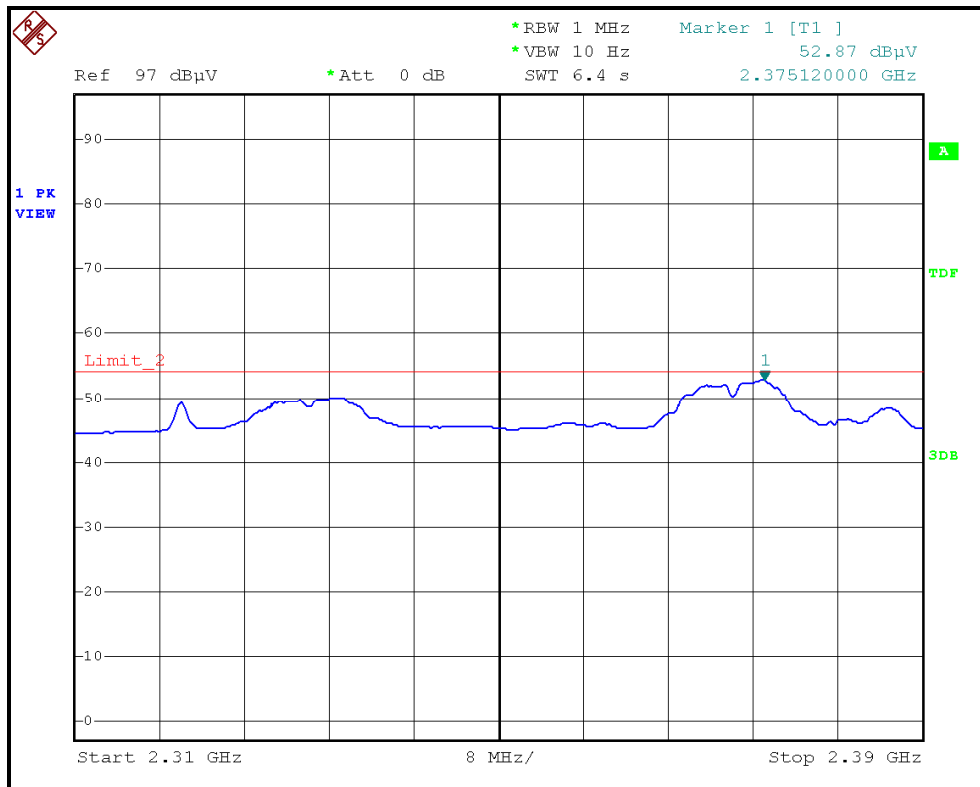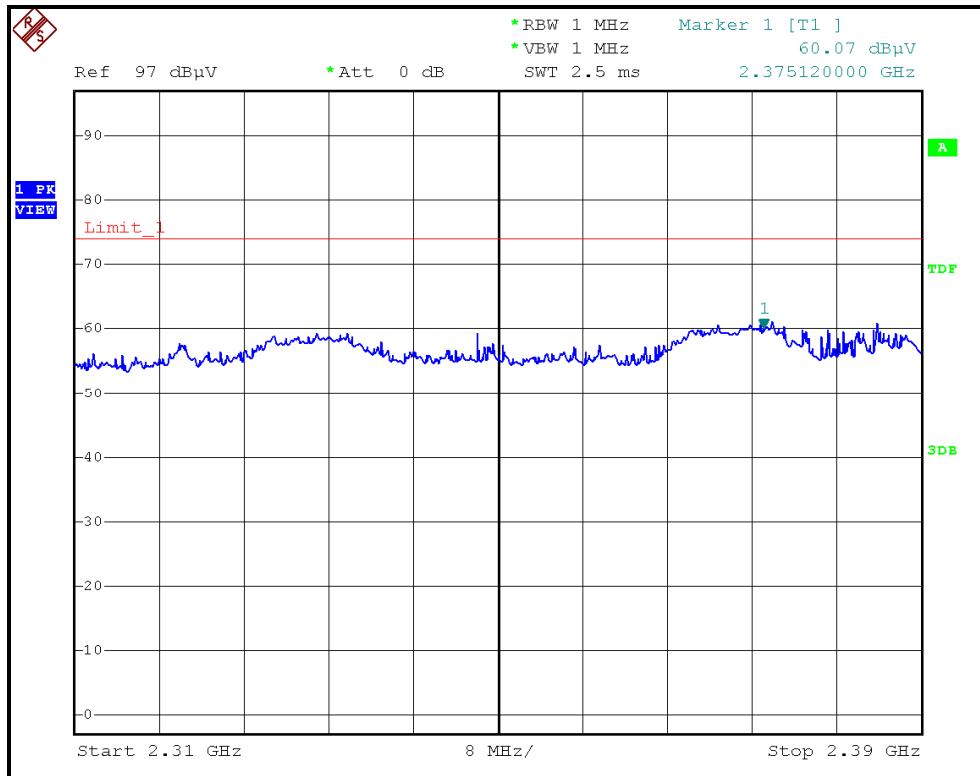





A D T

RESTRICTED BANDEDGE (802.11b MODE,CH11, HORIZONTAL)

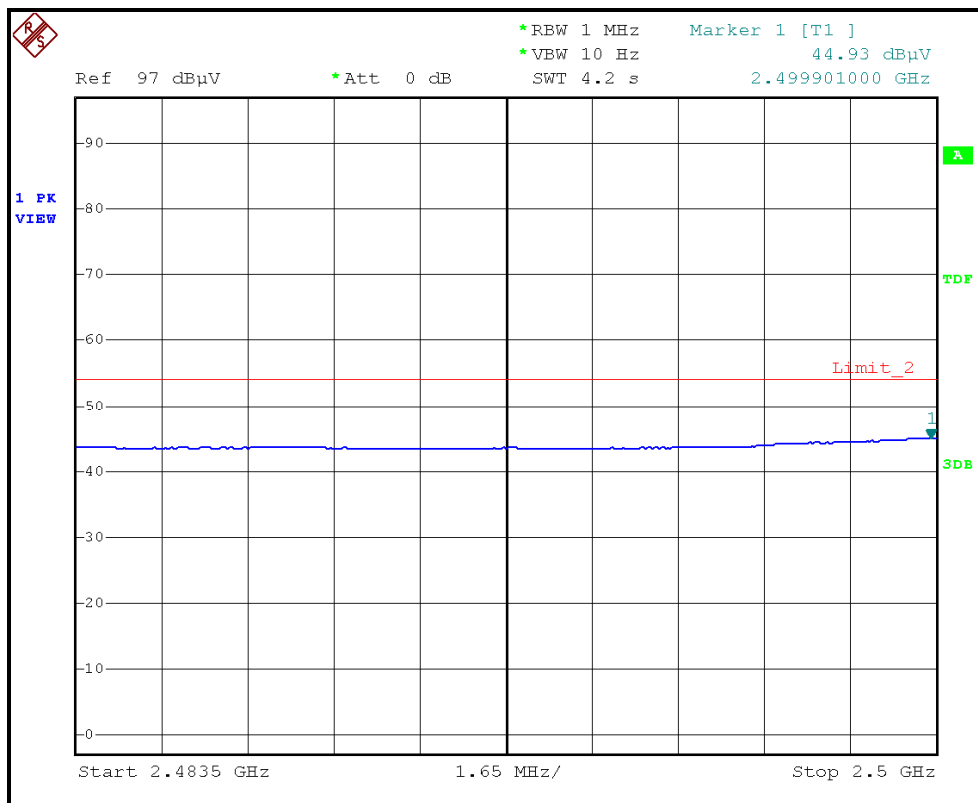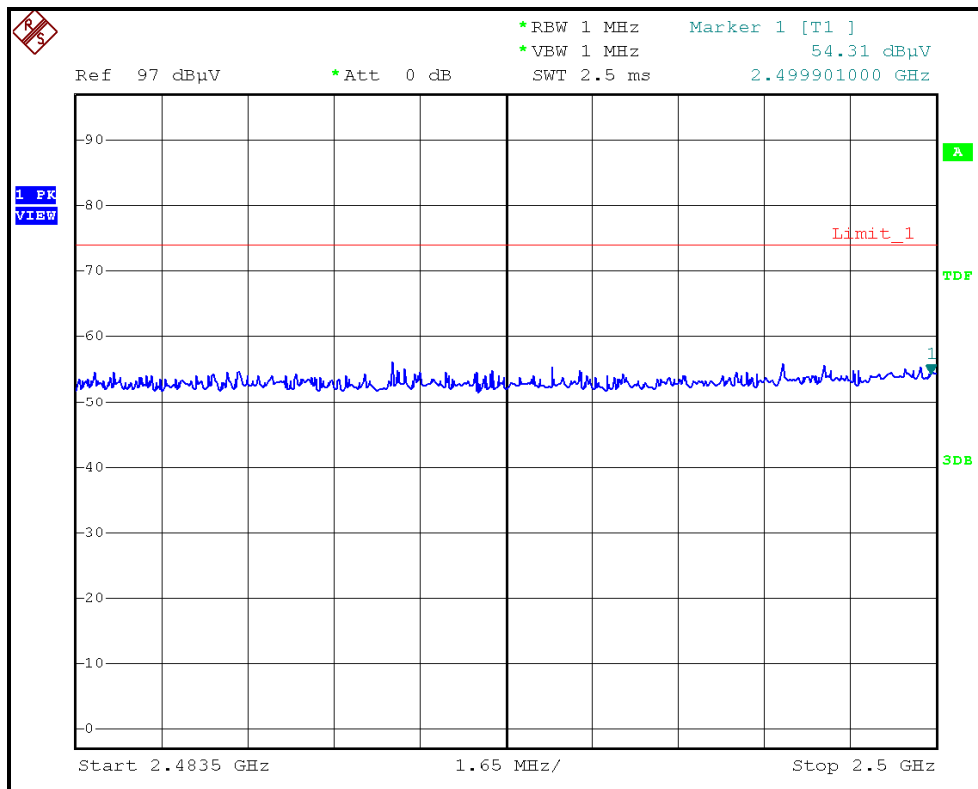

RESTRICTED BANDEDGE (802.11b MODE,CH11, VERTICAL)

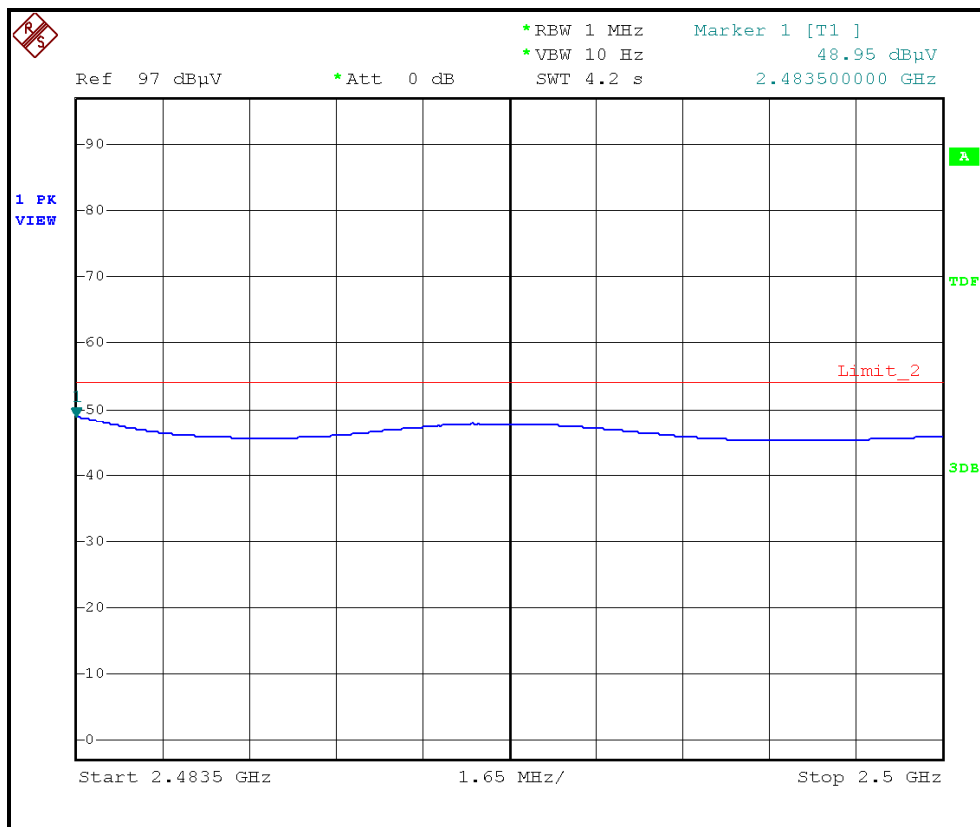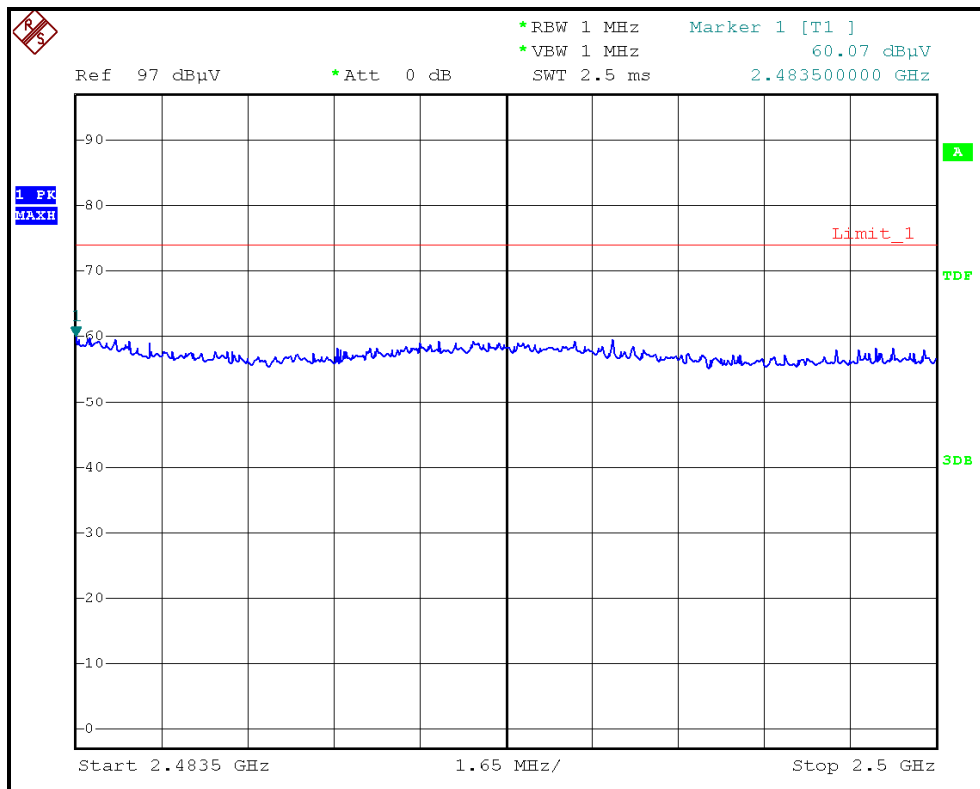



A D T

802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25.0deg. C, 62.0%RH 965hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.92 PK	74.00	-15.08	1.26 H	150	28.86	30.06
2	2390.00	44.66 AV	54.00	-9.34	1.26 H	150	14.60	30.06
3	*2412.00	108.40 PK			1.26 H	151	78.25	30.15
4	*2412.00	95.46 AV			1.26 H	151	65.31	30.15
5	2490.79	54.48 PK	74.00	-19.52	1.26 H	154	24.03	30.45
6	2490.79	45.21 AV	54.00	-8.79	1.26 H	154	14.76	30.45
7	4824.00	47.40 PK	74.00	-26.60	1.41 H	169	11.94	35.46
8	4824.00	37.60 AV	54.00	-16.40	1.41 H	169	2.14	35.46
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2389.84	70.40 PK	74.00	-3.60	1.00 V	146	40.34	30.06
2	2389.84	50.63 AV	54.00	-3.37	1.00 V	146	20.57	30.06
3	*2412.00	113.20 PK			1.00 V	262	83.05	30.15
4	*2412.00	100.58 AV			1.00 V	262	70.43	30.15
5	2492.87	60.87 PK	74.00	-13.13	1.00 V	360	30.24	30.63
6	2492.87	50.83 AV	54.00	-3.17	1.00 V	360	20.20	30.63
7	4824.00	45.93 PK	74.00	-28.07	1.26 V	179	10.47	35.46
8	4824.00	33.86 AV	54.00	-20.14	1.26 V	179	-1.60	35.46

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22.0deg. C, 85.0%RH 965hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2310.30	63.50 PK	74.00	-10.50	1.02 H	357	33.51	29.99
2	2310.30	51.41 AV	54.00	-2.59	1.02 H	357	21.42	29.99
3	*2437.00	110.20 PK			1.28 H	330	79.74	30.46
4	*2437.00	96.40 AV			1.28 H	330	65.94	30.46
5	4874.00	46.37 PK	74.00	-27.63	1.24 H	183	9.45	36.92
6	4874.00	34.26 AV	54.00	-19.74	1.24 H	183	-2.66	36.92
7	7311.00	53.72 PK	74.00	-20.28	1.26 H	0	10.58	43.14
8	7311.00	39.84 AV	54.00	-14.16	1.26 H	0	-3.30	43.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	107.30 PK			1.26 V	147	76.84	30.46
2	*2437.00	94.50 AV			1.26 V	147	64.04	30.46
3	4874.00	48.60 PK	74.00	-25.40	1.44 V	172	11.68	36.92
4	4874.00	38.10 AV	54.00	-15.90	1.44 V	172	1.18	36.92
5	7311.00	57.10 PK	74.00	-16.90	1.21 V	156	13.96	43.14
6	7311.00	43.20 AV	54.00	-10.80	1.21 V	156	0.06	43.14

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22.0deg. C, 85.0%RH 965hPa	TESTED BY	Frank Liu



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2335.60	62.62 PK	74.00	-11.38	1.02 H	147	32.54	30.08
2	2335.60	51.58 AV	54.00	-2.42	1.02 H	147	21.50	30.08
3	*2462.00	111.10 PK			1.20 H	325	80.55	30.55
4	*2462.00	97.40 AV			1.20 H	325	66.85	30.55
5	2497.19	60.06 PK	74.00	-13.94	1.27 H	322	29.38	30.68
6	2497.19	48.81 AV	54.00	-5.19	1.27 H	322	18.13	30.68
7	4924.00	46.90 PK	74.00	-27.10	1.23 H	192	9.84	37.06
8	4924.00	34.40 AV	54.00	-19.60	1.23 H	192	-2.66	37.06
9	7386.00	53.90 PK	74.00	-20.10	1.23 H	0	10.77	43.13
10	7386.00	40.90 AV	54.00	-13.10	1.23 H	0	-2.23	43.13
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2327.60	54.81 PK	74.00	-19.19	1.44 V	146	24.76	30.05
2	2327.60	44.58 AV	54.00	-9.42	1.44 V	146	14.53	30.05
3	*2462.00	106.92 PK			1.24 V	143	76.37	30.55
4	*2462.00	93.94 AV			1.24 V	143	63.39	30.55
5	2483.50	57.23 PK	74.00	-16.77	1.44 V	146	26.60	30.63
6	2483.50	43.94 AV	54.00	-10.06	1.44 V	146	13.31	30.63
7	4924.00	49.30 PK	74.00	-24.70	1.43 V	184	12.24	37.06
8	4924.00	38.40 AV	54.00	-15.60	1.43 V	184	1.34	37.06
9	7386.00	57.30 PK	74.00	-16.70	1.24 V	157	14.17	43.13
10	7386.00	43.70 AV	54.00	-10.30	1.24 V	157	0.57	43.13

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.





A D T

RESTRICTED BANDEDGE (802.11g MODE,CH1, HORIZONTAL)

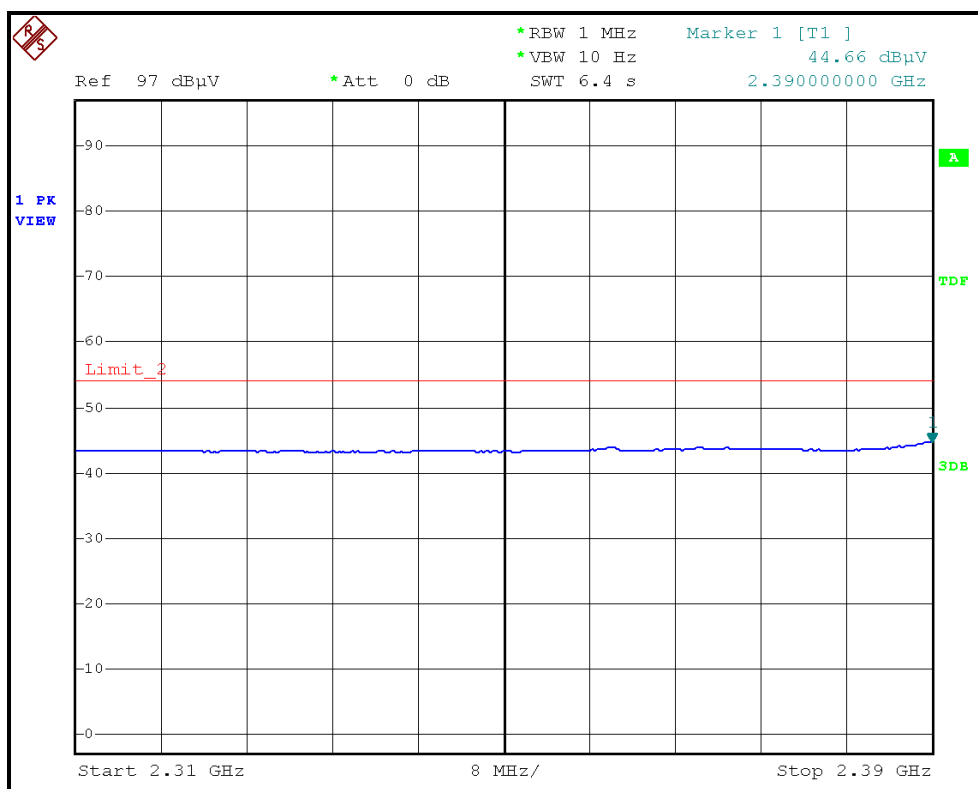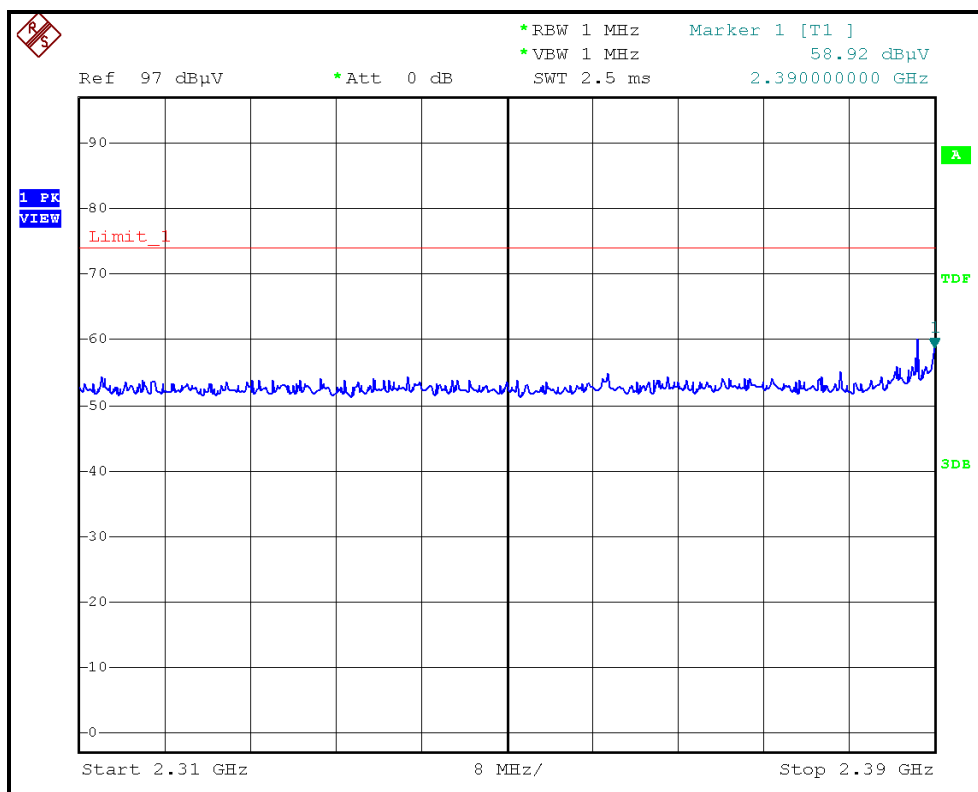



RESTRICTED BANDEDGE (802.11g MODE,CH1, VERTICAL)

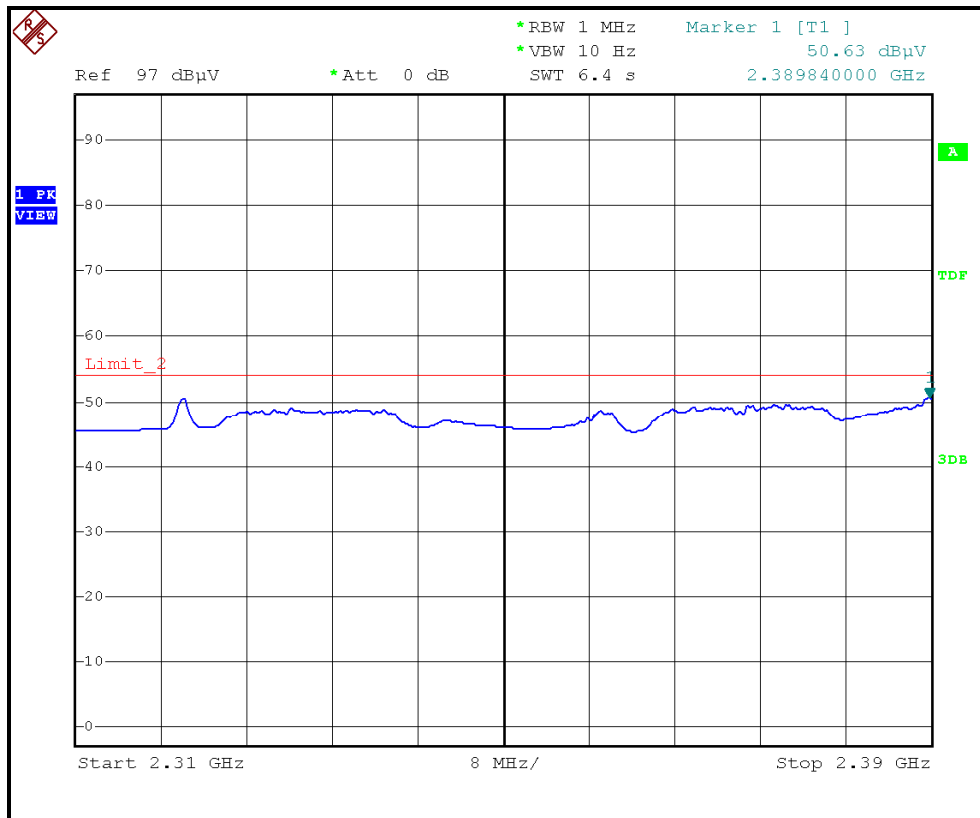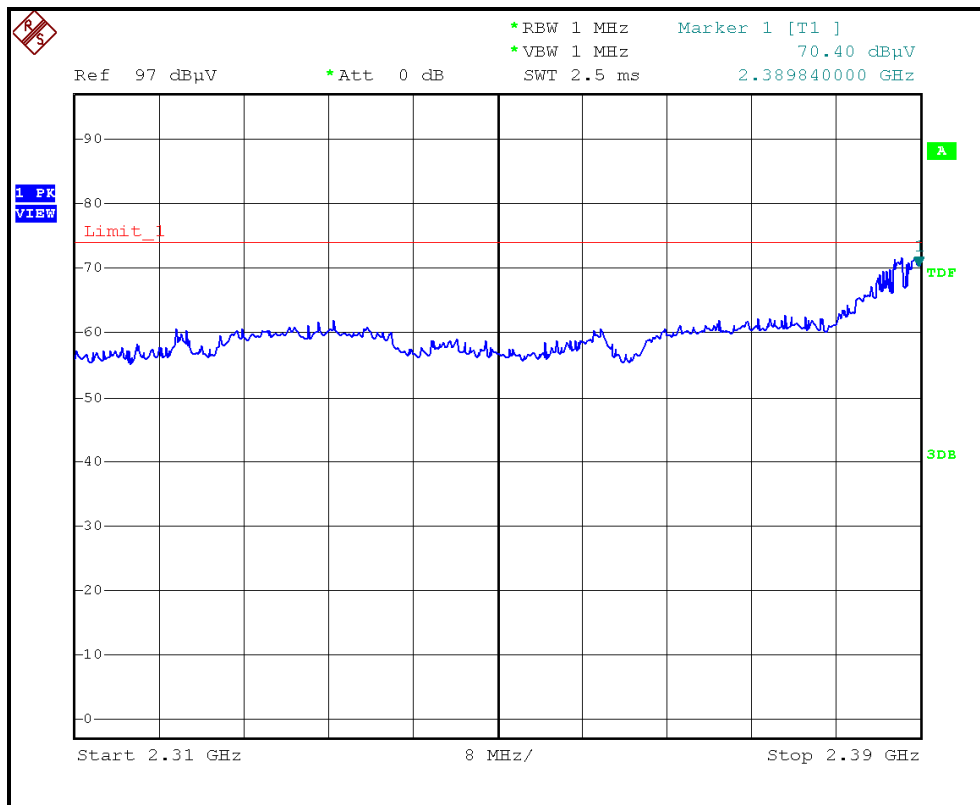



A D T



RESTRICTED BANDEDGE (802.11g MODE,CH11, HORIZONTAL)

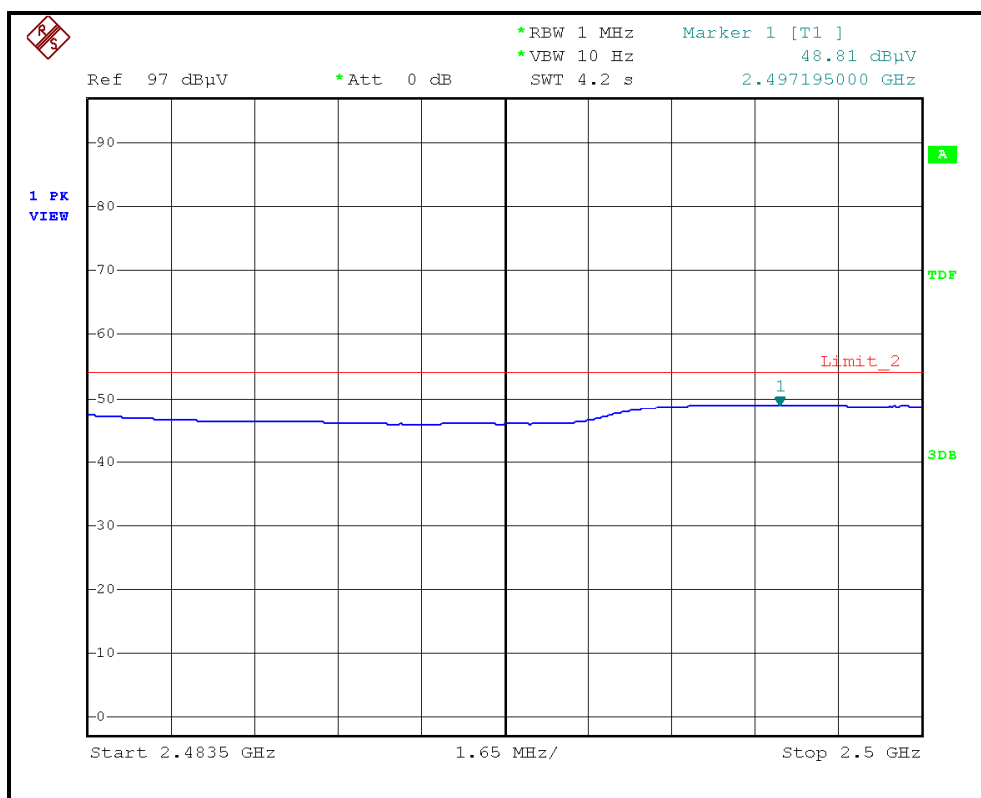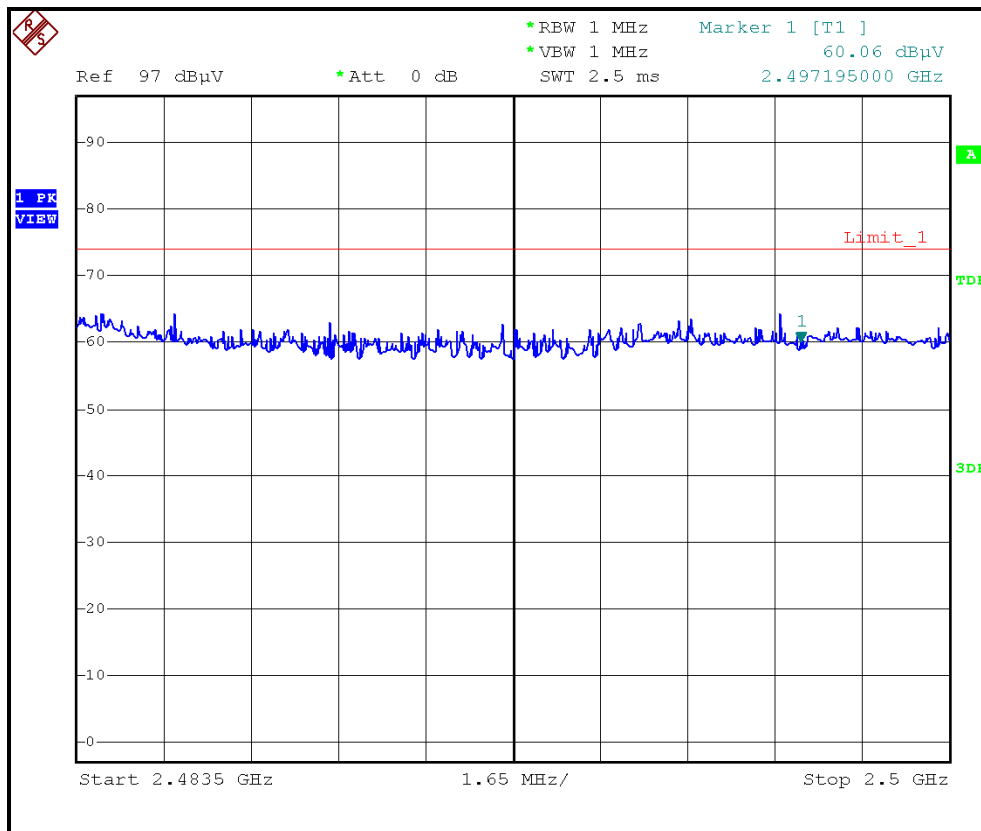



A D T

RESTRICTED BANDEDGE (802.11g MODE,CH11, VERTICAL)

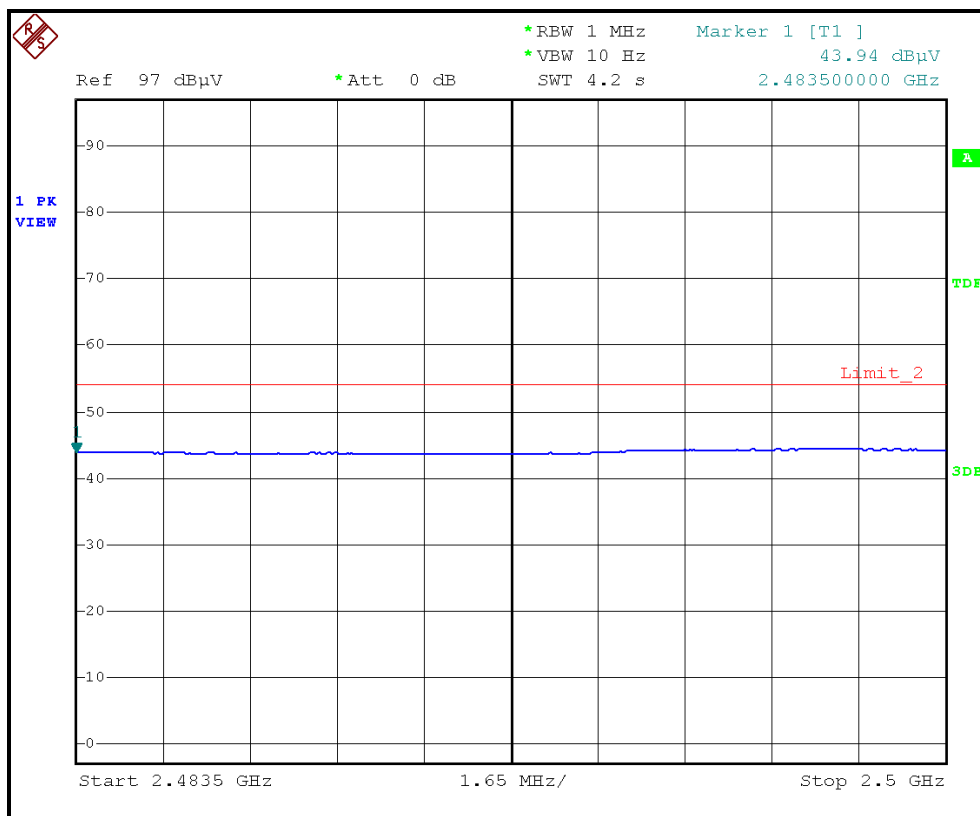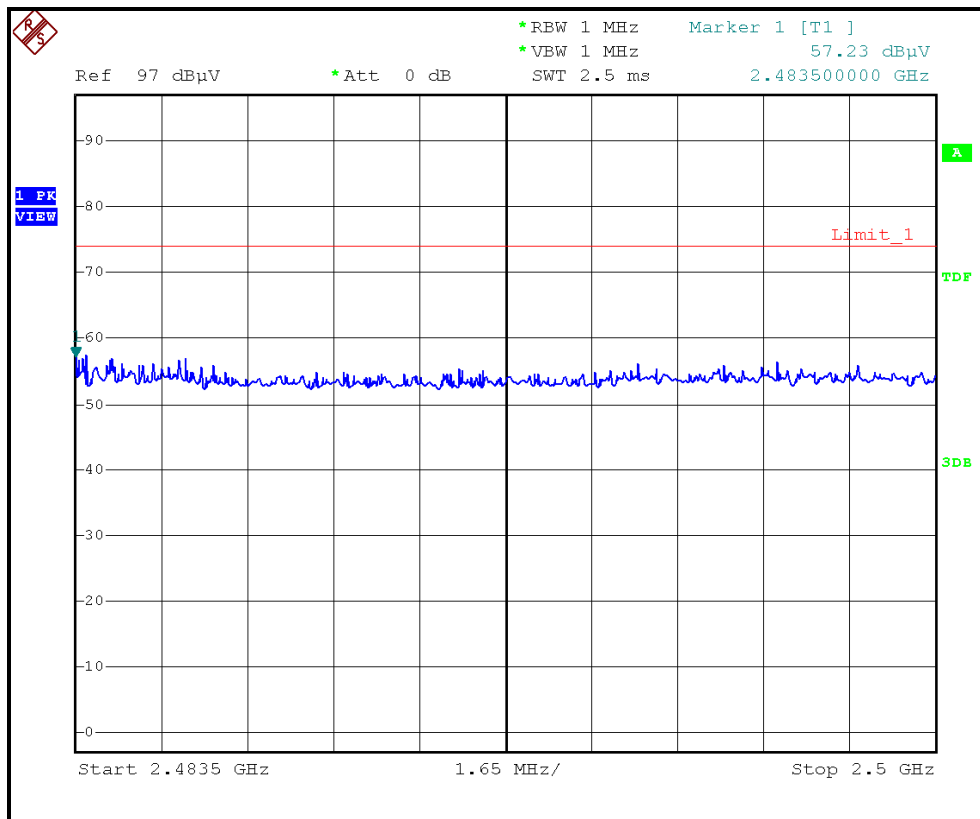



A D T

DRAFT 802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22.0deg. C, 85.0%RH 965hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.35 PK	74.00	-11.65	1.26 H	154	32.07	30.28
2	2390.00	48.31 AV	54.00	-5.69	1.26 H	154	18.03	30.28
3	*2412.00	108.30 PK			1.27 H	209	77.94	30.36
4	*2412.00	97.40 AV			1.27 H	209	67.04	30.36
5	2485.02	55.43 PK	74.00	-18.57	1.27 H	159	24.80	30.63
6	2485.02	45.90 AV	54.00	-8.10	1.27 H	159	15.27	30.63
7	4824.00	46.30 PK	74.00	-27.70	1.34 H	183	9.51	36.79
8	4824.00	33.60 AV	54.00	-20.40	1.34 H	183	-3.19	36.79
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.80 PK	74.00	-3.20	1.27 V	199	40.52	30.28
2	2390.00	53.04 AV	54.00	-0.96	1.27 V	199	22.76	30.28
3	*2412.00	111.89 PK			1.01 V	216	81.53	30.36
4	*2412.00	102.20 AV			1.01 V	216	71.84	30.36
5	4824.00	48.10 PK	74.00	-25.90	1.27 V	186	11.31	36.79
6	4824.00	37.20 AV	54.00	-16.80	1.27 V	186	0.41	36.79

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22.0deg. C, 85.0%RH 965hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	107.20 PK			1.21 H	208	76.74	30.46
2	*2437.00	96.80 AV			1.21 H	208	66.34	30.46
3	4874.00	46.40 PK	74.00	-27.60	1.31 H	166	9.48	36.92
4	4874.00	33.70 AV	54.00	-20.30	1.31 H	166	-3.22	36.92
5	7311.00	53.40 PK	74.00	-20.60	1.20 H	159	10.26	43.14
6	7311.00	39.30 AV	54.00	-14.70	1.20 H	159	-3.84	43.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2320.00	59.85 PK	74.00	-14.15	1.32 V	334	29.83	30.02
2	2320.00	53.38 AV	54.00	-0.62	1.32 V	334	23.36	30.02
3	*2437.00	111.57 PK			1.00 V	215	81.11	30.46
4	*2437.00	101.42 AV			1.00 V	215	70.96	30.46
5	4874.00	48.70 PK	74.00	-25.30	1.17 V	183	11.78	36.92
6	4874.00	37.60 AV	54.00	-16.40	1.17 V	183	0.68	36.92
7	7311.00	56.80 PK	74.00	-17.20	1.26 V	7	13.66	43.14
8	7311.00	42.40 AV	54.00	-11.60	1.26 V	7	-0.74	43.14

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22.0deg. C, 85.0%RH 965hPa	TESTED BY	Frank Liu



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2340.88	60.72 PK	74.00	-13.28	1.24 H	210	30.62	30.10
2	2340.88	50.58 AV	54.00	-3.42	1.24 H	210	20.48	30.10
3	*2462.00	106.90 PK			1.24 H	203	76.35	30.55
4	*2462.00	96.70 AV			1.24 H	203	66.15	30.55
5	2483.50	56.58 PK	74.00	-17.42	1.26 H	205	25.95	30.63
6	2483.50	46.39 AV	54.00	-7.61	1.26 H	205	15.76	30.63
7	4924.00	46.70 PK	74.00	-27.30	1.37 H	179	9.64	37.06
8	4924.00	34.10 AV	54.00	-19.90	1.37 H	179	-2.96	37.06
9	7386.00	53.29 PK	74.00	-20.71	1.21 H	154	10.16	43.13
10	7386.00	40.40 AV	54.00	-13.60	1.21 H	154	-2.73	43.13
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2340.88	64.26 PK	74.00	-9.74	1.32 V	73	34.16	30.10
2	2340.88	53.27 AV	54.00	-0.73	1.32 V	73	23.17	30.10
3	*2462.00	112.20 PK			1.00 V	214	81.65	30.55
4	*2462.00	102.50 AV			1.00 V	214	71.95	30.55
5	2498.70	61.69 PK	74.00	-12.31	1.18 V	8	31.00	30.69
6	2498.70	51.37 AV	54.00	-2.63	1.18 V	8	20.68	30.69
7	4924.00	46.70 PK	74.00	-27.30	1.26 V	184	9.64	37.06
8	4924.00	34.10 AV	54.00	-19.90	1.26 V	184	-2.96	37.06
9	7386.00	53.29 PK	74.00	-20.71	1.24 V	0	10.16	43.13
10	7386.00	40.40 AV	54.00	-13.60	1.24 V	0	-2.73	43.13

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T



RESTRICTED BANDEDGE (DRAFT 802.11n (20MHz) MODE,CH1, HORIZONTAL)

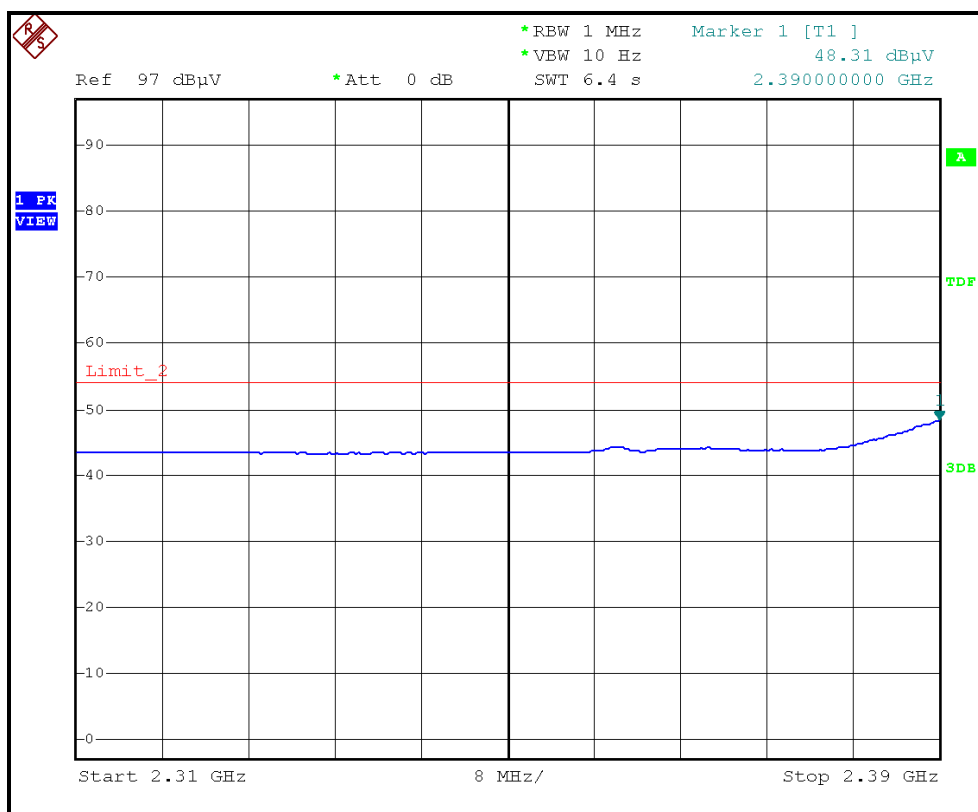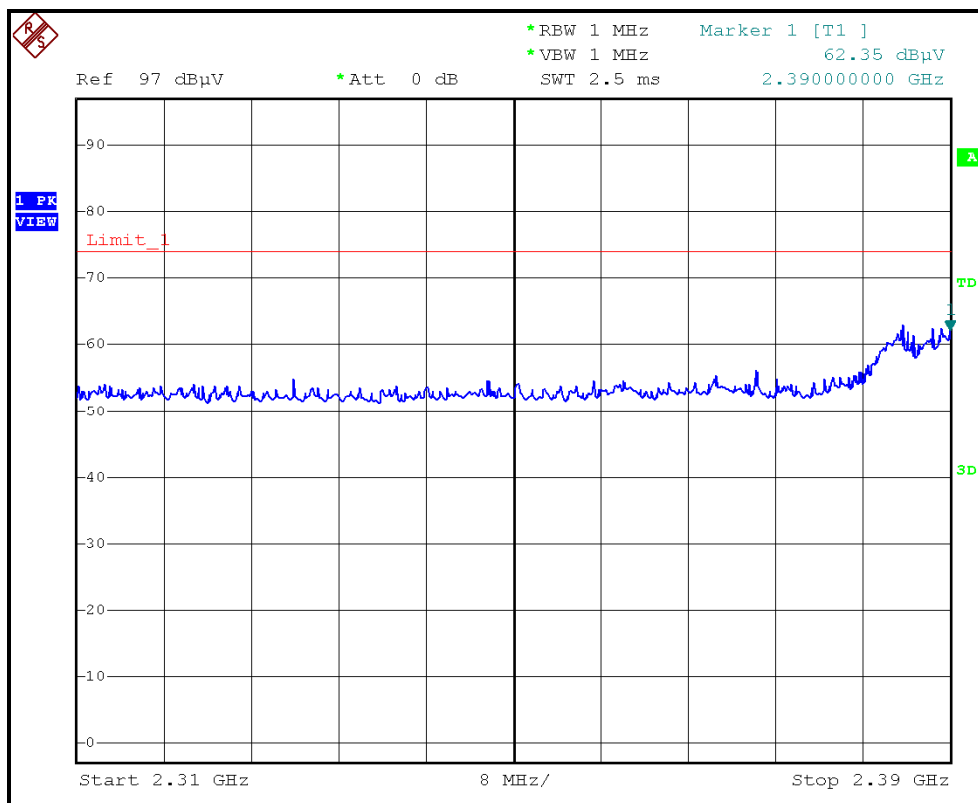



A D T



RESTRICTED BANDEDGE (DRAFT 802.11n (20MHz) MODE,CH1, VERTICAL)

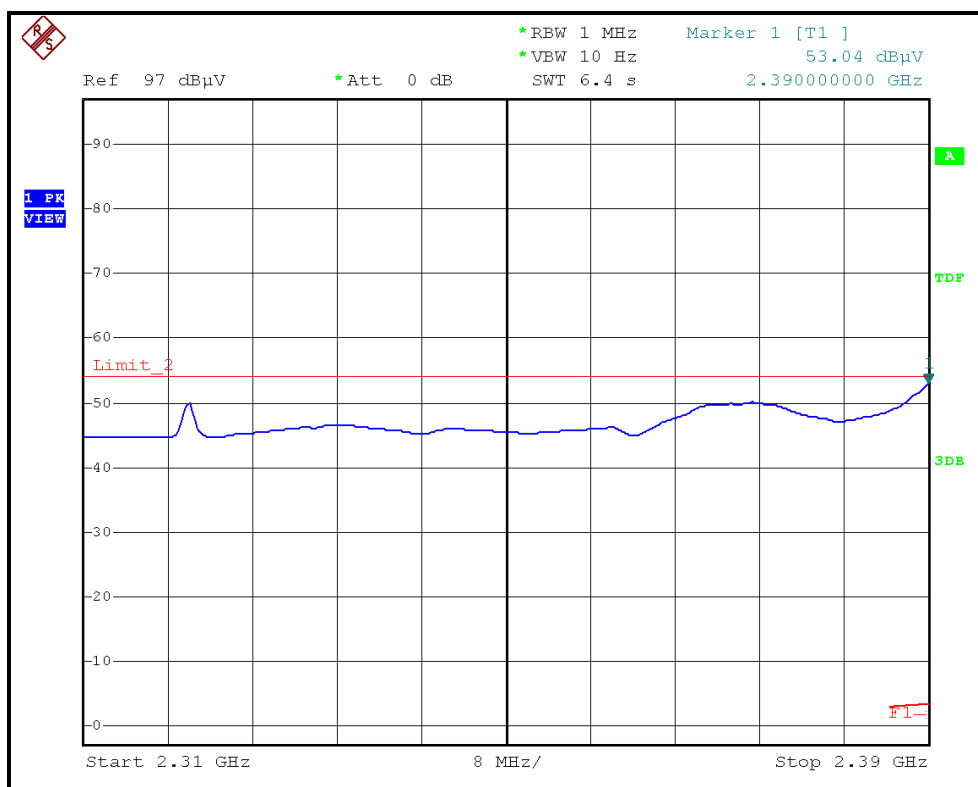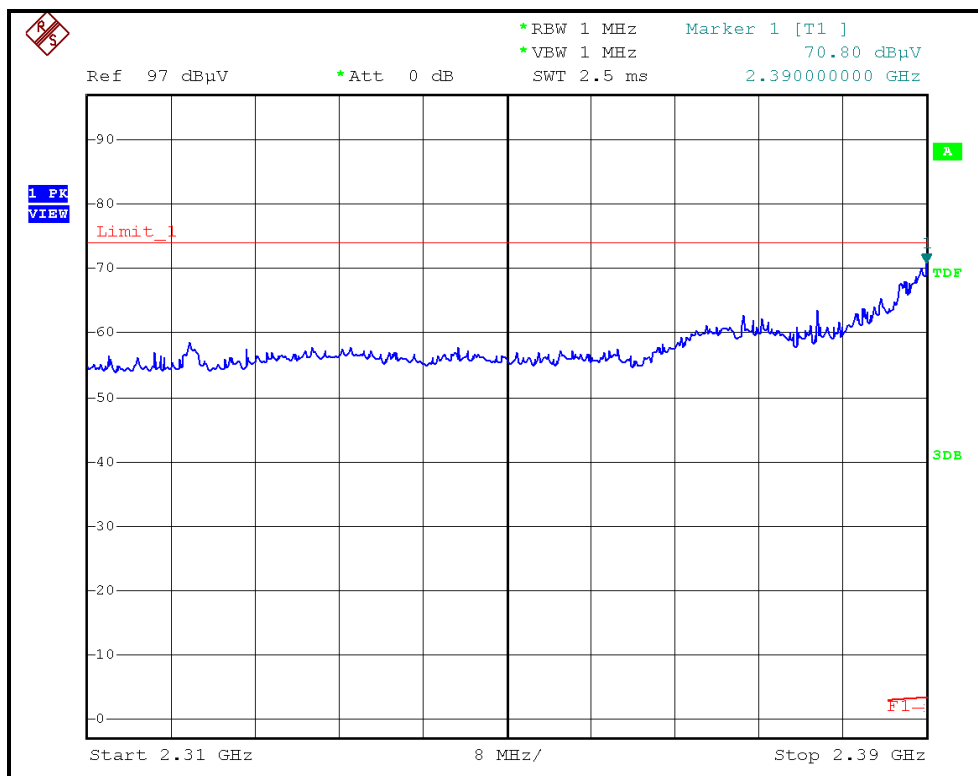





A D T

RESTRICTED BANDEDGE (DRAFT 802.11n (20MHz) MODE,CH11, HORIZONTAL)

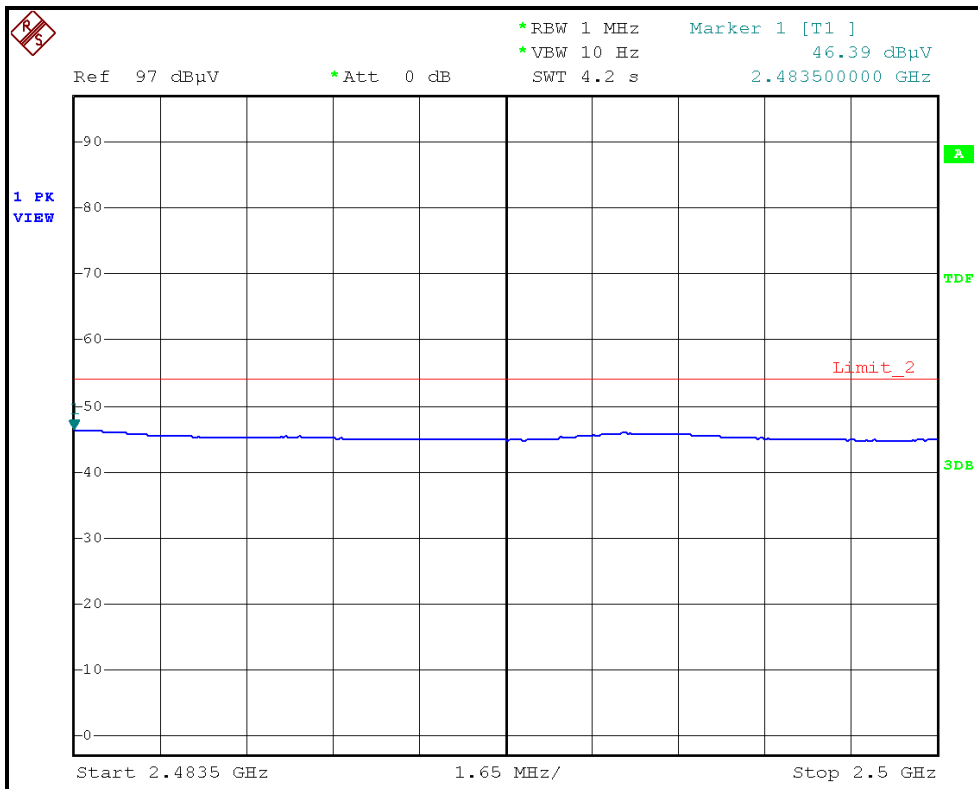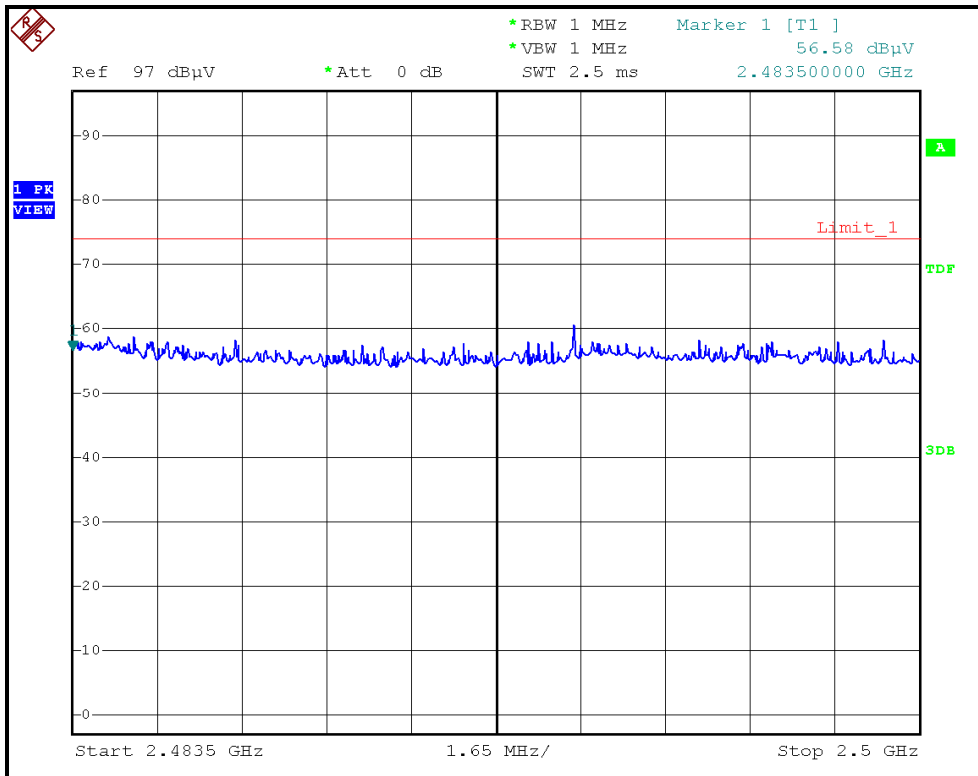

RESTRICTED BANDEDGE (DRAFT 802.11n (20MHz) MODE,CH11, VERTICAL)

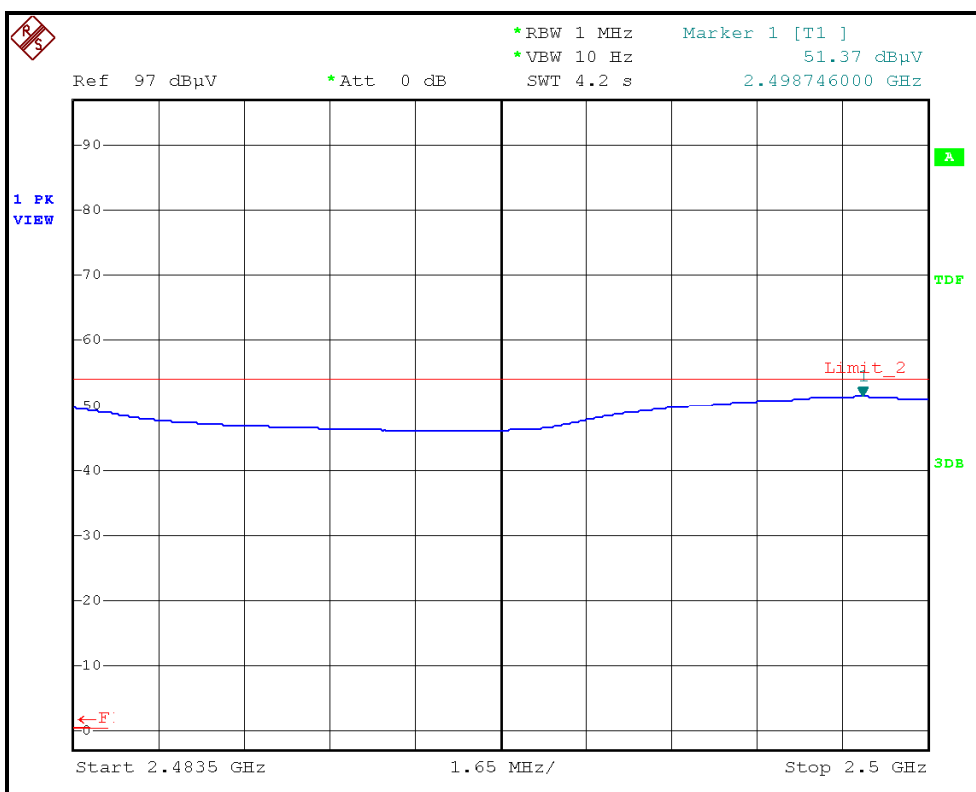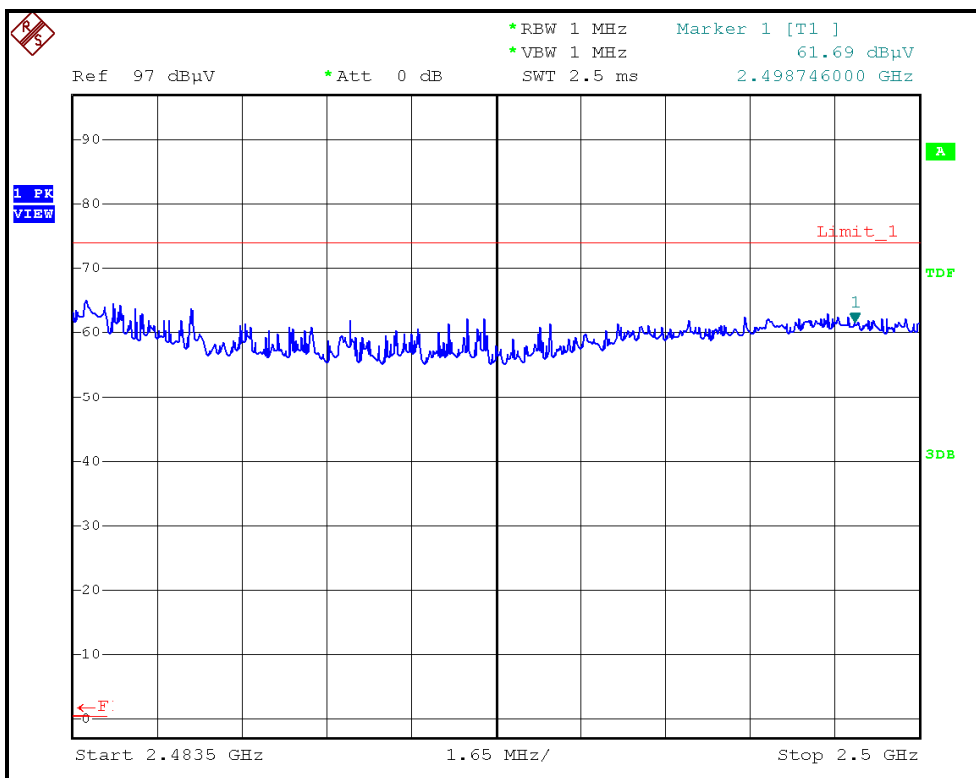



A D T

DRAFT 802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22.0deg. C, 85.0%RH 965hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.91 PK	74.00	-9.09	1.27 H	143	34.63	30.28
2	2390.00	50.55 AV	54.00	-3.45	1.27 H	143	20.27	30.28
3	*2422.00	100.20 PK			1.21 H	169	69.80	30.40
4	*2422.00	90.20 AV			1.21 H	169	59.80	30.40
5	2494.39	55.43 PK	74.00	-18.57	1.26 H	137	24.76	30.67
6	2494.39	45.69 AV	54.00	-8.31	1.26 H	137	15.02	30.67
7	4844.00	45.30 PK	74.00	-28.70	1.44 H	168	8.46	36.84
8	4844.00	32.60 AV	54.00	-21.40	1.44 H	168	-4.24	36.84
9	7266.00	50.10 PK	74.00	-23.90	1.20 H	153	6.96	43.14
10	7266.00	36.90 AV	54.00	-17.10	1.20 H	153	-6.24	43.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.29 PK	74.00	-8.71	1.04 V	235	35.01	30.28
2	2390.00	53.23 AV	54.00	-0.77	1.04 V	235	22.95	30.28
3	*2422.00	105.10 PK			1.00 V	216	74.70	30.40
4	*2422.00	96.20 AV			1.00 V	216	65.80	30.40
5	4844.00	47.30 PK	74.00	-26.70	1.23 V	179	10.46	36.84
6	4844.00	36.40 AV	54.00	-17.60	1.23 V	179	-0.44	36.84
7	7266.00	53.08 PK	74.00	-20.92	1.27 V	26	9.94	43.14
8	7266.00	38.70 AV	54.00	-15.30	1.27 V	26	-4.44	43.14

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22.0deg. C, 85.0%RH 965hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.10 PK			1.20 H	179	71.64	30.46
2	*2437.00	93.00 AV			1.20 H	179	62.54	30.46
3	4874.00	45.70 PK	74.00	-28.30	1.43 H	167	8.78	36.92
4	4874.00	32.80 AV	54.00	-21.20	1.43 H	167	-4.12	36.92
5	7311.00	50.30 PK	74.00	-23.70	1.49 H	144	7.16	43.14
6	7311.00	37.10 AV	54.00	-16.90	1.49 H	144	-6.04	43.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2320.00	61.01 PK	74.00	-12.99	1.23 V	229	30.99	30.02
2	2320.00	52.90 AV	54.00	-1.10	1.23 V	229	22.88	30.02
3	*2437.00	108.40 PK			1.00 V	231	77.94	30.46
4	*2437.00	99.80 AV			1.00 V	231	69.34	30.46
5	2483.50	63.70 PK	74.00	-10.30	1.18 V	24	33.07	30.63
6	2483.50	50.62 AV	54.00	-3.38	1.18 V	24	19.99	30.63
7	4874.00	48.20 PK	74.00	-25.80	1.21 V	179	11.28	36.92
8	4874.00	36.80 AV	54.00	-17.20	1.21 V	179	-0.12	36.92
9	7311.00	53.10 PK	74.00	-20.90	1.26 V	13	9.96	43.14
10	7311.00	39.20 AV	54.00	-14.80	1.26 V	13	-3.94	43.14

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.





A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22.0deg. C, 85.0%RH 965hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2330.96	59.77 PK	74.00	-14.23	1.24 H	183	29.71	30.06
2	2330.96	47.92 AV	54.00	-6.08	1.24 H	183	17.86	30.06
3	*2452.00	102.49 PK			1.21 H	186	71.98	30.51
4	*2452.00	94.37 AV			1.21 H	186	63.86	30.51
5	2483.50	60.64 PK	74.00	-13.36	1.26 H	190	30.01	30.63
6	2483.50	48.65 AV	54.00	-5.35	1.26 H	190	18.02	30.63
7	4904.00	46.10 PK	74.00	-27.90	1.41 H	179	9.10	37.00
8	4904.00	33.20 AV	54.00	-20.80	1.41 H	179	-3.80	37.00
9	7356.00	50.80 PK	74.00	-23.20	1.21 H	152	7.67	43.13
10	7356.00	37.40 AV	54.00	-16.60	1.21 H	152	-5.73	43.13
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2320.00	61.25 PK	74.00	-12.75	1.24 V	232	31.23	30.02
2	2320.00	52.49 AV	54.00	-1.51	1.24 V	232	22.47	30.02
3	*2452.00	108.70 PK			1.00 V	222	78.19	30.51
4	*2452.00	100.00 AV			1.00 V	222	69.49	30.51
5	2489.90	69.95 PK	74.00	-4.05	1.49 V	214	39.30	30.65
6	2489.90	53.44 AV	54.00	-0.56	1.49 V	214	22.79	30.65
7	4904.00	48.40 PK	74.00	-25.60	1.24 V	183	11.40	37.00
8	4904.00	37.20 AV	54.00	-16.80	1.24 V	183	0.20	37.00
9	7356.00	53.30 PK	74.00	-20.70	1.21 V	12	10.17	43.13
10	7356.00	39.60 AV	54.00	-14.40	1.21 V	12	-3.53	43.13

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



RESTRICTED BANDEDGE (DRAFT 802.11n (40MHz) MODE,CH1, HORIZONTAL)

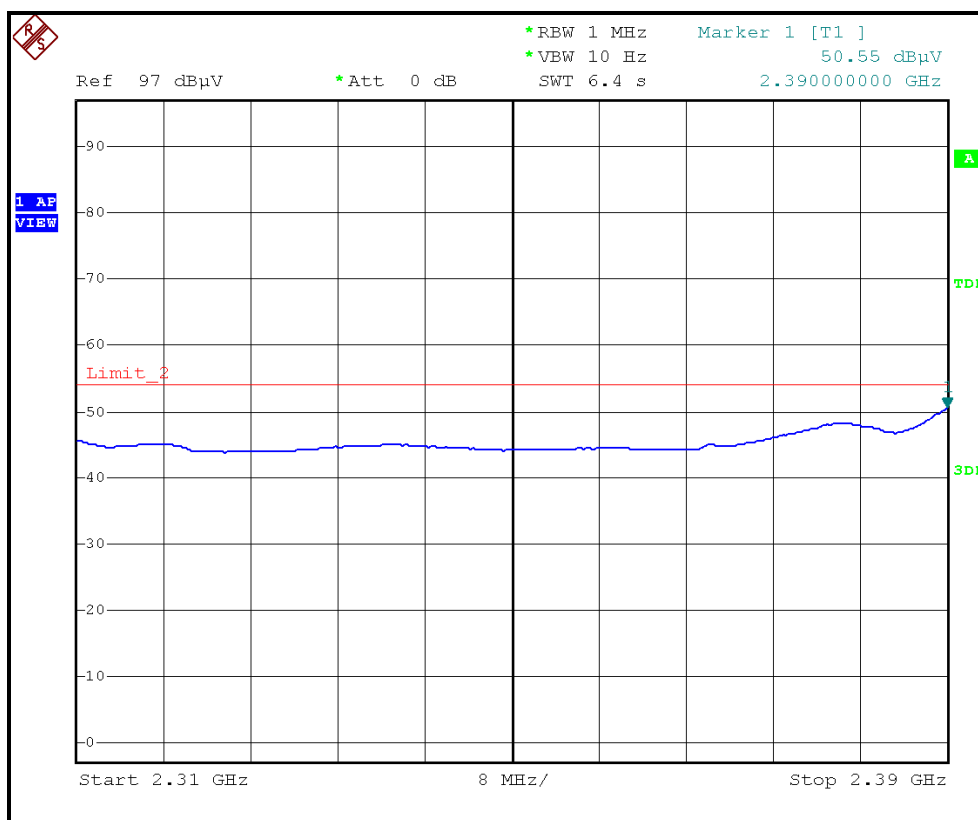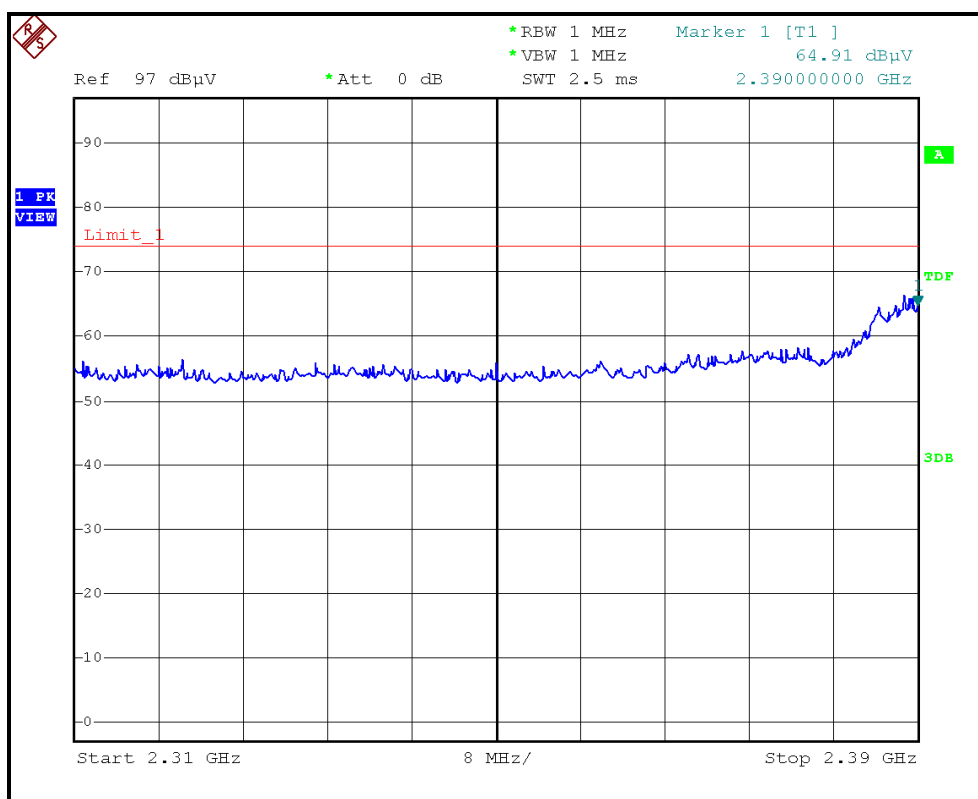



A D T


RESTRICTED BANDEDGE (DRAFT 802.11n (40MHz) MODE,CH1, VERTICAL)

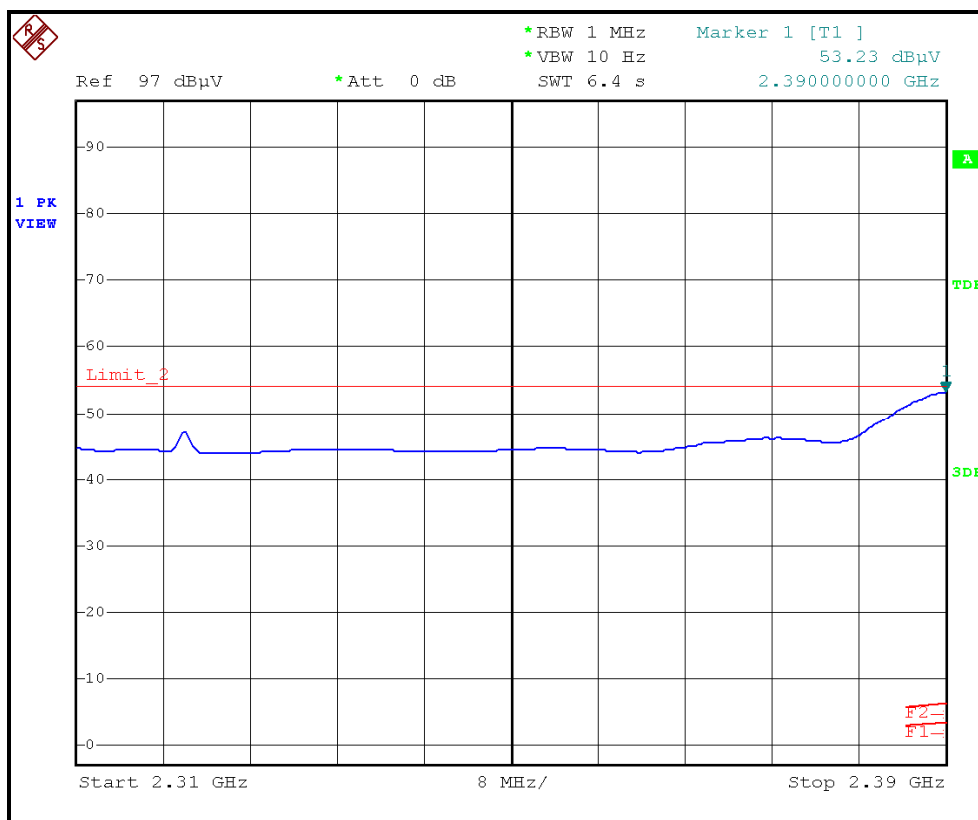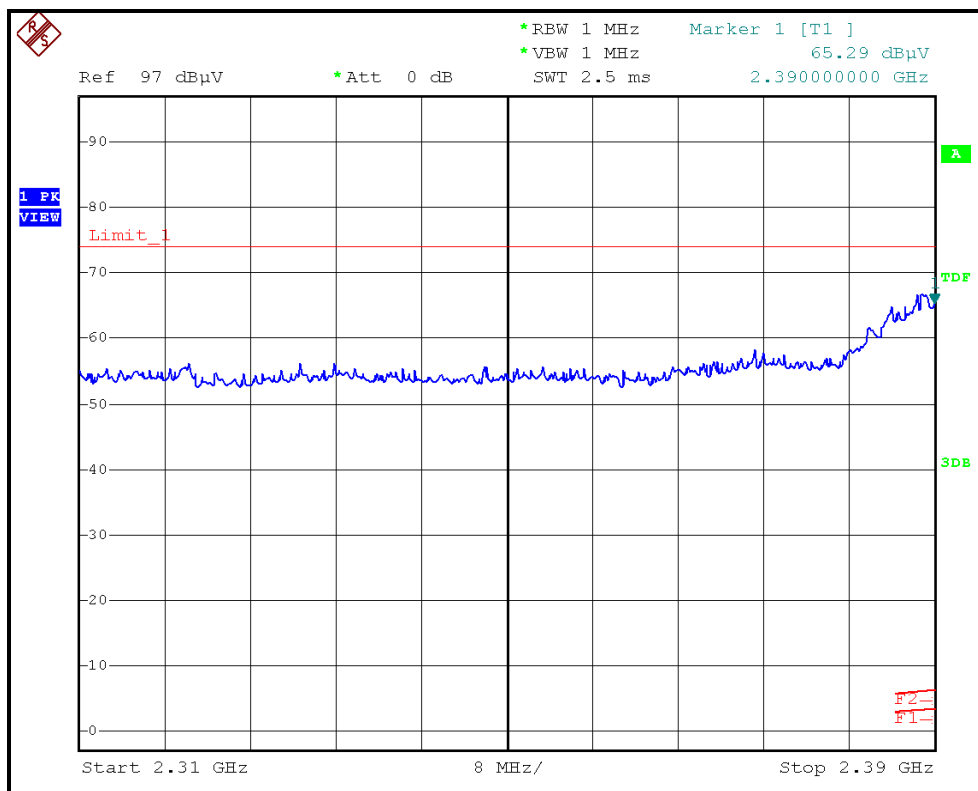





A D T

RESTRICTED BANDEDGE (DRAFT 802.11n (40MHz) MODE,CH7, HORIZONTAL)

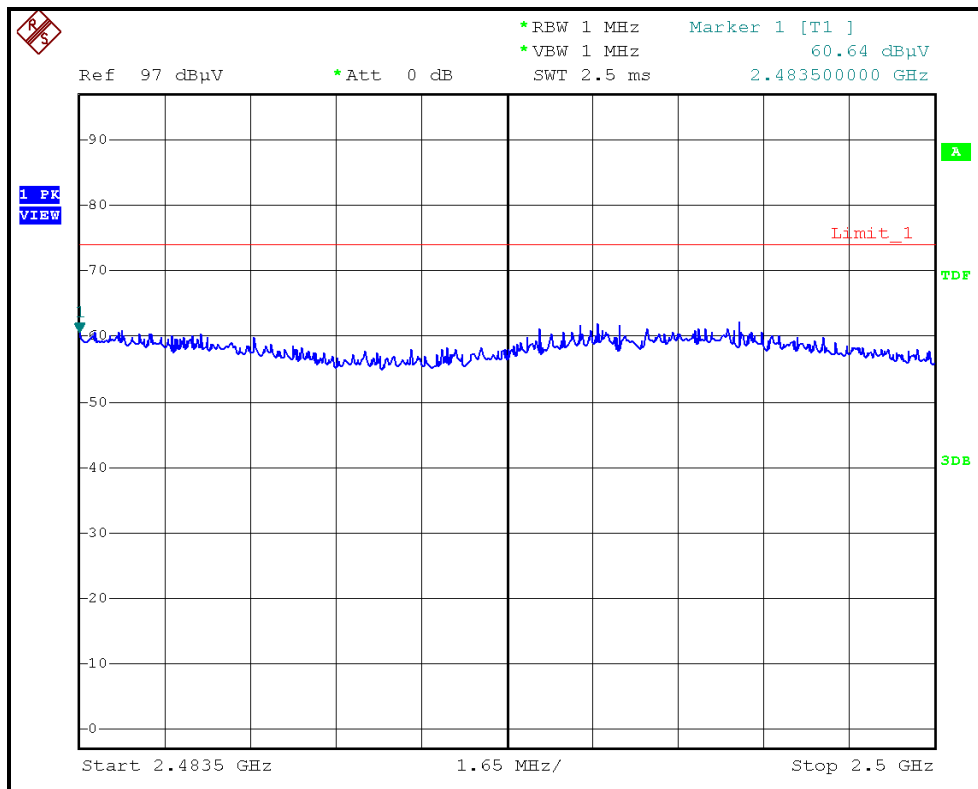

RESTRICTED BANDEDGE (DRAFT 802.11n (40MHz) MODE,CH7, VERTICAL)

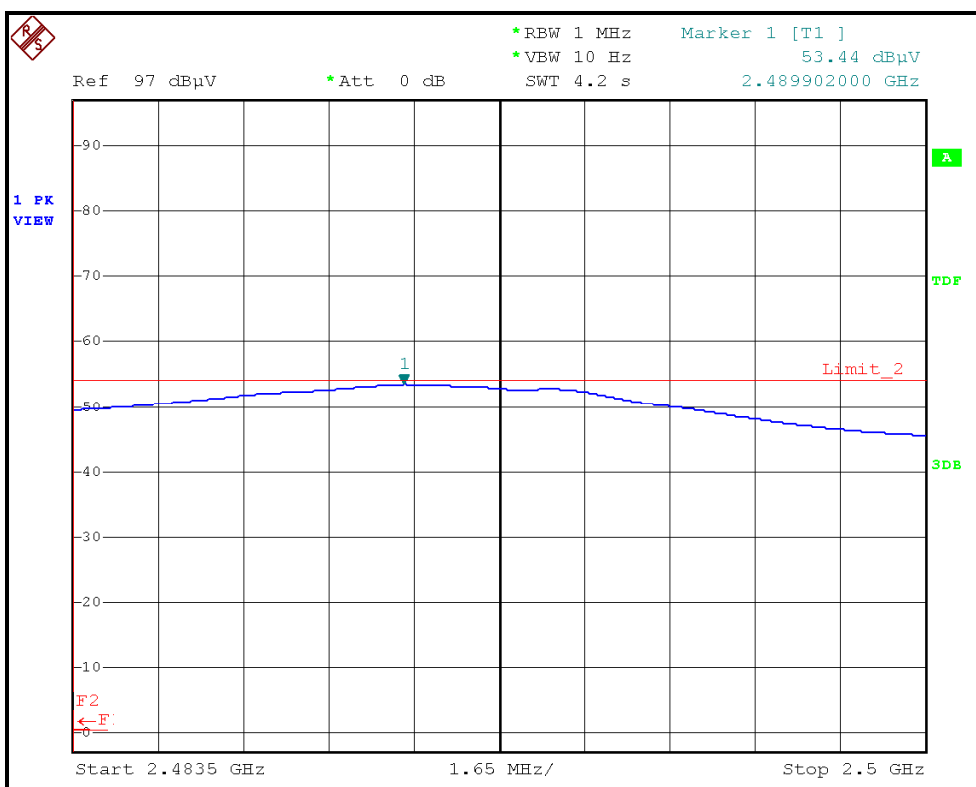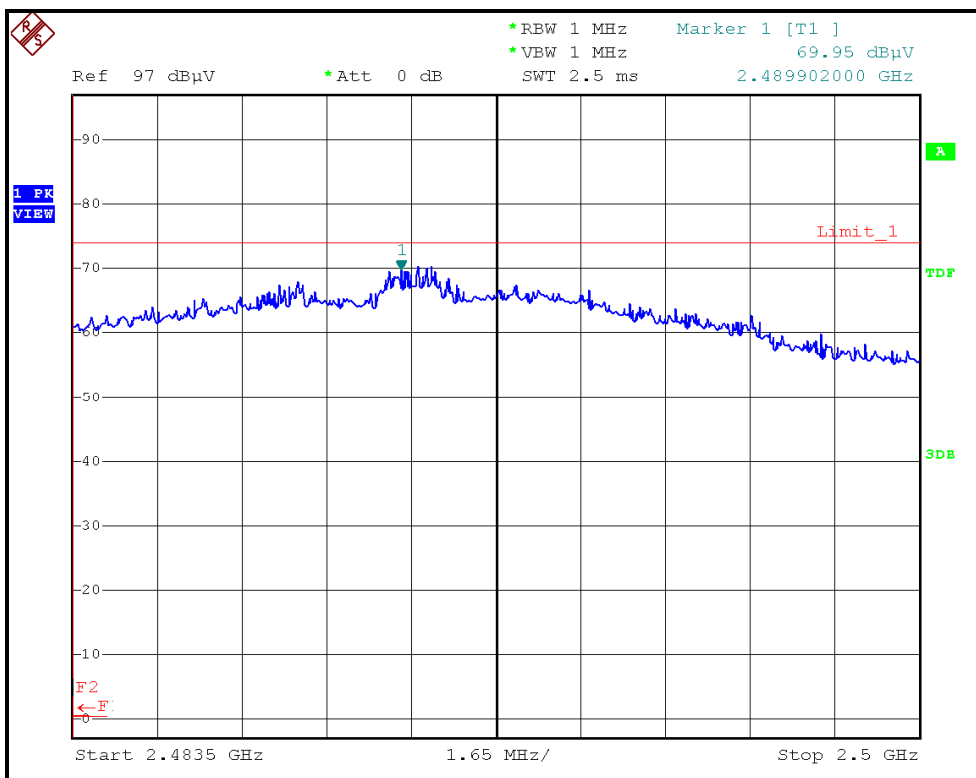

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 09, 2008	Dec. 08, 2009

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.7 TEST RESULTS

802.11b DSSS MODULATION:


MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Phoenix Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	9.69	0.5	PASS
6	2437	10.23	0.5	PASS
11	2462	10.17	0.5	PASS


CH1

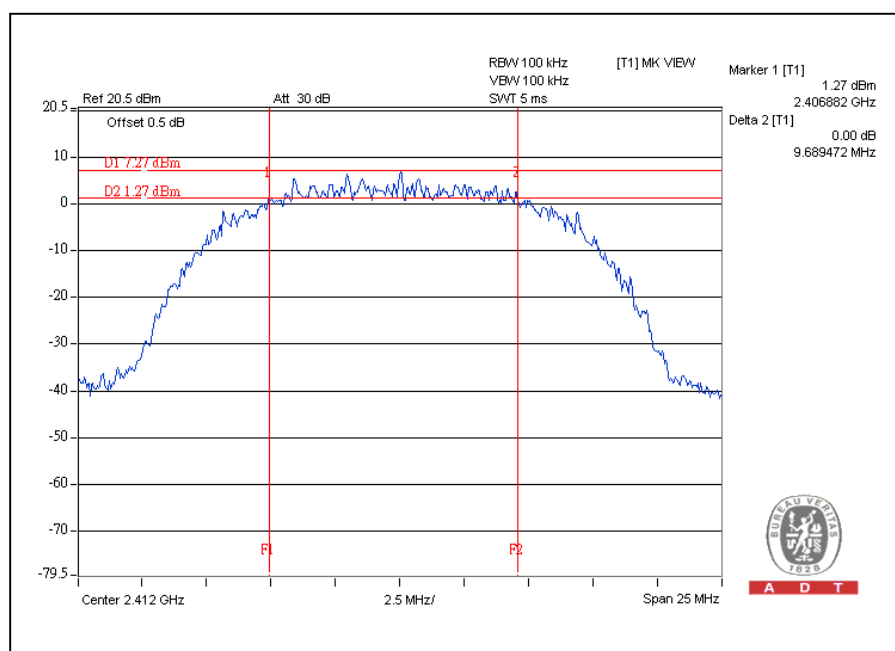

CH6

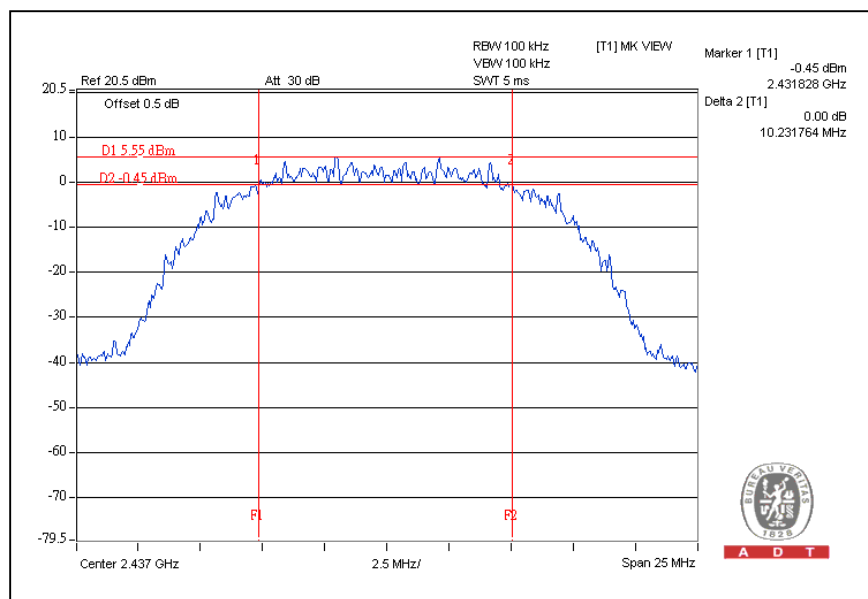

CH11

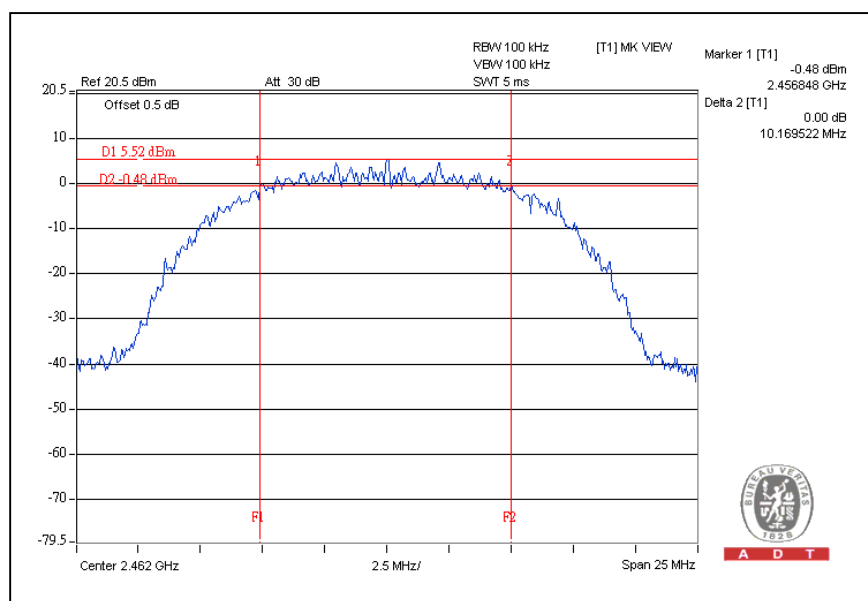


802.11g OFDM MODULATION:


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Phoenix Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	15.86	0.5	PASS
6	2437	16.33	0.5	PASS
11	2462	16.03	0.5	PASS


CH1

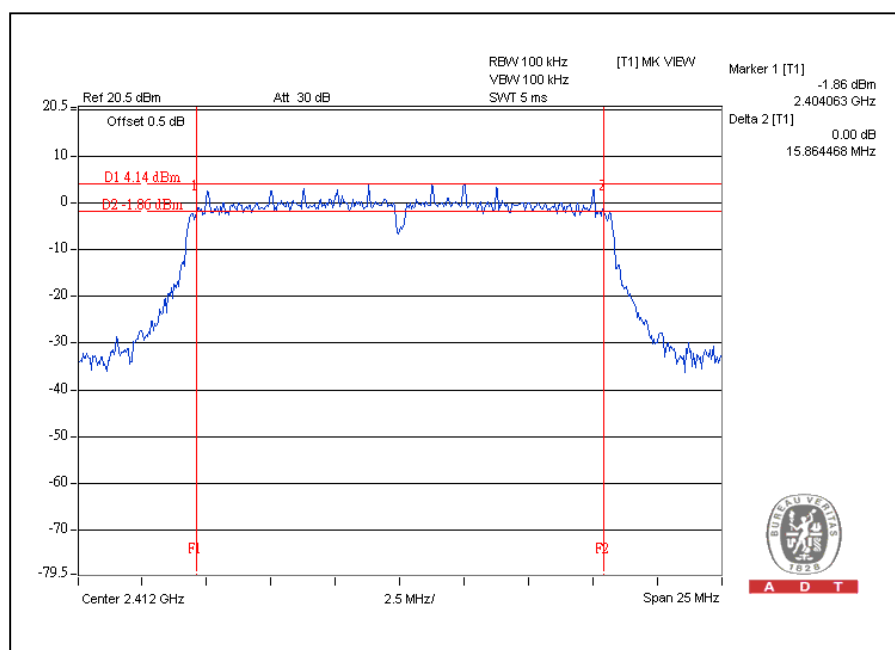

CH6

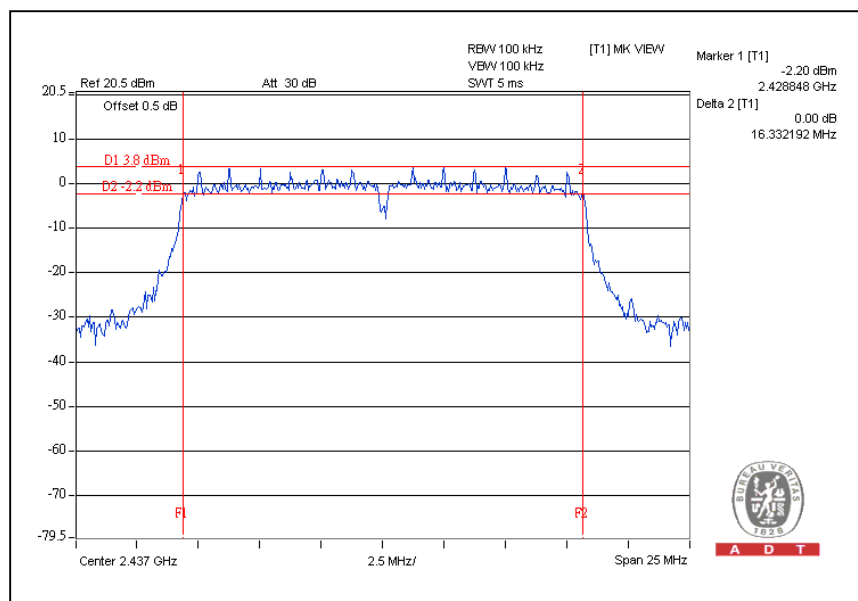

CH11

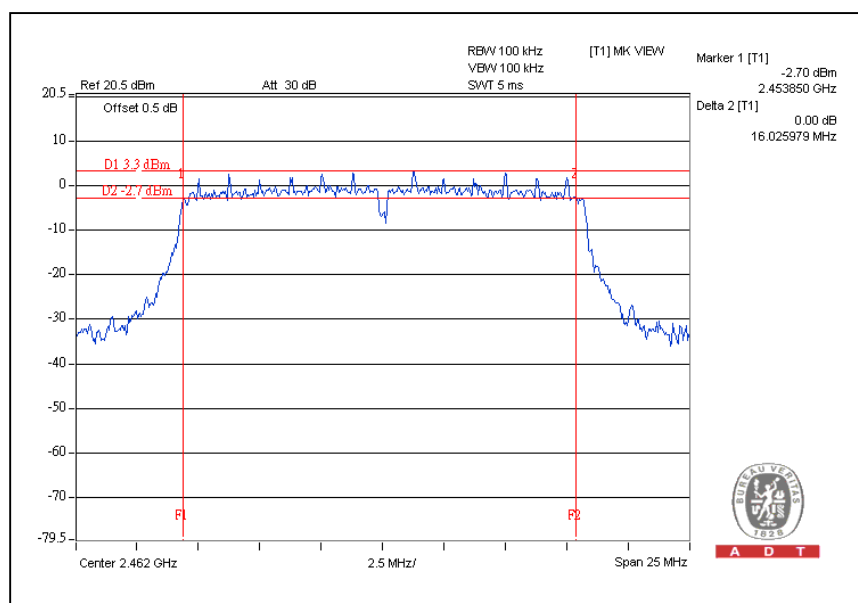


DRAFT 802.11n (20MHz) OFDM MODULATION:


MODULATION TYPE	BPSK	TRANSFER RATE	7.2Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 54%RH, 965hPa
TESTED BY	Phoenix Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN(0)	CHAIN(1)		
1	2412	16.14	15.45	0.5	PASS
6	2437	16.37	16.40	0.5	PASS
11	2462	16.63	16.35	0.5	PASS


For Chain(0): CH1

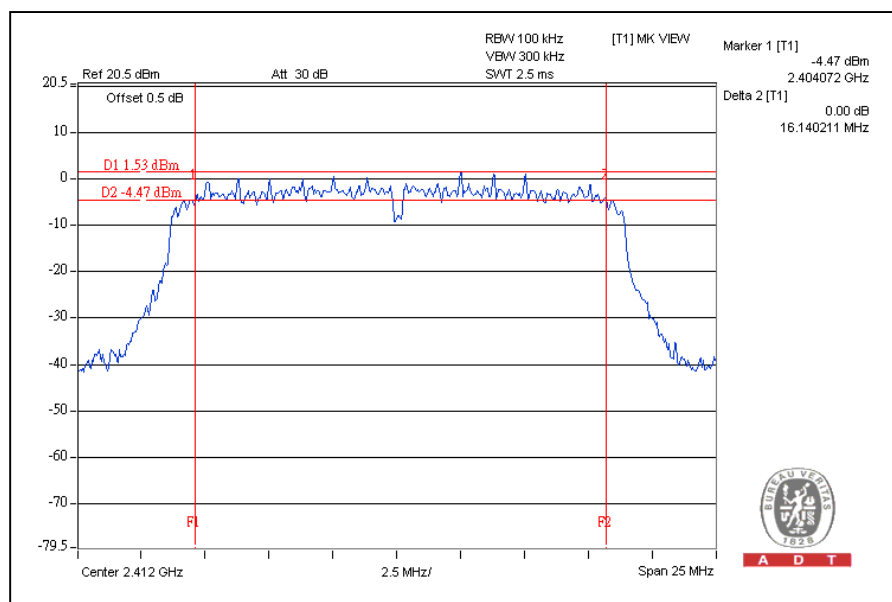


CH6

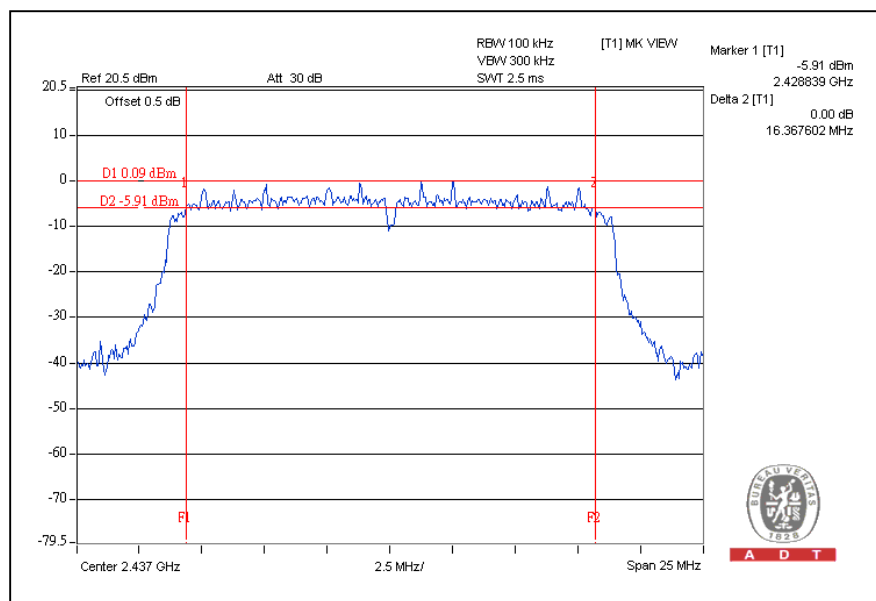


CH11

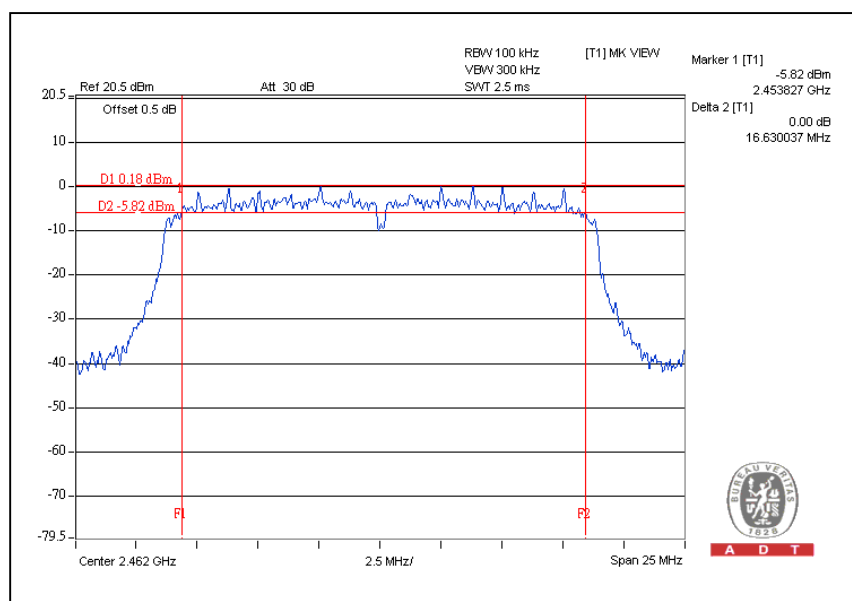

For CHAIN(1): CH1

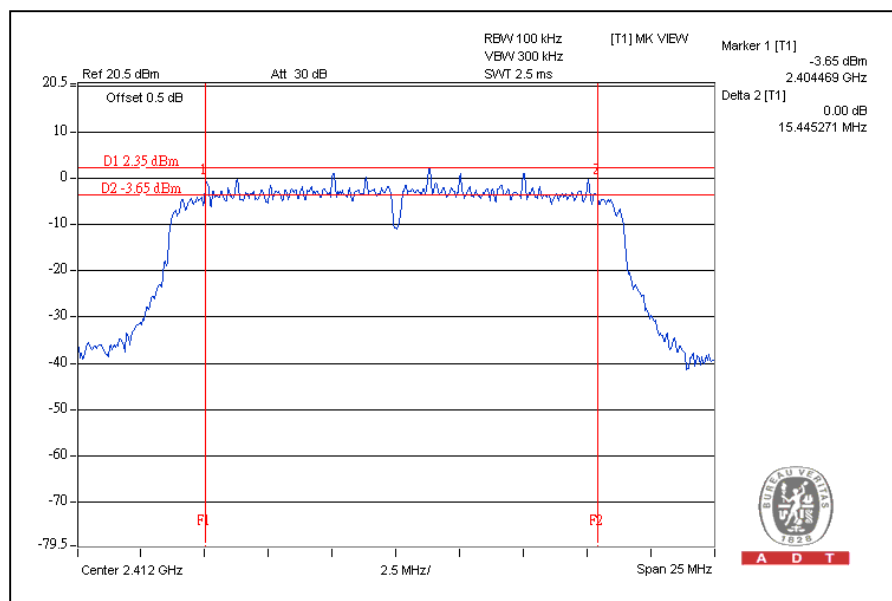


CH6

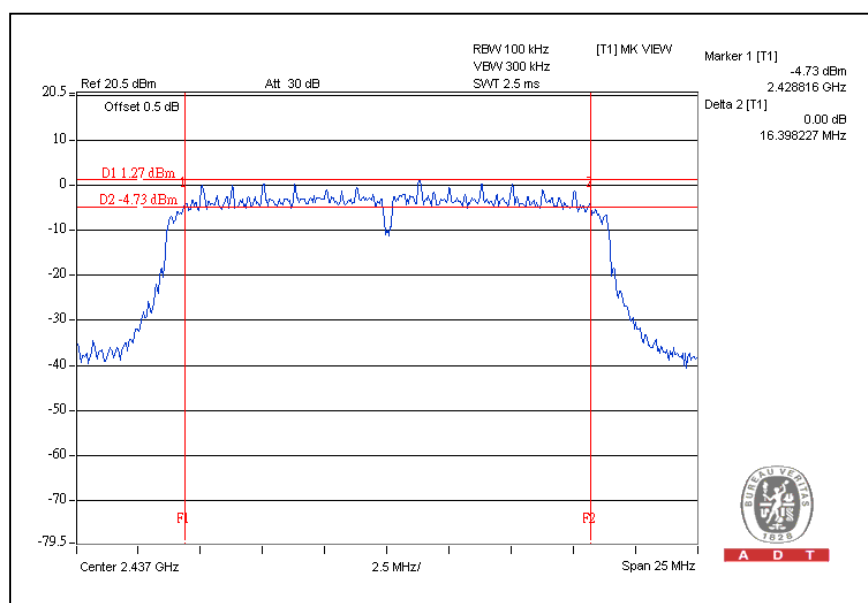



A D T

CH11

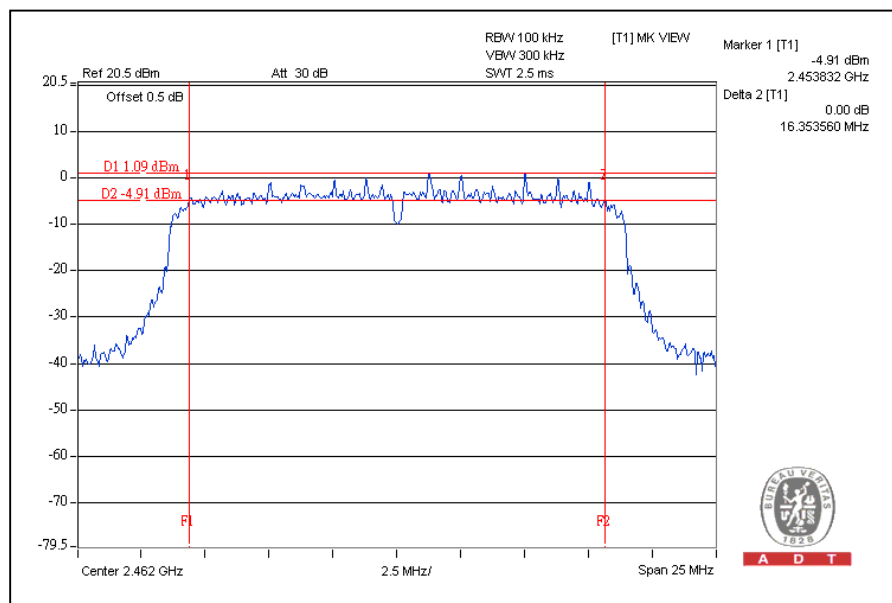


DRAFT 802.11n (40MHz) OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	15Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Phoenix Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN(0)	CHAIN(1)		
1	2422	35.13	33.67	0.5	PASS
4	2437	35.25	35.18	0.5	PASS
7	2452	35.22	35.2	0.5	PASS


For Chain (0): CH1

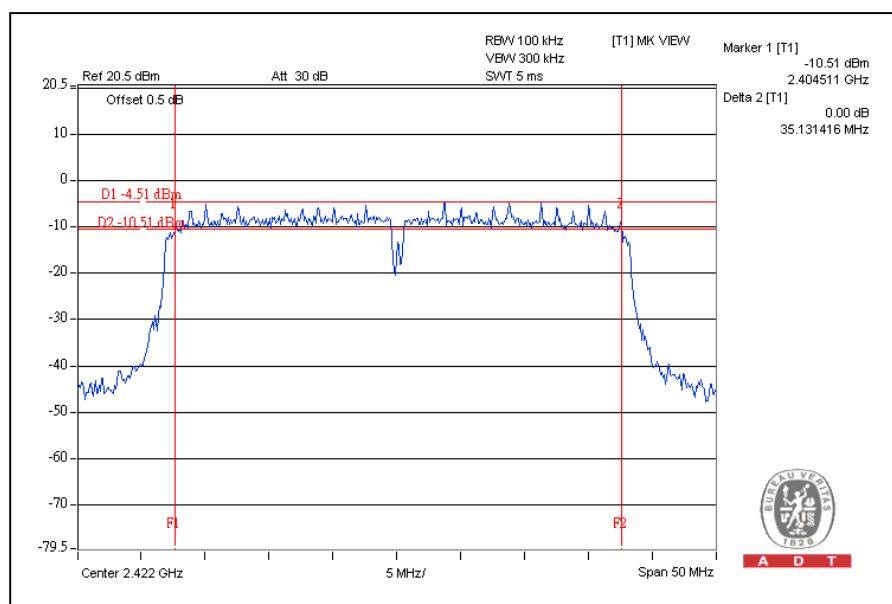




A D T


CH4

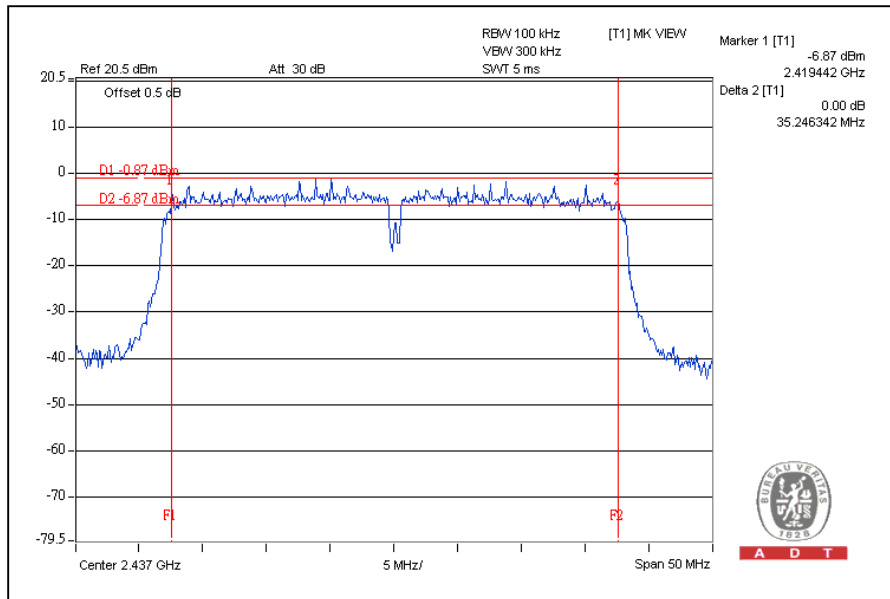


CH7

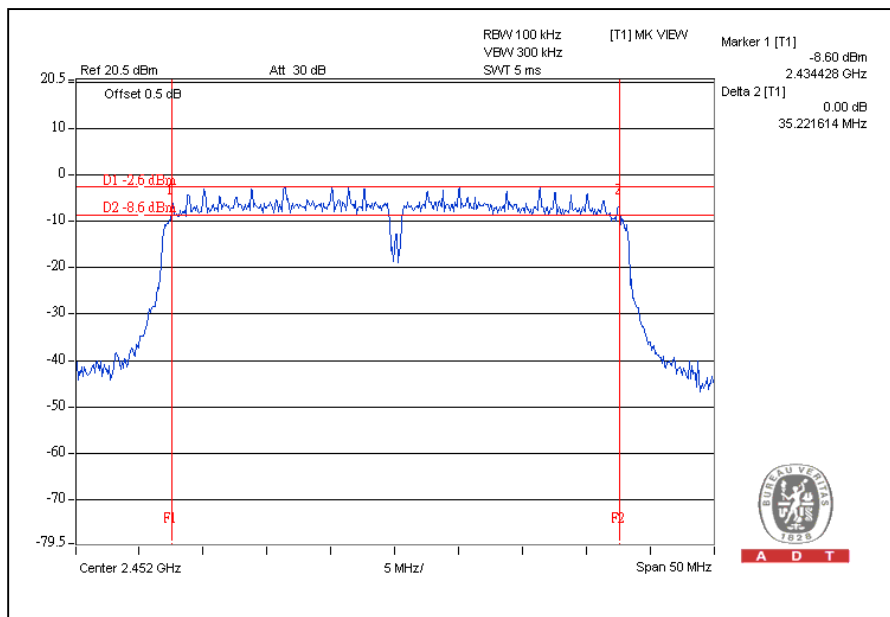

For Chain (1): CH1

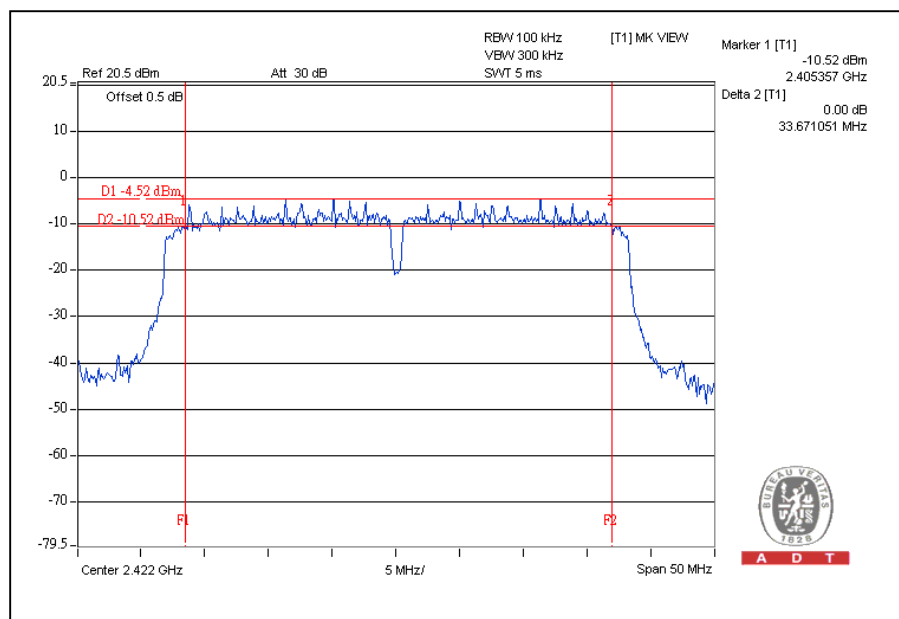


CH4

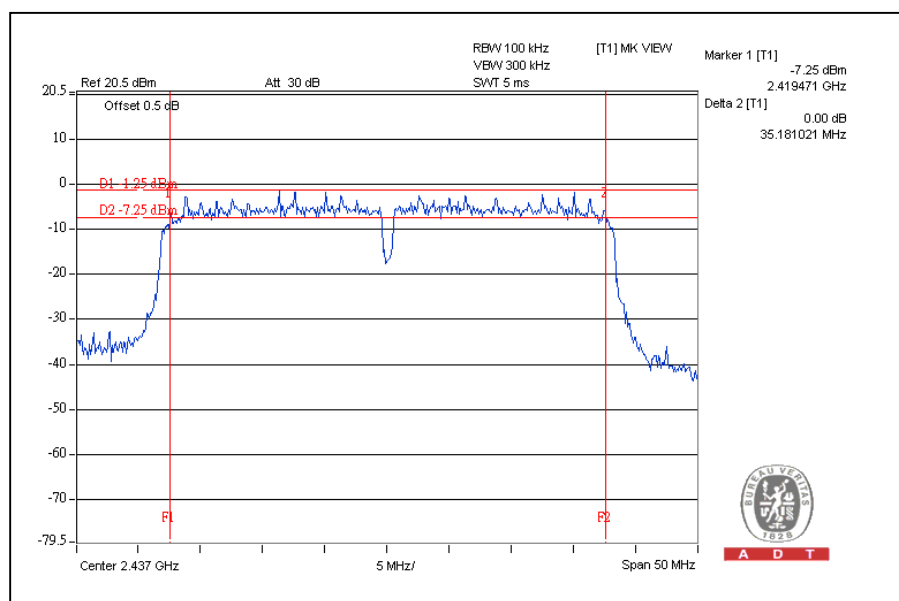



A D T

CH7

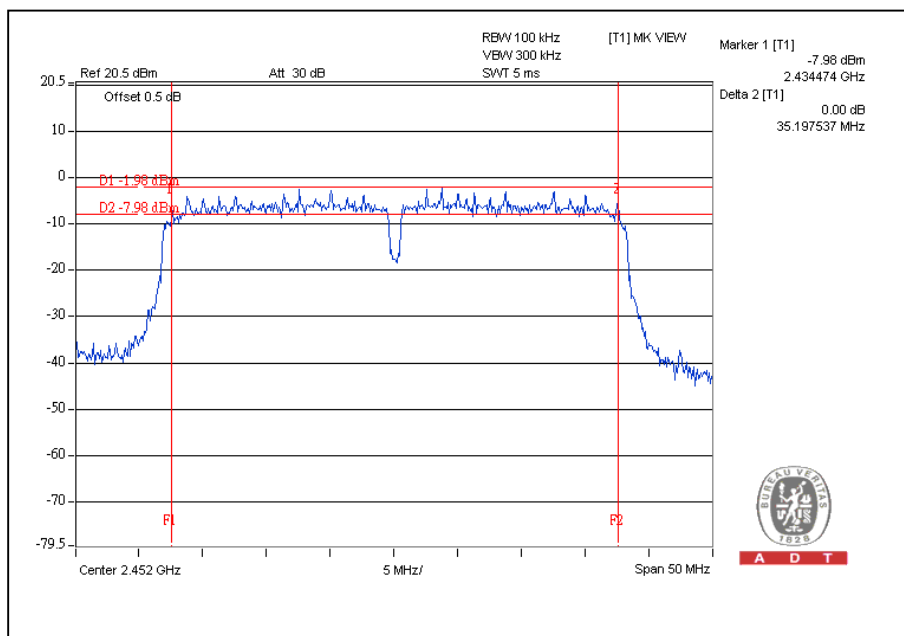

A D T

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

Description & Manufacturer	Model no.	Serial No.	Calibrated date	Calibrated Until
Anritsu Power Meter	ML2495A	0824006	April 25, 2009	April 24, 2010
Pulse Power Sensor	MA2411B	0738172	April 25, 2009	April 24, 2010

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

1. The transmitter output was connected to the power meter through an attenuator; the bandwidth of the fundamental frequency was measured with the power meter.
2. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

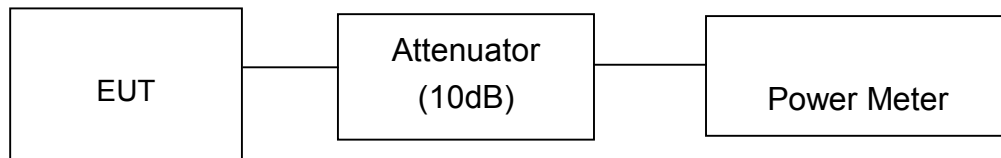

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.2.6

4.4.7 TEST RESULTS

802.11b DSSS MODULATION:

MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Phoenix Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER OUTPUT (mW)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2412	18.70	74.131	30	PASS
6	2437	18.10	64.565	30	PASS
11	2462	18.60	72.444	30	PASS

802.11g OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Phoenix Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER OUTPUT (mW)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2412	25.10	323.594	30	PASS
6	2437	24.70	295.121	30	PASS
11	2462	24.30	269.153	30	PASS



A D T

DRAFT 802.11n (20MHz) OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	7.2Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 54%RH, 965hPa
TESTED BY	Phoenix Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)		PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)	CHAIN(0)	CHAIN(1)				
1	2412	204.174	194.984	23.10	22.90	399.158	26.01	30	PASS
6	2437	147.911	151.356	21.70	21.80	299.267	24.76	30	PASS
11	2462	169.824	165.959	22.30	22.20	335.783	25.26	30	PASS

DRAFT 802.11n (40MHz) OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	15Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Phoenix Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)		PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)	CHAIN(0)	CHAIN(1)				
1	2422	89.125	87.096	19.50	19.40	176.221	22.46	30	PASS
4	2437	218.776	229.087	23.40	23.60	447.863	26.51	30	PASS
7	2452	223.872	218.776	23.50	23.40	442.648	26.46	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 09, 2008	Dec. 08, 2009

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

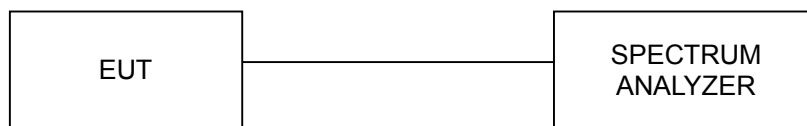

4.5.6 EUT OPERATING CONDITION

Same as Item 4.2.6


4.5.7 TEST RESULTS

802.11b DSSS MODULATION:


MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Phoenix Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	2412	-8.99	8	PASS
6	2437	-2.04	8	PASS
11	2462	-9.28	8	PASS


CH1

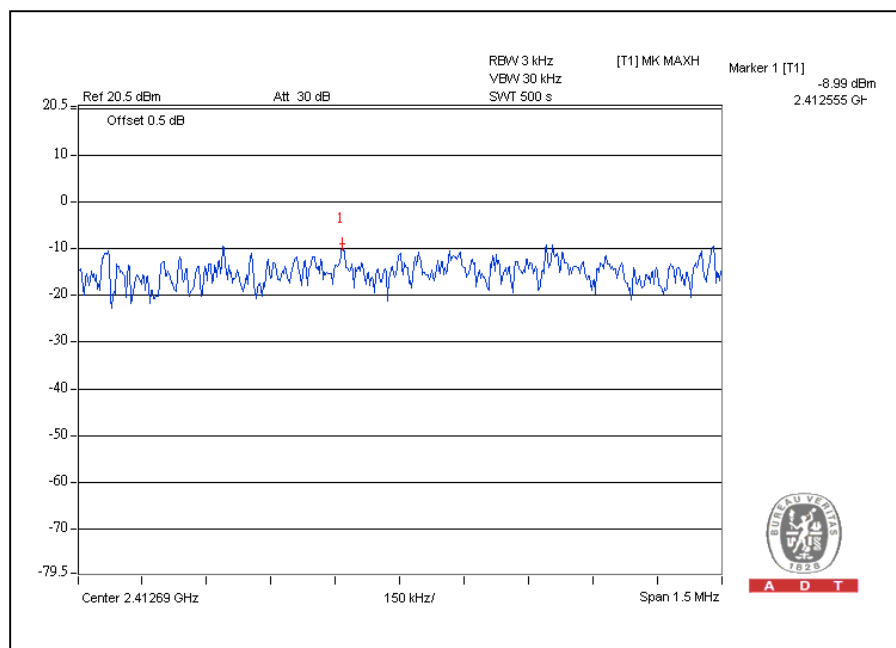

CH6

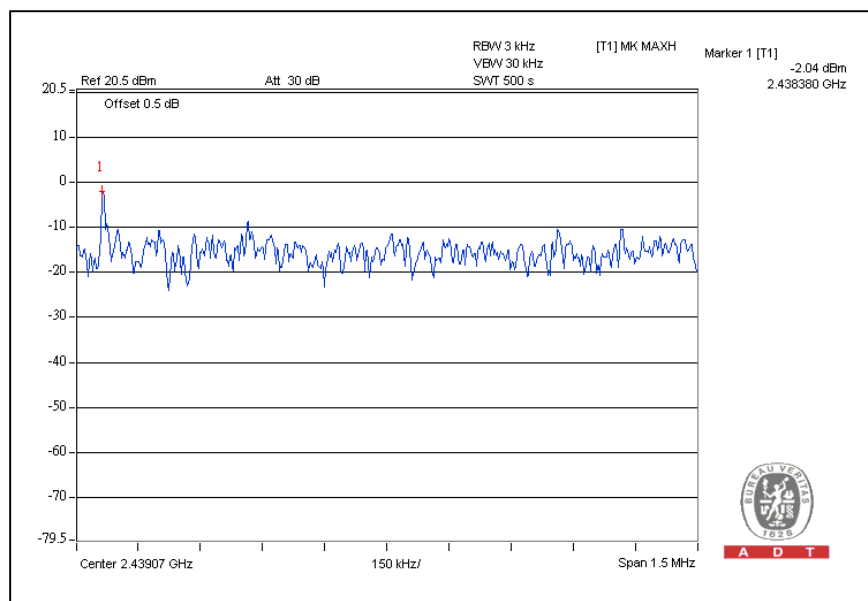

CH11

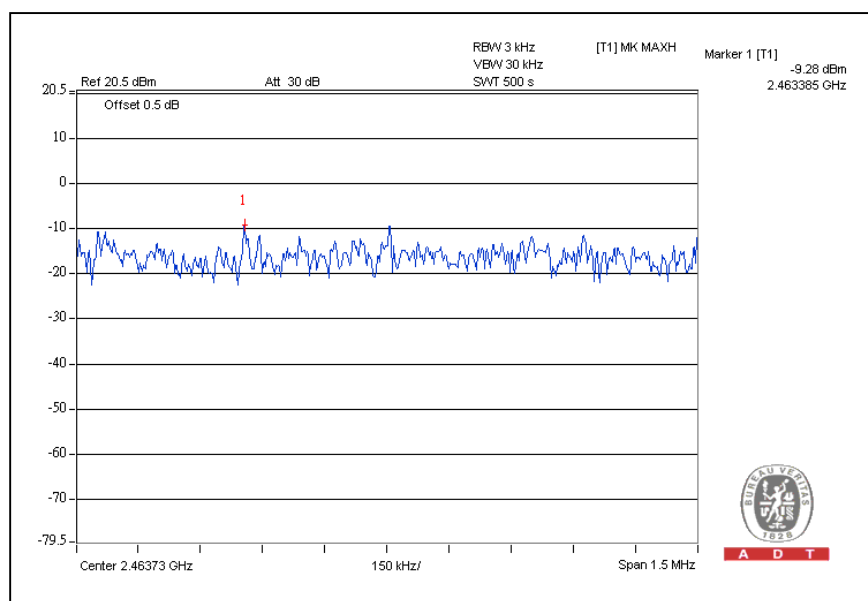


802.11g OFDM MODULATION:


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Phoenix Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	2412	-11.94	8	PASS
6	2437	-11.54	8	PASS
11	2462	-12.02	8	PASS


CH1

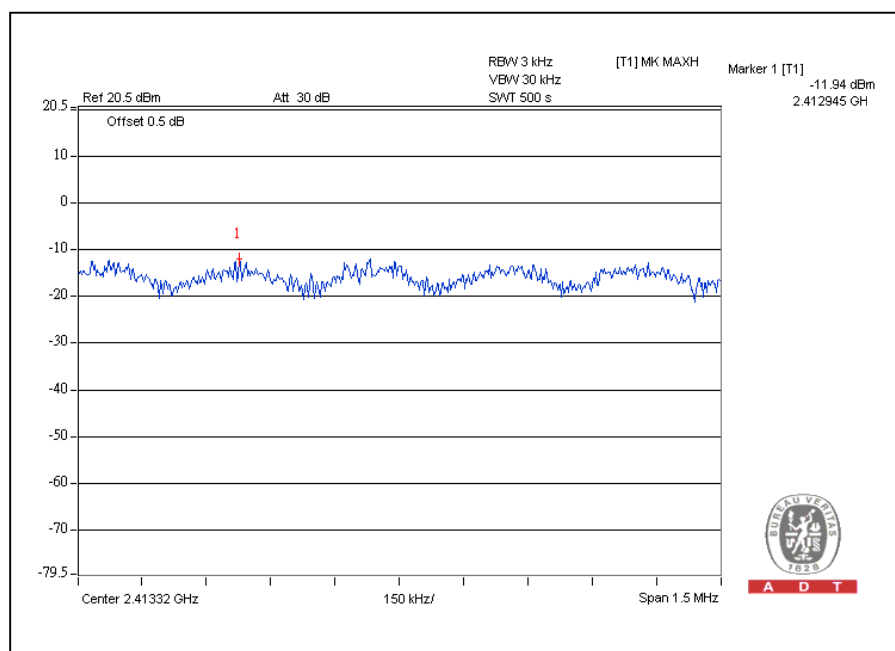

CH6

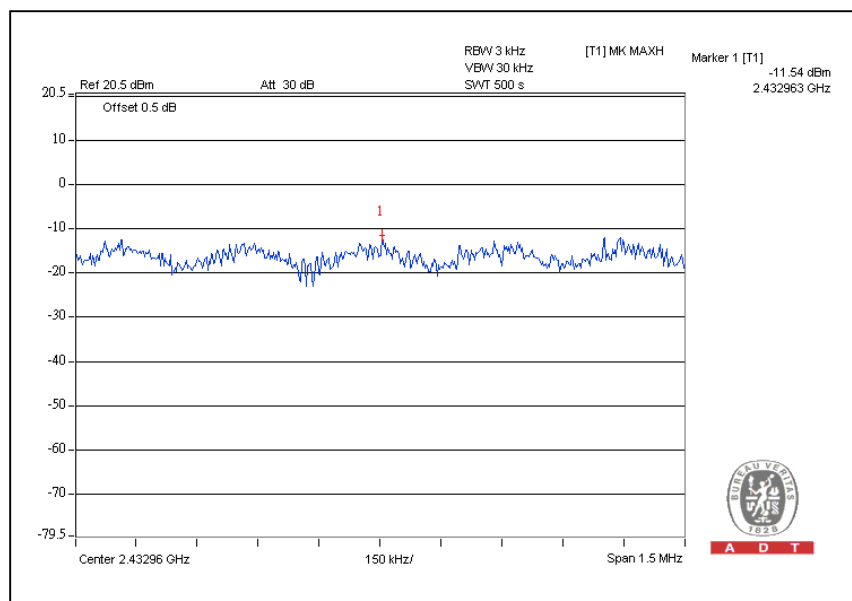

CH11

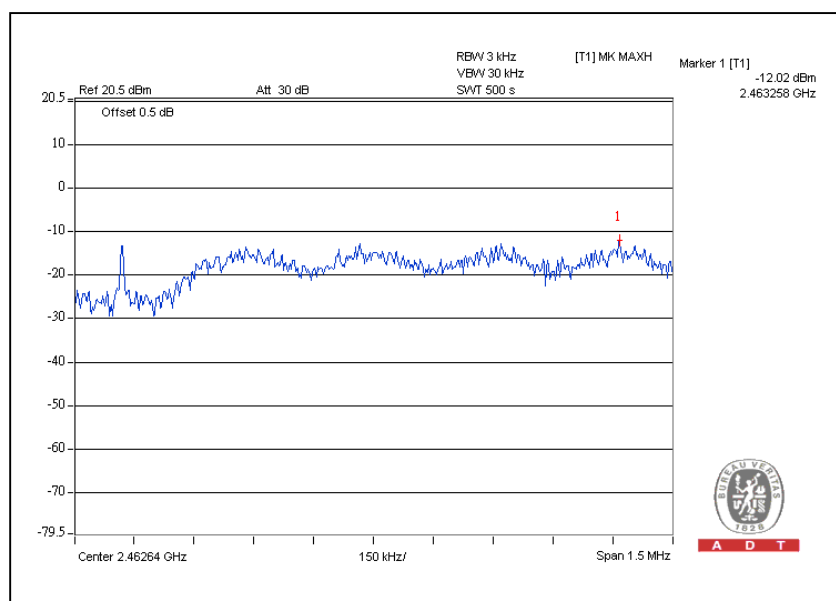


DRAFT 802.11n (20MHz) OFDM MODULATION:


MODULATION TYPE	BPSK	TRANSFER RATE	7.2Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 54%RH, 965hPa
TESTED BY	Phoenix Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (mW)		RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)	CHAIN(0)	CHAIN(1)				
1	2412	0.056	0.022	-12.51	-13.57	0.078	-11.08	8	PASS
6	2437	0.025	0.044	-16.06	-14.42	0.069	-11.61	8	PASS
11	2462	0.034	0.028	-14.67	-15.60	0.062	-12.08	8	PASS


For Chain(0): CH1

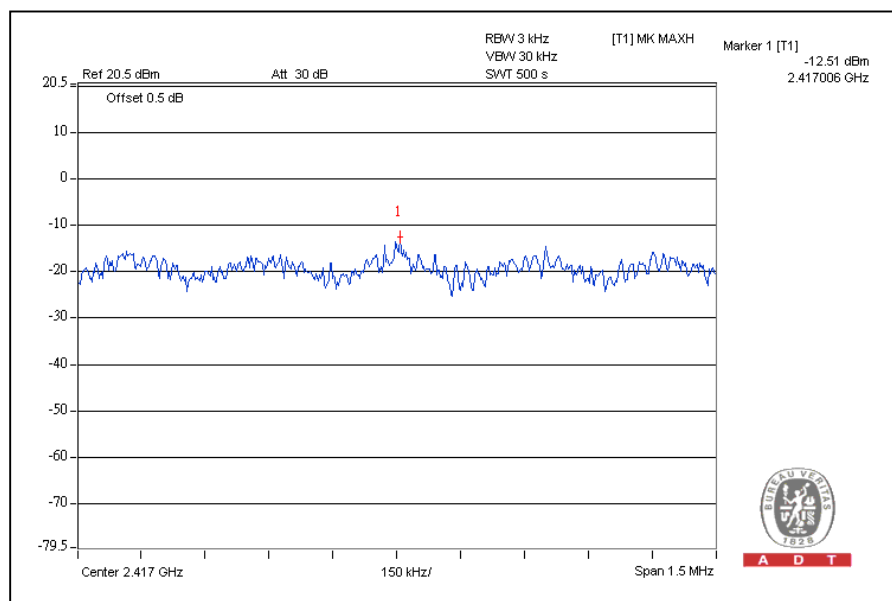


CH6

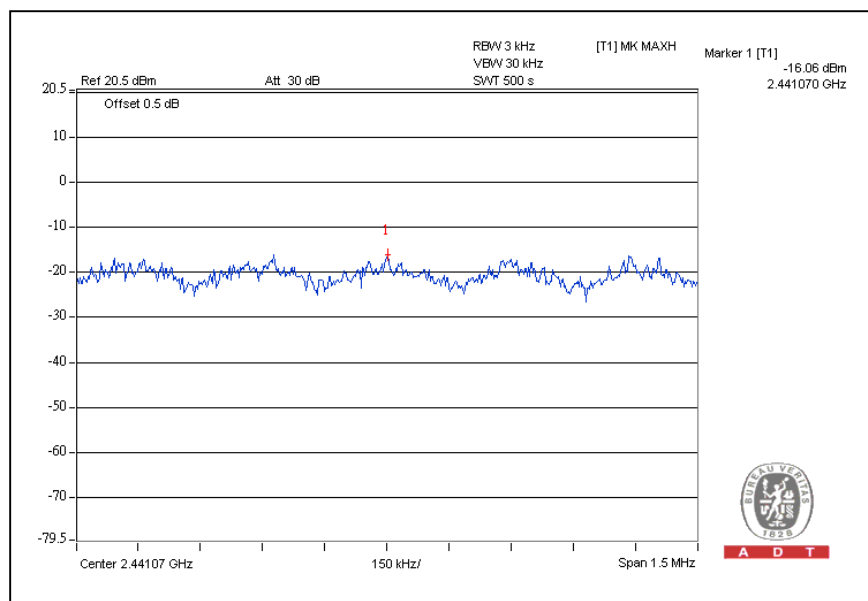


CH11

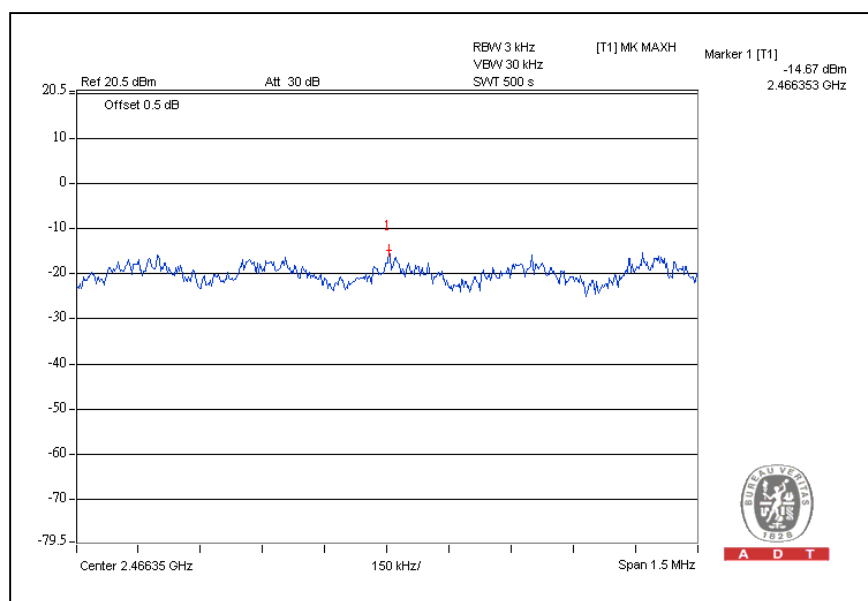

For Chain (1): CH1

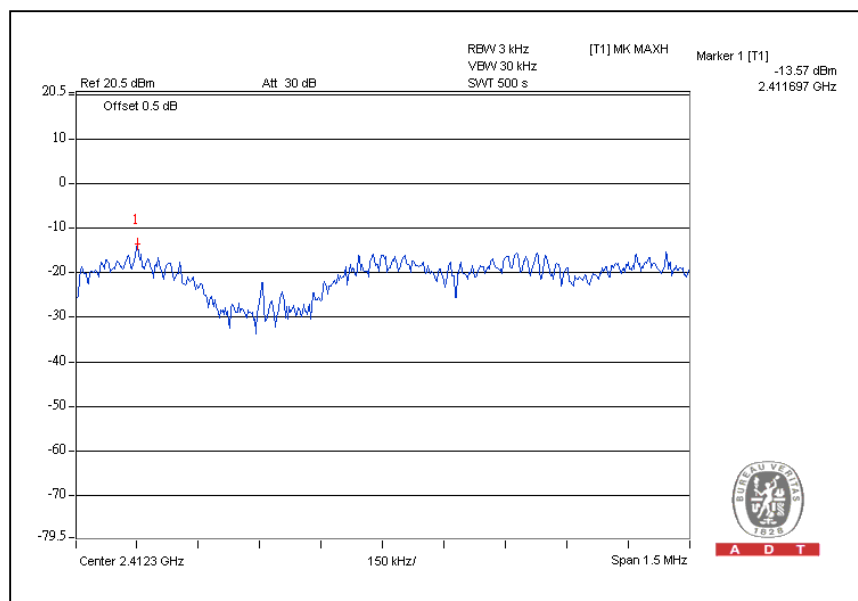


CH6

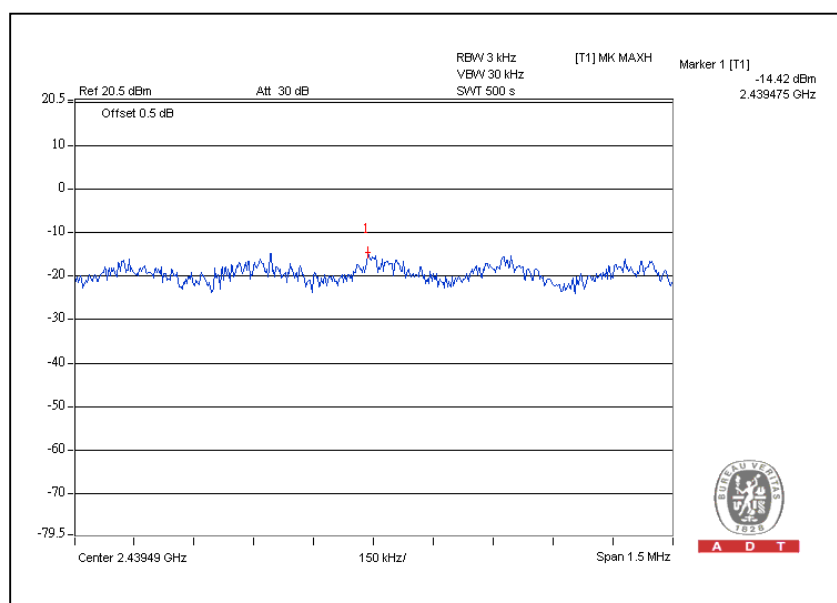



A D T

CH11

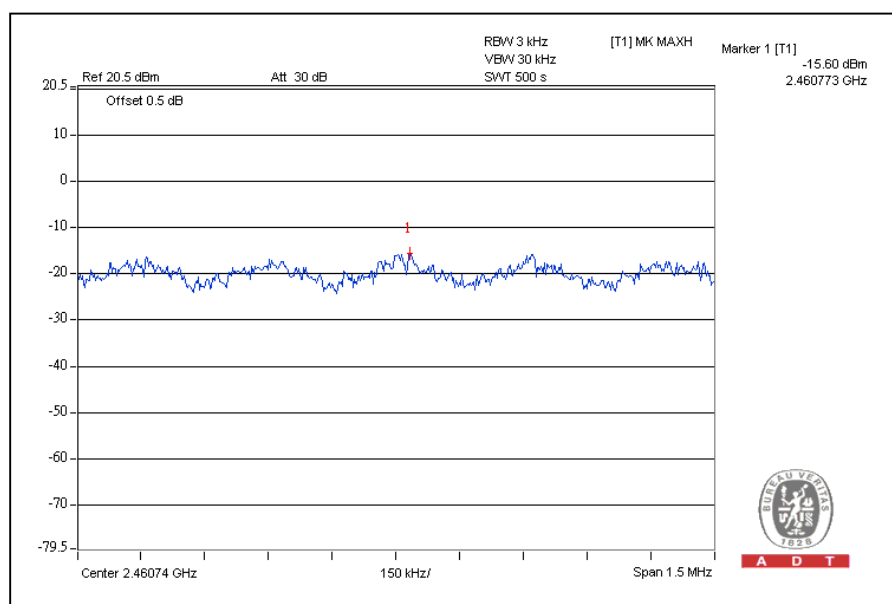


DRAFT 802.11n (40MHz) OFDM MODULATION:


MODULATION TYPE	BPSK	TRANSFER RATE	15Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Phoenix Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (mW)		RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)	CHAIN(0)	CHAIN(1)				
1	2422	0.017	0.012	-17.73	-19.35	0.029	-15.38	8	PASS
4	2437	0.029	0.024	-15.43	-16.11	0.053	-12.76	8	PASS
7	2452	0.025	0.015	-15.99	-18.32	0.040	-13.98	8	PASS


For Chain (0): CH1

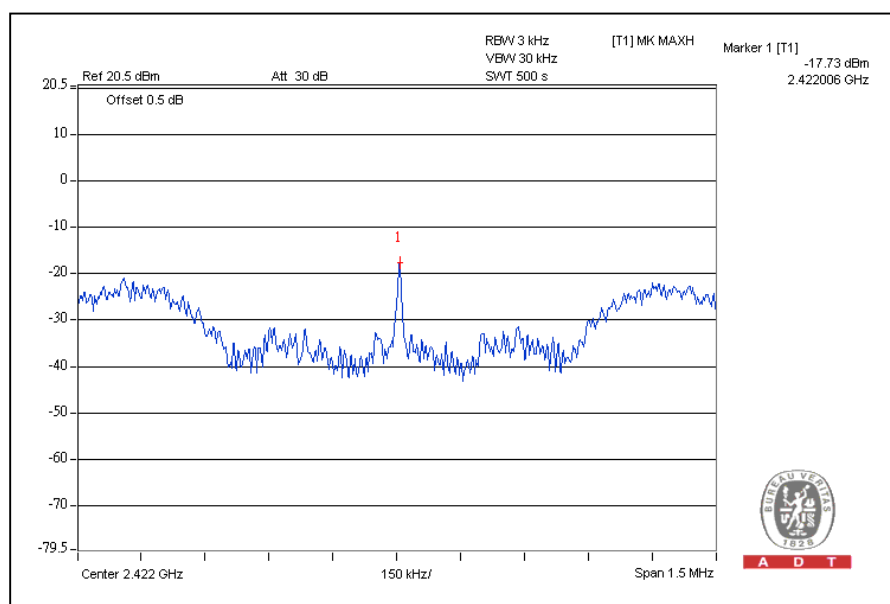


CH4

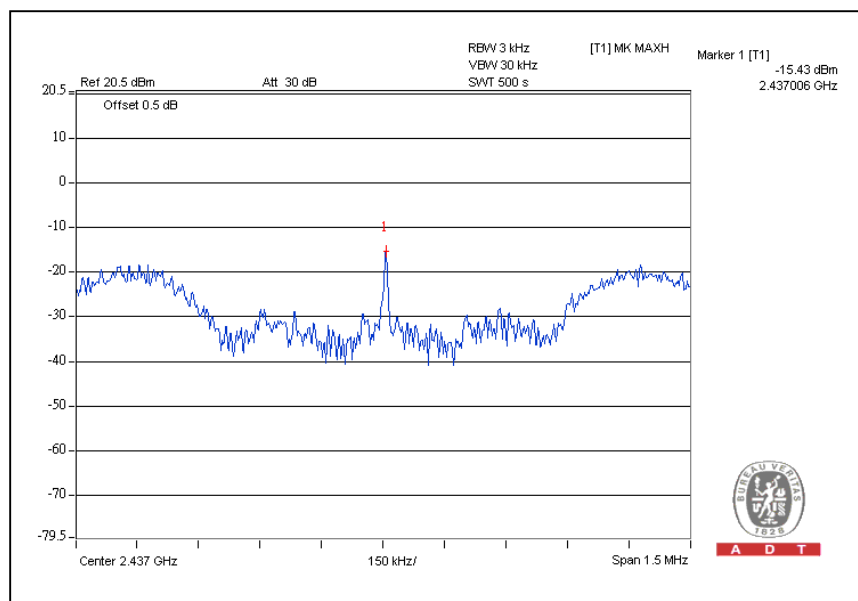


CH7

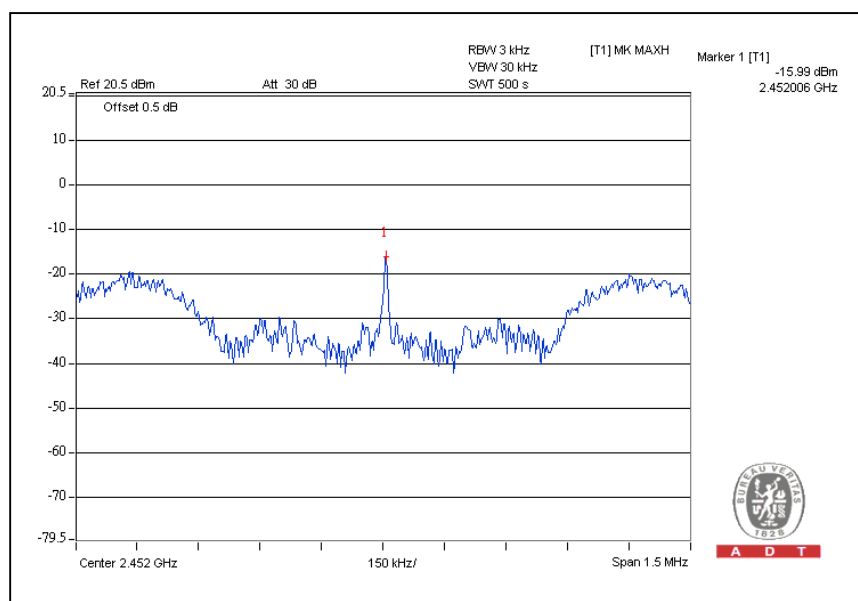

For Chain (1): CH1

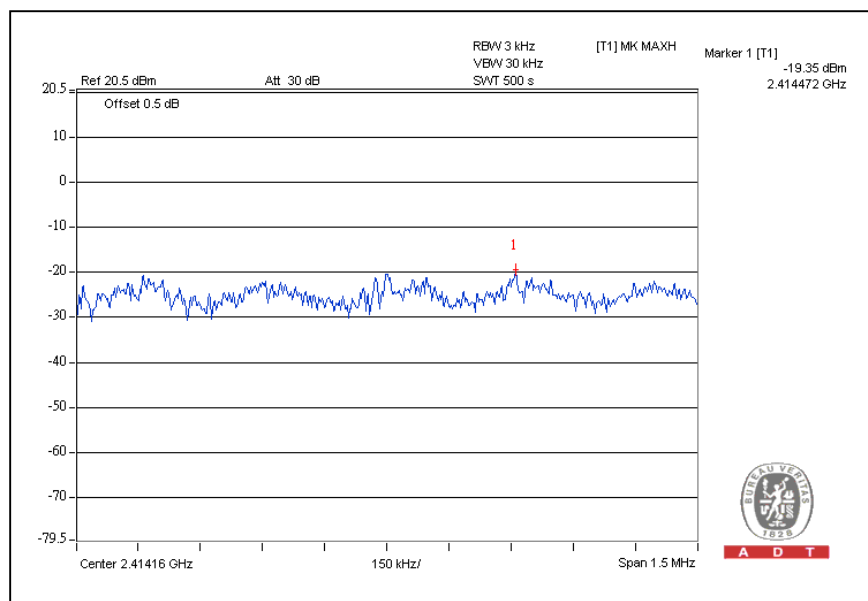


CH4

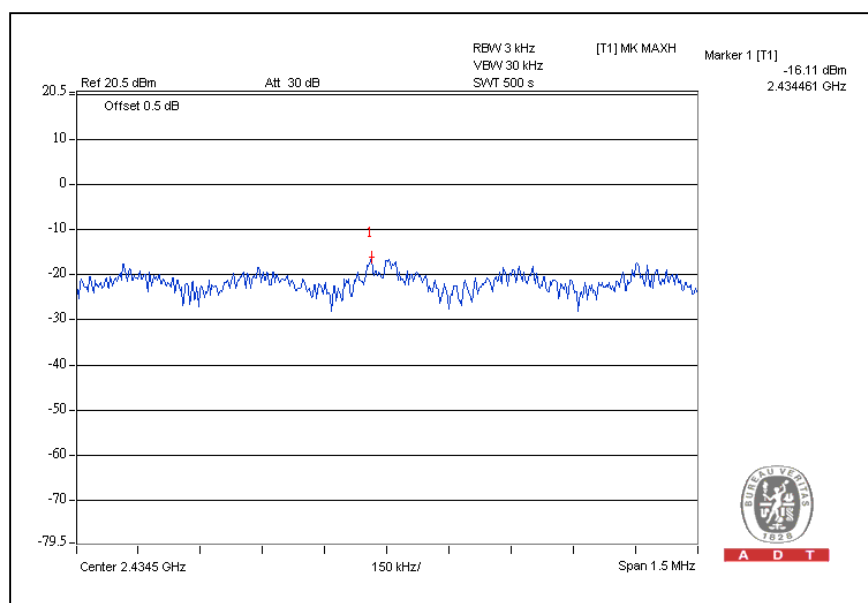



A D T

CH7

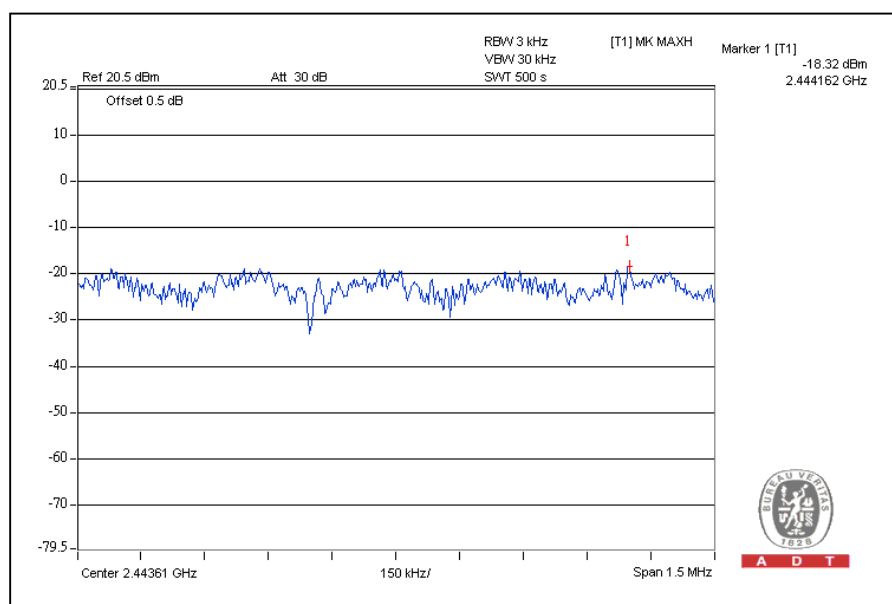

4.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 09, 2008	Dec. 08, 2009

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100kHz and 300kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (RBW = 100kHz and VBW = 300kHz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION


Same as Item 4.2.6

4.6.6 TEST RESULTS


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS MODULATION:


CH1

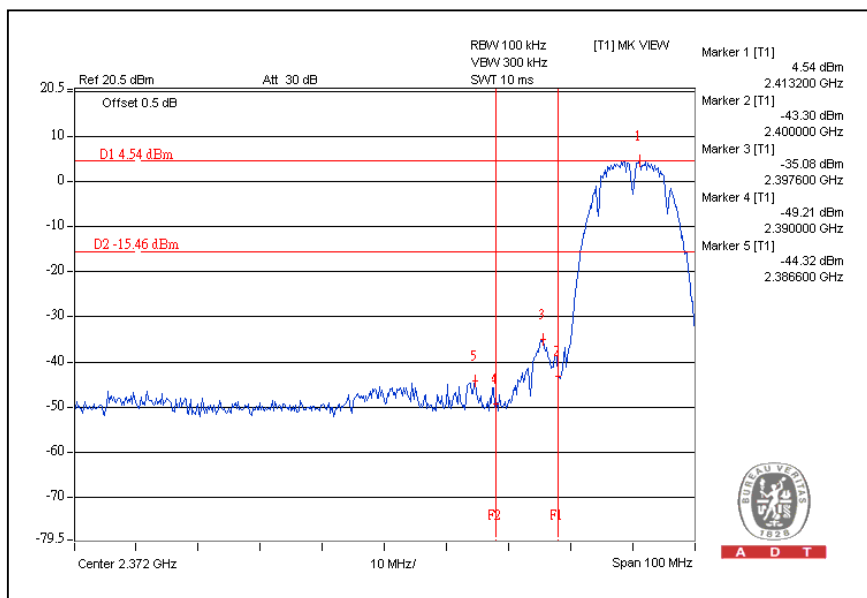


CH11

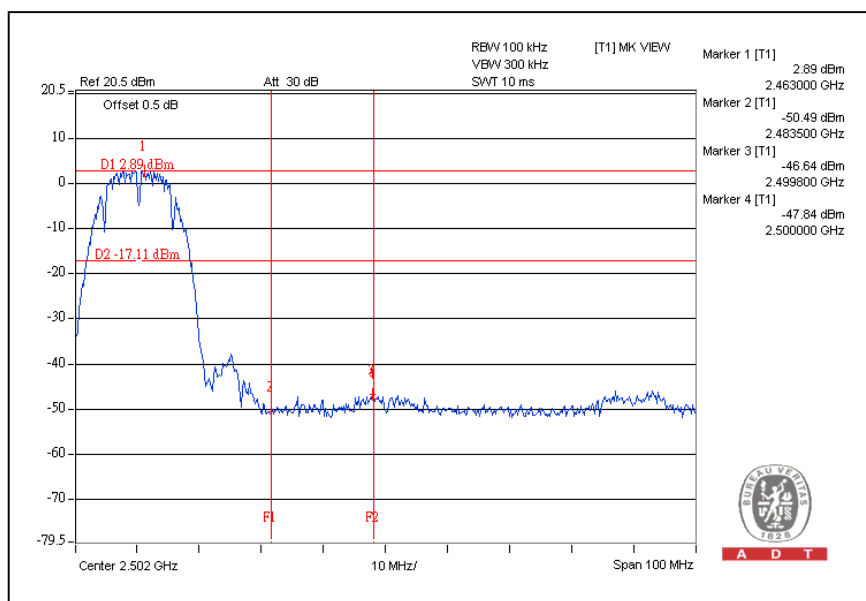

CH1

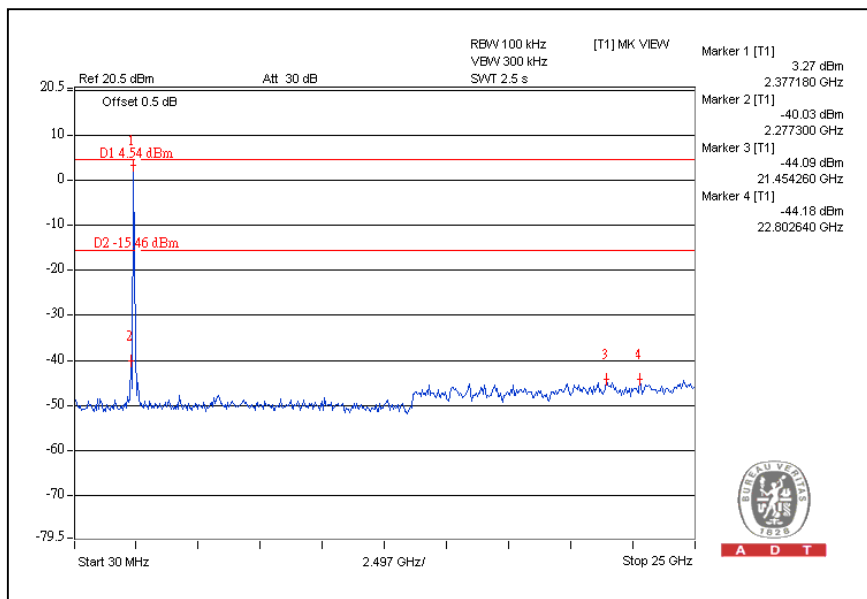


CH11

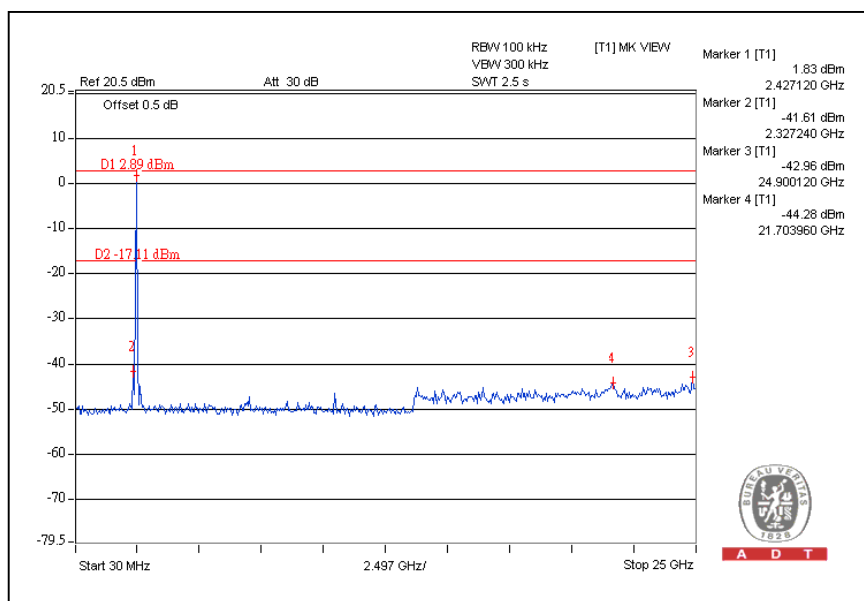


802.11g OFDM MODULATION:


CH 1

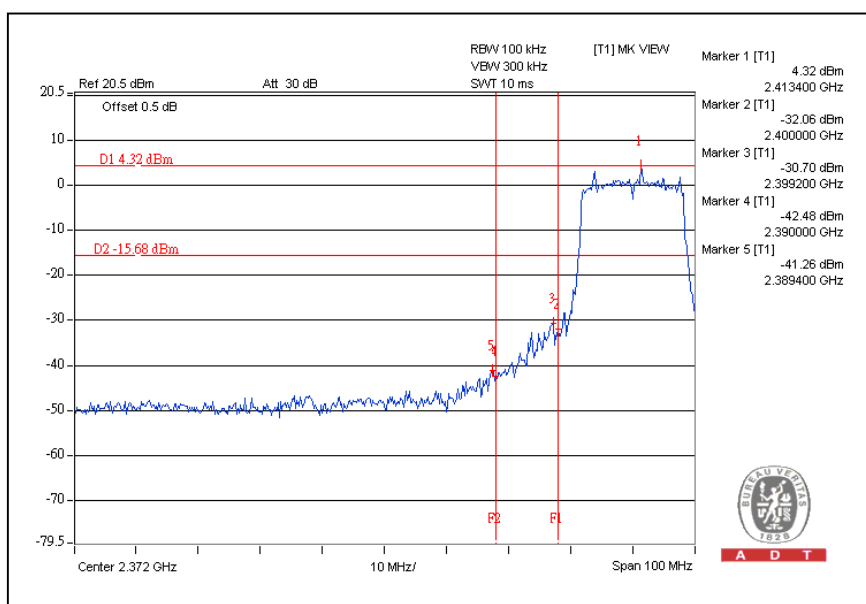


CH11

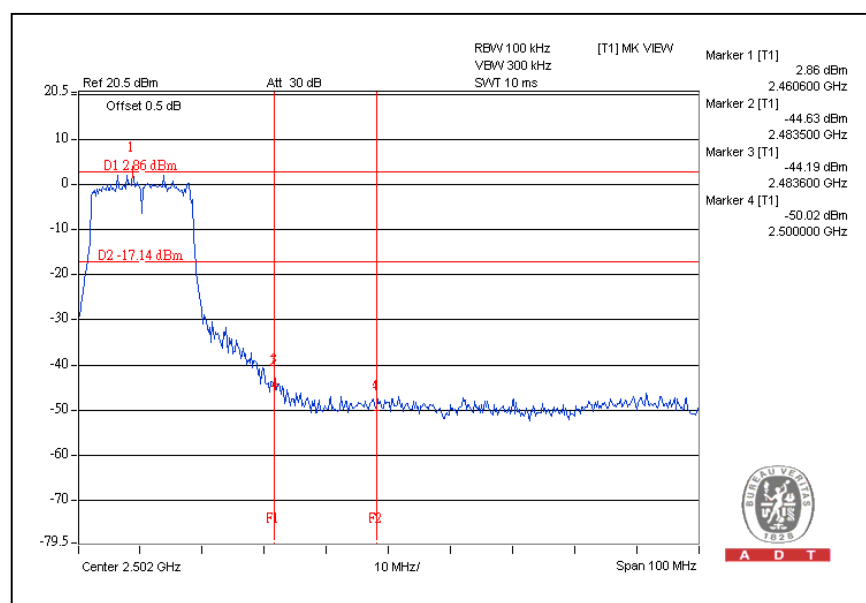


CH1

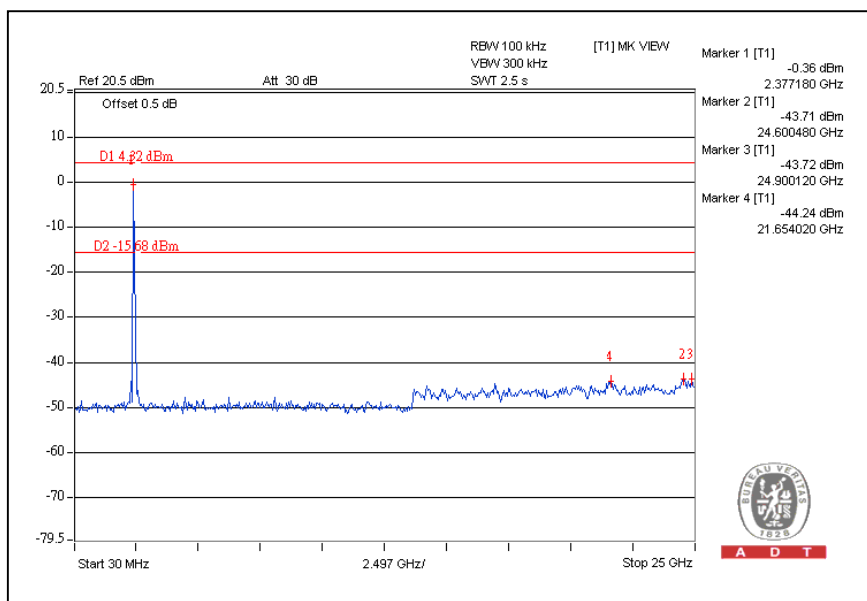


CH11

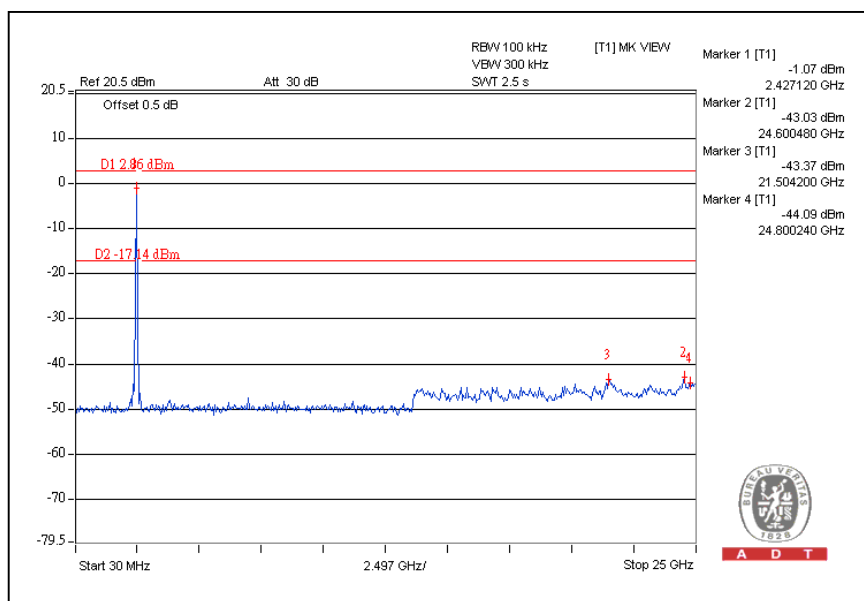


DRAFT 802.11n (20MHz) OFDM MODULATION: For Chain (0):CH1

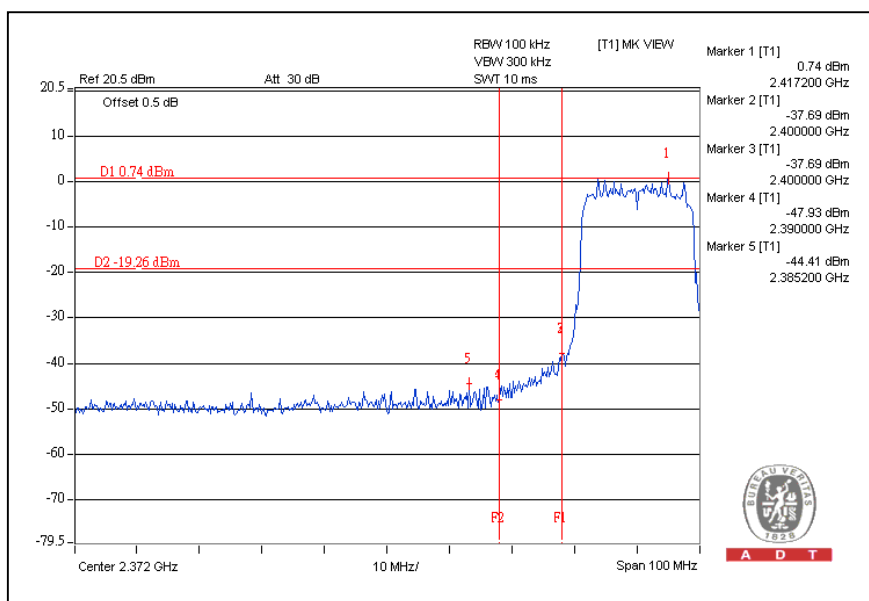


CH11

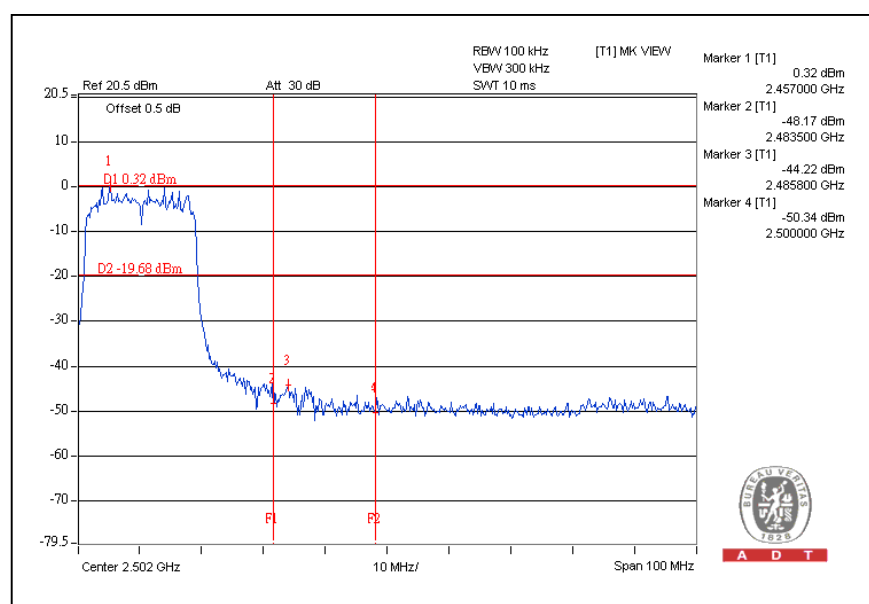


CH1

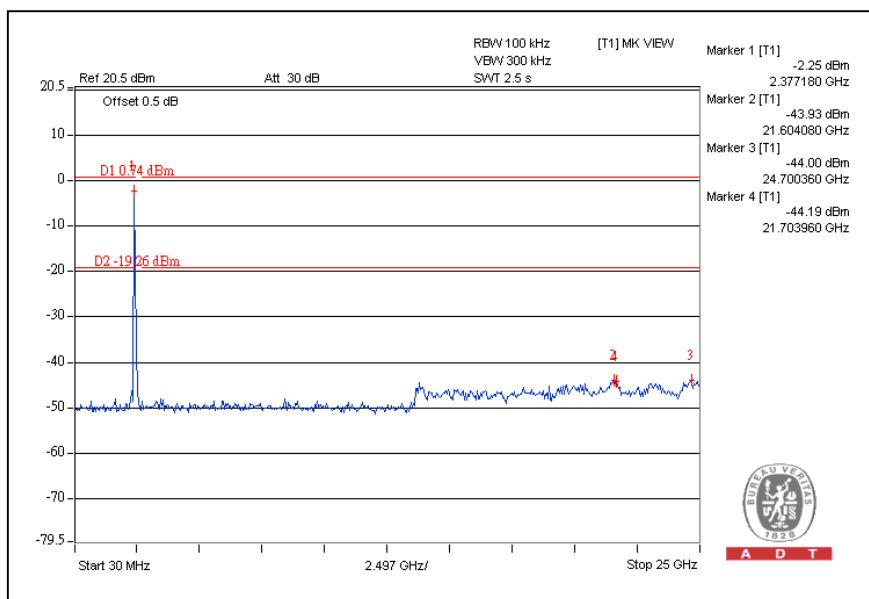


CH11

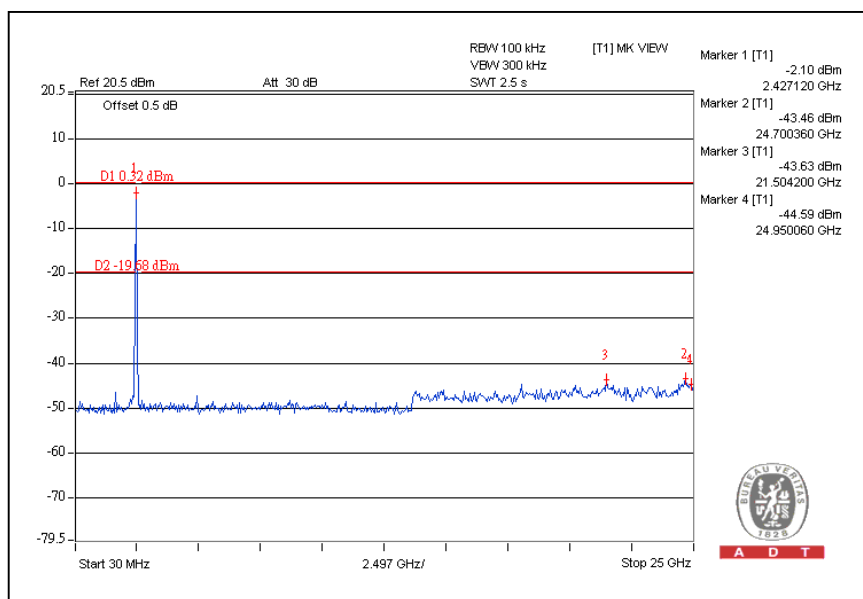


For Chain (1):CH1

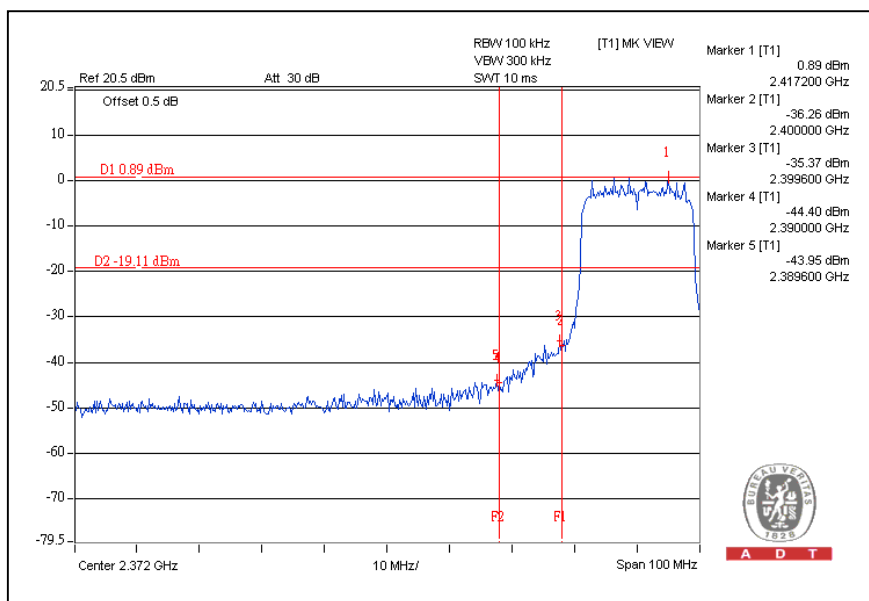


CH11

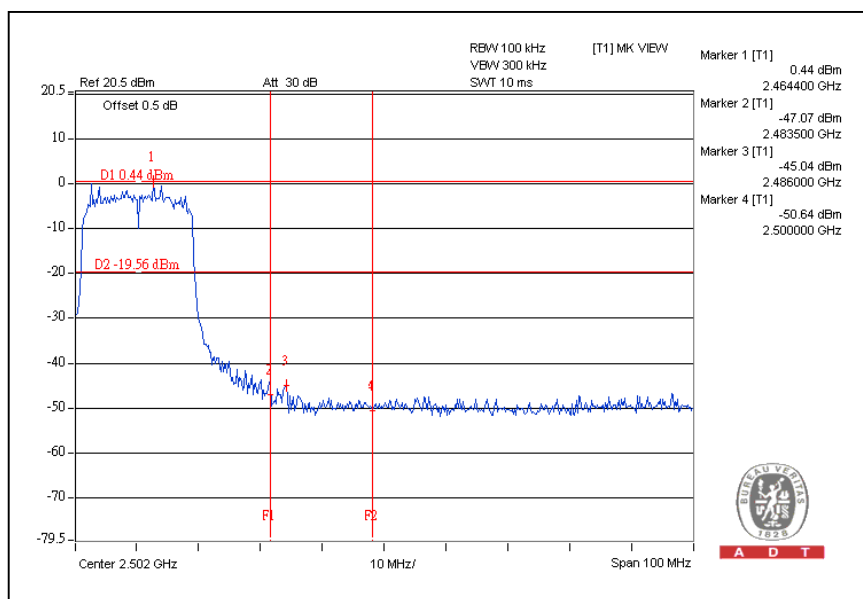


CH1

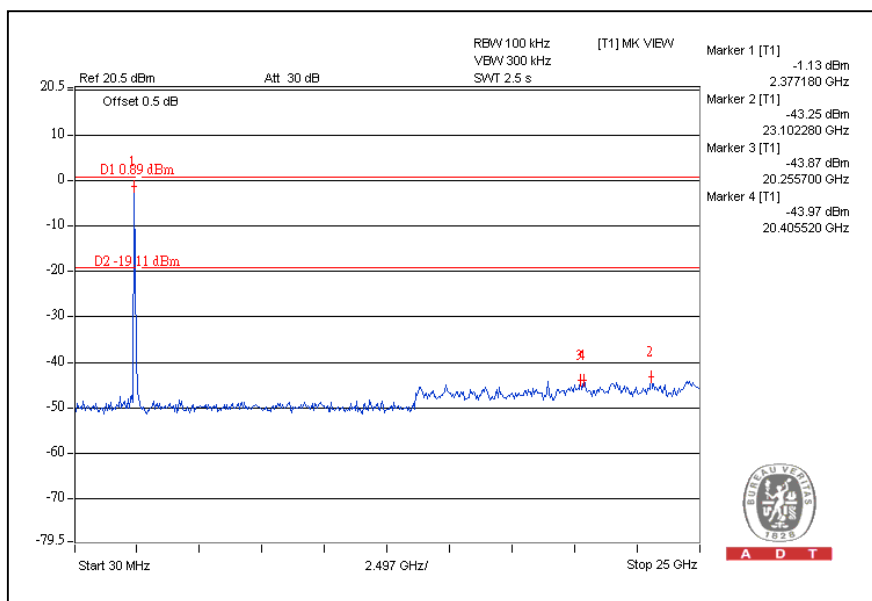


CH11

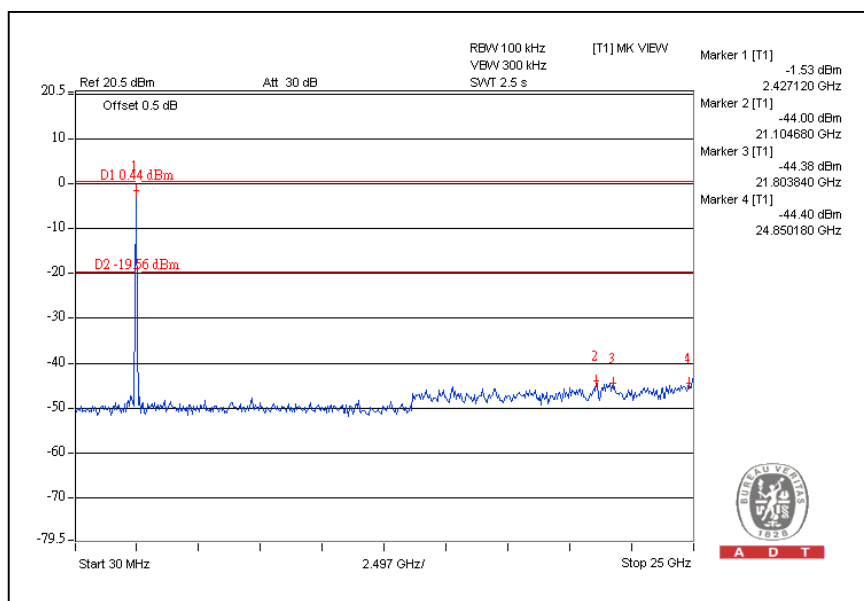


DRAFT 802.11n (40MHz) OFDM MODULATION: For Chain (0):CH1

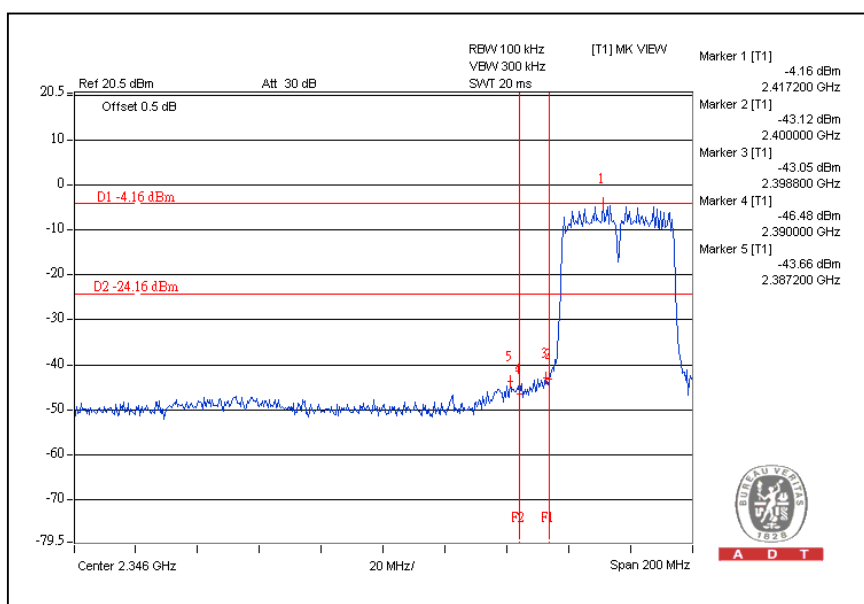


CH7

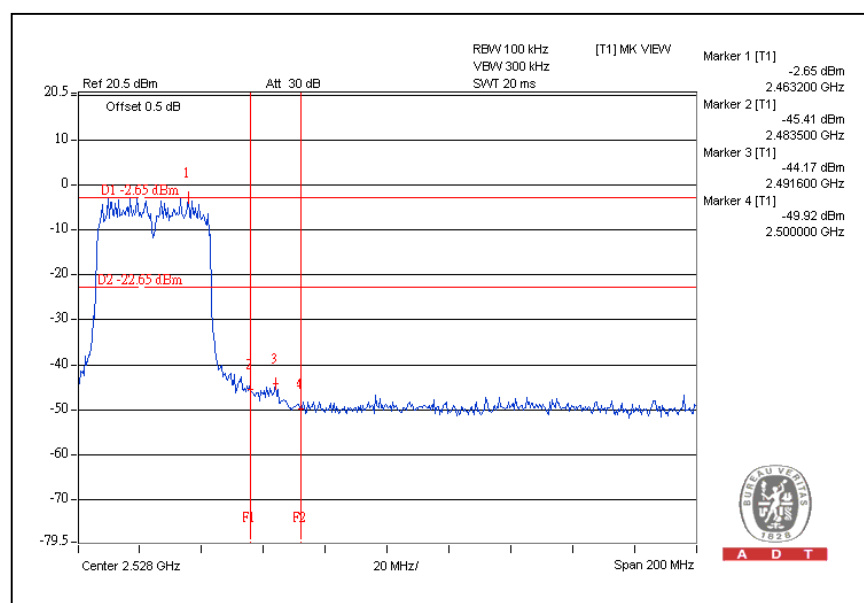


CH1

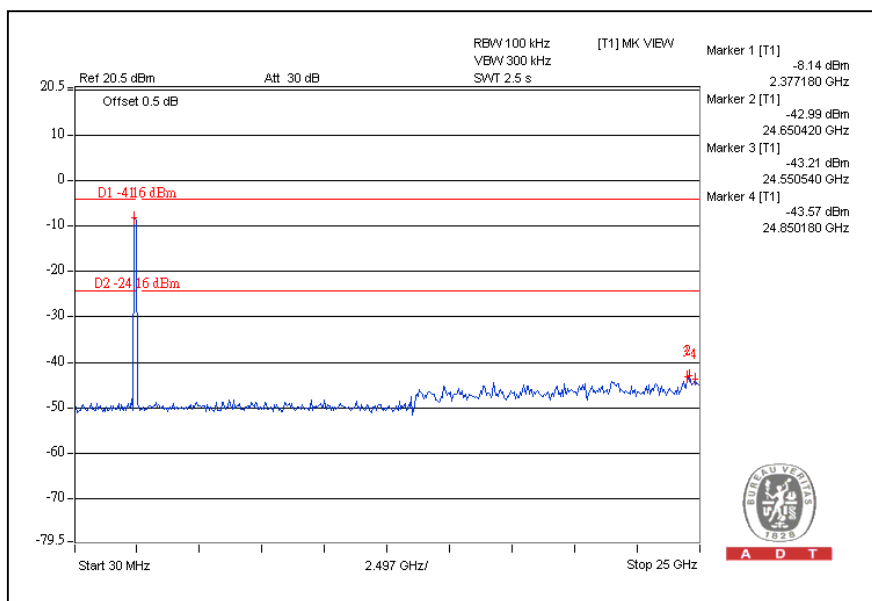


CH7

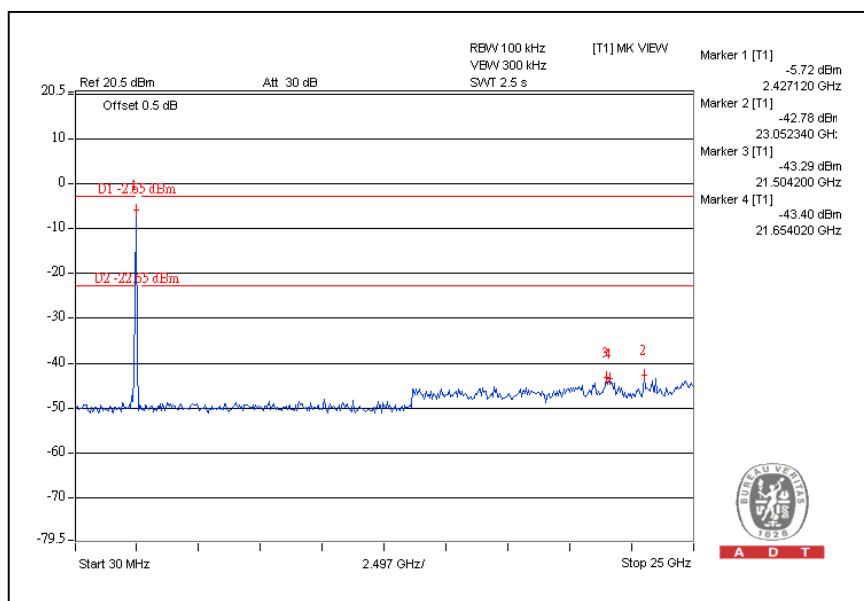


For Chain (1):CH1

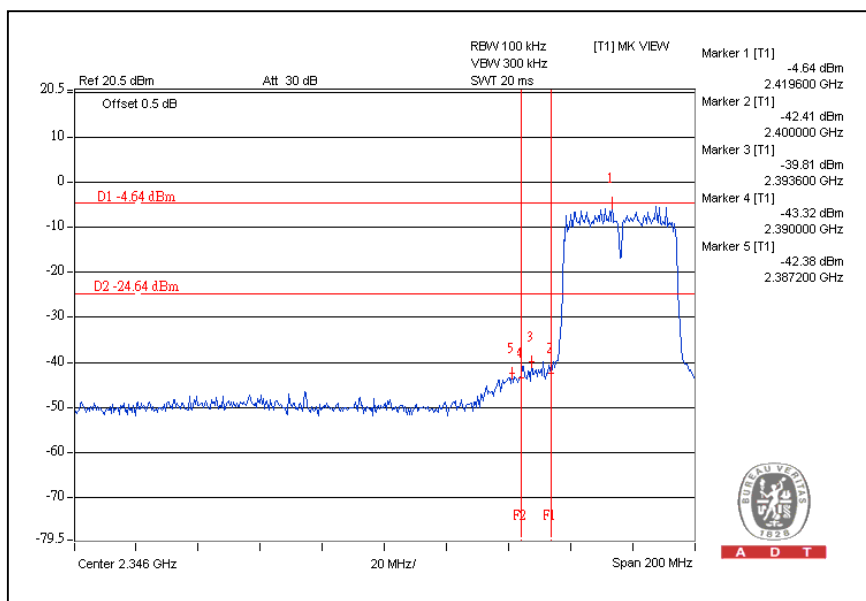


CH7

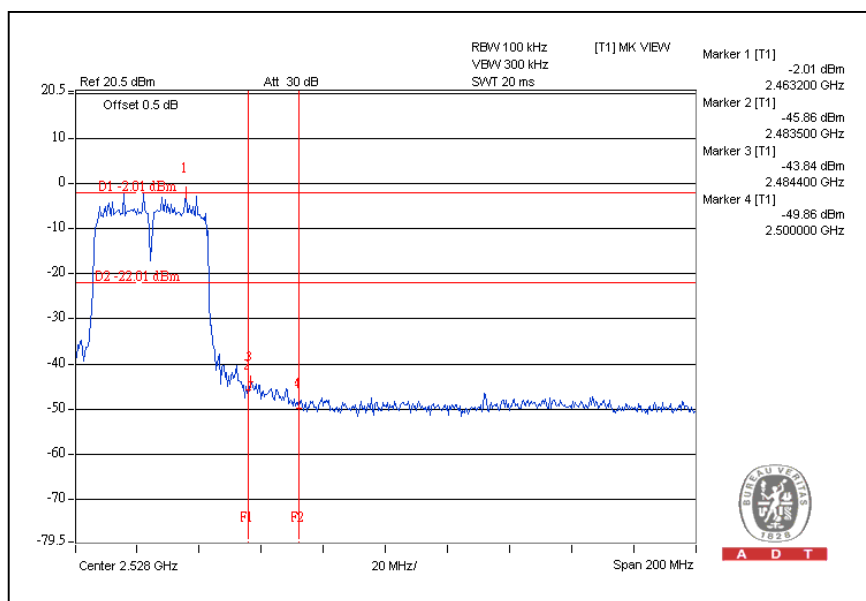

CH1

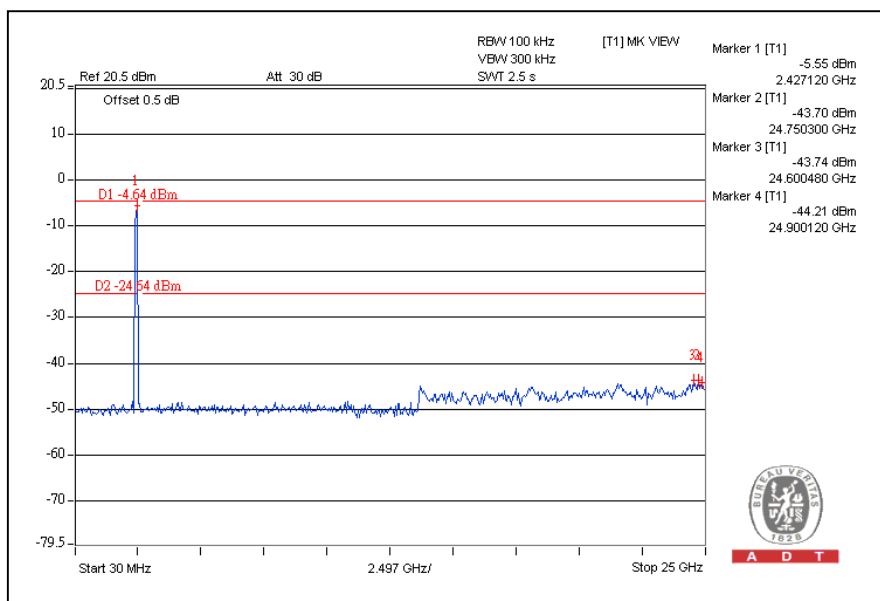

CH7

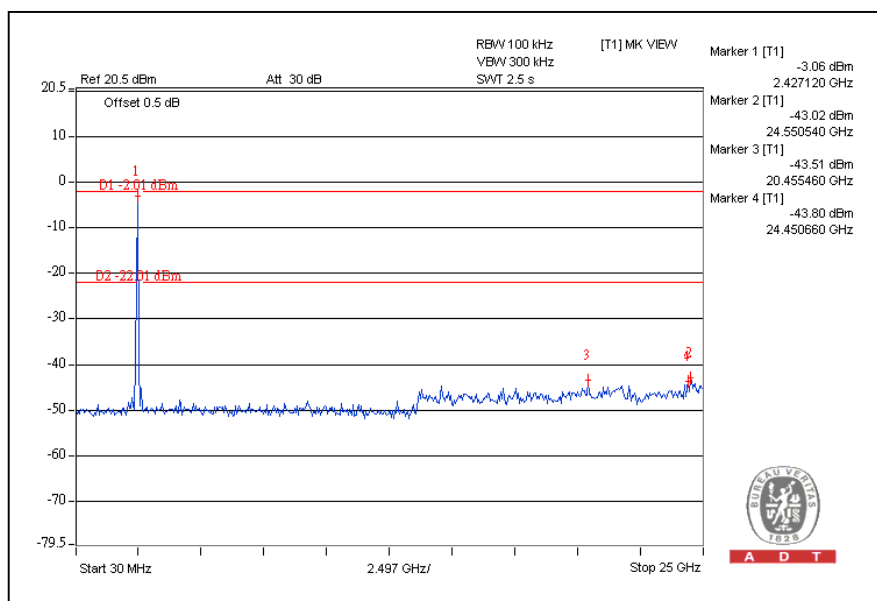

4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

There are two antennas provided to this EUT, please refer to the following table:

No.	Brand	Model	Gain (dBi)	Antenna Type	Connector Type	Frequency range (MHz to MHz)	Diversity Function
1	AWB	ES6602113033-150	2	Omni	UFL	2400~2500	Yes
2	AWB	ES6602113033-190	2	Omni	UFL	2400~2500	Yes

**A D T**

5. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA, CSA
R.O.C.	TAF, BSMI, NCC
Netherlands	Telefication
Singapore	GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.
If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

6. APPENDIX - A MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--- END ---