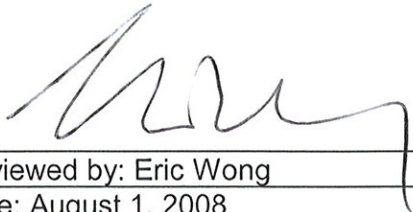



TEST REPORT N°: EGI-08-MA-H0368-HTHFB

TEST REPORT

To:	ELEGANT INNOVATION LIMITED	To:	-		
Attn:	Peggy Lim	Attn:	-		
Address:	Suite 2001, 20 th Floor Chinachem Century Tower, 178 Gloucester Road, Wanchai, Hong Kong	Address:	-		
Fax:	2295 6229	Fax:	-		
E-mail:	eti@etielegant.com.hk	E-mail:	-		
Factory name:	Unidentified	Offer:	EGI08MA25-01HTHHFP-R1-A2		
Location:	Unidentified	Sample No:	--		
		Start date:	March 28, 2008		
		Finish date:	June 26, 2008		
		Test Requested:	FCC Part 15 Certification Procedure		
		Test Method:	ANSI C63.4 – 2003		
		Re-testing:	NONE		
BUMPER CARS – SETS OF TWO, MODEL: 4289		FCC ID: V9GELEGANT1			
The results given in this report are related to the tested specimen of the described electrical apparatus.					
CONCLUSION: The submitted sample was found to <u>COMPLY</u> with requirement of FCC Part 15 Subpart C.					
Authorized Signature:					
		 			
Reviewed by: Eric Wong		Approved by: Man-kit Law			
Date: August 1, 2008		Date: August 1, 2008			

BUREAU VERITAS HONG KONG LIMITED –
Unit 1611, 1614 & 1615,
16/F, VANTA INDUSTRIAL CENTRE 21-33,
TAI LIN PAI ROAD, KWAI CHUNG, N.T.
HONG KONG
Tel: +852 2494 4676
Fax: +852 2426 0613
Email: bvcps.electrical@hk.bureauveritas.com

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://cps.bureauveritas.com> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TEST REPORT N°: EGI-08-MA-H0368-HTHFB

Location of the test site

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2003. A Semi-Anechoic Chamber Testing Site (FCC listed test firm: 552221) is set up for investigation and located at:

Ground Floor, Yan Hing Centre,
9 – 13 Wong Chuk Yeung Street,
Fo Tan, Shatin,
New Territories,
Hong Kong.

List of measuring equipment

Radiated Emission

Equipment	Manufacturer	Model No.	Serial No.	Calibration Due Date
EMI TEST RECEIVER	R&S	ESCI	100152	2008 OCT 14
BROADBAND ANTENNA	SCHAFFNER	CBL6112B	2718	2009 JAN 21
LOOP ANTENNA	EMCO	6502	00056620	2009 JULY 19

Remarks:-

N/A : Not Applicable or Not Available

The measurement instrumentation uncertainty would be taking into consideration on each of the test result



TEST REPORT N°: EGI-08-MA-H0368-HTHFB

Equipment Under Test [EUT]

Description of Sample:

Model Name: Bumper Cars – Sets of Two
Model Number: 4289
Rating: 3Vd.c. (“AAA” size battery x 2)

Description of EUT Operation:

The equipment under test (EUT) is a transmitter for Bumper car. It operates at 49.86MHz and the oscillation of radio control is generated by crystal. The EUT is powered by 2 x 1.5V AAA size batteries. There are four button keys on the EUT. When it switched on and passed the key once, it will transmit a radio control signal to receiver.

Antenna Requirement (Section 15.203)

The EUT is use of a permanently antenna. It is soldered on the PCB. The antenna is not replaceable or user serviceable. The requirement of S15.203 are met. There are no deviations or exceptions to the specifications.

TEST REPORT N°: EGI-08-MA-H0368-HTHFB

Radiated Emissions (Fundamental)

Test Requirement: FCC Part 15 Section 15.235
Test Method: ANSI C63.4:2003

Test Date(s): 2008-06-26

Mode of Operation: Transmission mode


Test Procedure:

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2003.

The equipment under test (EUT) was placed on a non-conductive turntable with dimensions of 1.5m x 1m and 0.8m high above the ground. 3m from the EUT, a broadband antenna mounting on the mast received the signal strength. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using new battery. The turntable was rotated to maximize the emission level. The antenna was then moving along the mast from 1m up to 4m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated.

For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.

Test Setup: Semi-Anechoic Chamber

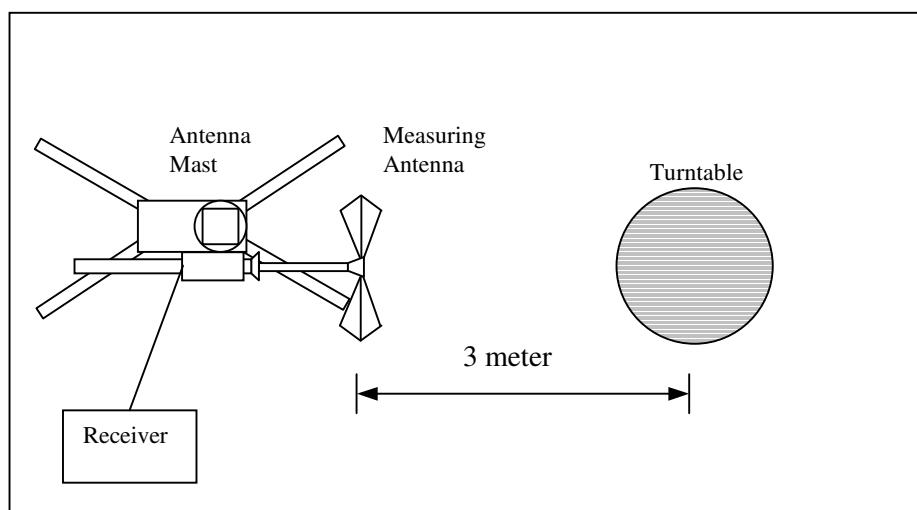

TEST REPORT N°: EGI-08-MA-H0368-HTHFB

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.235]:

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission [Peak] [μV/m]	Field Strength of Fundamental Emission [Average] [μV/m]
49.82-49.90	100,000	10,000

Measurement Data

Test Result of (Transmission mode): PASS

Detection mode: Peak

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
49.86	V	10.5	67.5	100	-32.5

Detection mode: # Average

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
49.86	V	10.5	**62.0	80	-18.0

For pulse modulated devices and using measuring equipment employing a peak detection mode, properly adjusted for such factor as pulse desensitisation.

**Duty Cycle Correction = $20\log(0.53) = -5.5\text{dB}$

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 100KHz
VBW = 300KHz



TEST REPORT N°: EGI-08-MA-H0368-HTHFB

Radiated Emissions (9kHz – 1GHz)

Test Requirement: FCC Part 15 Section 15.209
Test Method: ANSI C63.4:2003

Test Date(s): 2008-06-26

Mode of Operation: **Transmission mode**

Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range [MHz]	Quasi-Peak Limits [μ V/m]
1.705-30	300
30-88	100
88-216	150
216-960	200
Above 960	500

Measurement Data

Test Result of (Transmission mode): PASS

Detection mode: Quasi-Peak

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
99.718	V	9.4	30.3	43.5	-13.2
149.576	H	12.6	30.5	43.5	-13.0
199.440	H	10.0	28.7	43.5	-14.8
249.304	H	10.3	38.8	46.0	-7.2
299.162	H	13.7	36.7	46.0	-9.3
349.020	H	14.7	36.0	46.0	-10.0
398.886	H	14.7	34.5	46.0	-11.5
448.742	H	18.6	34.5	46.0	-11.5
498.604	H	18.6	37.8	46.0	-8.2

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 120KHz
VBW = 120KHz



TEST REPORT N°: EGI-08-MA-H0368-HTHFB

Measurement Data

26dB Bandwidth of Fundamental Emission

Test Requirement:	FCC 47 CFR 15.235
Test Method:	ANSI C63.4:2003 (Section 13.1.7)
Test Date:	2008-06-26
Mode of Operation:	Transmission mode


Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

TEST REPORT N°: EGI-08-MA-H0368-HTHFB

Measurement Data :

Test Result of 26dB Bandwidth of Fundamental Emission: PASS

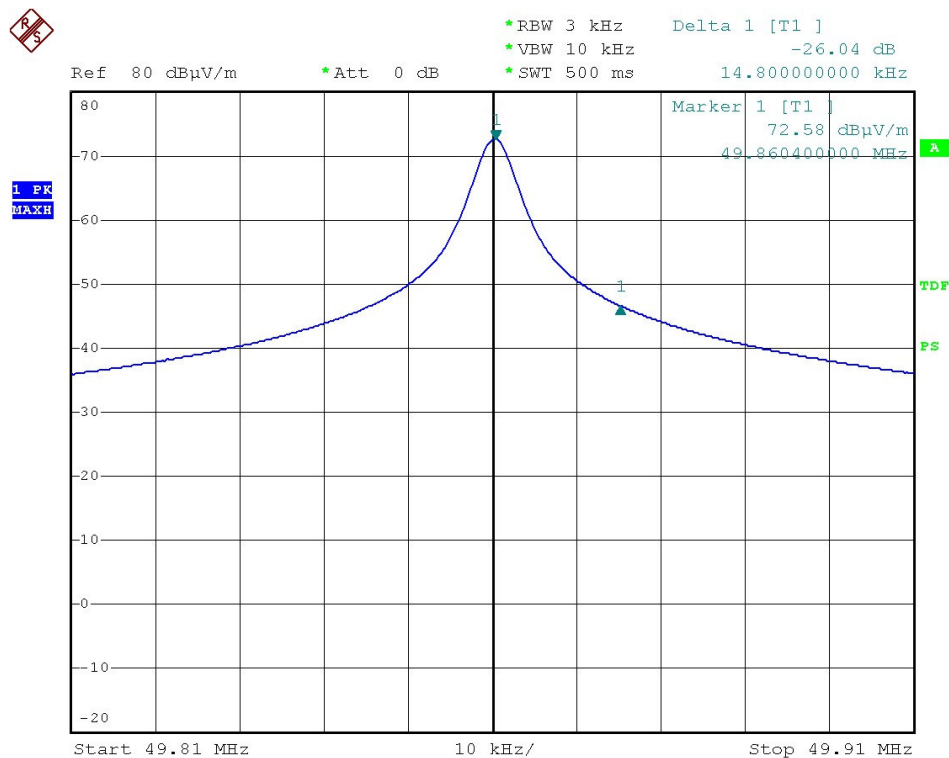

TEST REPORT N°: EGI-08-MA-H0368-HTHFB

Duty Cycle Correction During 100msec:


Each function key sends a different series of characters, but each packet period (60.0msec) never exceeds a series of 4 long (1.50msec) and 52 short (0.5msec) pulses. Assuming any combination of short or long pulses may be obtained due to encoding the worst case transmit duty cycle would be considered 32.0msec(1.5msec x 4 + 0.5msec x 52) per 60.0msec=53.0% duty cycle. Figure A to C show the characteristics of the pulse train for one of these functions.

Remarks:

Duty Cycle Correction = $20\text{Log}(0.53) = -5.5\text{dB}$

The following figures [Figure A to Figure C] show the characteristics of the pulse train for one of these functions.

Figure A [Pulse Train]

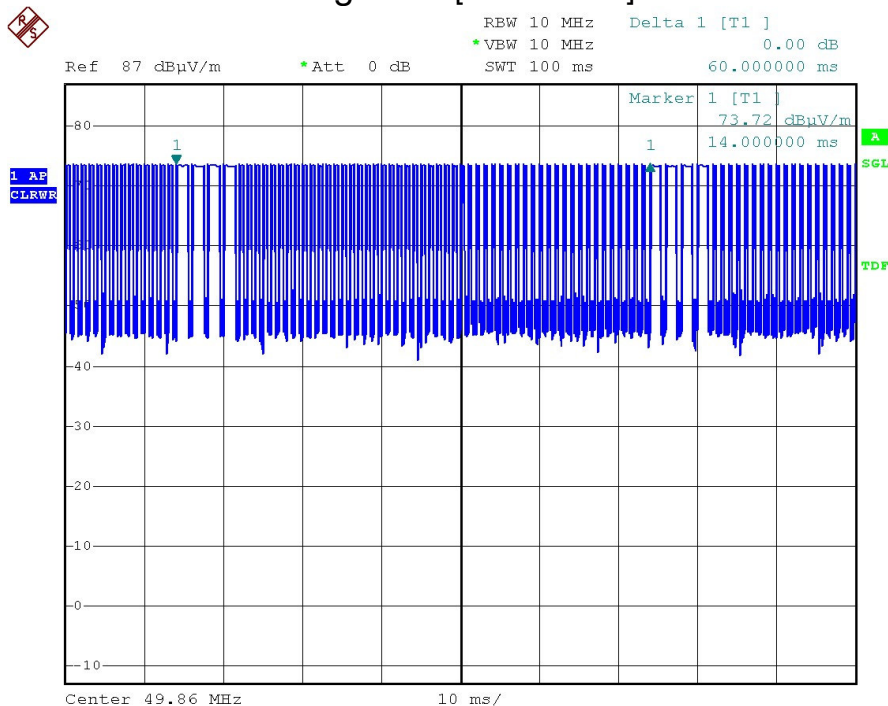



BUREAU
VERITAS

TEST REPORT N°: EGI-08-MA-H0368-HTHFB

Figure B [Long pulses]


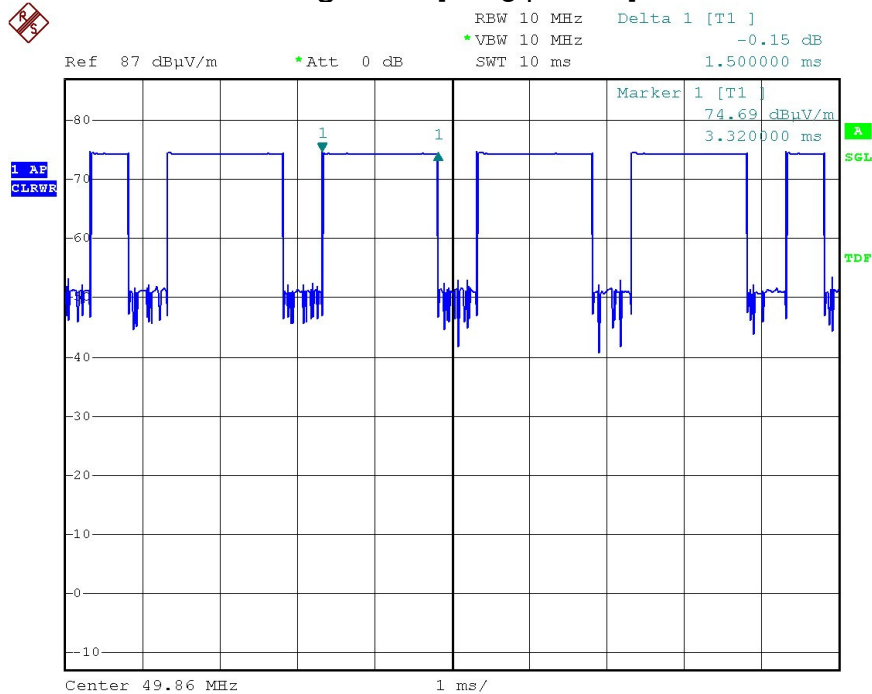


Figure C [Short Pulses]

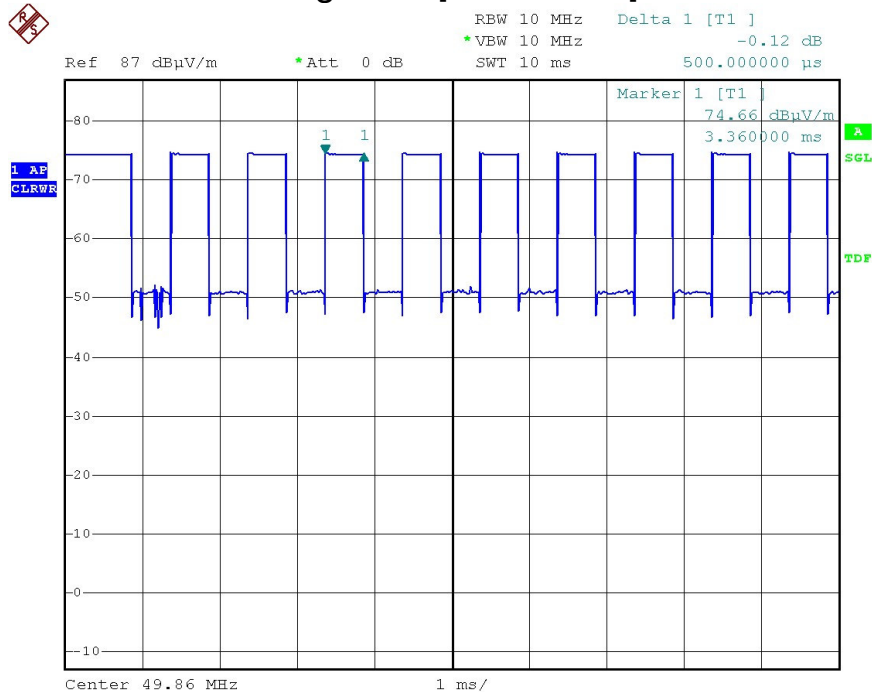


BUREAU VERITAS HONG KONG LIMITED –
Unit 1611, 1614 & 1615,
16/F, VANTA INDUSTRIAL CENTRE 21-33,
TAI LIN PAI ROAD, KWAI CHUNG, N.T.
HONG KONG
Tel: +852 2494 4676
Fax: +852 2426 0613
Email: bvcp.electrical@hk.bureauveritas.com

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://cps.bureauveritas.com> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.


TEST REPORT N°: EGI-08-MA-H0368-HTHFB

Photographs of EUT


Front View of the product

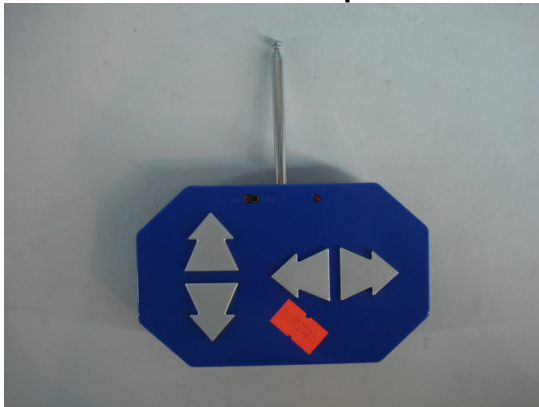


Rear View of the product

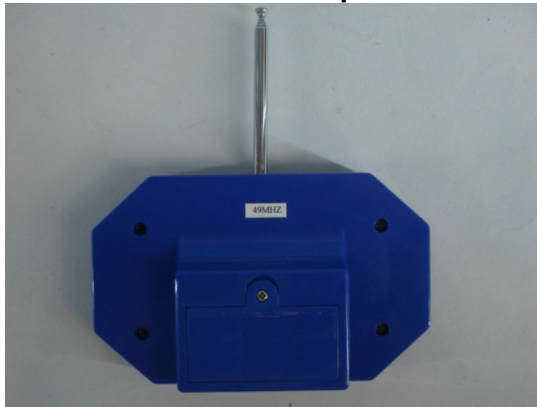

Inner Circuit Top View

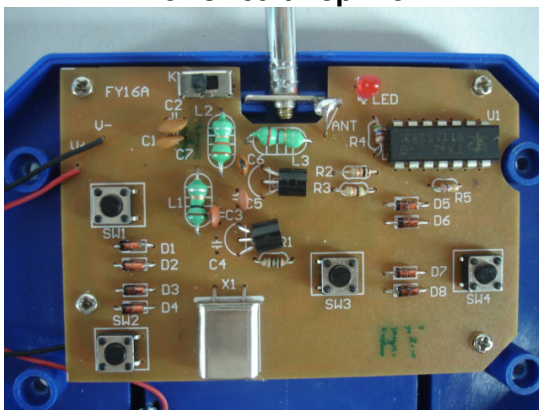


Inner Circuit Bottom View

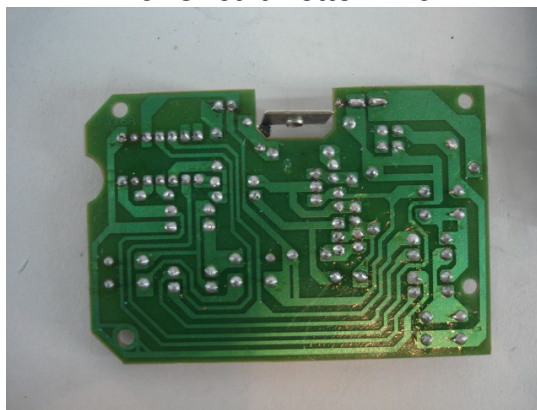

TEST REPORT N°: EGI-08-MA-H0368-HTHFB

Measurement of Radiated Emission Test Set Up

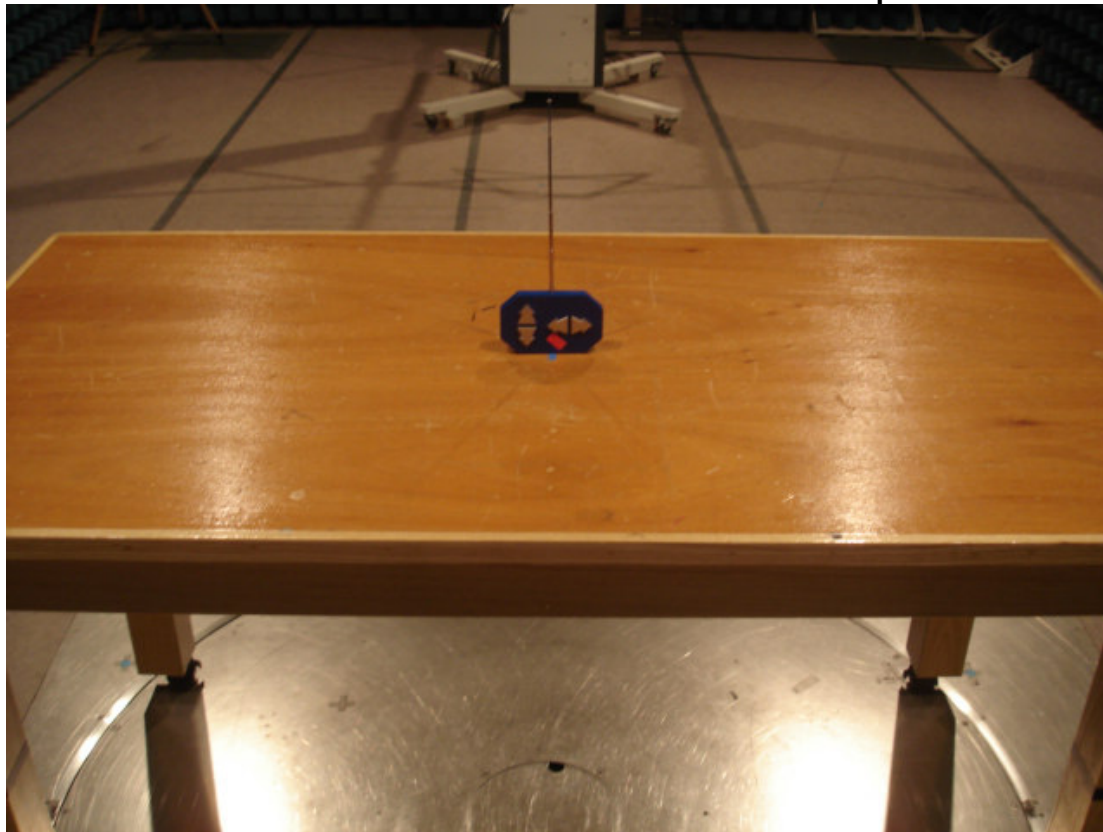

******* End of Report *******