

# TEST REPORT

## 1. Applicant

**Name** : SEGI LIMITED  
**Address** : Room 1808, 18/F, Tower 2, Admiralty Center, 18  
Harcourt road, Hongkong City, 186, CHINA

## 2. Products

**Name** : Security/Remote Control transmitter (Car Alarm System)  
**Model/Type** : MA510SS  
**Manufacturer** : SEGI LIMITED

**3. Test Standard** : FCC CFR 47 Part 15, Subpart C section 15.247

**4. Test Method** : ANSI C63.4-2003

**5. Test Result** : Positive

**6. Date of Application** : January. 23, 2009

**7. Date of Issue** : February. 03, 2009

Tested by

*Sung-kyu Cho*

Sung-kyu Cho

Telecommunication Team  
Engineer

Approved by

*Jeong-min Kim*

Jeong-min Kim

Telecommunication Team  
Manager

*The test results contained apply only to the test sample(s) supplied by the applicant, and this test report shall not be reproduced in full or in part without approval of the KTL in advance.*

## Korea Testing Laboratory

## TABLE OF CONTENTS

<b>1. GENERAL INFORMATION</b>	<b>4</b>
1.1. Applicant (Client)	4
1.2. Equipment (EUT)	4
1.3. Testing Laboratory	5
<b>2. SUMMARY OF TEST RESULTS</b>	<b>6</b>
<b>3. MEASUREMENT &amp; RESULTS</b>	<b>7</b>
3.1. 20 dB Bandwidth : Session 15.247(a)(1)	7
3.1.1. Test Setup Layout	7
3.1.2. Limit	7
3.1.3. Test result	7
3.2. Maximum Peak Power : Section 15.247(b)(1)	10
3.2.1. Test Setup Layout	10
3.2.2. Limit	10
3.2.3. Test result	10
3.3. 100 KHz Bandwidth of Frequency Band Edges : Section 15.247(d)	13
3.3.1. Test Setup Layout	13
3.3.2. Limit	13
3.3.3. Test result	13
3.4. Hopping Channel Separation : Section 15.247(a)(1)	15
3.4.1. Test Setup Layout	15
3.4.2. Limit	15
3.4.3. Test result	15
3.5. Number of Hopping Channels : Session 15.247(a)(1)(i)	16
3.5.1. Test Setup Layout	16
3.5.2. Limit	16
3.5.3. Test result	16

<b>3.6. Dwell Time : Session 15.247(a)(1)(i)</b>	<b>17</b>
3.6.1. Test Setup Layout	17
3.6.2. Limit	17
3.6.3. Test result	17
<b>3.7. Conducted Spurious Emission : Session 15.247(d)</b>	<b>19</b>
3.7.1. Test Setup Layout	19
3.7.2. Limit	19
3.7.3. Test result	19
<b>3.8. Radiated Spurious Emissions : Session 15.205 &amp; 15.209</b>	<b>22</b>
3.8.1. Test Procedure	22
3.8.2. Test Results	25
<b>4. TEST EQUIPMENTS</b>	<b>26</b>
<b>APPENDIX.1 TEST SETUP PHOTO</b>	<b>27</b>

## 1. GENERAL INFORMATION

### 1.1. Applicant (Client)

Name	SEGI LIMITED
Address	Room 1808, 18/F, Tower 2, Admiralty Center, 18 Harcourt road, Hongkong City, 186, CHINA
Contact Person	Young Soo Lim
Telephone No.	82-32-623-5550 (#276)
Facsimile No.	82-32-623-6667
E-mail address	YUONGSOO@magicar.com
Manufacturer Name	SEGI LIMITED
Manufacturer Address	Chenjiapucun, Liaobu Town, Dongguan City, Guangdong Province, P.R.China(523-408)

### 1.2. Equipment (EUT)

FCC Classification	DSS – Part 15 Spread Spectrum Transmitter
Model Name	MA510SS
FCC ID	VA5JMA510SS
Frequency Band	907.6 ~ 909.7 MHz
EUT Modes of Operation	Transceiver
Type of Modulation	FHSS
Number of Channels	50 channels
Channel Spacing	50 kHz
Input power supply	External DC Sources 12V (Car battery)

### 1.3. Testing Laboratory

Testing Place	Korea Testing Laboratory (KTL) 1271-12, Sa-Dong Sangnok-Gu, Ansan-si Gyunggi-Do , Korea
FCC registration number	408324
Industry Canada filing number	6298
Test Engineer	Sung-kyu Cho
Telephone number	+82 31 5000 132
Facsimile number	+82 31 5000 159
E-mail address	skcho@ktl.re.kr
Other Comments	-

## 2. SUMMARY OF TEST RESULTS

Testing performed for : SEGI Limited.

Equipment Under Test : Car Alarm System

Receipt of Test Sample : 2009. 01. 15

Test Start Date : 2009. 01. 22

Test End Date : 2009. 02. 02


The following table represents the list of measurements required under the FCC CFR47 Part 15.205, 15.247, and 15.209.

FCC Rules	Test Requirements	Result	Comments
15.247 (a)(1)	20dB Bandwidth	Pass	See Data sheets
15.247 (b)(1)	Maximum Peak Power	Pass	See Data sheets
15.247(d)	100 KHz Bandwidth of Frequency Band Edges	Pass	See Data sheets
15.247 (a)(1)	Hopping channel separation	Pass	See Data sheets
15.247 (a)(1)(i)	Number of hopping channels	Pass	See Data sheets
15.247 (a)(1)(i)	Dwell time	Pass	See Data sheets
15.247 (d)	Conducted Spurious Emission	Pass	See Data sheets
15.205 & 15.209	Radiated Spurious Emissions	Pass	See Data sheets

## 3. Measurement & Results

### 3.1. 20 dB Bandwidth : Session 15.247(a)(1)

#### 3.1.1. Test Setup Layout

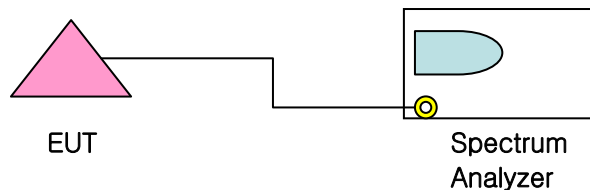


#### 3.1.2. Limit


- The 20 dB bandwidth is defined as the frequency range where the power is higher than the peak power minus 20 dB. Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater

#### 3.1.3. Test result

Frequency (MHz)	Channel Number	Result (kHz)	Verdict
907.6	1	15.875	Pass
908.4	25	15.875	Pass
909.7	50	15.625	Pass

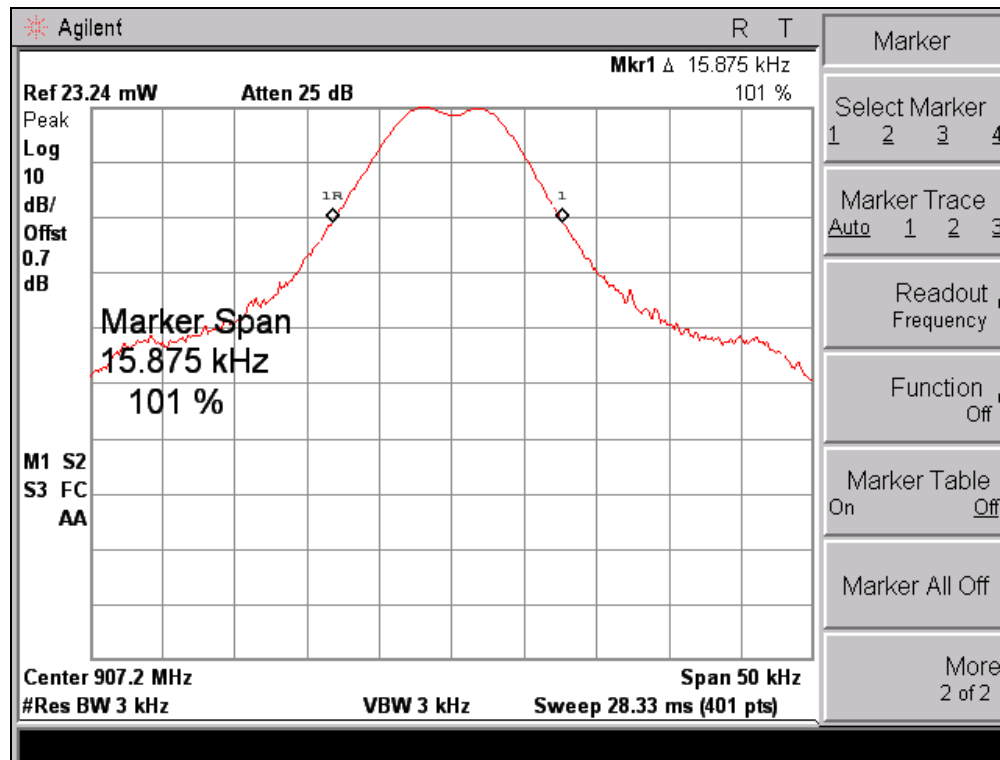


- Occupied Bandwidth : Ch 1 -

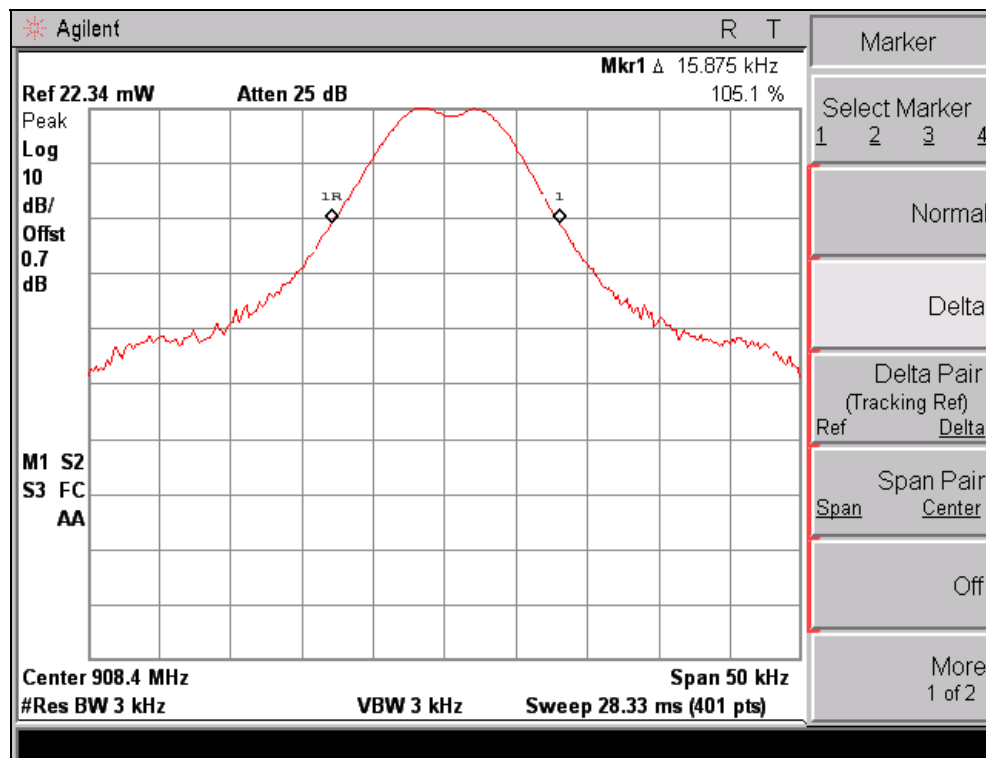

- Occupied Bandwidth : Ch 25 -




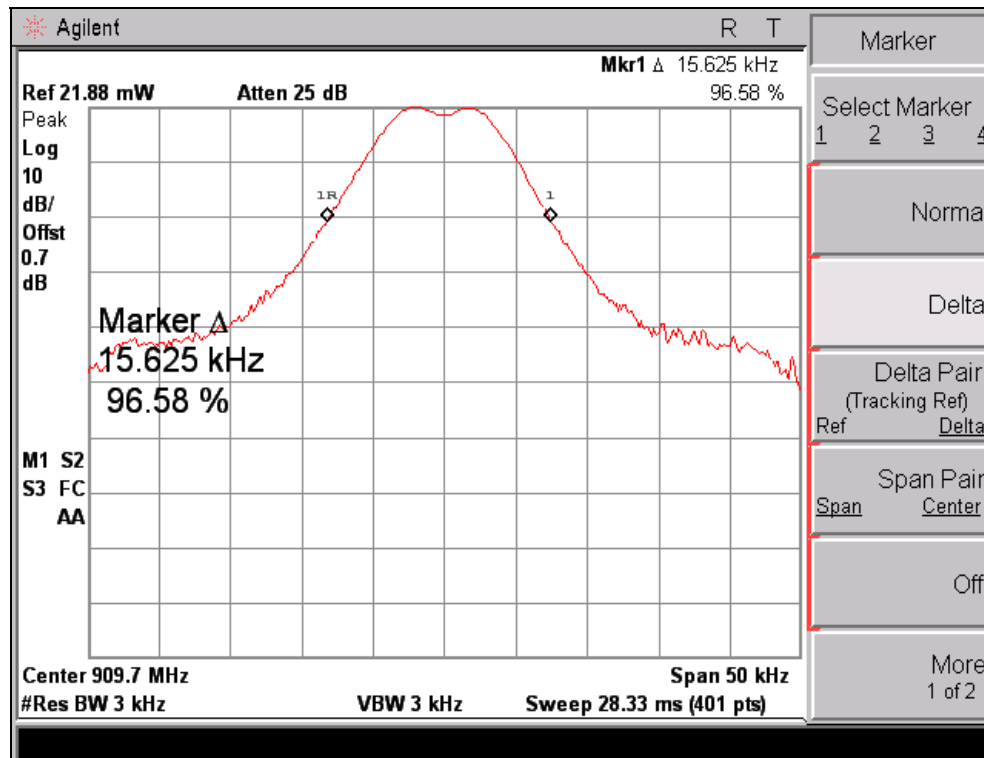

- Occupied Bandwidth : Ch 50 -

## 3.2. Maximum Peak Power : Section 15.247(b)(1)

### 3.2.1. Test Setup Layout

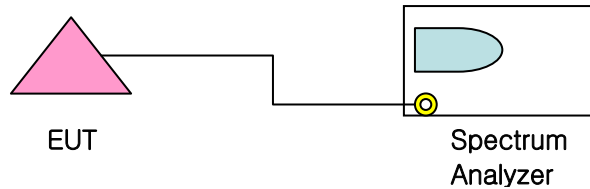


### 3.2.2. Limit


- For Frequency hopping systems operating in the 902~928 MHz band: 1 watt for systems employing at least 50 hopping channels; and 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

### 3.2.3. Test result


Frequency (MHz)	Channel Number	Result (mW)	Limit (W)	Verdict
907.6	1	23.36	1	Pass
908.4	25	22.90	1	Pass
909.7	50	22.82	1	Pass

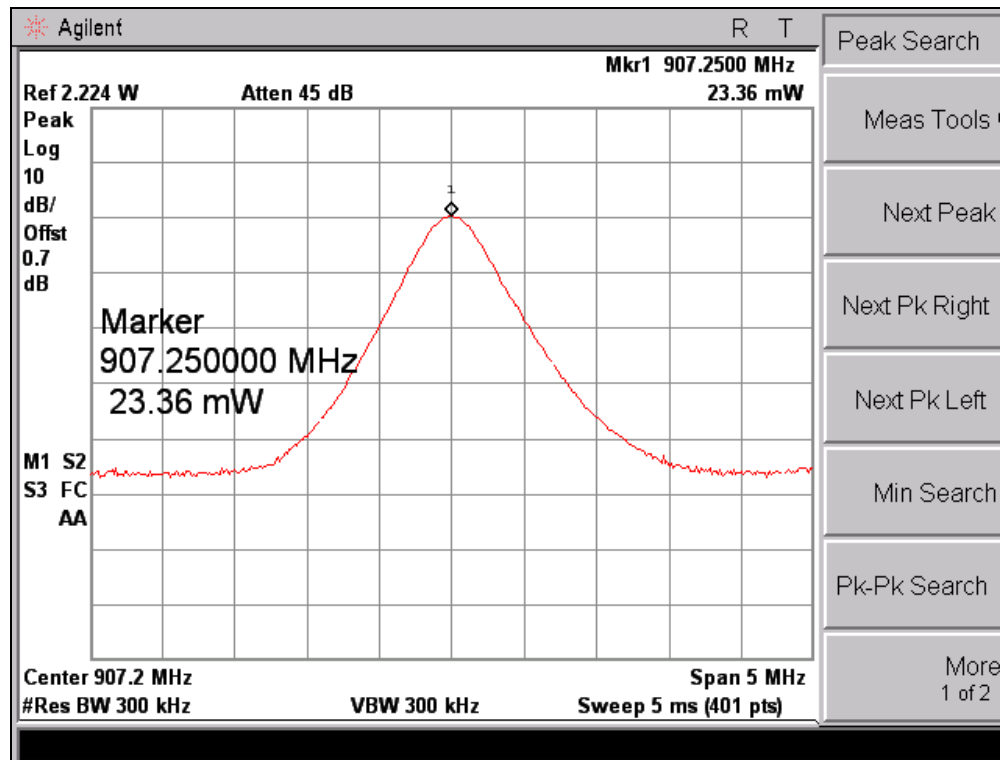

- Output Power : Ch 1 -

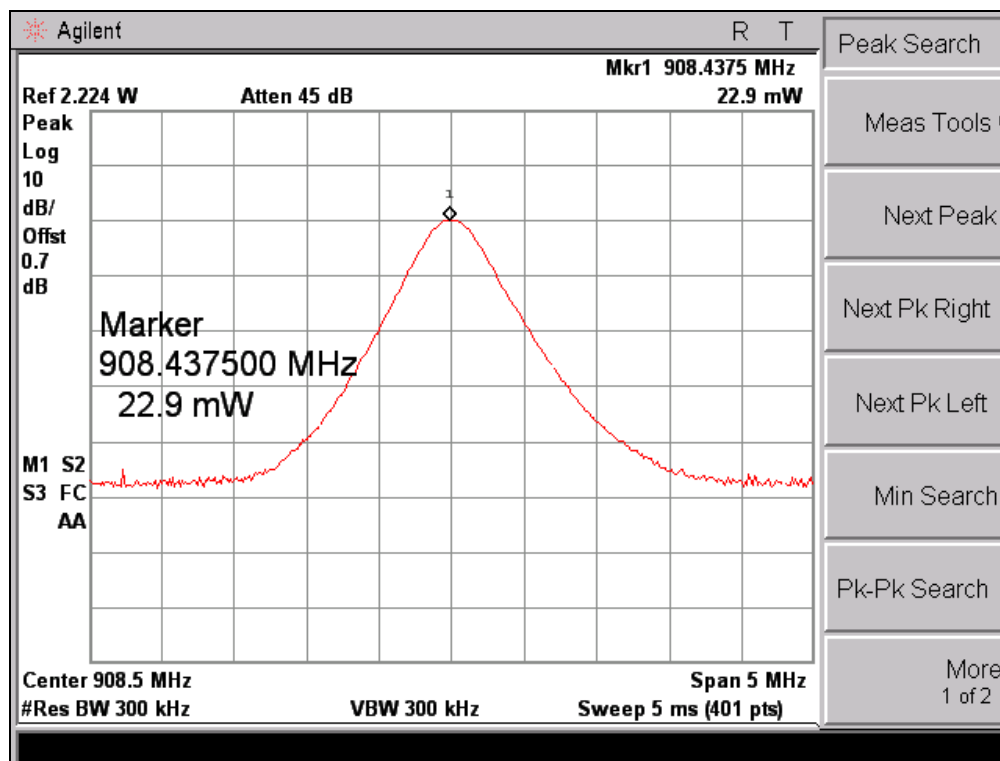


- Output Power : Ch 25 -

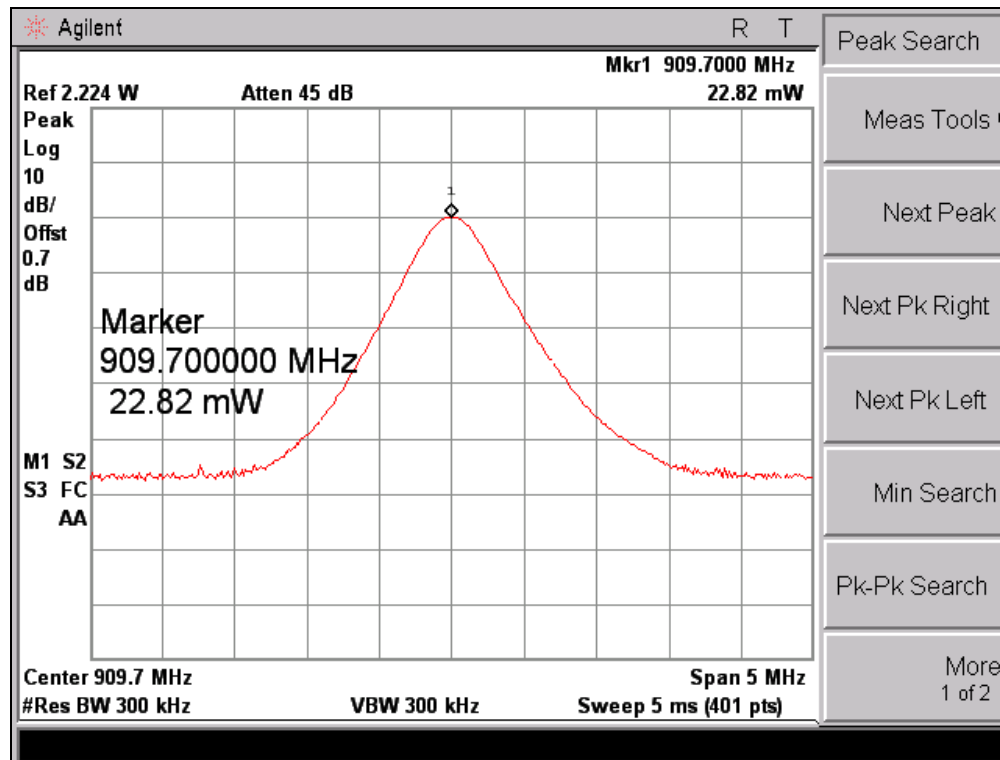

- Output Power : Ch 50 -

### 3.3. 100 KHz Bandwidth of Frequency Band Edges : Section 15.247(d)

#### 3.3.1. Test Setup Layout

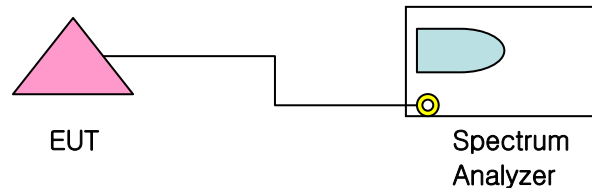


#### 3.3.2. Limit


- In any 100 kHz bandwidth outside the frequency band in which the spread spectrum of digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in section 15.209(a) is not required.

#### 3.3.3. Test result

Frequency (MHz)	Channel Number	Result (dBc)	Limit ( dBc)	Verdict
907.6	1	40 >	20	Pass
909.7	25	40 >	20	Pass

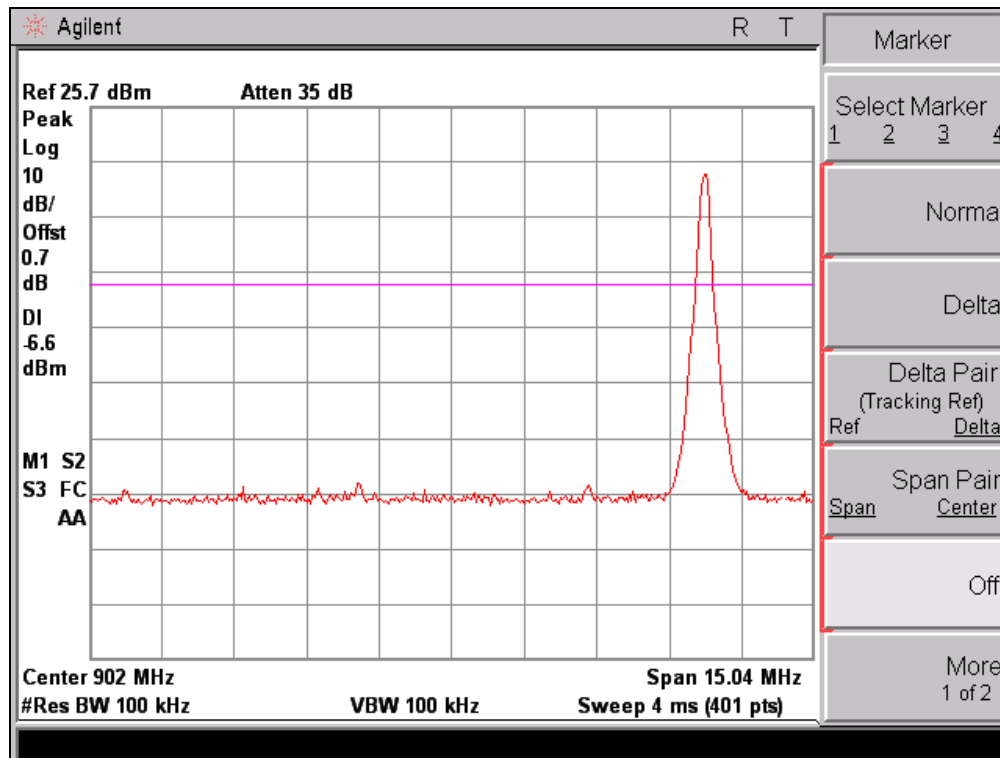


- Lower side band edge -

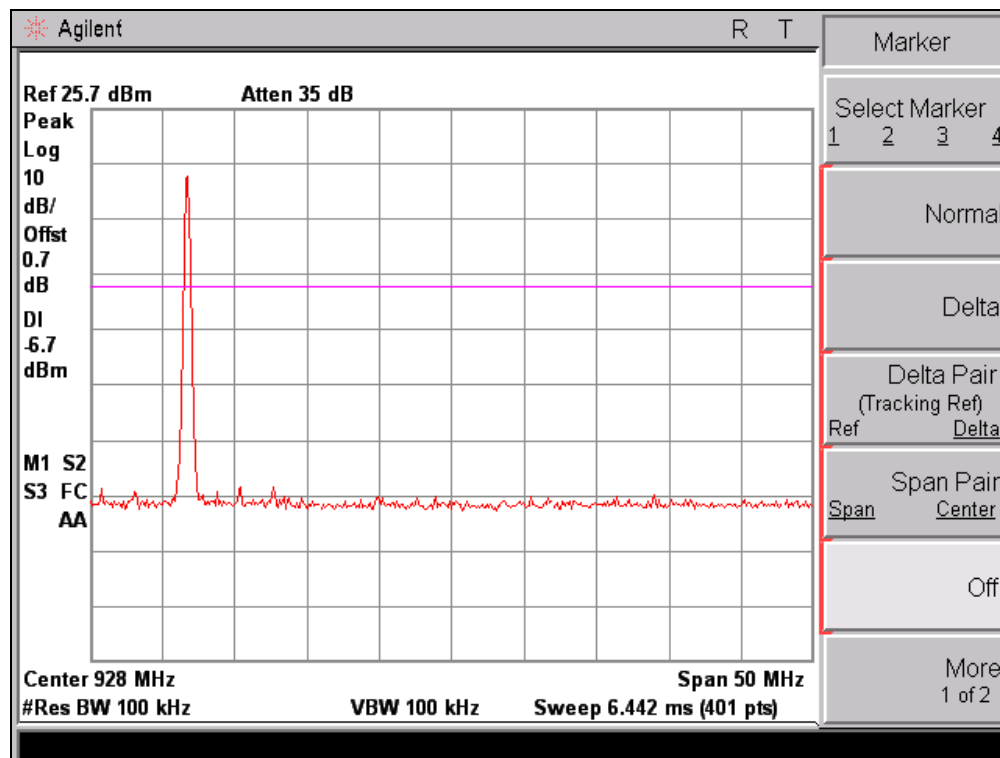

- Upper side band edge -

### 3.4. Hopping Channel Separation : Section 15.247(a)(1)

#### 3.4.1. Test Setup Layout

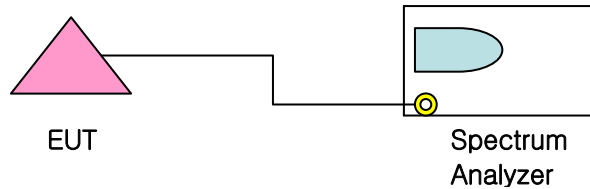


#### 3.4.2. Limit

- Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB Bandwidth of the hopping channel, whichever greater.

#### 3.4.3. Test result


Mode	Result (kHz)	Limit (kHz)	Verdict
Hopping mode	50	25	Pass

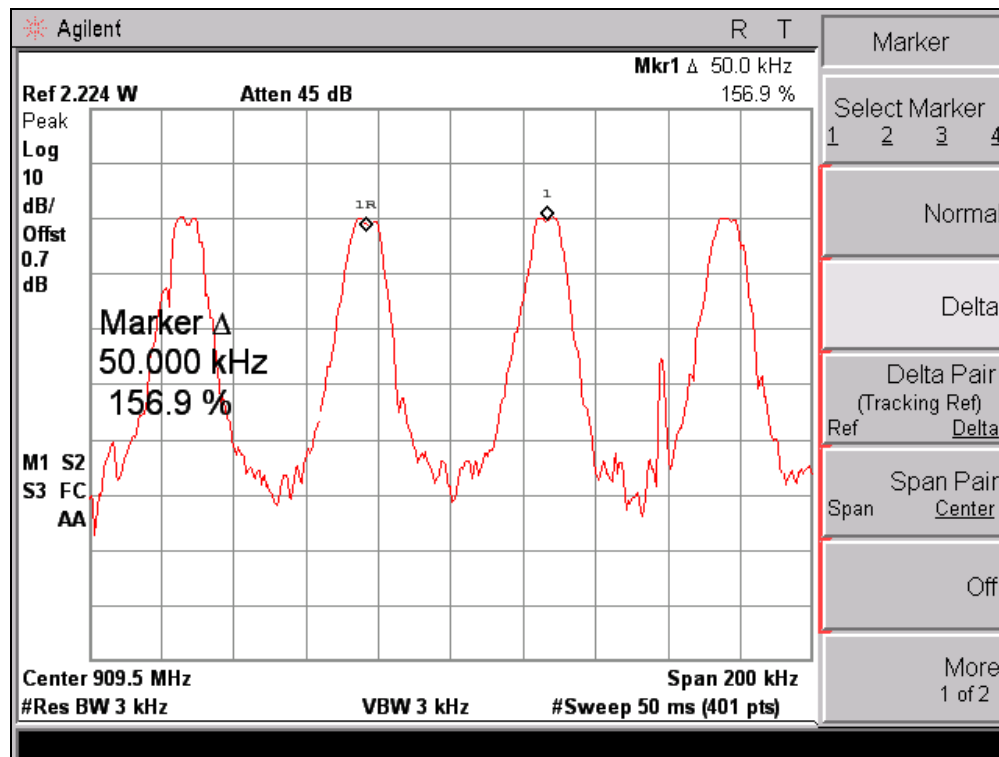

– Hopping Channel Separation –

### 3.5. Number of Hopping Channels : Session 15.247(a)(1)(i)

#### 3.5.1. Test Setup Layout

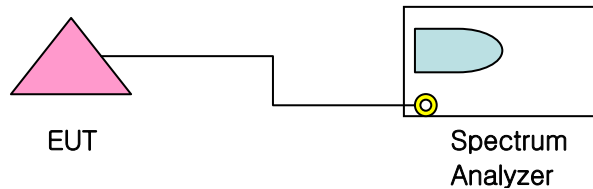


#### 3.5.2. Limit

- For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies

#### 3.5.3. Test result

Mode	Frequency (MHz)	Result (channel)	Limit (channel)	Verdict
Hopping mode	--	50	50	Pass

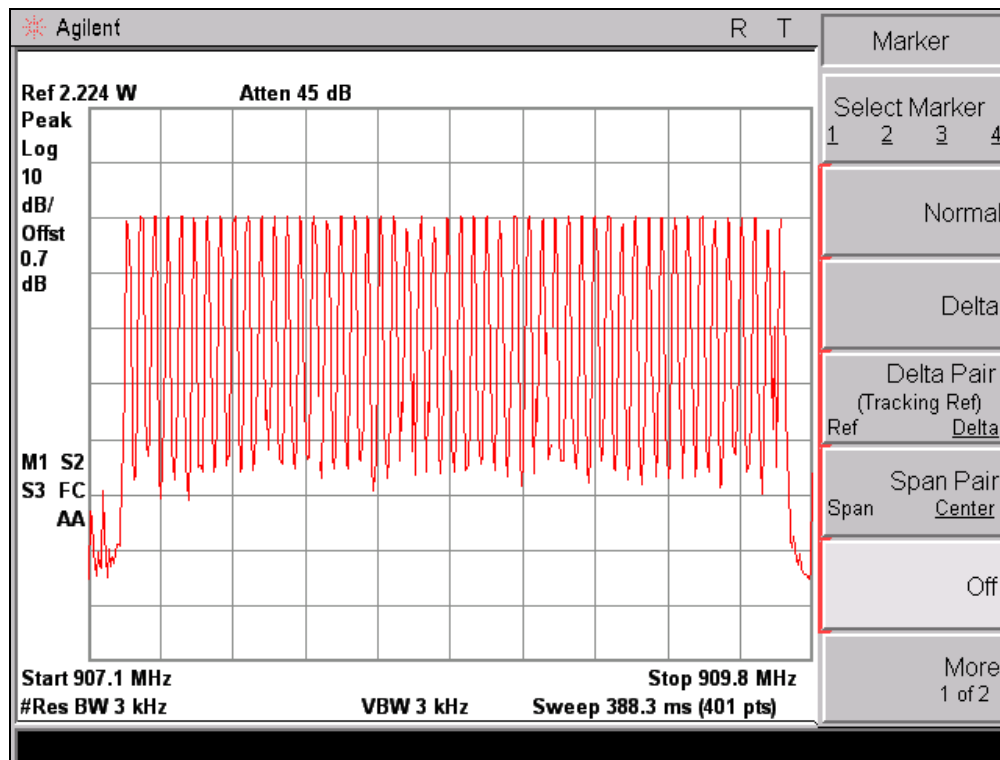


– Number of hopping Channels –



### 3.6. Dwell Time : Session 15.247(a)(1)(i)

#### 3.6.1. Test Setup Layout

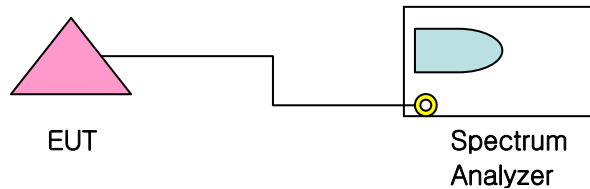

#### 3.6.2. Limit

- The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

The dwell time is calculated by:

Dwell Time : Time slot length \* The number of hopping channels in 20 s

Time slot length = 336.25 ms


The number of hopping channels in 20 s = 1

Therefore:


Dwell Time = 336.25 ms X 1 = 336.25 ms

#### 3.6.3. Test result

Type slot length(ms)	Dwell time (ms)	Limits (msec)	Verdict
336.25	336.25	≤ 400	Pass

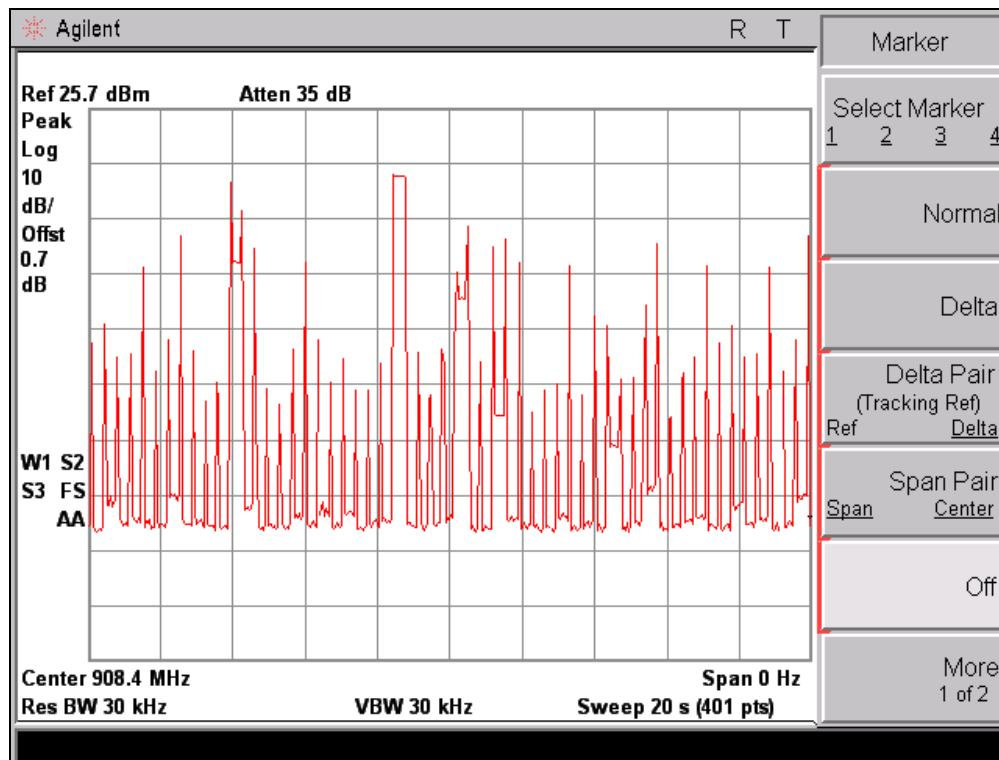


- The Number of channels in 20 s -

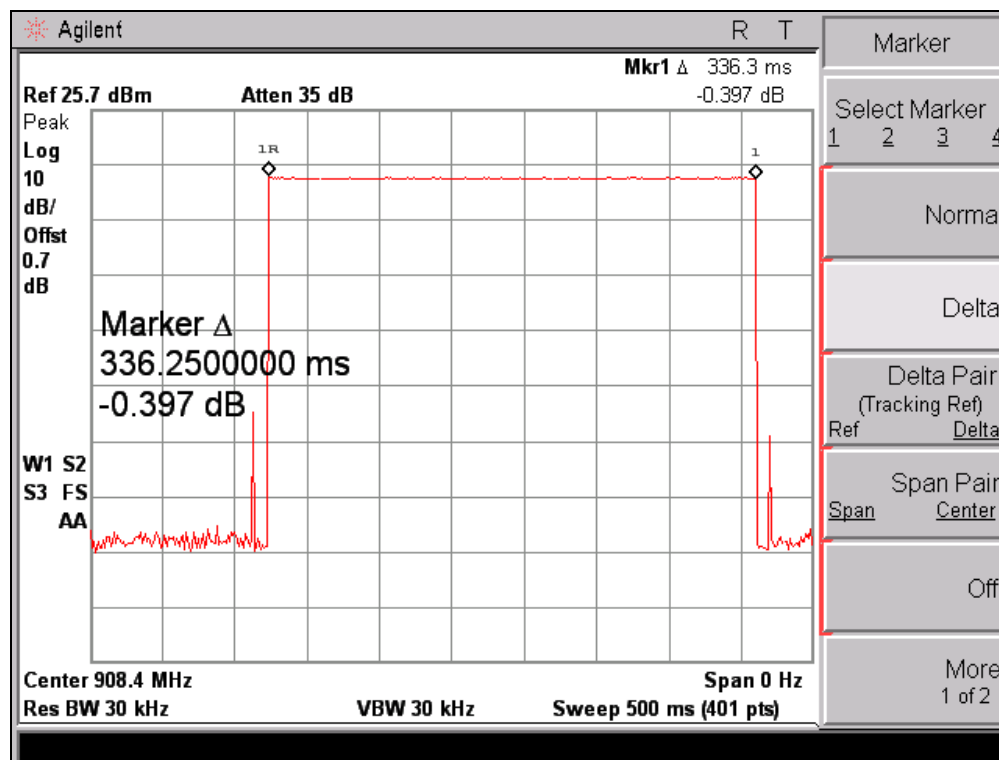

- Time Slot Length -

### 3.7. Conducted Spurious Emission : Session 15.247(d)

#### 3.7.1. Test Setup Layout

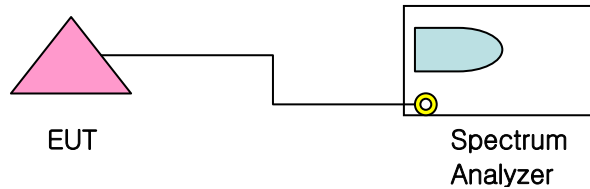


#### 3.7.2. Limit


- In any 100 kHz bandwidth outside the frequency band in which the spread spectrum of digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in section 15.209(a) is not required.

#### 3.7.3. Test result


Frequency (MHz)	Channel Number	Result (dBc)	Limit ( dBc)	Verdict
907.6	1	50 >	20	Pass
908.4	25	50 >	20	Pass
909.7	50	50 >	20	Pass

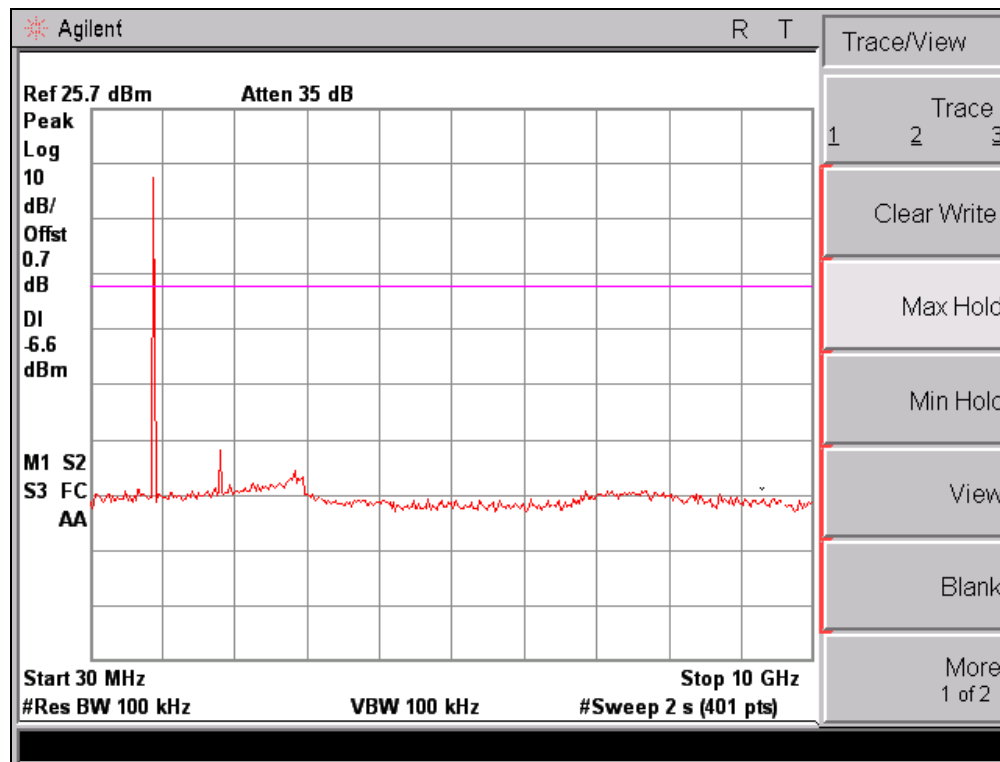

- Spurious emission of Ch 1 -

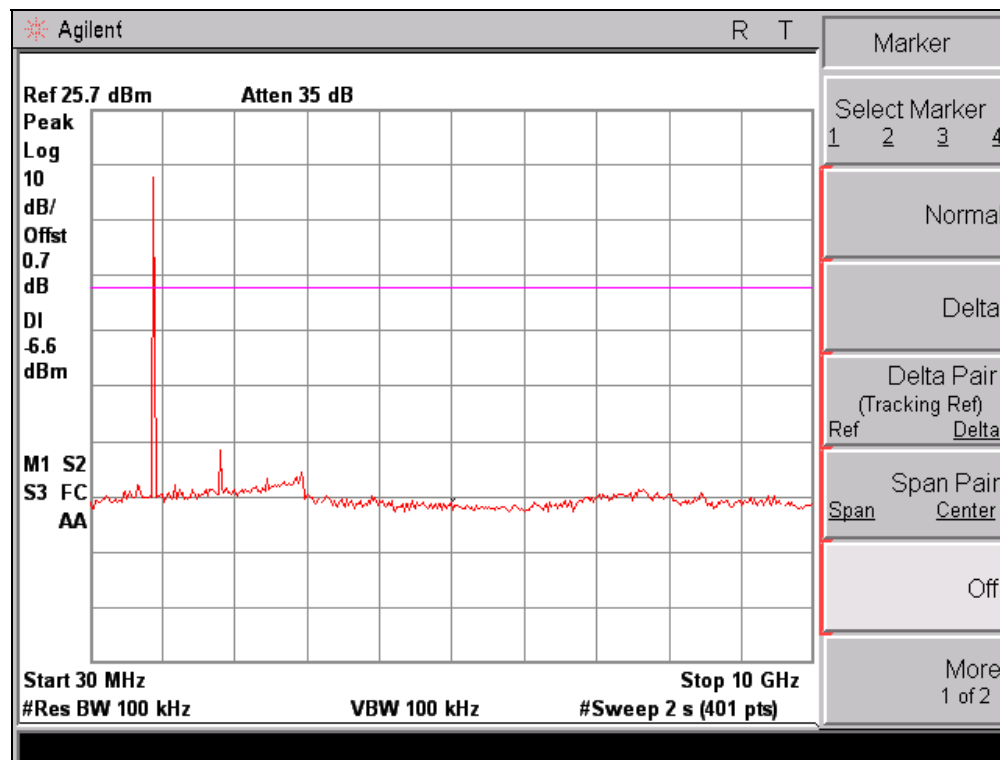

- Spurious emission of Ch 25 -

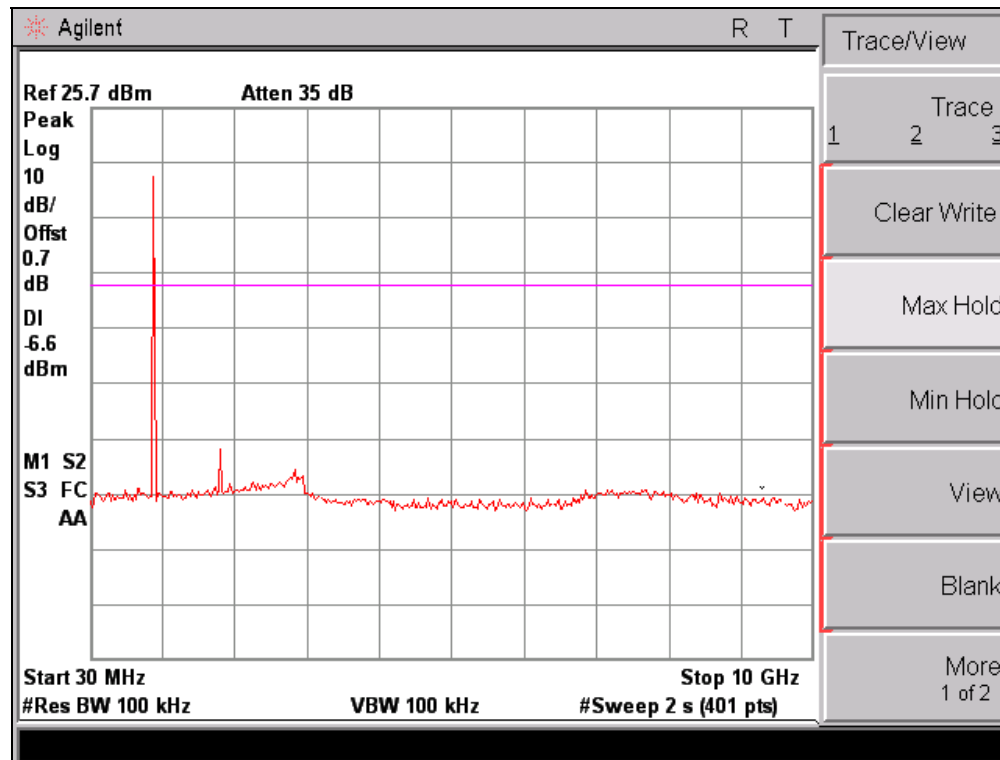

– Spurious emission of Ch 50 –

## 3.8. Radiated Spurious Emissions : Session 15.205 & 15.209

### 3.8.1. Test Procedure

#### 3.8.1.1 Preliminary Testing for Reference

Preliminary testing was performed in a KTL absorber-lined room to determine the emission characteristics of the EUT. The EUT was placed on the wooden table which has dimensions of 0.8 meters in height, 1 meter in length and 1.5 meters in width. Receiving antenna (Biconi-Log antenna : 30 to 1000 MHz or Horn Antenna : 1 to 40 GHz) was placed at the distance of 3 meter from the EUT.

An attempt was made to maximize the emission level with the various configurations of the EUT. Emission levels from the EUT with various configurations were examined on a spectrum analyzer connected with a RF amplifier and graphed.

The emission was within the illumination area of the 3 dB beam width of the antenna so that the maximum emission from the EUT is measured.

#### 3.8.1.2 Final Radiated Emission Test at an Absorber-Lined Room

The final measurement of radiated field strength was carried out in a KTL Absorber-Lined Room that was listed up at FCC according to the "Radiated Emissions Testing" procedure specified by ANSI C63.4.

Based on the test results in preliminary test, measurement was made in same test set up and configuration which produced maximum emission level. Receiving antenna was installed at 3-meter distance from the EUT, and was connected to an EMI receiver.

Turntable was rotated through 360 degrees and receiving antenna height was varied from 1 to 4 meters above the ground plane to read maximum emission level. Receiving antenna polarization was changed vertical and horizontal. The worst value was recorded.

If necessary, the radiated emission measurements could be performed at a closer distance than specified distance to ensure higher accuracy and their results were extrapolated to the specified distance using an inverse linear distance extrapolation factor (20 dB/decade) as per Section 15.31(f).

The maximum emission level from the EUT occurred in such configuration as shown in the following photograph.

Tested in x, y, z axis and worst case results are reported

The maximum frequency range measuring with the spectrum from 30 MHz to 10<sup>th</sup> harmonic was investigated with the transmitter.

### 3.8.1.3 Limits

Radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see 15.205(c)). In addition, where an average detector is used for determining compliance with the limits in 15.209(a), there is a corresponding peak limit 20 dB above the specified average limit according to 15.35(b)

MHz	MHz	MHz	MHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(2)
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6


### 3.8.1.4 Sample Calculation

The emission level measured in decibels above one microvolt (dB) was following sample calculation.

For example ;

Measured Value at <u>4824 MHz</u>	33.9 dB $\mu$ V $\mu$ V
Antenna Factor & Cable loss	45.0 dB/m
- Preamplifier	-30.0 dB
-----	
= Radiated Emission	48.9 dB $\mu$ V/m

### 3.8.1.5 Photograph for the test configuration

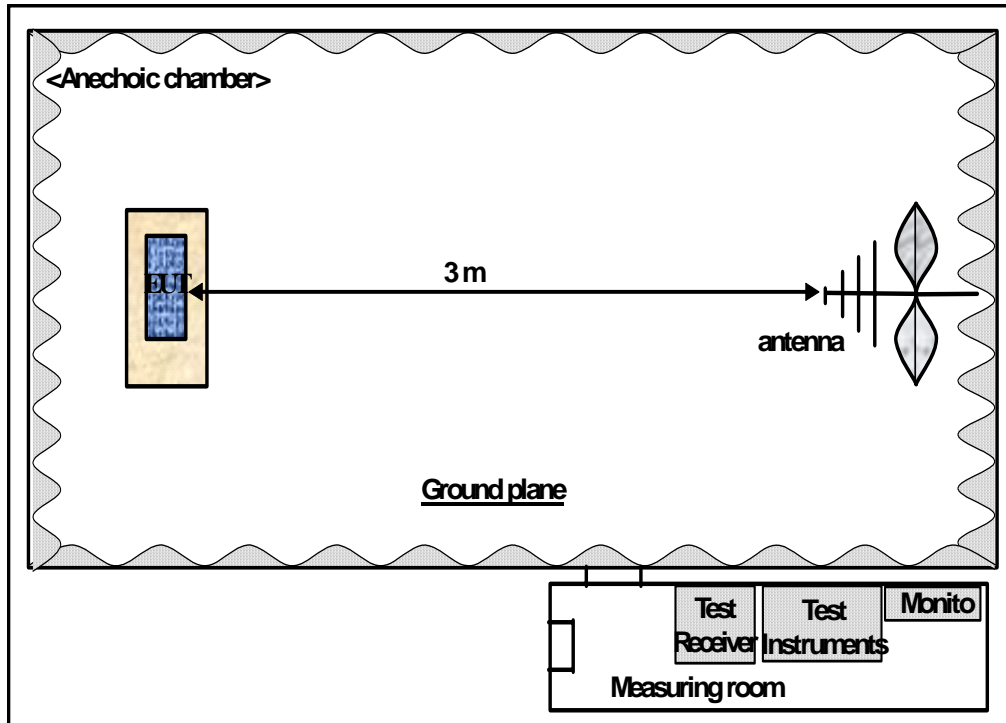



### 3.8.2. Test Results

#### 3.8.2.1 Spurious Radiated Emission (Section 15.205 & 15.209)

Model No. : MA510SS  
 Test distance : 3m  
 Test mode : Continuous TX  
 Date : Jan 29, 2009

Frequency MHz	Antenna Pol. H/V	Detector	Reading Level dB $\mu$ V	Correction (AF+CL) dB $\mu$ V/m	Emission Level dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin +/-
<b>* No emission in the restricted bands was detected.</b>  <b>Emissions falling in the restricted bands of 15.205 detected above the noise floor which was at least 20 dB below the specification limit.</b>							

- Note :**
- Measurement was done over the frequency range from 30 MHz to 10<sup>th</sup> harmonic. The EUT was rotated and the antenna was changed to a range of height of from 1 m to 4 m above the ground plane for maximum response.
  - The observed EMI Receiver (ESIB26) noise floor level was 2.0 dB $\mu$ V. And all other emissions not reported on data were more than 40 dB below the permitted level.
  - SurroundBar and Subwoofer were connected and tested together.


\* D.M. : Detect Mode (P : Peak, Q : Quasi-Peak, A : Average)  
 Antenna Polarization (H : Horizontal, V : Vertical)  
 A.F. : Antenna Factor  
 C.L. : Cable Loss  
 A.G. : Amplifier Gain

**Remark :** Emission level (dB $\mu$ V/m) = Reading level (dB $\mu$ V) + Correction (dB/m) + Amplifier Gain (dB)  
 Margin (dB) = Limit (dB $\mu$ V/m) – Emission level (dB $\mu$ V/m)  
 The “+” sign of the margin means that emission level are within the limit and the “-” sign means over the limit.

## 4. TEST EQUIPMENTS

No.	Equipment	Manufacturer	Model	S/N	Effective Cal.Duration
1	EMI Receiver (20 Hz ~ 26.5 GHz)	R&S	ESIB	100280	08/17/2008 ~ 08/17/2009
2	Spectrum Analyzer (100 Hz ~ 26.5 GHz)	Agilent	E4407B	US41443316	12/01/2008 ~ 12/01/2009
3	Spectrum Analyzer (3 Hz ~ 50 GHz)	Agilent	E4448A	MY43360322	08/30/2008 ~ 08/30/2009
4	Pre-Amplifier ( 100 kHz ~ 1 GHz)	SONOMA.	310N	186270	08/25/2008 ~ 08/25/2009
5	Pre-Amplifier (0.5 GHz ~ 26.5 GHz)	Agilent	83017A	MY39500982	04/02/2008 ~ 04/02/2009
6	LISN(50 $\Omega$ , 50 $\mu$ H) (10 kHz ~ 100 MHz)	R&S	ESH3-Z5	826789009	07/05/2008 ~ 07/05/2009
7	Biconi-Log Ant. (30 MHz ~ 1000 MHz)	Schwarzbeck	VULB9168	9168-180	08/24/2008 ~ 08/24/2009
8	Horn Ant. (1 GHz ~ 18 GHz)	EMCO	3115	9012-3595	03/26/2007 ~ 03/26/2009
9	Horn Ant. (18 GHz ~ 40 GHz)	EMCO	3116	2664	03/26/2007 ~ 03/26/2009
10	Active Loop Ant. (9 kHz ~ 30 MHz)	EMCO	6502	2532	06/08/2008 ~ 06/08/2009
11	DC Power Supply	Agilent	E4356A	MY41000296	10/01/2008 ~ 10/01/2009
12	Power Meter	Agilent	E4417A	GB4129075	09/17/2008 ~ 09/17/2009

## Appendix.1 Test setup photo

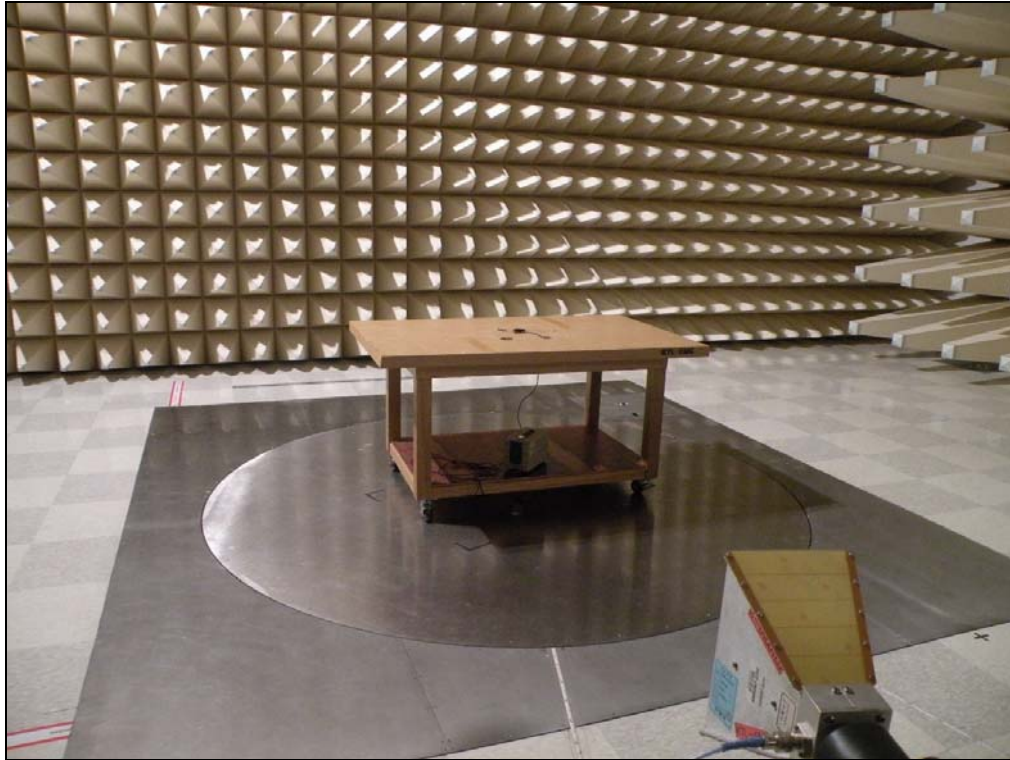

**<Radiated Emission>**