

Date: 2007-07-04 Page 1 of 16

No. : HM159186

Applicant (BUV001): A-Ha Toys (Hong Kong) Limited.

Rm 1113, Tower A, New Mandarin Plaza, 14 Science

Museum Road, TST East, Kowloon, HK.

Manufacturer: Chit Wang Toy Factory Shi Jie Dong Guan China

Xingxing Industrial District, Er Huan Road, Xin Gong Ye Chu

Description of Samples: Product: Street Beatz 6 inch radio control vehicle

Brand Name: Street Beatz

Model Number: 170

FCC ID: VE6010017049

Date Samples Received: 2007-06-16

Date Tested: 2007-06-20

Investigation Requested: Perform ElectroMagnetic Interference measurement in

accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2006 and ANSI C63.4:2003 for FCC Certification.

Conclusions: The submitted product <u>COMPLIED</u> with the requirements of

Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this

Test Report.

Remarks: ----

LEE Kam Chuen,

ElectroMagnetic Compatibility Department
For and on behalf of

The Hong Kong Standards and Testing Centre Ltd.



Date: 2007-07-04 Page 2 of 16

No. : HM159186

CONTENT:

| | Cover Content | Page 1 of 16 Page 2-3 of 16 |
|------------|--|--------------------------------|
| <u>1.0</u> | General Details | |
| 1.1 | Test Laboratory | Page 4 of 16 |
| 1.2 | Applicant Details Applicant HKSTC Code Number for Applicant Manufacturer | Page 4 of 16 |
| 1.3 | Equipment Under Test [EUT] Description of EUT operation | Page 5 of 16 |
| 1.4 | Date of Order | Page 5 of 16 |
| 1.5 | Submitted Samples | Page 5 of 16 |
| 1.6 | Test Duration | Page 5 of 16 |
| 1.7 | Country of Origin | Page 5 of 16 |
| <u>2.0</u> | Technical Details | |
| 2.1 | Investigations Requested | Page 6 of 16 |
| 2.2 | Test Standards and Results Summary | Page 6 of 16 |
| <u>3.0</u> | <u>Test Results</u> | |
| 3.1 | Emission | Page 7-9 of 16 |
| 3.2 | Bandwidth Measurement | Page 10-11 of 16 |



Date : 2007-07-04 Page 3 of 16

No. : HM159186

Appendix A

Page 12 of 16 List of Measurement Equipment

Appendix B

Page 13-14 of 16 Duty Cycle Correction During 100 msec

Appendix C

Page 15-16 of 16 Photographs



Date: 2007-07-04 Page 4 of 16

No. : HM159186

<u>1.0</u> **General Details**

1.1 **Test Laboratory**

The Hong Kong Standards and Testing Centre Ltd. **EMC Laboratory** 10 Dai Wang Street, Taipo Industrial Estate New Territories, Hong Kong

1.2 **Applicant Details** Applicant

A-Ha Toys (Hong Kong) Limited. Rm 1113, Tower A, New Mandarin Plaza, 14 Science Museum Road, TST East, Kowloon, HK.

Manufacturer

Chit Wang Toy Factory Shi Jie Dong Guan China Xingxing Industrial District, Er Huan Road, Xin Gong Ye Chu



Date: 2007-07-04 Page 5 of 16

No.: HM159186

1.3 Equipment Under Test [EUT] Description of Sample

Model Name: Street Beatz 6 inch radio control vehicle

Manufacturer: Chit Wang Toy Factory Shi Jie Dong Guan China

Brand Name: Street Beatz

Model Number: 170

Input Voltage: 3Vd.c ("AA" size battery x 2)

1.3.1 Description of EUT Operation

The Equipment Under Test (EUT) is a A-Ha Toys (Hong Kong) Limited.., Street Beatz 6 inch radio control vehicle. The transmitter is a 4 button transmitter. The EUT continues to transmit while button is being pressed, Modulation by IC, and type is pulse modulation.

1.4 Date of Order

2007-06-16

1.5 Submitted Sample(s):

1 Sample

1.6 Test Duration

2007-06-20

1.7 Country of Origin

China

The Hong Kong Standards and Testing Centre Ltd.



Date : 2007-07-04 Page 6 of 16

No. : HM159186

2.0 Technical Details

Investigations Requested 2.1

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2005 and ANSI C63.4:2003 for FCC Certification.

2.2 **Test Standards and Results Summary Tables**

| EMISSION Results Summary | | | | | | |
|--|------------------|-----------------|----------|-------------|--------|--|
| Test Condition | Test Requirement | Test Method | Class / | Test | Result | |
| | | | Severity | Pass | Failed | |
| Field Strength of Fundamental Emissions & Spurious Emissions | FCC 47CFR 15.235 | ANSI C63.4:2003 | N/A | \boxtimes | | |
| Radiated Emissions, 30MHz to 1GHz | FCC 47CFR 15.209 | ANSI C63.4:2003 | N/A | | | |

Note: N/A - Not Applicable



Date: 2007-07-04 Page 7 of 16

No.: HM159186

3.0 Test Results

3.1 Emission

3.1.1 Radiated Emissions (30 – 1000MHz)


Test Requirement: FCC 47CFR 15.235
Test Method: ANSI C63.4:2003
Test Date: 2007-06-20
Mode of Operation: Tx mode

Test Method:

The sample was placed 0.8m above the ground plane on a standard radiated emission test site. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. In the frequency range of 9kHz to 30MHz, The center of the loop antenna shall be 1 meter above the ground and rotated loop axis for maximum reading. The emissions worst-case are shown in Test Results of the following pages.

*: Semi-anechoic chamber located on the G/F of HKSTC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

Test Setup:

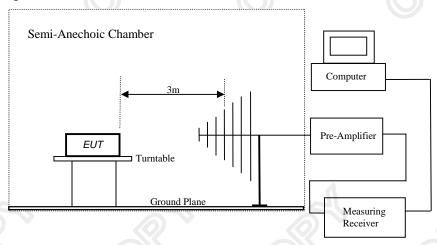



Date: 2007-07-04 Page 8 of 16

No. : HM159186

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.235]:

| Frequency Range of | Field Strength of | Field Strength of | |
|--------------------|----------------------|----------------------|--|
| Fundamental | Fundamental Emission | Fundamental Emission | |
| | [Peak] | [Average] | |
| [MHz] | $[\mu V/m]$ | $[\mu V/m]$ | |
| 49.82-49.90 | 100,000 | 10,000 | |

Results of Tx Mode: PASS

| Field Strength of Fundamental Emissions | | | | | | | | |
|---|------------|------------|----------|----------|-----------|----------|--|--|
| | Peak Value | | | | | | | |
| Frequency | Measured | Correction | Field | Field | Limit @3m | E-Field | | |
| | Level @3m | Factor | Strength | Strength | | Polarity | | |
| MHz | dΒμV | dB/m | dBμV/m | μV/m | μV/m | | | |
| 49.86 | 57.8 | 9.2 | 67.0 | 2,238.7 | 100,000 | Vertical | | |

| Field Strength of Fundamental Emissions | | | | | | | | |
|---|-----------|-------------|------------|----------|----------|-----------|----------|--|
| Average | | | | | | | | |
| Frequency | Measured | Adjusted by | Correction | Field | Field | Limit @3m | E-Field | |
| | Level @3m | Duty Cycle | Factor | Strength | Strength | | Polarity | |
| MHz | dΒμV | dB | dB/m | dBµV/m | μV/m | μV/m | | |
| 49.86 | 53.7 | -4.1 | 9.2 | 62.9 | 1,396.4 | 10,000 | Vertical | |

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Remarks:

Correction Factor includes Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz ±5.2dB

The Hong Kong Standards and Testing Centre Ltd.



Date: 2007-07-04 Page 9 of 16

No. : HM159186

Limits for Radiated Emissions [FCC 47 CFR 15.209]:

| Frequency Range | Quasi-Peak Limits | | | |
|-----------------|-------------------|--|--|--|
| [MHz] | $[\mu V/m]$ | | | |
| 30-88 | 100 | | | |
| 88-216 | 150 | | | |
| 216-960 | 200 | | | |
| Above960 | 500 | | | |

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results:

| Radiated Emissions Ouasi-Peak | | | | | | | | | |
|----------------------------------|---|----------------|--------------------|------------------|------|----------|--|--|--|
| Frequency | Frequency Measured Correction Field Field Limit @3m E-Field | | | | | | | | |
| MHz | Level @3m dBµV | Factor dB/m | Strength dBµV/m | Strength µV/m | μV/m | Polarity | | | |
| 99.72 | 22.7 | 8.8 | 31.5 | 37.6 | 150 | Vertical | | | |
| 149.58 | < 1.0 | 9.8 | < 10.8 | < 3.5 | 150 | Vertical | | | |
| 199.44 | < 1.0 | 11.5 | < 12.5 | < 4.2 | 150 | Vertical | | | |
| 249.30 | < 1.0 | 15.9 | < 16.9 | < 7.0 | 200 | Vertical | | | |
| 299.16 | < 1.0 | 17.4 | < 18.4 | < 8.3 | 200 | Vertical | | | |
| 349.02 | < 1.0 | 17.2 | < 18.2 | < 8.1 | 200 | Vertical | | | |
| 398.88 | < 1.0 | 18.8 | < 19.8 | < 9.8 | 200 | Vertical | | | |
| 448.74 | < 1.0 | 19.7 | < 20.7 | < 10.8 | 200 | Vertical | | | |
| 498.60 | < 1.0 | 20.6 | < 21.6 | < 12.0 | 200 | Vertical | | | |

Remarks:

Correction Factor includes Antenna Factor and Cable Attenuation.

30MHz to 1GHz Calculated measurement uncertainty $\pm 5.2 dB$



Date: 2007-07-04 Page 10 of 16

No.: HM159186

3.2 26dB Bandwidth of Fundamental Emission

Test Requirement: FCC 47 CFR 15.235

Test Method: ANSI C63.4:2003 (Section 13.1.7)

Test Date: 2005-06-20 Mode of Operation: On mode

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.

The Hong Kong Standards and Testing Centre Ltd.




Date: 2007-07-04 Page 11 of 16

No.: HM159186

Limits for 26dB Bandwidth of Fundamental Emission:

| Frequency Range | 26dB Bandwidth | FCC Limits |
|-----------------|----------------|--------------------|
| [MHz] | [KHz] | [MHz] |
| 49.859 | 90.5 | within 49.82-49.90 |

26dB Bandwidth of Fundamental Emission

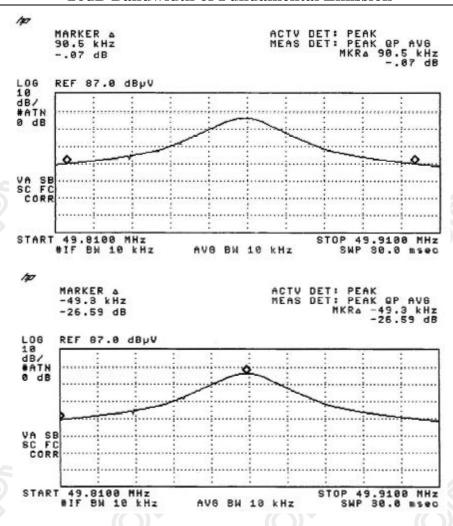

The Hong Kong Standards and Testing Centre Ltd.
10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong



Date: 2007-07-04 Page 12 of 16

No. : HM159186

Appendix A

List of Measurement Equipment

Radiated Emission

| EQP NO. | DESCRIPTION | MANUFACTURER | MODEL NO. | SERIAL NO. | |
|---------|----------------------------|-----------------|-----------|------------|--|
| EM007 | SPECTRUM ANALYZER | HEWLETT PACKARD | HP85660B | 3144A21192 | |
| EM008 | SPECTRUM ANALYZER DISPLAY | HEWLETT PACKARD | HP85662A | 3144A20514 | |
| EM009 | QUASI PEAK ADAPTOR | HEWLETT PACKARD | HP85650A | 3303A01702 | |
| EM010 | RF PRESELECTOR | HEWLETT PACKARD | HP85685A | 3221A01410 | |
| EM011 | ATTENUATOR/SWITCH | HEWLETT PACKARD | HP11713A | 2508A10595 | |
| EM012 | PRE-AMPLIFIER | HEWLETT PACKARD | HP8449B | 3008A00262 | |
| EM020 | HORN ANTENNA | ETS-Linggren | 3115 | 4032 | |
| EM022 | LOOP ANTENNA | ETS-Linggren | 6502 | 1189-2424 | |
| EM072 | SIGNAL GENERATOR | HEWLETT PACKARD | 8640B | 1948A11892 | |
| EM083 | OPEN AREA TEST SITE | HKSTC | N/A | N/A | |
| EM131 | EMC ANALYZER | HEWLETT PACKARD | 8595EM | 3710A00155 | |
| EM145 | EMI TEST RECEIVER | ROHDE & SCHWARZ | ESCS 30 | 830245/021 | |
| EM195 | ANTENNA POSITIONING MAST | ETS-Linggren | 2075 | 2368 | |
| EM196 | MULTI-DEVICE CONTROLLER | ETS-Linggren | 2090 | 1662 | |
| EM215 | MULTIDEVICE CONTROLER | ETS-Linggren | 2090 | 00024676 | |
| EM216 | MINI MAST SYSTEM | ETS-Linggren | 2075 | 00026842 | |
| EM217 | ELECTRIC POWERED TURNTABLE | ETS-Linggren | 2088 | 00029144 | |
| EM218 | ANECHOIC CHAMBER | ETS-Linggren | FACT-3 | | |
| EM219 | BICONILOG ANTENNA | ETS-Linggren | 3142C | 00029071 | |
| EM229 | EMI TEST RECEIVER | ROHDE & SCHWARZ | ESIB40 | 100248 | |

Line Conducted

| EQP NO. | DESCRIPTION | MANUFACTURER | MODEL NO. | SERIAL NO. |
|---------|-----------------------------------|-------------------------------------|------------|-----------------|
| EM078 | VARIAC | SHANGHAI VOLTAGE | TDGC-3/0.5 | N/A |
| EM081 | SMALL SCREENED ROOM | MIKO INST HK | N/A | N/A |
| EM119 | LISN | ROHDE & SCHWARZ | ESH3-Z5 | 0831.5518.52 |
| EM127 | ISOLATION TRANSFORMER 220 TO 300V | WING SUN | N/A | N/A |
| EM233 | PULSE LIMITER | ROHDE & SCHWARZ | ESH3-Z2 | 100314 |
| EM181 | EMI TEST RECEIVER | ROHDE & SCHWARZ | ESIB7 | 100072 |
| EM154 | SHIELDING ROOM | SIEMENA MATSUSHITA COMPONENTS | N/A | 803-740-057-99A |
| EM197 | LISN | ETS-Linggren | 4825/2 | 1193 |

Remarks:-

CM Corrective Maintenance

Not Applicable or Not Available N/A

TBD To Be Determined



Date: 2007-07-04 Page 13 of 16

No. : HM159186

Appendix B


Duty Cycle Correction During 100msec

Each function key sends a different series of characters, but each packet period (15.938msec) never exceeds a series of 4 long (1.35msec) and 10 short (450μsec) pulses. Assuming any combination of short and long pulses may be obtained due to encoding the worst case transmit duty cycle would be considered 4x1.35msec+10x450μsec per 9.9msec=62.1% duty cycle. Figure A through C show the characteristics of the pulse train for one of these functions.

Remarks:

Duty Cycle Correction = 20Log(0.621) = -4.1dB

The following figures [Figure A to Figure C] show the characteristics of the pulse train for one of these functions.

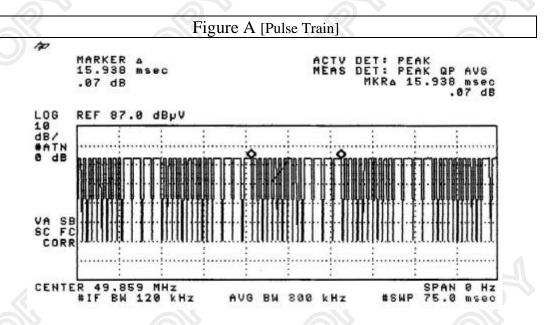


The Hong Kong Standards and Testing Centre Ltd.



Date: 2007-07-04 Page 14 of 16

No. : HM159186

Figure B [Long Pulse] 10 DET: PEAK DET: PEAK QP AVG MKRA 1.3500 msec .03 dB MARKER A 1.3500 msec .03 dB LOG REF 87.0 dBpV 10 dB/ #ATN 0 dB VA SB SC FC CORR CENTER 49.859 MHz #IF BW 120 kHz AVB BW 300 kHz

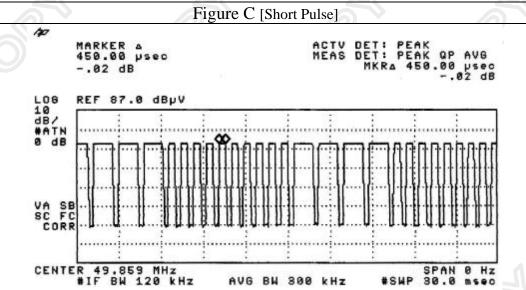

The Hong Kong Standards and Testing Centre Ltd.
10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong



Date : 2007-07-04 Page 15 of 16

No. : HM159186

Appendix C

Photographs of EUT

Front View of the product



Rear View of the product



Inner Circuit Top View



Inner Circuit Bottom View





Date: 2007-07-04 Page 16 of 16

No. : HM159186

Photographs of EUT

Measurement of Radiated Emission Test Set Up

***** End of Test Report *****