

FCC TEST REPORT

FCC ID : VERSK102

Applicant : **SKYMART LTD**

Address : Minzu Industrial Park, Yanjiang Rd, Torch Development Area, Zhongshan,
Guangdong, 528000 China

Equipment Under Test (EUT) :

Product : Portable DVD Player

Model No. : SK102


Modulation : FM

Operation Frequency : 88.0~ 108.0MHz

Standards : FCC 15 Subpart C Paragraph 15.239

Date of Test : June 22, 2007

Test Engineer : **Tiger Su**

Reviewed By : 

PERPARED BY:

Waltek Services (Shenzhen) Co., Ltd.

8C, West Tower, Aidi Building, No.5003 Binhe Rd, Futian District, Shenzhen 518045,
Guangdong, China.

Tel: 86-755-83551033

Fax: 86-755-83552400

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS.....	2
3 TEST SUMMARY.....	5
4 GENERAL INFORMATION.....	6
4.1 CLIENT INFORMATION	6
4.2 GENERAL DESCRIPTION OF E.U.T.....	6
4.3 DETAILS OF E.U.T.	6
4.4 DESCRIPTION OF SUPPORT UNITS	6
4.5 STANDARDS APPLICABLE FOR TESTING.....	6
4.6 TEST FACILITY.....	7
4.7 TEST LOCATION.....	7
5 EQUIPMENT USED DURING TEST	8
6 CONDUCTED EMISSION TEST	9
6.1 TEST EQUIPMENT.....	9
6.2 TEST PROCEDURE	9
6.3 CONDUCTED TEST SETUP	10
6.4 EUT OPERATING CONDITION	10
6.5 CONDUCTED EMISSION LIMITS	11
6.6 CONDUCTED EMISSION TEST RESULT	11
6.7 CONDUCTED EMISSION TEST DATE	12
7 RADIATION EMISSION TEST.....	13
7.1 TEST EQUIPMENT.....	13
7.2 MEASUREMENT UNCERTAINTY.....	13
7.3 TEST PROCEDURE	13
7.4 RADIATED TEST SETUP.....	14
7.5 SPECTRUM ANALYZER SETUP.....	14
7.6 CORRECTED AMPLITUDE & MARGIN CALCULATION	15
7.7 SUMMARY OF TEST RESULTS.....	15
7.8 EUT OPERATING CONDITION	16
7.9 RADIATED EMISSIONS LIMIT.....	16
7.10 RADIATED EMISSIONS TEST RESULT.....	17
8 BAND EDGE	19
8.1 TEST EQUIPMENT.....	19
8.2 TEST PROCEDURE	19
8.3 BAND EDGE TEST RESULT	20
9 PHOTOGRAPHS OF TESTING.....	22
9.1 CONDUCTION EMISSION TEST VIEW	22
9.2 RADIATION EMISSION TEST VIEW	22
10 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS	23

10.1 EUT - FRONT VIEW23

10.2 EUT - BACK VIEW23

10.3 ADAPTER - FRONT VIEW24

10.4 ADAPTER - BACK VIEW24

10.5 PCB1-FRONT VIEW25

10.6 PCB1-BACK VIEW25

10.7 PCB2-FRONT VIEW26

10.8 PCB2-BACK VIEW26

10.9 PCB3-FRONT VIEW27

10.10 PCB3-BACK VIEW27

11 FCC ID LABEL28

3 Test Summary

Test	Test Requirement	Test Method	Class / Severity	Result
Radiated Emission (30MHz to 1GHz)	FCC PART 15: 2003	ANSI C63.4: 2003	Class B	PASS
Conducted Emission (150KHz to 30MHz)	FCC PART 15: 2003	ANSI C63.4: 2003	Class B	PASS

4 General Information

4.1 Client Information

Applicant:	SKYMART LTD
Address:	Minzu Industrial Park, Yanjiang Rd, Torch Development Area, Zhongshan, Guangdong 528000 China
Manufacturer:	SKYMART LTD
Address:	Minzu Industrial Park, Yanjiang Rd, Torch Development Area, Zhongshan, Guangdong 528000 China

4.2 General Description of E.U.T.

Product description:	Portable DVD Player
Model No.:	SK102

4.3 Details of E.U.T.

Power Supply:	Aadapter input: AC 100~240V, Adapter output: DC 12V/2A
---------------	---

4.4 Description of Support Units

The EUT has been tested as an independent unit.

4.5 Standards Applicable for Testing

The customer requested FCC tests for a Portable DVD Player. Under DVD playing mode, FM Transmitter tests were done in this report, and the TV tests were included in the other FCC Verification Test Report. The standards used were FCC 15 Paragraph 15.209 and Paragraph 15.239.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC – Registration No.: 101879**

Compliance Engineering Service (China) EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 101879, September 28, 2004.

4.7 Test Location

All Emissions tests were performed at:-

No. 6 Bldg. 35 Jin Ao Industry Technolog Yuan, Jukeng Rd., Da-Dhui-Keng Cun, Guan Lan Zhen, Bao An Qu, ShenZhen City, China 518110

5 Equipment Used during Test

DESCRIPTION	MFR	MODEL#	SERIAL #	LAST CAL.	CAL.DUE	Firmware	Software
AMPLIFIER	MITEQ	AW-1604-3000	1093584	2007/06/10	2008/06/09	N/A	N/A
ANTENNA	EMCO	3142B	9910-1436	2007/06/10	2008/06/09	N/A	N/A
BILOG ANTENNA	SCHAF FNER	CBL6143	5082	2007/06/10	2008/06/09	N/A	N/A
Horn Antenna	ASA	NA	NA	2007/06/10	2008/06/09	N/A	N/A
CABLE	TIME MICRO WAVE	LMR-400	N-TYPE04	2007/06/10	2008/06/09	N/A	N/A
Spectrum Analyzer	Agilent	E7402A	MY42000139	2007/06/10	2008/06/09	N/A	N/A
EMI test Receiver	ROHD E&SCH WARZ	ESCI	1166.595K03	2007/02/09	2008/02/08	N/A	N/A
Signal Generator	Agilent	8648C	3847M01114	2007/02/09	2008/02/08	N/A	N/A
DESCRIPTION	MFR	MODEL#	SERIAL#	LAST CAL.	CAL. DUE	Firmware	Software
Receiver	R&S	ESPI3		2007/02/09	2008/02/08	Ver 3.32 SP2	Labview 5.0
LISN (EUT)	R&S	ENV216		2007/02/09	2008/02/08	N/A	N/A
LISN	EMCO	3825/2	8901-1459	2007/02/09	2008/02/08	N/A	N/A
SPECTRUM ANALYZER	ADVA NTENT	R3132	N02563	2007/06/10	2008/06/09	Ver F04	N/A

6 Conducted Emission Test

Product Name:	Portable DVD Player
Test Requirement:	FCC Part15 Paragraph 15.207
Test Method:	Based on FCC Part15 Paragraph 15.207
Test Date:	June 22, 2007
Frequency Range:	150kHz to 30MHz
Class:	Class B
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

6.1 Test Equipment


Please refer to Section 5 this report.

6.2 Test Procedure

1. The EUT was tested according to ANSI C63.4:2003. The frequency spectrum from 150kHz to 30MHz was investigated.
2. The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.
3. Compliance test was performed test in the EUT was connect the adaptor output.

6.3 Conducted Test Setup


The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 Paragraph 15.207 limits.

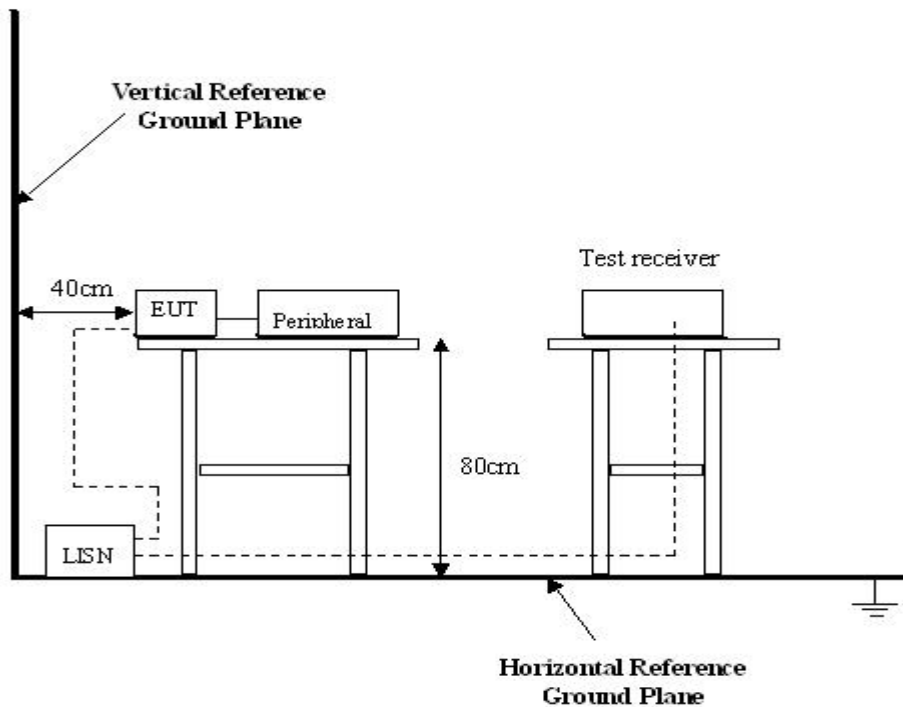

6.4 EUT Operating Condition

Operating condition is according to ANSI C63.4:2003.

- A. Setup the EUT and simulators as shown on follow.
- B. Enable RF signal and confirm EUT active.
- C. Modulate output capacity of EUT up to specification.

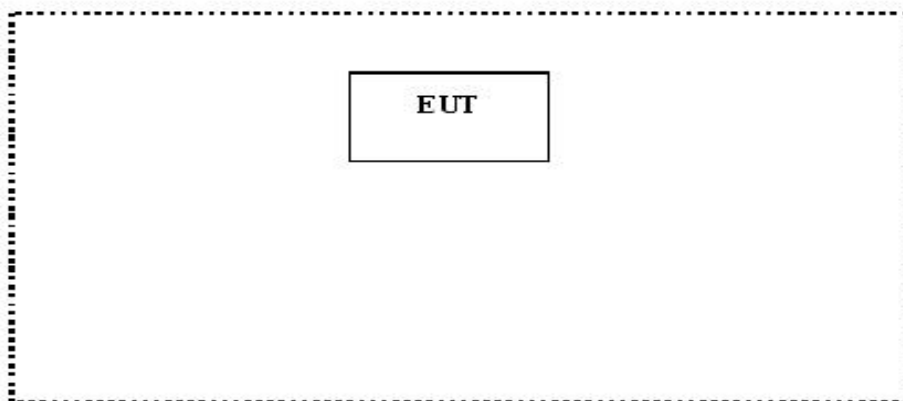

6.5 Conducted Emission Limits

66-56 dB μ V/m between 0.15MHz & 0.5MHz


56 dB μ V/m between 0.5MHz & 5MHz

60 dB μ V/m between 5MHz & 30MHz


Note: In the above limits, the tighter limit applies at the band edges.

6.6 Conducted Emission Test Result

Live Line

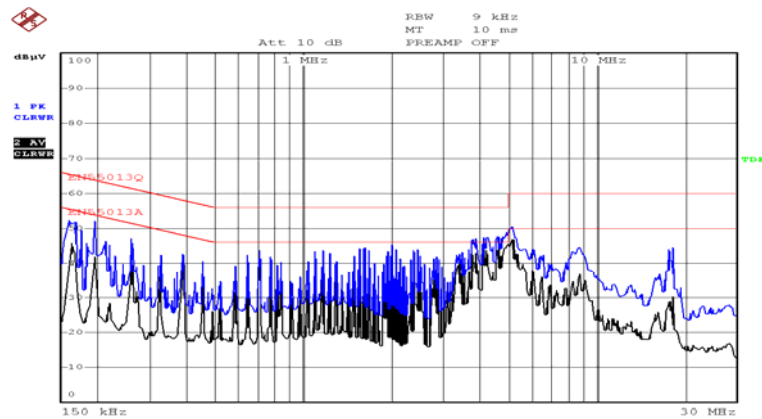

Netural Line

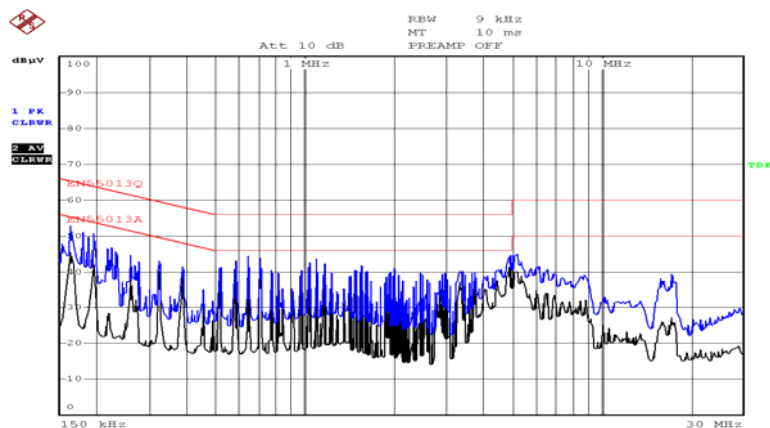

6.7 Conducted Emission Test Data

Freq. MHz	Line	QP Reading dBuV	Limit dBuV	Margin dB	AV Reading dBuV	Limit dBuV	Margin dB
0.17	Live	52.24	64.97	12.73	35.12	54.97	19.85
0.27	Live	48.69	61.15	12.46	36.23	51.15	14.92
0.32	Live	42.52	59.75	17.23	34.49	49.75	15.26
0.16	Neutral	52.17	65.47	13.30	43.32	55.47	12.15
0.23	Neutral	47.73	62.47	14.74	27.88	52.47	24.59
0.32	Neutral	42.44	59.75	17.31	31.11	49.75	18.64

7 Radiation Emission Test

Product Name:	Portable DVD Player
Test Requirement:	FCC Part15 Paragraph 15.239
Test Method:	Based on ANSI C63.4:2003
Test Date:	June 22, 2007
Frequency Range:	30MHz to 1GHz
Measurement Distance:	3m
Detector:	Peak for pre-scan (120kHz resolution bandwidth) Quasi-Peak if maximised peak within 6dB of limit

7.1 Test Equipment

Please refer to Section 5 this report.

7.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on ANSI C63.4:2003, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at CCS EMC Laboratory is +4.0 dB.

7.3 Test Procedure

1. Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combinations.
2. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB μ V of specification limits), and are distinguished with a "Qp" in the data table.
3. The EUT was under normal mode during the final qualification test and the configuration was used to represent the worst case results.
4. The sample is tested for low frequency testing at 88.1 MHz , middle frequency 98MHz and high frequency testing at 107.9 MHz.

7.4 Radiated Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 Paragraph 15.209 and Paragraph 15.239 limits.

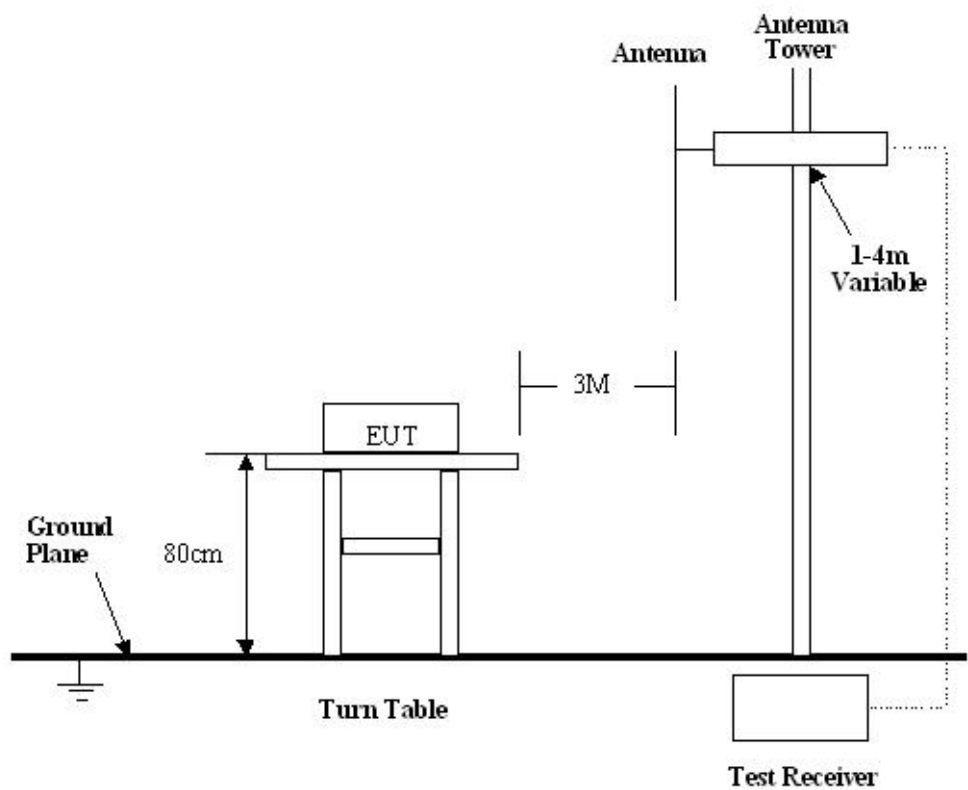

7.5 Spectrum Analyzer Setup

According to FCC Part15 Paragraph 15.239 Rules, the system was tested to 1000 MHz.

Start Frequency30 MHz
Stop Frequency1000 MHz
Sweep Speed Auto
IF Bandwidth100 kHz
Video Bandwidth1 MHz
Quasi-Peak Adapter Bandwidth120 kHz
Quasi-Peak Adapter Mode.....Normal
Resolution Bandwidth1MHz

7.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB μ V means the emission is 7dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$

7.7 Summary of Test Results

According to the data in section 7.10, the EUT complied with the FCC Part15 Paragraph 15.239 standards.

7.8 EUT Operating Condition

Same as section 6.4 of this report. Compliance test was performed test in the transmitter operation Mode.

7.9 Radiated Emissions Limit

A. FCC Part 15 subpart C Paragraph 15.239 Limit

Fundamental Frequency(MHZ)	Field Strength of Fundamental	
	uV/m	dBuV/m
88-108	250	48

- Note:**
- (1) $\text{RF Voltage(dBuV)} = 20 \log \text{RF Voltage(uV)}$
 - (2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
 - (3) The emission limit in this paragraph is based on measurement instrumentation employing an average detector. Measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency(MHZ)	Distance(m)	Field strength(dBuV/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

- Note:**
- (1) $\text{RF Voltage(dBuV)} = 20 \log \text{RF Voltage(uV)}$
 - (2) In the Above Table, the tighter limit applies at the band edges.
 - (3) Distance refers to the distance in meters between the measuring instrument antenna.

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

7.10 Radiated Emissions Test Result

Formula of conversion factors: the field strength at 3m was established by adding
The meter reading of the spectrum analyzer (which is set to read in units of dBuV)
To the antenna correction factor supplied by the antenna manufacturer. The antenna
Correction factors are stated in terms of dB. The gain of the pressletor was accounted
For in the spectrum analyser meter reading.

Example:

Freq(MHz) Meter Reading +ACF=FS

33 20dBuV+10.36dB=30.36dBuV/m @3m

Radiated Emission Test Data

A. Test Item: Radiated Emission Test Data

Test Voltage: DC 12V

Test Mode: ON TX

Temperature: 24 °C

Humidity: 52%RH

Test Result: PASS

Frequency (MHz)	Detector	Antenna Polarization	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Turntable Angle (°C)
Low Frequency							
88.10	PK	Horizontal	50.2	68.0	17.8	1.0	90
88.10	AV	Horizontal	44.1	48.0	3.9	1.0	120
176.2	QP	Horizontal	40.2	43.5	3.3	1.8	45
264.3	QP	Horizontal	39.7	46.0	6.3	1.8	180
352.4	QP	Horizontal	38.2	46.0	7.8	1.5	90
88.10	PK	Vertical	48.4	68.0	19.6	1.2	45
88.10	AV	Vertical	42.3	48.0	5.7	1.0	90
176.2	QP	Vertical	39.6	43.5	3.9	1.8	180
264.3	QP	Vertical	36.7	46.0	9.3	2.0	120
352.4	QP	Vertical	34.9	46.0	11.1	1.0	45
Middle Frequency							
98.0	PK	Horizontal	49.3	68.0	18.7	1.5	90
98.0	AV	Horizontal	44.4	48.0	3.6	1.8	180
196.0	QP	Horizontal	39.7	43.5	3.8	1.8	90
294.0	QP	Horizontal	38.9	46.0	7.1	2.0	45

98.0	PK	Vertical	48.2	68.0	19.8	1.0	120
98.0	AV	Vertical	42.1	48.0	5.9	2.0	90
196.0	QP	Vertical	37.6	43.5	5.9	1.5	90
294.0	QP	Vertical	35.1	46.0	10.9	1.0	180
High Frequency							
107.9	PK	Horizontal	50.1	68.0	17.9	2.0	120
107.9	AV	Horizontal	44.7	48.0	3.3	1.0	90
215.8	QP	Horizontal	38.6	43.5	4.9	1.8	45
323.7	QP	Horizontal	37.5	46.0	8.5	1.5	60
107.9	PK	Vertical	48.6	68.0	19.4	1.5	180
107.9	AV	Vertical	42.1	48.0	5.9	2.0	120
215.8	QP	Vertical	37.6	43.5	5.9	1.8	180
323.7	QP	Vertical	36.3	46.0	9.7	1.0	180

- Note:** (1) All Reading Levels below 1GHz are Quasi-Peak, above are peak and average value.
- (2) Emission Level = Reading Level + Probe Factor + Cable Loss.

B. Test Item: Radiated Emission Test Data

Test Voltage: DC 12V

Test Mode: ON DVD

Temperature: 24 °C

Humidity: 52%RH

Test Result: PASS

Frequency (MHz)	Detector	Antenna Polarization	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Turntable Angle (°C)
105.3	QP	Horizontal	36.8	43.5	6.7	1.0	90
122.2	QP	Horizontal	38.5	43.5	5.0	1.8	120
243.4	QP	Horizontal	40.6	46.0	5.4	1.8	180
117.6	QP	Vertical	36.6	43.5	6.9	1.0	60
122.1	QP	Vertical	38.8	43.5	4.7	1.8	45
264.0	QP	Vertical	40.5	46.0	5.5	2.0	180

8 Band Edge

8.1 Test Equipment

Please refer to Section 5 this report.


8.2 Test Procedure

- 1.The EUT, peripherals were put on the turntable which table size is 1mX1.5m, table high 0.8m. All set up is according to ANSI C63.4:2003.
2. The antenna high were varied from 1m to 4m high to find the maximum emission for each frequency.
3. The field strength of any emissions radiated on any frequency outside of the specified 200KHz band shall not exceed the general radiated emission limits in Section 15.209.
4. The market sample is tested for low frequency testing at 88.1 MHz, 98MHz and high frequency testing at 107.9 MHz..


8.3 Band Edge Test Result

Product Name: Portable DVD Player
Test Item: Band Edge Test
Test Voltage: DC 12V
Test Mode: TX ON
Temperature: 24 °C
Humidity: 52%RH


88.1 MHz

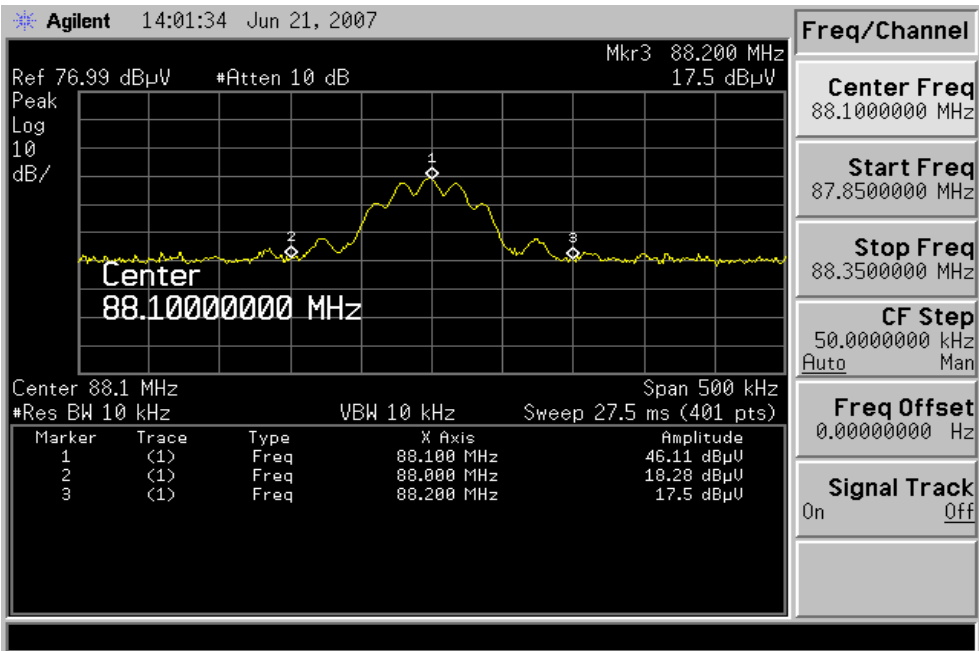

98.0 MHz

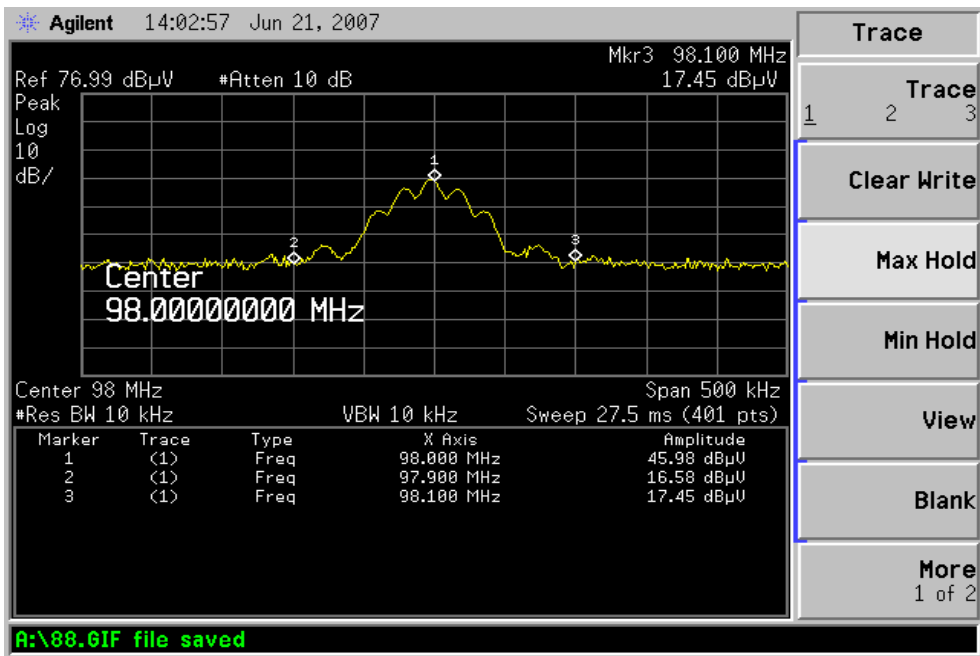

107.9 MHz

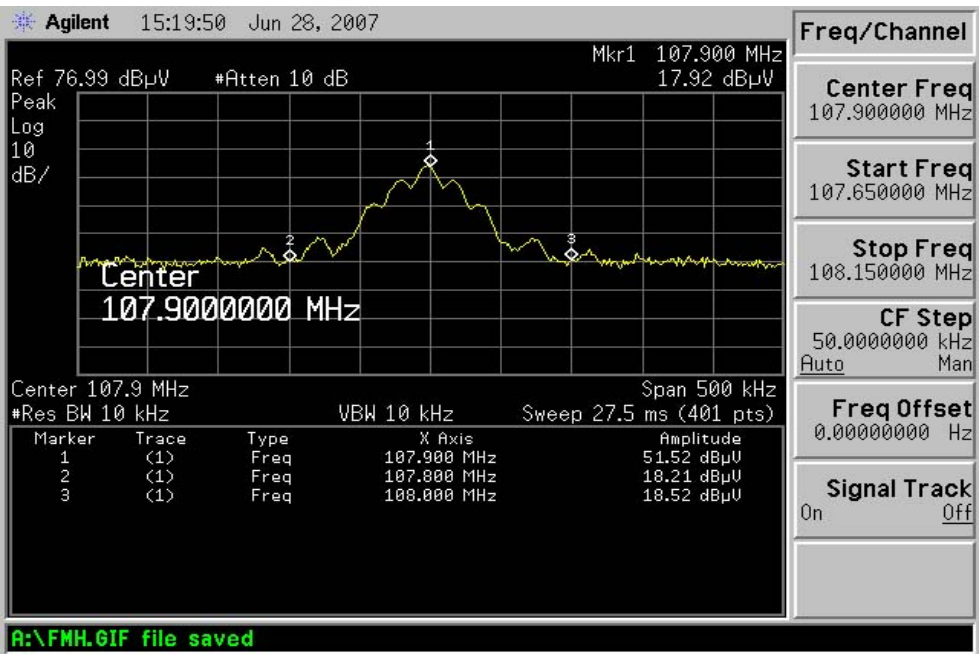


- Note:** (1) The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209.
- (2) The average measurement was not performed when the peak measured data under the limit of average detection.

9 Photographs of Testing

9.1 Conduction Emission Test View




9.2 Radiation Emission Test View

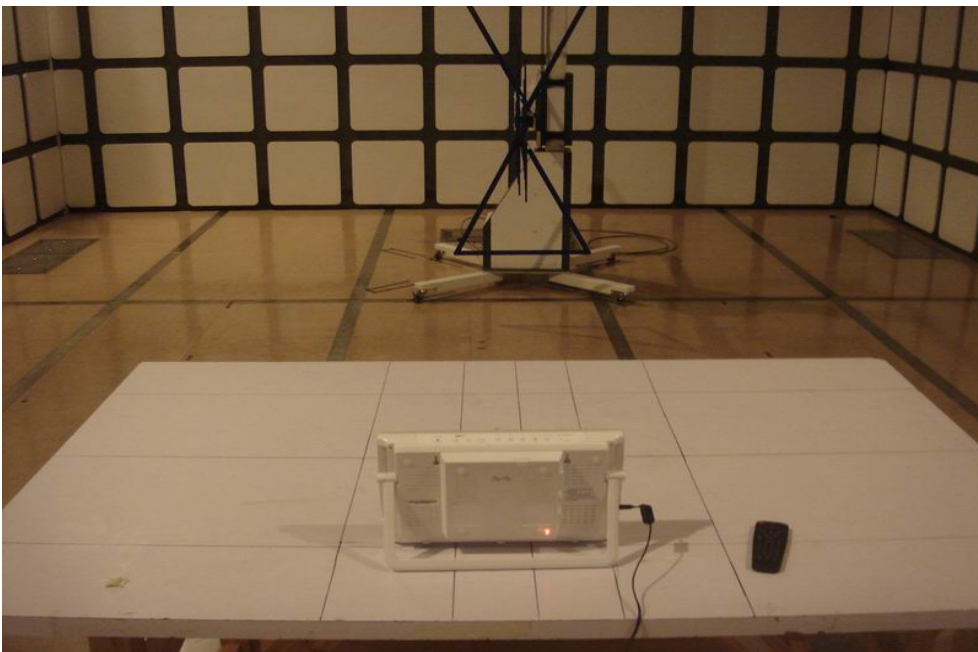

10 Photographs - Constructional Details

10.1 EUT - Front View

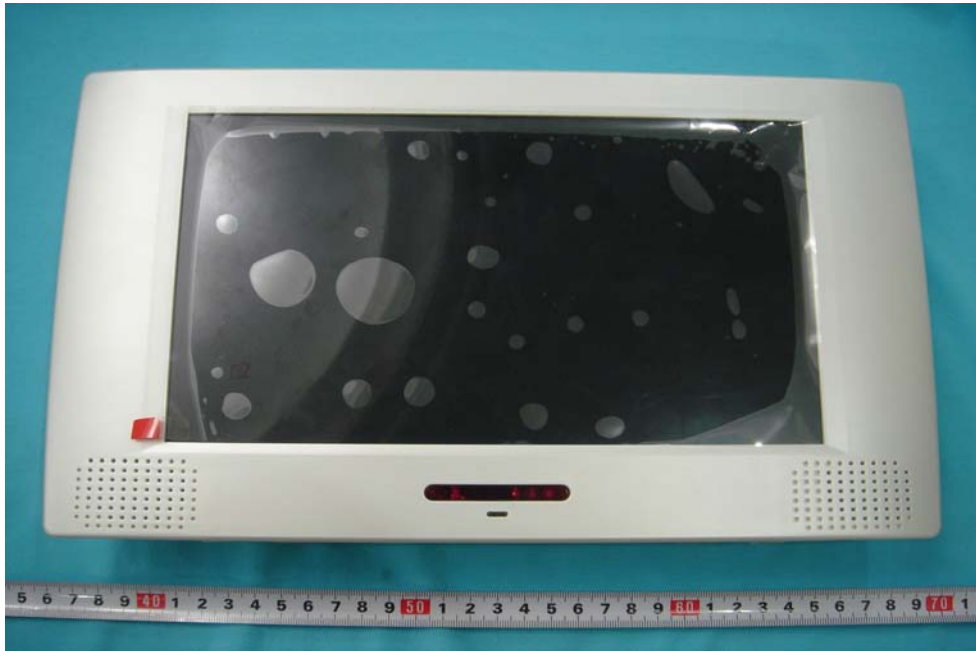

10.2 EUT - Back View




10.3 Adapter - Front View




10.4 Adapter - Back View




10.5 PCB1-Front View

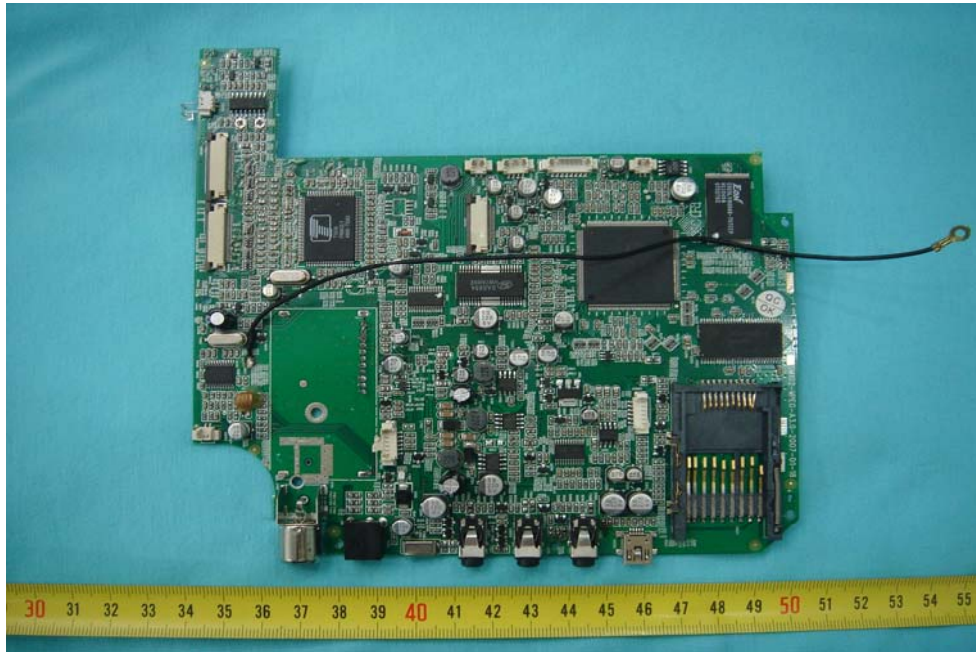


10.6 PCB1-Back View


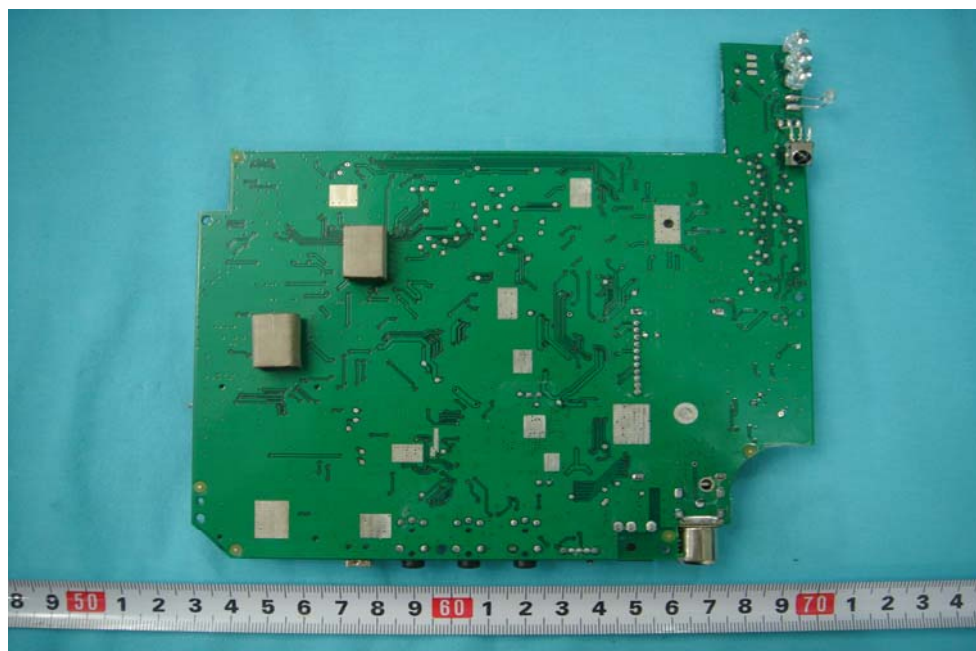


10.7 PCB2-Front View

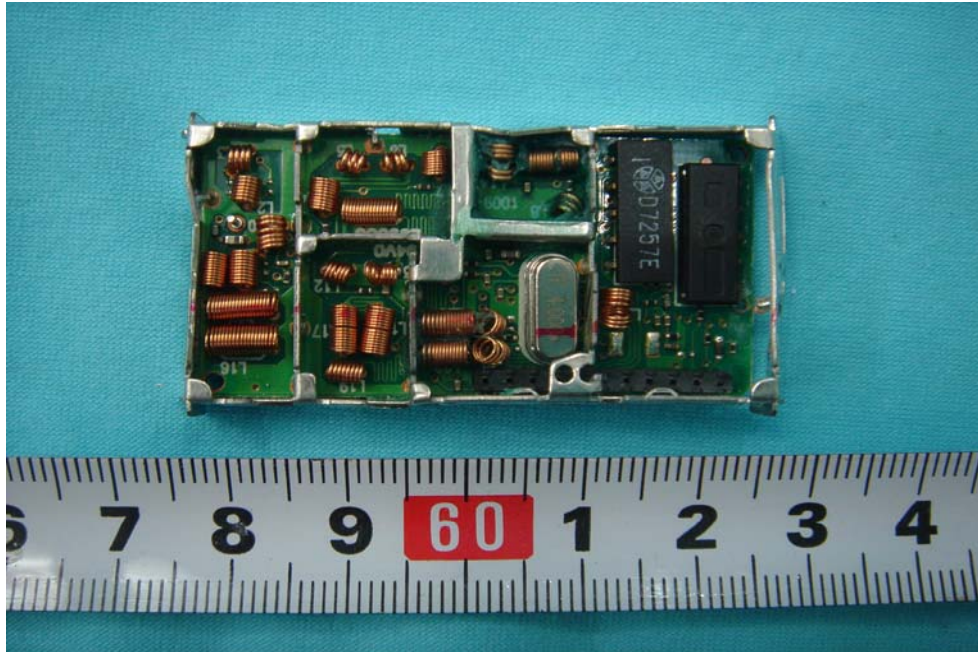

10.8 PCB2-Back View

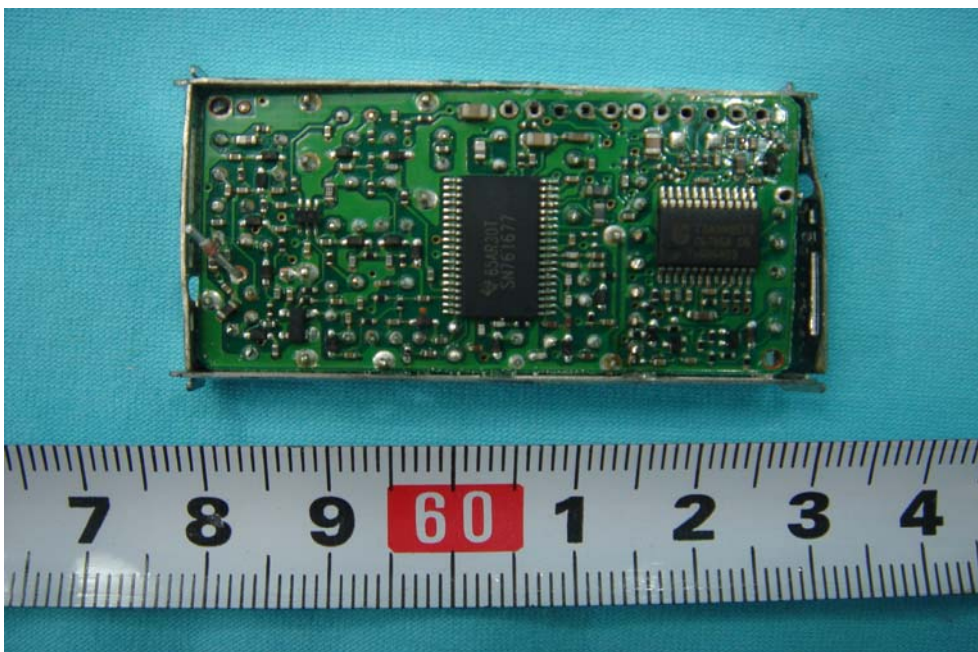

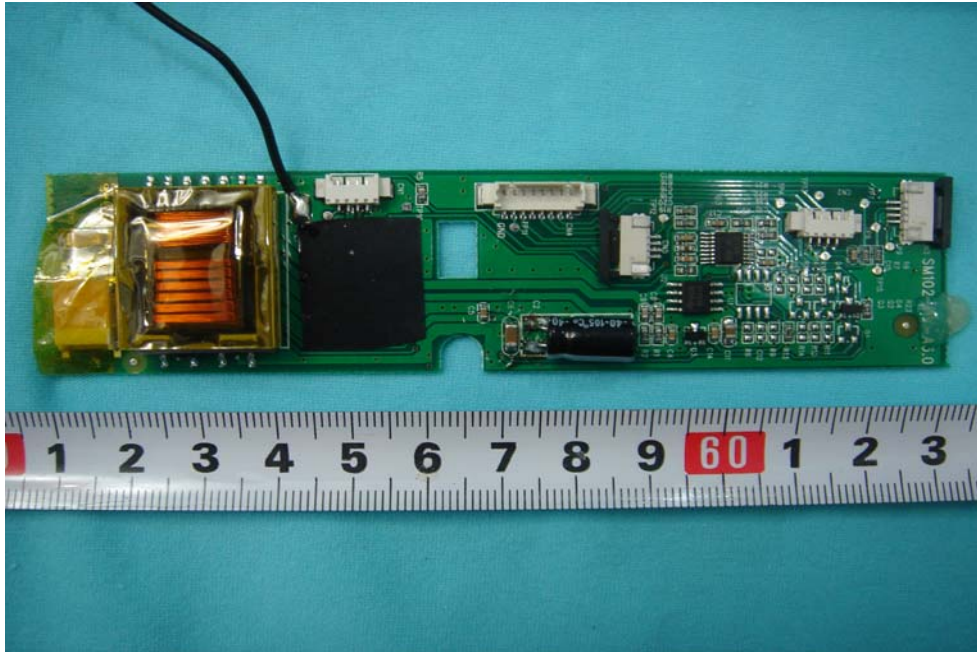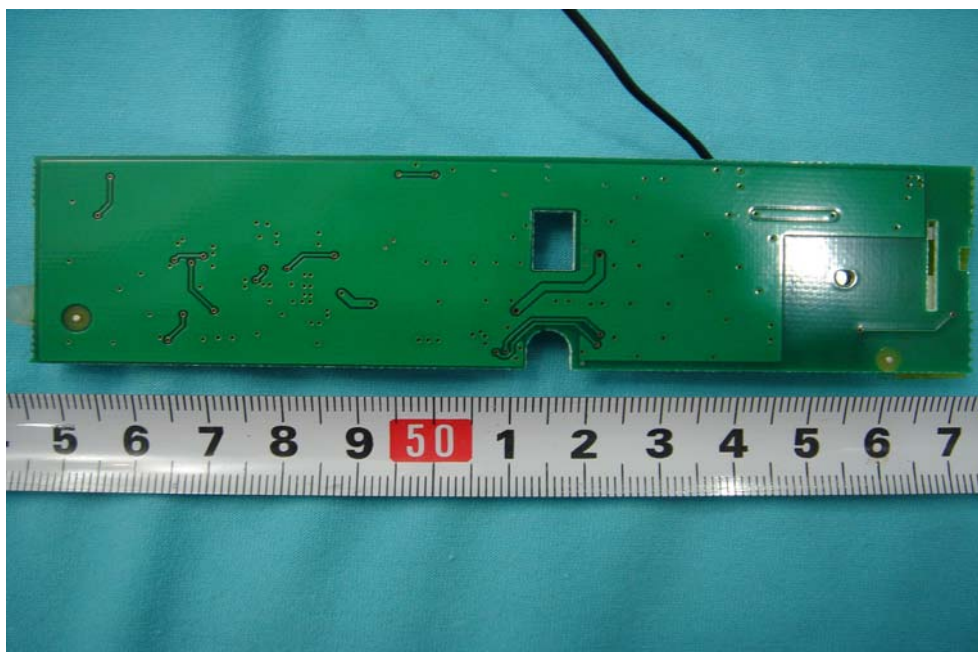10.9 PCB3-Front View**10.10 PCB3-Back View**

11 FCC ID Label

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1)this device may not cause harmful interference,and (2) this device must accept any interference received, including interference that may cause undesired operation.

The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT
EUT Bottom View/proposed FCC Mark Location

