



**Telecommunications & Telematics  
for Transports Lab.**

# TEST REPORT

Ref. No. ARSH00182/2

Date: 2007-10-26

Measurements performed in accordance with:



**FCC Rules : Code of Federal Regulations (CFR) no. 47 -  
PART 15 – RADIO FREQUENCY DEVICES**

PRODUCT : EMG WIRELESS MODULE FOR ELECTROMYOGRAPH

TESTED MODEL : ZEROWIRE

FCC ID. : VH6ZWTX07

APPLICANT : AURION S.r.l. – Viale Certosa, 191– 20151 MILANO

MANUFACTURER : AURION S.r.l. – Viale Certosa, 191– 20151 MILANO

TRADEMARK : AURION

OTHER INFORMATION      Testing dates : 2007-09-24 ÷ 2007-10-10

   Tested samples No. : 1

   Testing Laboratory : IMQ S.p.A. Via Quintiliano, 43 I-20138 MILANO

Tested by : R. Radice      Signature: *Roberto Radice*      Date : 2007-10-26

R. Colombo

Checked by: (EMC and R&TTE Lab. deputy)      Signature: *Roberto Colombo*      Date : 2007-10-26

## Revision Sheet

Release No.	Date	Revision Description
Rev. 0	2007-10-26	Test Results and Evaluation Report

*NOTICE: The results of tests and checks reported in this Test Report refer exclusively to the samples tested and described in the Report itself. This report shall not be reproduced partially or in its entirety without the written approval of IMQ S.p.A.*

**IMQ S.p.A. - Via Quintiliano, 43 – I-20138 MILANO**

# CONTENTS

<b>1 General Description of Equipment under Test.....</b>	<b>1-3</b>
1.1 APPLICANT.....	1-3
1.2 MANUFACTURER.....	1-3
1.3 EQUIPMENT CLASSIFICATION.....	1-3
1.4 BASIC DESCRIPTION OF EQUIPMENT UNDER TEST .....	1-4
1.5 FEATURE OF EQUIPMENT UNDER TEST.....	1-5
<b>2 Test Configuration of Equipment under Test .....</b>	<b>2-6</b>
2.1 ENVIRONMENTAL CONDITIONS .....	2-6
2.2 DESCRIPTION OF SUPPORT EQUIPMENT.....	2-6
2.3 INTERFACE IDENTIFICATION AND CONNECTION DIAGRAM OF TEST SYSTEM.....	2-7
<b>3 Operation of Equipment under Test .....</b>	<b>3-8</b>
3.1 OPERATING TEST CONDITIONS.....	3-8
<b>4 Tests Identification and Results .....</b>	<b>4-9</b>
4.1 METHODS OF MEASUREMENT .....	4-11
4.2 FREQUENCY RANGE INVESTIGATED .....	4-11
<b>5 Measurements and Tests Data.....</b>	<b>5-12</b>
<b>6 Additional Technical Information.....</b>	<b>6-45</b>
6.1 ELECTROMAGNETICALLY RELEVANT COMPONENTS: ....	6-45
6.2 RFI SUPPRESSION DEVICES: .....	6-45
6.3 EMI PROTECTION DEVICES: .....	6-45
<b>7 Technical Documentation.....</b>	<b>7-46</b>
<b>8 Photographic Documentation .....</b>	<b>8-47</b>
8.1 EUT IDENTIFICATION .....	8-47
8.2 TEST SET-UP .....	8-49
<b>9 Measurement and Test Equipment Instrumentation.....</b>	<b>9-50</b>

# 1 GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST

## 1.1 APPLICANT

NAME	AURION S.r.l.
ADDRESS	Viale Certosa, 191– 20151 MILANO
COUNTRY	Italy

## 1.2 MANUFACTURER

NAME	AURION S.r.l.
ADDRESS	Viale Certosa, 191– 20151 MILANO
COUNTRY	Italy

## 1.3 EQUIPMENT CLASSIFICATION

According to the definition 15.3 (o) EUT is a **Intentional Radiator operating within the bands 2400-2483,5 MHz** so it shall fulfil provisions of 47CFR Part 15 Subpart C – Intentional radiators – and Section 15.247.

## 1.4 BASIC DESCRIPTION OF EQUIPMENT UNDER TEST

Parameters	Value
Type of equipment :	▪ EMG WIRELESS MODULE FOR ELECTROMYOGRAPH
Model :	▪ ZEROWIRE
FCC ID. :	▪ VH6ZWTX07
Trade Name	▪ AURION
Data cable :	▪ /
Telecom cable :	▪ /
Power supply type :	▪ 4V Internal rechargeable battery
AC power input cable :	▪ /
DC power input cable :	▪ /

## 1.5 FEATURE OF EQUIPMENT UNDER TEST

Power specification	▪ 4 V dc
Operating frequency:	▪ 2402 ÷ 2480 MHz (125 Channels)
Maximum RF output power:	▪ < 1W
Modulation:	▪ FSK
Bitrate	▪ 16 bit – 2ks/sec.
Main SW identification	▪ /
Main HW Board identification	▪ /
Peripherals included (for system application)	▪ None
Interfaces :	▪ None
Integrated interfaces :	▪ None
AC adapter:	▪ None

## 2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST

### 2.1 ENVIRONMENTAL CONDITIONS


TEST CONDITIONS	MEASURED
Ambient Temperature	20 ÷ 25 °C
Relative Humidity	50 ÷ 60 %
Atmospheric Pressure	900 ÷ 1000 mbar

### 2.2 DESCRIPTION OF SUPPORT EQUIPMENT

Here following the details concerning equipment needed for correct operation or loading of the EUT:

EQUIPMENT	MANUFACTURER	MODEL
None	-----	-----

## 2.3 INTERFACE IDENTIFICATION AND CONNECTION DIAGRAM OF TEST SYSTEM

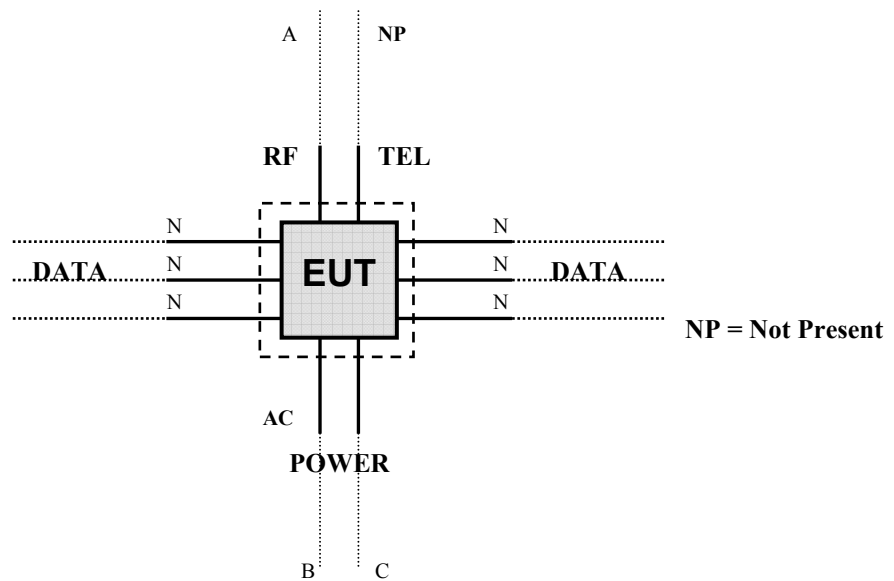

#	Interface	Description	Maximum length	Ref. Document
1	Enclosure	Plastic surface	/	/
2	AC mains power input/output port	None	/	/
3	DC power port	Internal battery 1 x 4 V	/	/
4	Signal / control port	N°2 electrodes	< 10cm.	/
5	Antenna port (RF)	Integrated antenna	/	/

### 3 OPERATION OF EQUIPMENT UNDER TEST

---

#### 3.1 OPERATING TEST CONDITIONS

---

Ref.	Description
#1	Continuous transmission (single channel transmission)



## 4 TESTS IDENTIFICATION AND RESULTS

TABLE 1 : SUMMARY OF TESTS

CFR47 Part 15 Section	Title	Operating condition	Result	Test No.
15.203 15.247 (b)(4)(i)	Antenna Requirements	/	PASS	1
15.207 (a)	Conducted Emission	Not applicable		
15.209 (a) (f)	Radiated Emission	#1	PASS	2
15.247 (a)	Frequency Hopping Spread Spectrum Specifications			
15.247(a)(1)(iii)	Number of Hopping Channels Used	Not applicable		
15.247(a)	20 dB Bandwidth	Not applicable		
15.247(a)(1)	Carrier frequency (Hopping Channel) Separation	Not applicable		
15.247(a)(1)(iii)	Time occupancy (Dwell Time) of Each Channel (ch) within a $0,4 \times N_{ch}$ (sec) Period	Not applicable		
15.247(a)(2)	6dB Minimum Bandwidth	#1	PASS	3
15.247(b)	Maximum Peak Output Power			
15.247(b) (1)	Peak Output Power	#1	PASS	4
15.247(b) (4)	Antenna gain	Not applicable		
15.247(c)	Operation with directional antenna gains greater than 6 dBi	Not applicable		
15.247 (d)	100 kHz Bandwidth of Frequency Band Edges	#1	PASS	5

CFR47 Part 15 Section	Title	Operating condition	Result	Test No.
15.247 (d)	Conducted Emission	#1	PASS	6
15.247 (e)	Power Spectral Density	#1	PASS	7
15.247 (f)	Hybrid systems	Not applicable		
15.247 (g)	FHSS Transmission characteristics	Not applicable		
15.247 (h)	Recognition of occupied channel and multiple transmission system	Not applicable		
15.247(i) (§ 47CFR 1.1307(b)(1))	RF humane exposure	#1	PASS	8

## 4.1 METHODS OF MEASUREMENT

---

All compliance measurements have been carried out using the procedures described in the standard ANSI C63.4-2003 (excluding sub-par. 4.1.5.2, 5.7.9 and 14) and Section 15.31 of CFR47 Part 15 – Subpart A (General).

Additional test requirements have been adopted according to the reference Section indicated in the Test Table

## 4.2 FREQUENCY RANGE INVESTIGATED

---

a. Radiated emission tests : from 30 MHz to tenth harmonic of the highest fundamental frequency.

## 5 MEASUREMENTS AND TESTS DATA

TEST No. 1	Title "Antenna Requirements"	47CFR Part 15 Ref. Section
		15.203 / 15.204
TEST REQUIREMENTS	<p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.</p>	

Antenna specifications	
N° of authorized antenna types:	▪ 1
Antenna type :	▪ Internal integrated antenna
Total gain :	▪ +3 dBi
External R.F. power amplifiers:	▪ Not present

### Test Result:

Within the specifications


TEST No. 2	Title "Radiated disturbances"	47CFR Part 15 Ref. Section
		15.205 / 15.209
TEST REQUIREMENTS	Test setup	ANSI C63.4
	Test facility	Anechoic chamber
	Test distance	3 m
	Limits for radiated disturbances	15.209 (a)
	Frequency range	30 MHz to tenth harmonic of the highest fundamental frequency
	IF bandwidth (below 1000 MHz)	100 kHz
	IF bandwidth (above 1000 MHz)	1 MHz
	EMC class	B

TEST DATA	PORT UNDER TEST	OPERATING CONDITION	RESULT
	Enclosure	#1	Complies
	Note: In search of max noise (EUT rotation: from 0° to 360°; receiving antenna height: from 1 to 4m; receiving antenna polarization: horizontal and vertical).		

#### LIMITS FOR SPURIOUS

Band of operations	Peak (dBμV/m)	Average Limit (dBμV/m)
Restricted bands (par. 15.205)	74,00	54,00
Other bands	According to 15.209 or fundamental –20dB (which is greater)	According to 15.209 or fundamental –20dB (which is greater)

## MEASUREMENTS RESULTS (below 1000 MHz)

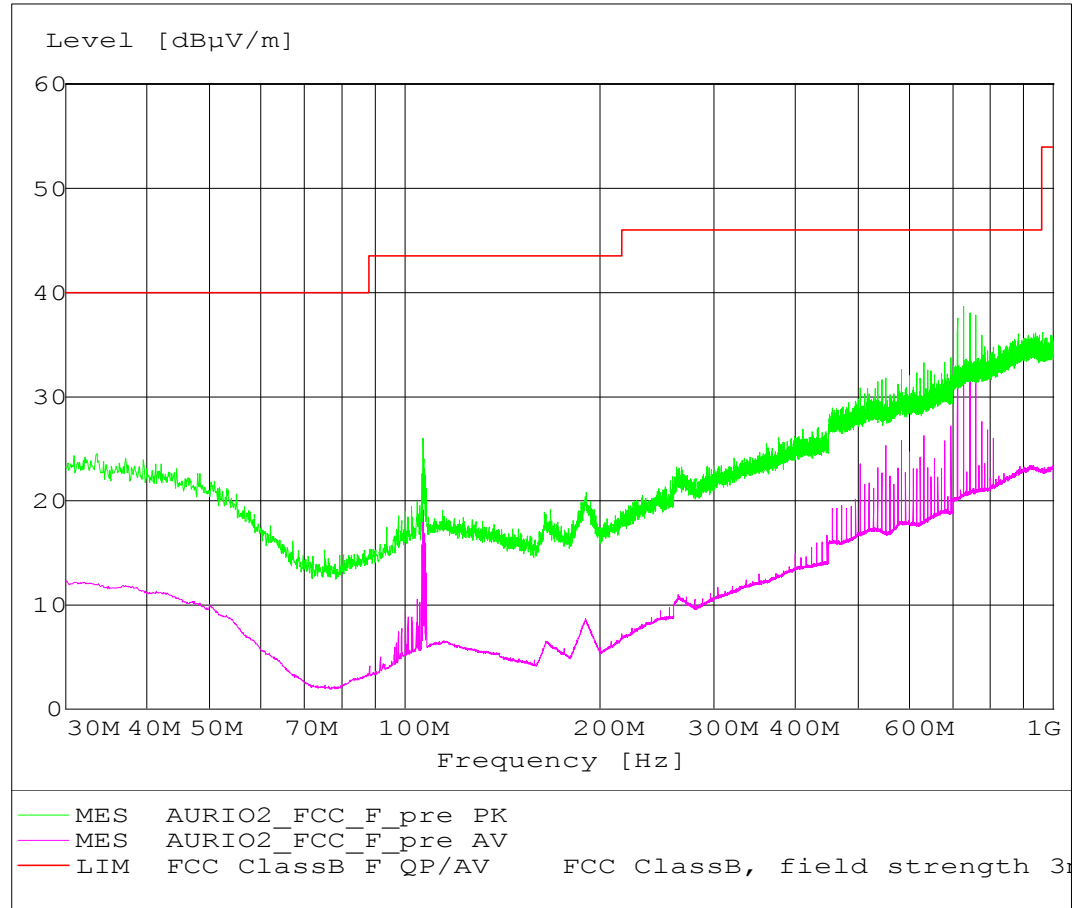

## MEASUREMENTS RESULTS (1000 MHz to 25000 MHz)

SPURIOUS EMISSION channel n°00: 2402,00 MHz

### PEAK (RBW= 1MHz; VBW=1MHz)

Frequency (MHz)	Measured Level (dBμV/m)	Limit (μVolt/meter)	Limit (dBμV/m)	Margin (dB)
2402,00 (fundamental)	86,04	-----	-----	-----
4804,30	56,24	5000	74,00	17,76
7206,02	< 40	5000	74,00	> 34
f>7300	No spurious detected			

### AVERAGE (RBW= 1MHz; VBW=10Hz)

Frequency (MHz)	Measured Level (dBμV/m)	Limit (μVolt/meter)	Limit (dBμV/m)	Margin (dB)
2402,00 (fundamental)	62,00	-----	-----	-----
4804,30	36,34	500	54,00	17,66
7206,02	< 40	500	54,00	> 14
f>7300	No spurious detected			

## SPURIOUS EMISSION channel n°62: 2440 MHz

**PEAK (RBW= 1MHz; VBW=1MHz)**

Frequency (MHz)	Measured Level (dB $\mu$ V/m)	Limit ( $\mu$ Volt/meter)	Limit (dB $\mu$ V/m)	Margin (dB)
2440,28 (fundamental)	87,22	-----	-----	-----
4880,40	62,33	5000	74,00	11,67
7320,00	< 40	5000	74,00	> 34
f>7400	No spurious detected			

**AVERAGE (RBW= 1MHz; VBW=10Hz)**

Frequency (MHz)	Measured Level (dB $\mu$ V/m)	Limit ( $\mu$ Volt/meter)	Limit (dB $\mu$ V/m)	Margin (dB)
2440,28 (fundamental)	63,05	-----	-----	-----
4880,40	40,21	500	54,00	13,79
7320,00	< 40	500	54,00	> 14
f>7400	No spurious detected			



## SPURIOUS EMISSION channel n°124: 2480 MHz

**PEAK (RBW= 1MHz; VBW=1MHz)**

Frequency (MHz)	Measured Level (dB $\mu$ V/m)	Limit ( $\mu$ Volt/meter)	Limit (dB $\mu$ V/m)	Margin (dB)
2480,00 (fundamental)	89,86	-----	-----	-----
4960,52	61,10	5000	74,00	12,90
7440,00	< 40	5000	74,00	> 34
f>7500	No spurious detected			

**AVERAGE (RBW= 1MHz; VBW=10Hz)**

Frequency (MHz)	Measured Level (dB $\mu$ V/m)	Limit ( $\mu$ Volt/meter)	Limit (dB $\mu$ V/m)	Margin (dB)
2480,00 (fundamental)	65,60	-----	-----	-----
4960,52	38,78	500	54,00	15,22
7440,00	< 40	500	54,00	> 14
f>7500	No spurious detected			

TEST No.3	Title "6 dB Bandwidth"	47CFR Part 15 Ref. Section
		15.247 (a) (2)
TEST SET-UP & REQUIREMENTS	Spectrum analyzer settings	
	Span	1,5 MHz
	Resolution (or IF) Bandwidth (RBW)	100 kHz
	Video (or Average) Bandwidth (VBW)	300 kHz
	Sweep time	auto
	Detector function	Peak
	Trace	max hold
	Attenuator	/
	LIMIT	> 500 kHz

The EUT is set to transmit has its maximum data rate.

The transmitter output was connected to the spectrum analyzer through a test fixture (radio frequency coupling device associated with the dedicated antenna of the equipment under test)


### Test Result:

Channel (No.)	Frequency (MHz)	Channel Bandwidth (kHz)	Plot (No.)
00	2402,00	501	1
62	2440,00	501	2
124	2480,00	510	3


### Modification during the test:

- none


Plot No. 1:

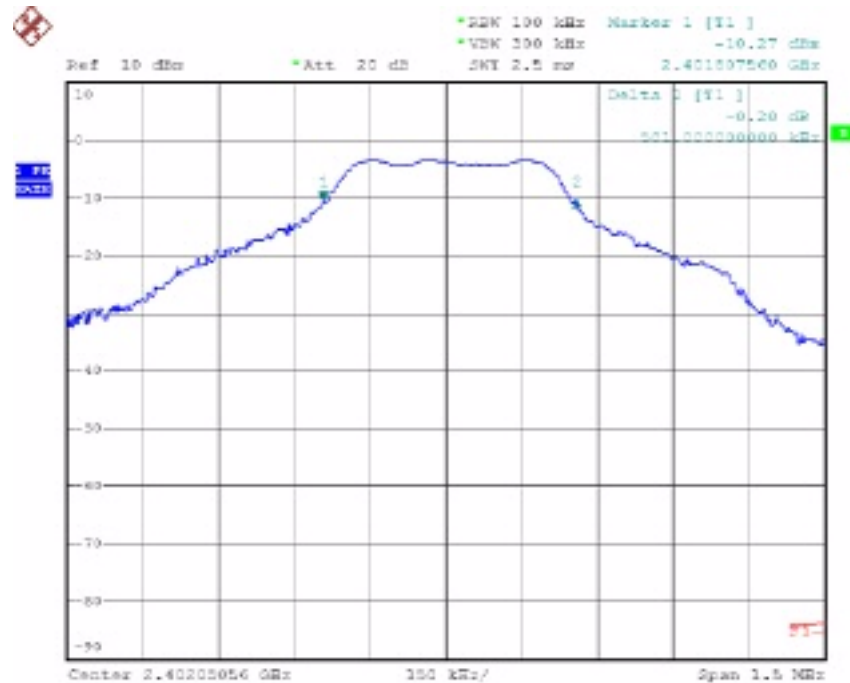

Plot No. 2:

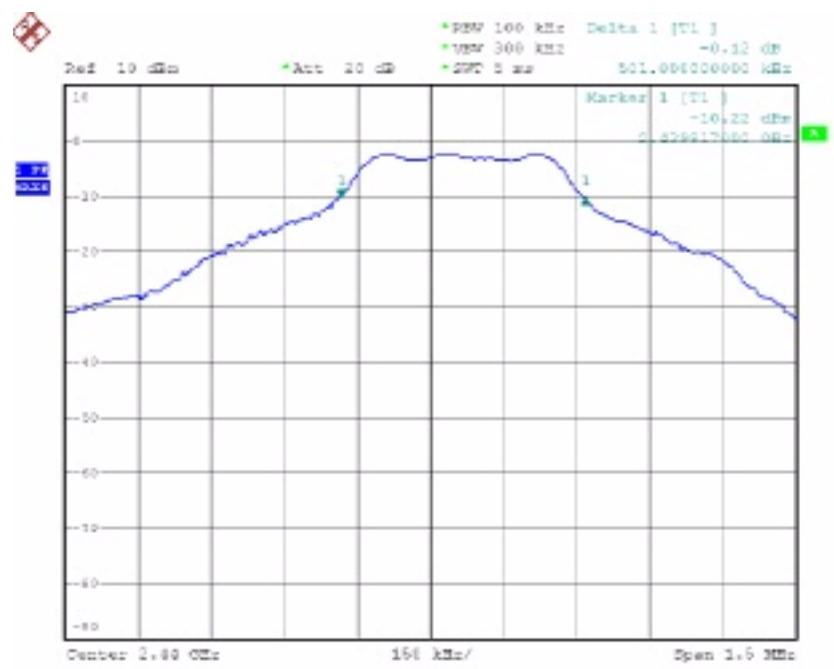

Plot No. 3:

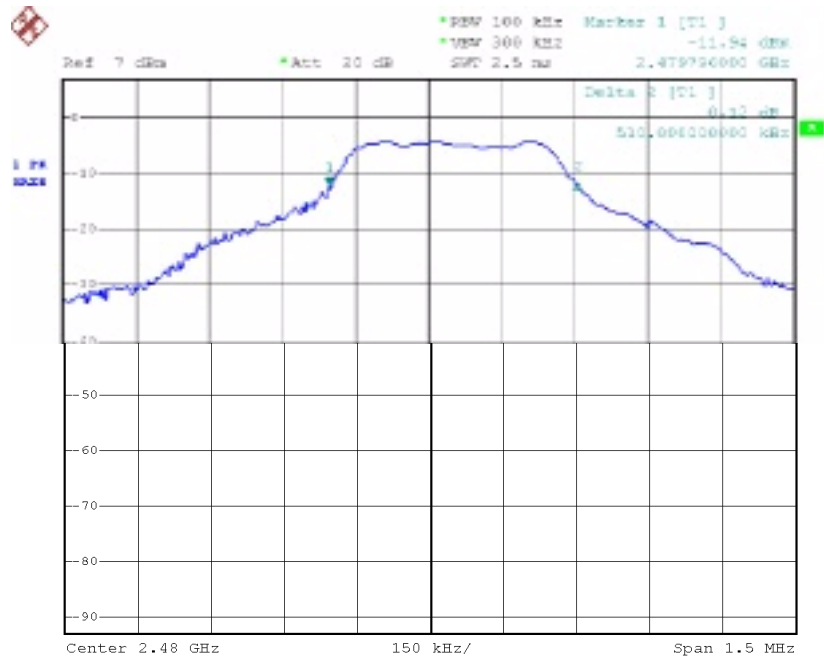

TEST No.4	Title		47CFR Part 15 Ref. Section
	“Maximum Peak Output Power with External Antenna (De Facto EIRP)”		15.247 (b) (3)
TEST SET-UP & REQUIREMENTS	Spectrum analyzer settings		
	Span	30 MHz	
	Resolution (or IF) Bandwidth (RBW)	3 MHz	
	Video (or Average) Bandwidth (VBW)	10 MHz	
	Sweep time	as necessary to capture the entire dwell time per hopping channel	
	Detector function	Peak	
	Trace	max hold	
	Attenuator	/	
	LIMIT	1 Watt (30dBm)	

#### Conducted measurements:

The transmitter output was connected to the spectrum analyzer via a low loss cable.

#### Radiated measurements:


As the EUT is supplied with a dedicated antenna, the effective radiated power is measured in a 3 m anechoic chamber with the substitution antenna method.

### Test Result:


#### Conducted measure (Peak detector)

Channel (No.)	Frequency (MHz)	Measured Output Power (dBm)	Cable loss (dB)	Conducted Output Power (dBm)	Antenna Gain (dB)	Calculated Radiated Output Power (dBm)
00	2402,00	-2,32	+0,50	-1,82	+3	+1,18
62	2440,00	-2,39		-1,89		+1,11
124	2480,00	-4,12		-3,62		-0,62


#### Channel No. 00

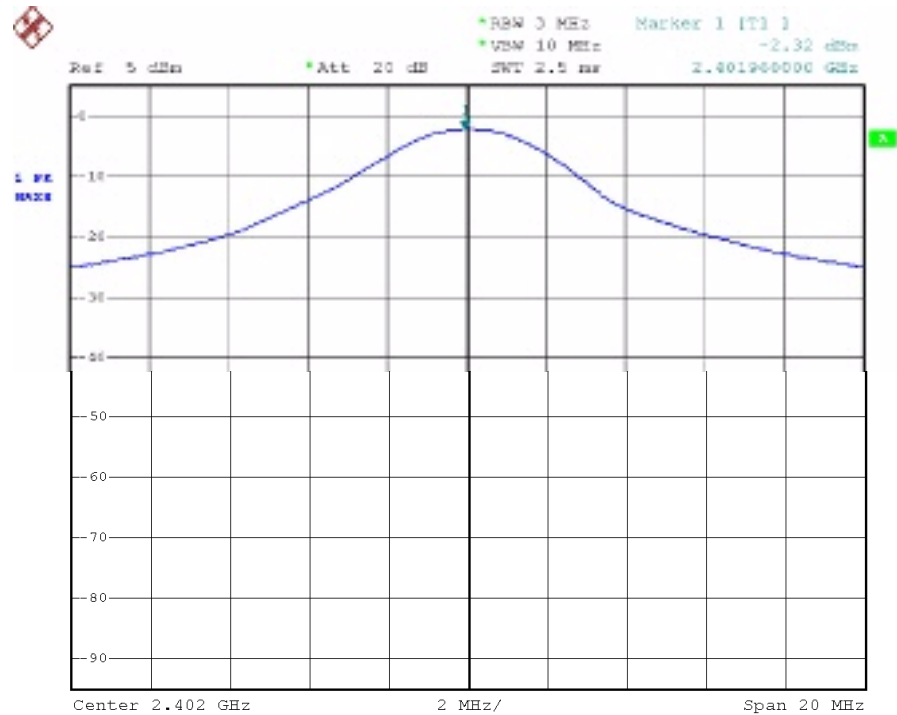

### Channel No. 62

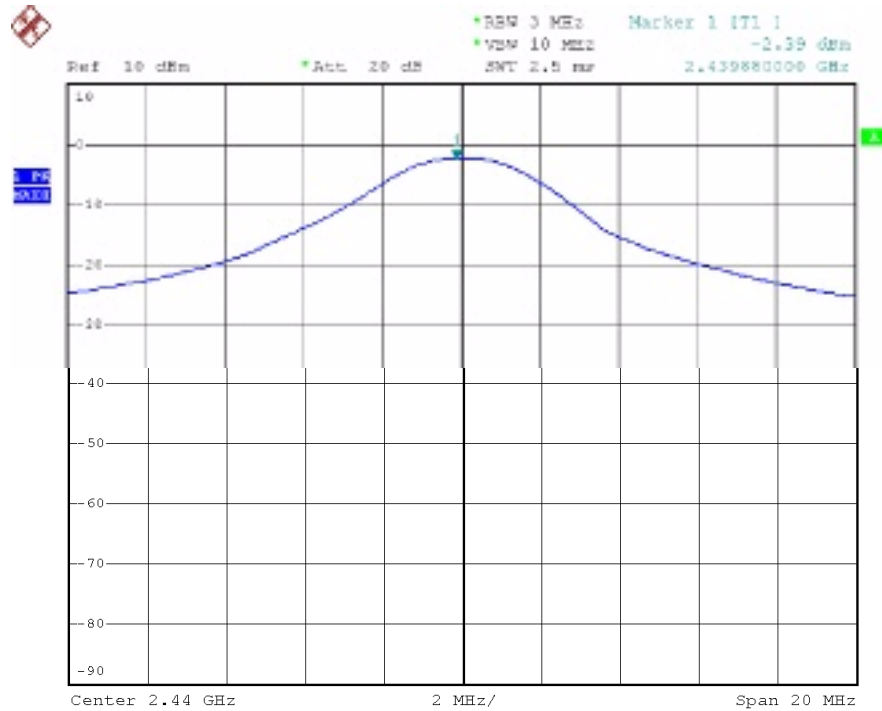

### Channel No. 124

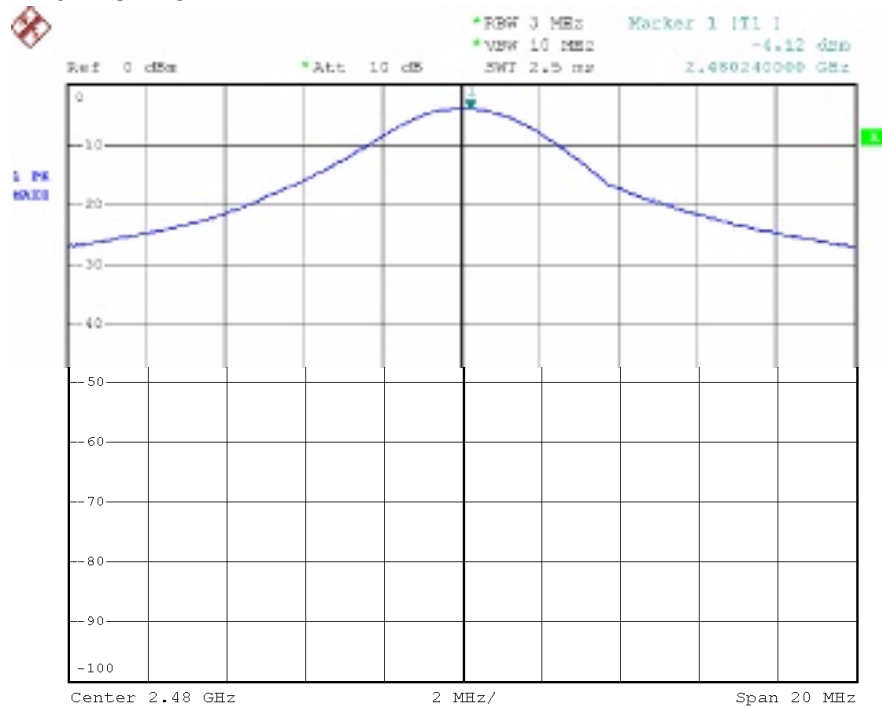

TEST No. 5	Title “Band-edge Compliance of RF Conducted Emissions “		47CFR Part 15 Ref. Section
			15.247 (d)
TEST SET-UP & REQUIREMENTS	Spectrum analyzer settings		
	Span	Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation	
	Resolution (or IF) Bandwidth (RBW)	100 kHz	
	Video (or Average) Bandwidth (VBW)	100 kHz	
	Sweep time	Auto	
	Detector function	Peak	
	Trace	Max hold	
	Attenuator	/	
	LIMIT	> 20 dB below that in the 100 kHz bandwidth within the assigned band	

The transmitter output was connected to the spectrum analyzer through a test fixture (radio frequency coupling device associated with the dedicated antenna of the equipment under test)


Once the trace is stabilized, by the marker the emission at the band edge (or on the highest modulation product outside of the band, if this level is greater than that at the band edge) was set.

The n by the marker-delta function and the marker-to-peak function the peak of the in-band emission was selected. The marker-delta value displayed was compared with the limit specified in this Section.

### Test Result:


Within the specifications

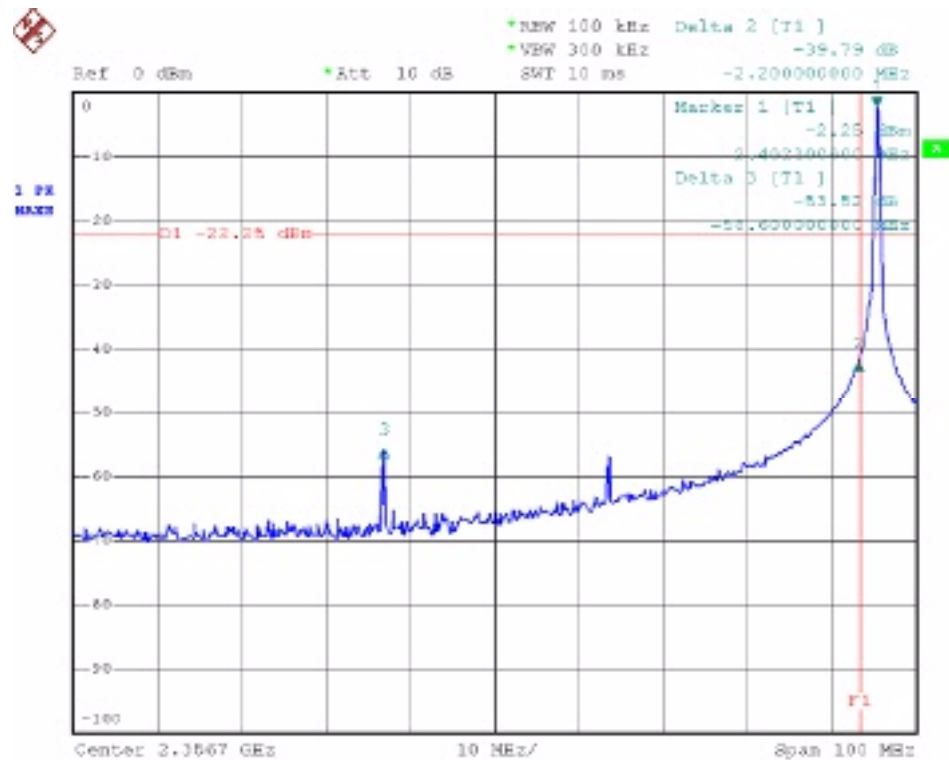

**Test Result:****Band-edge compliance, lower band edge (Peak)**

All out of band spurious emissions are more 20dB below the in band power of the fundamental.

Band-edge compliance to radiated emission test				
Band edge	Different to the signal peak (dB) (Marker 2)	Field strength measured (dB $\mu$ V/m)	Field strength at the band-edge (peak detector)	Average Limit at the band-edge
Lower	39,79	86,04	46,25	54,00
Within the Average limit				

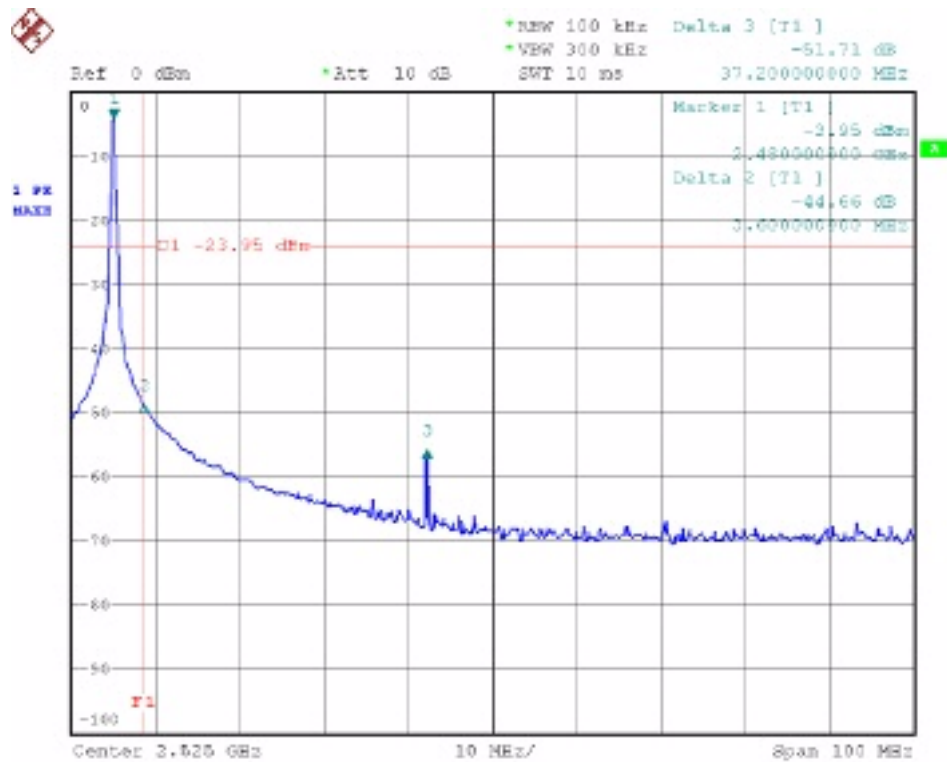**Band-edge compliance, upper band edge (Peak)**

All out of band spurious emissions are more 20dB below the in band power of the fundamental.

Band-edge compliance to radiated emission test				
Band edge	Different to the signal peak (dB) (Marker 2)	Field strength measured (dB $\mu$ V/m)	Field strength at the band-edge (peak detector)	Average Limit at the band-edge
Lower	44,66	89,86	45,20	54,00
Within the Average limit				



TEST No. 6	Title		47CFR Part 15 Ref. Section
	“Conducted Emissions outside the band 2400-2483.5 MHz”		15.247 (d)
TEST SET-UP & REQUIREMENTS	Spectrum analyzer settings		
	Span	9kHz to 10 <sup>th</sup> harmonic of fundamental frequency	
	Resolution (or IF) Bandwidth (RBW)	100 kHz	
	Video (or Average) Bandwidth (VBW)	300 kHz	
	Sweep time	Auto	
	Detector function	Peak	
	Trace	Max hold	
	Attenuator	/	
	LIMIT	20 dB below from Conducted peak of RF or limit specified in section 15.209 for Restricted Band.	


The transmitter output was connected to the spectrum analyzer through an opportune RF attenuator.

The measure has been executed with the lowest transmit channel, the highest transmit channel and one located somewhere in the middle of the band.


### Test Result:

Within the specifications

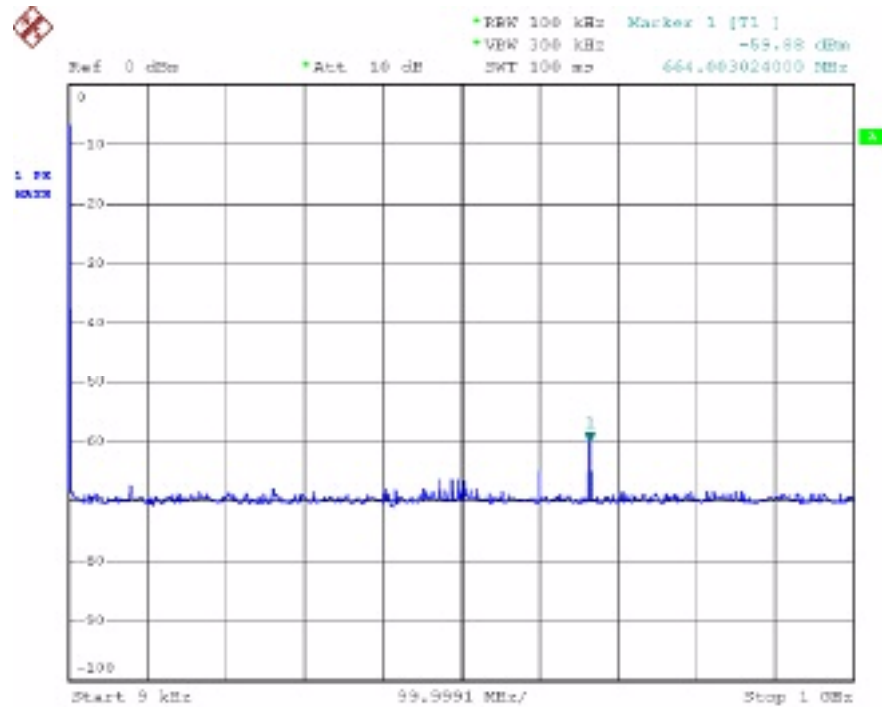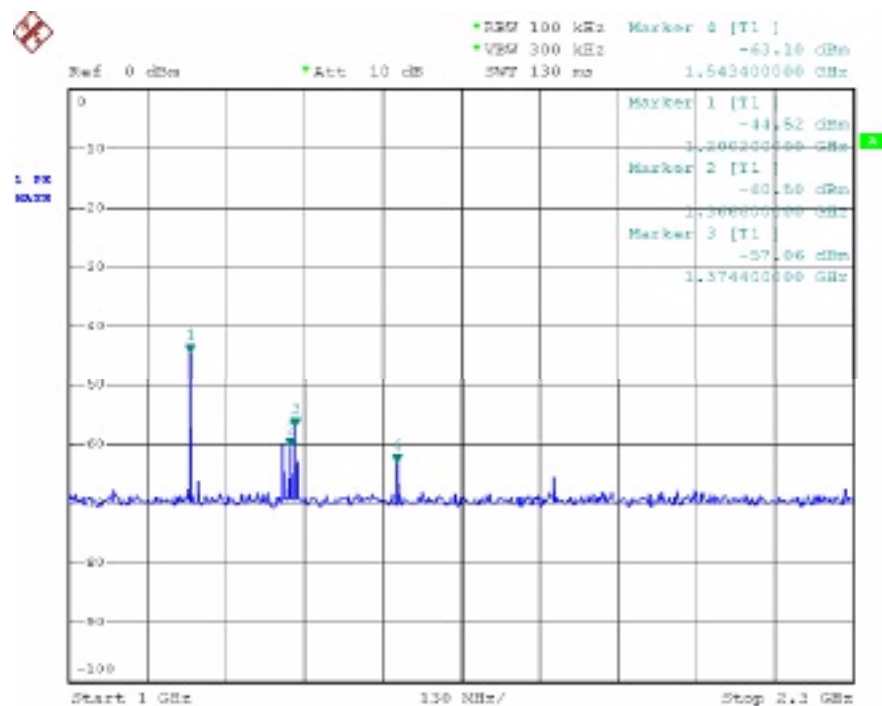
**Test Result:**  
**Lowest transmit channel (00)****9kHz to 1 GHz****1 GHz to 2,3GHz**

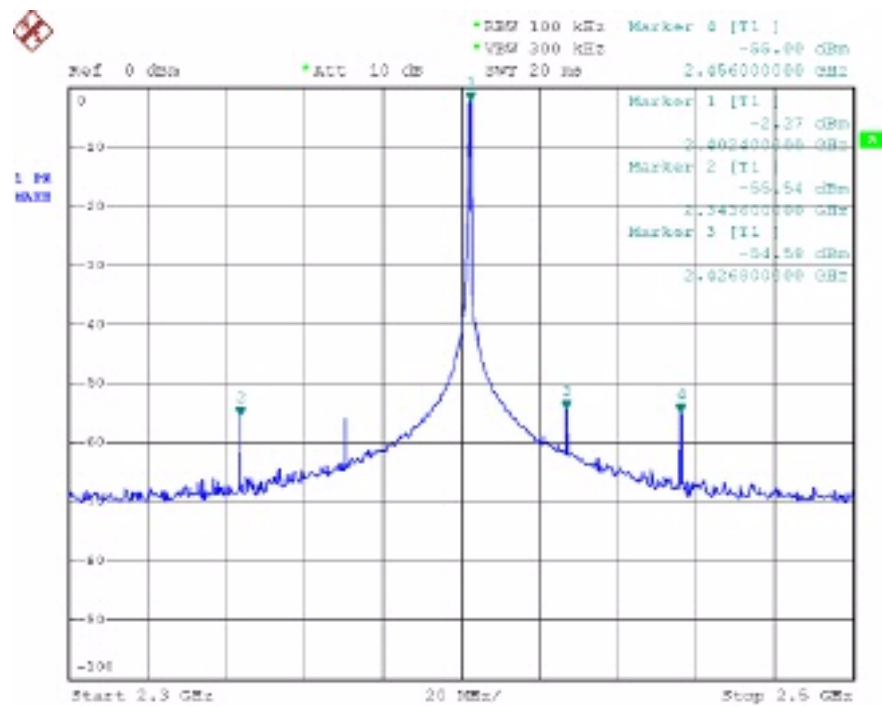


2,3 GHz to 2,5 GHz

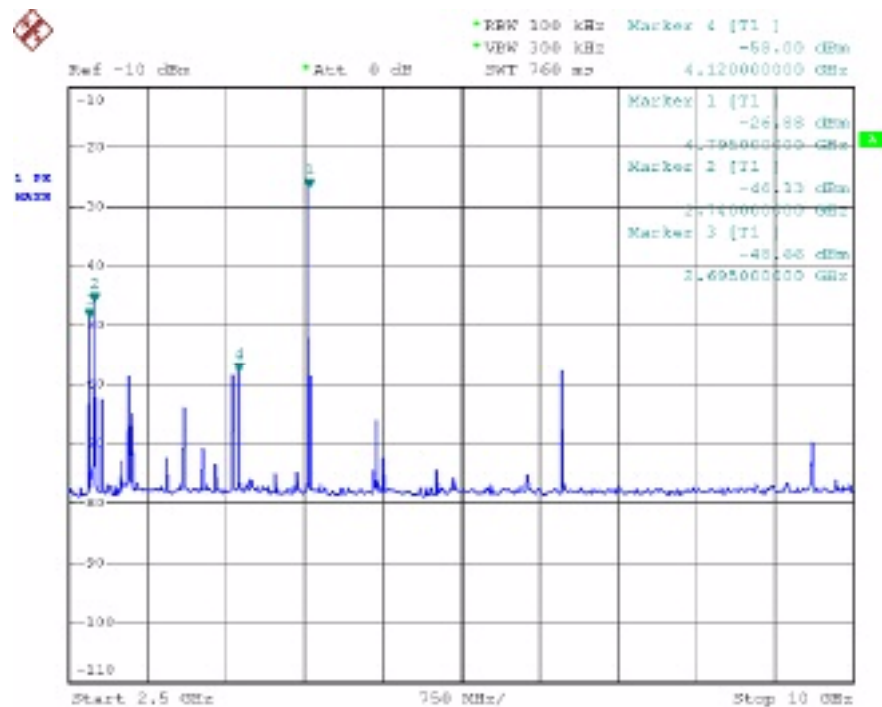

2,5 GHz to 10 GHz

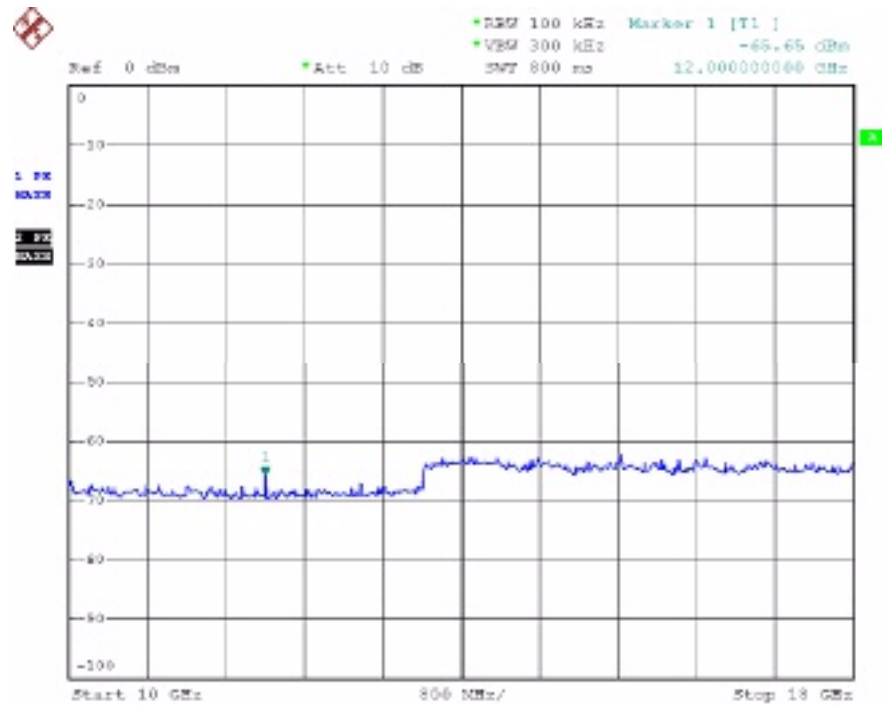


### 10 GHz to 18 GHz

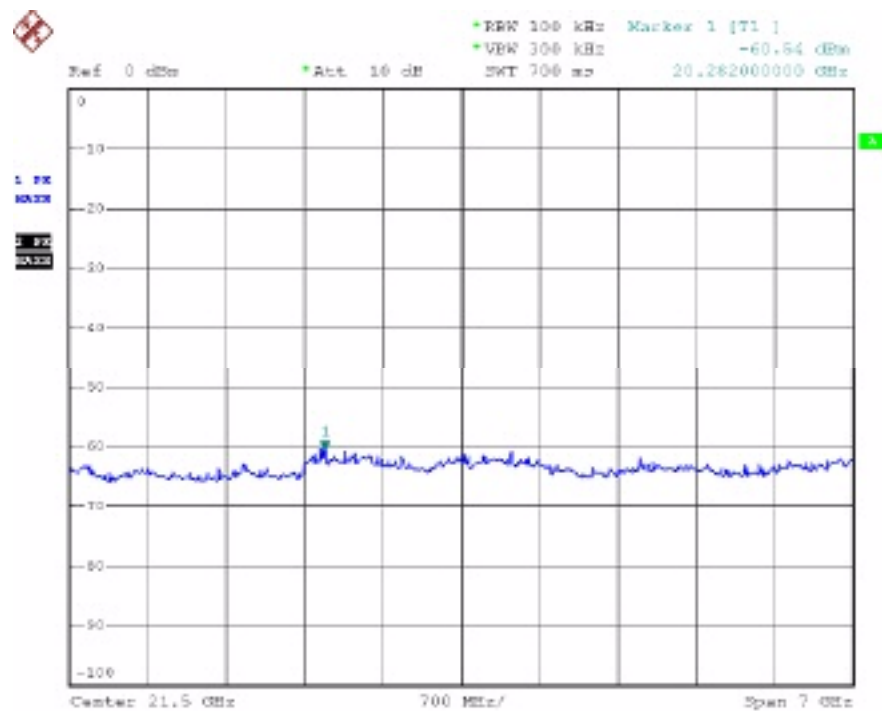


### 18 GHz to 26 GHz

Frequency (MHz)	Measured Level (dBm)	Limit (dBm) Fundamental value – 20dB	Margin (dB)
664,00	-59,88	-22,27	37,61
1200,20	-44,62	-22,27	22,35
1366,60	-60,50	-22,27	38,23
1374,40	-57,06	-22,27	34,79
1543,40	-63,10	-22,27	40,83
2343,60	-55,54	-22,27	33,27
2402,40 (fundamental)	-2,27	-----	-----
2426,80	-54,58	-22,27	32,31
2456,00	-55,00	-22,27	32,73
2695,00	-48,66	-22,27	26,39
2740,00	-46,13	-22,27	23,86
4120,00	-58,00	-22,27	35,73
4795,00	-26,88	-22,27	4,61
12000,00	-65,65	-22,27	43,38
20282,00	-60,54	-22,27	38,27

### Middle transmit channel (62)

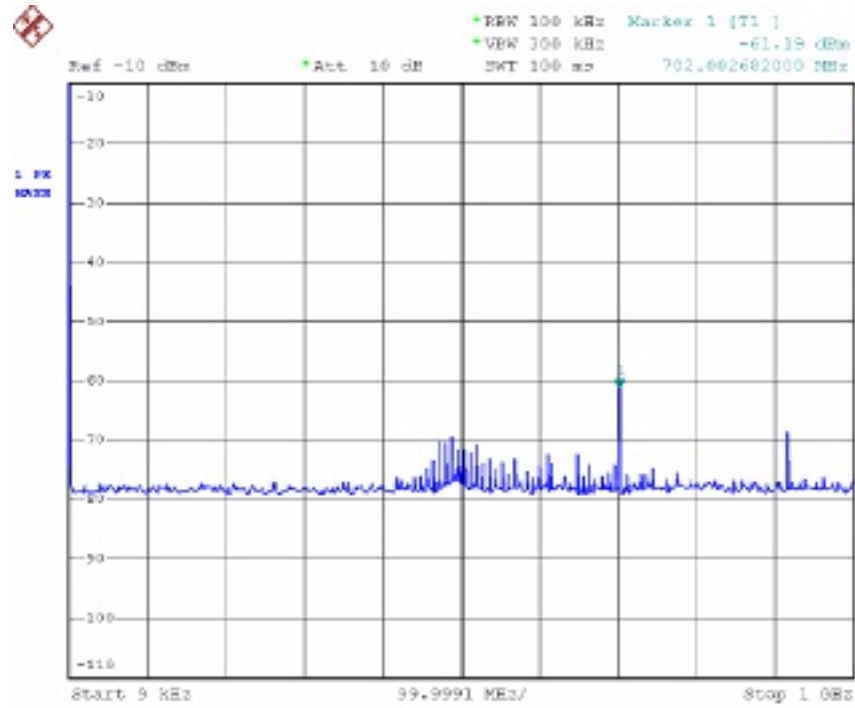


### 9kHz to 1 GHz

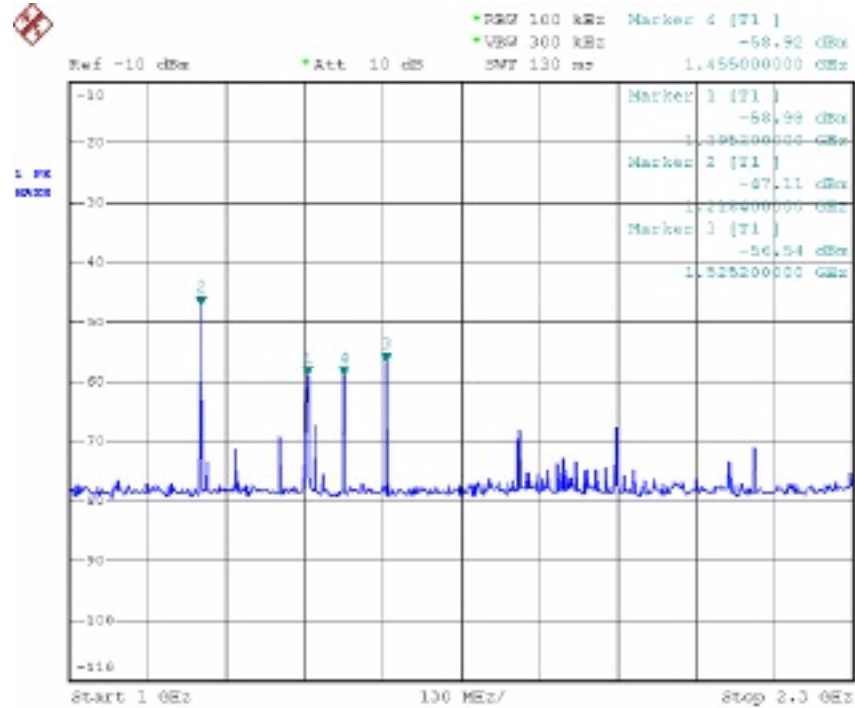


### 1 GHz to 2,3GHz




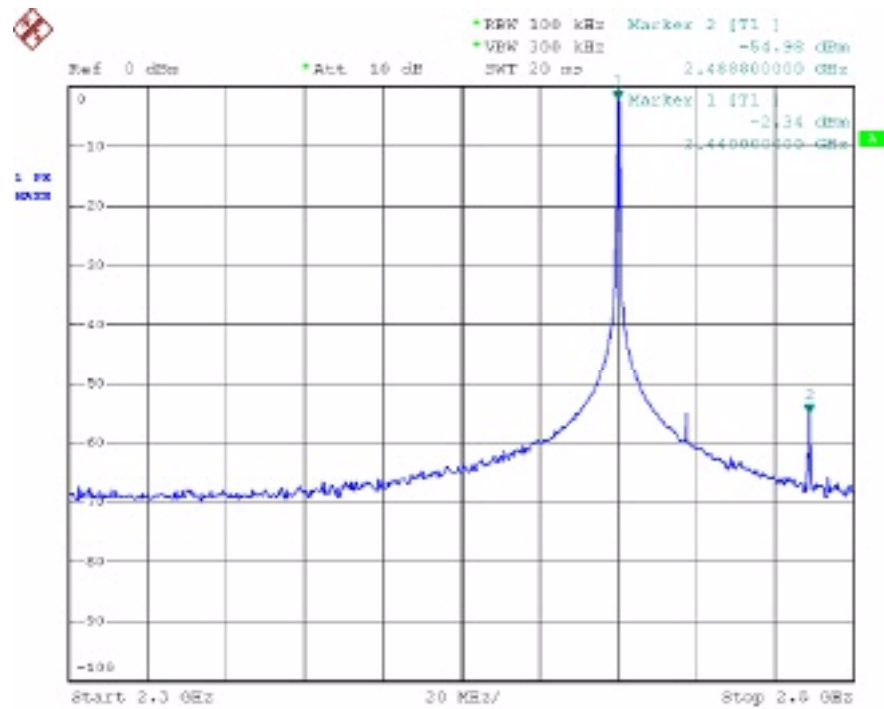


## 2,3 GHz to 2,5 GHz

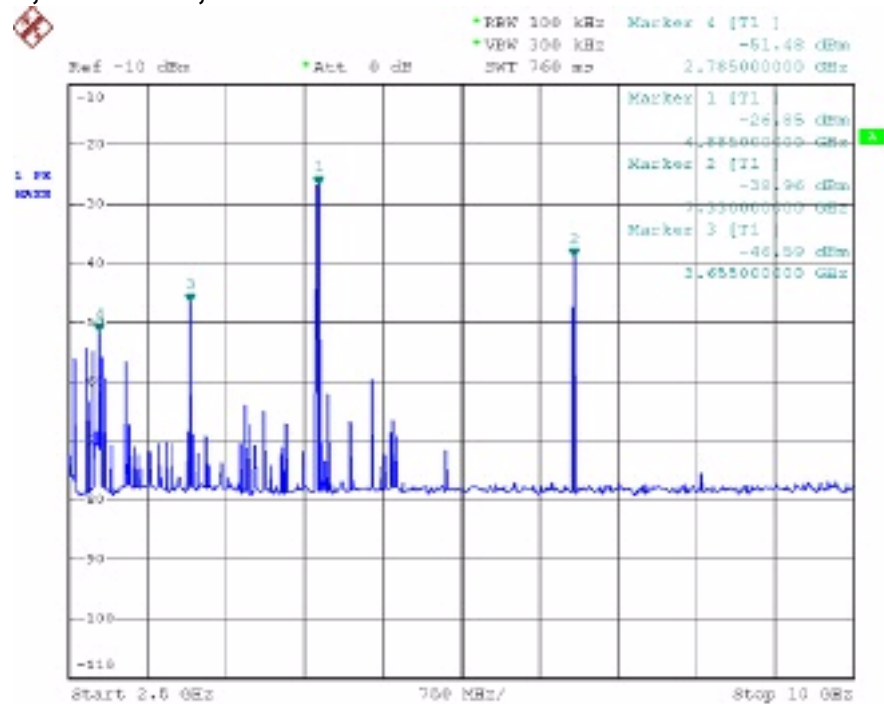

## 2,5 GHz to 10 GHz

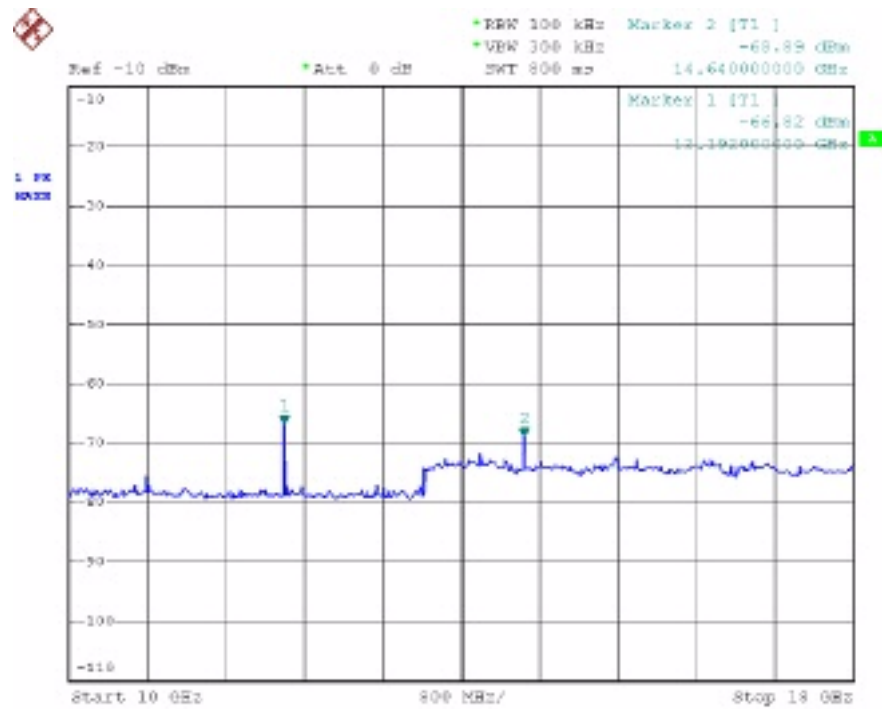


### 10 GHz to 18 GHz

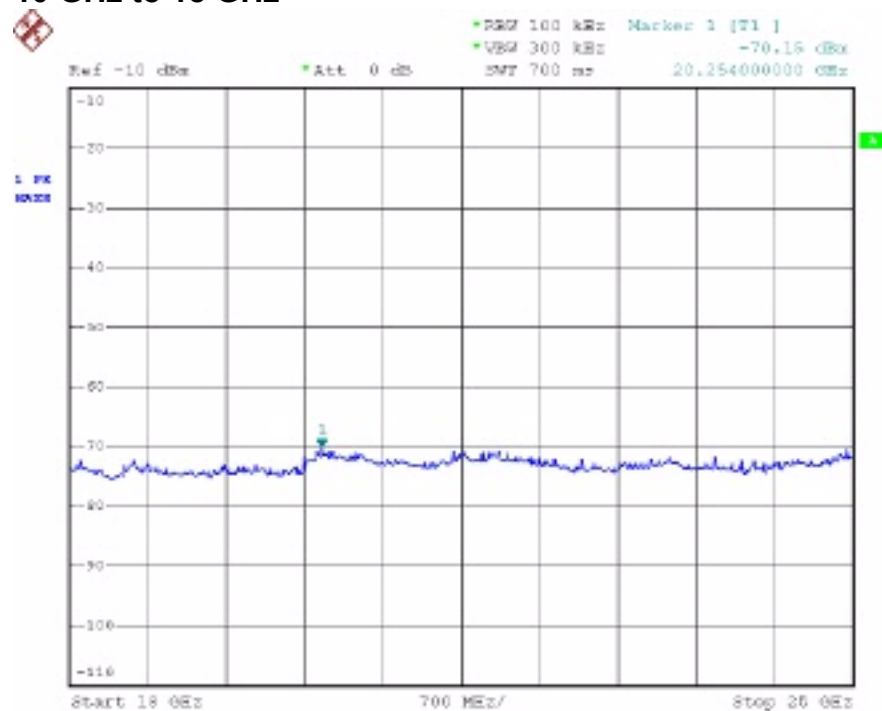


### 18 GHz to 26 GHz

Frequency (MHz)	Measured Level (dBm)	Limit (dBm) Fundamental value – 20dB	Margin (dB)
702,00	-61,19	-22,34	38,85
1218,40	-47,11	-22,34	24,77
1395,20	-58,98	-22,34	36,64
1455,00	-58,92	-22,34	36,58
1525,20	-56,54	-22,34	34,2
2440,00 (fundamental)	-2,34	-----	-----
2488,80	-54,98	-22,34	32,64
2785,00	-51,48	-22,34	29,14
3655,00	-46,59	-22,34	24,25
4885,00	-26,85	-22,34	4,51
7330,00	-38,96	-22,34	16,62
12192,00	-66,82	-22,34	44,48
14640,00	-68,89	-22,34	46,55
20254,00	-70,15	-22,34	47,81


### Highest transmit channel (124)

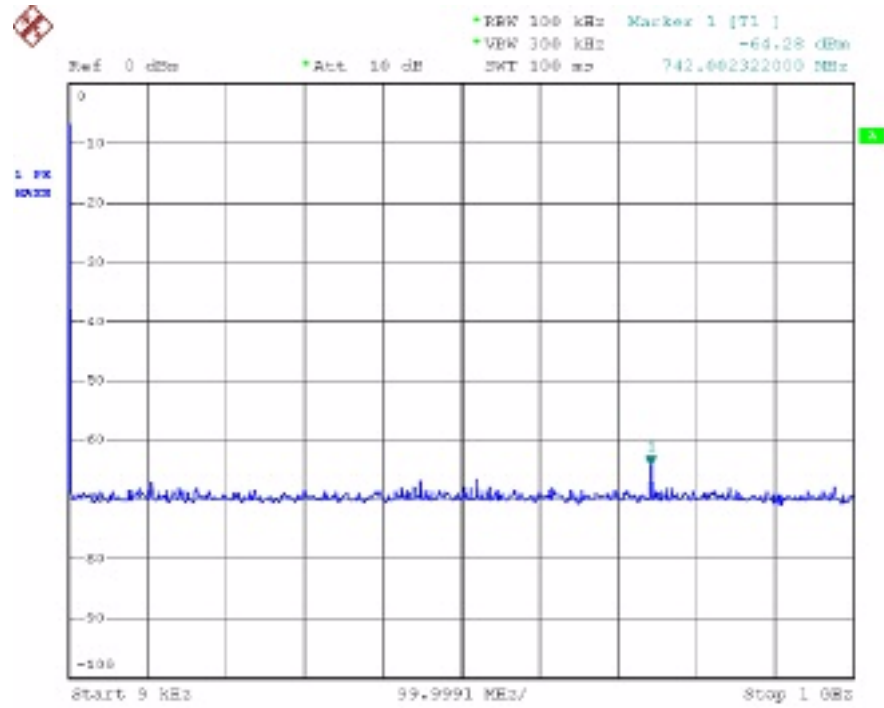


### 9kHz to 1 GHz

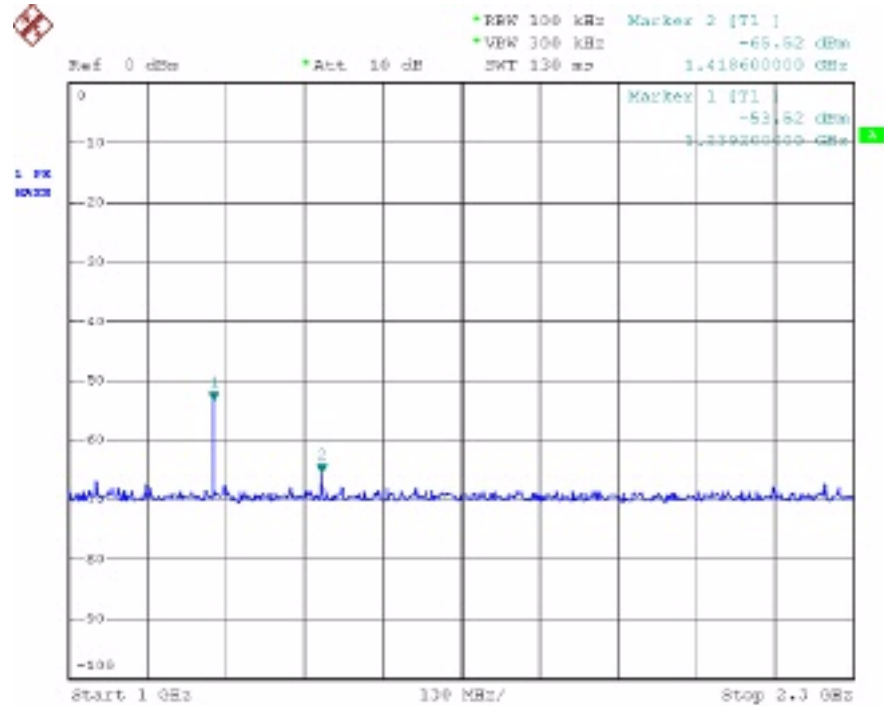


### 1 GHz to 2,3GHz

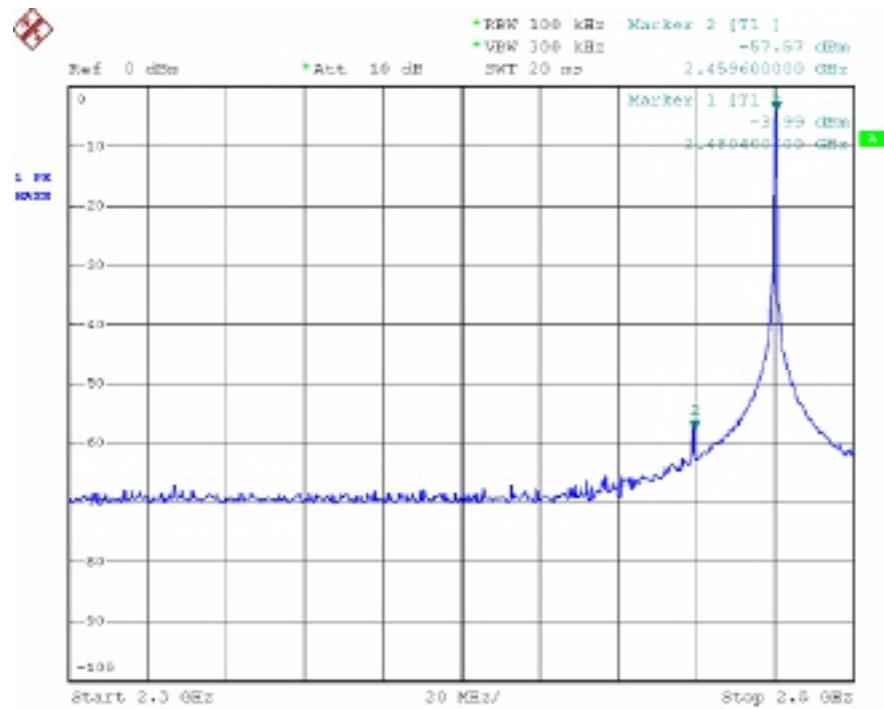


### 2,3 GHz to 2,5 GHz

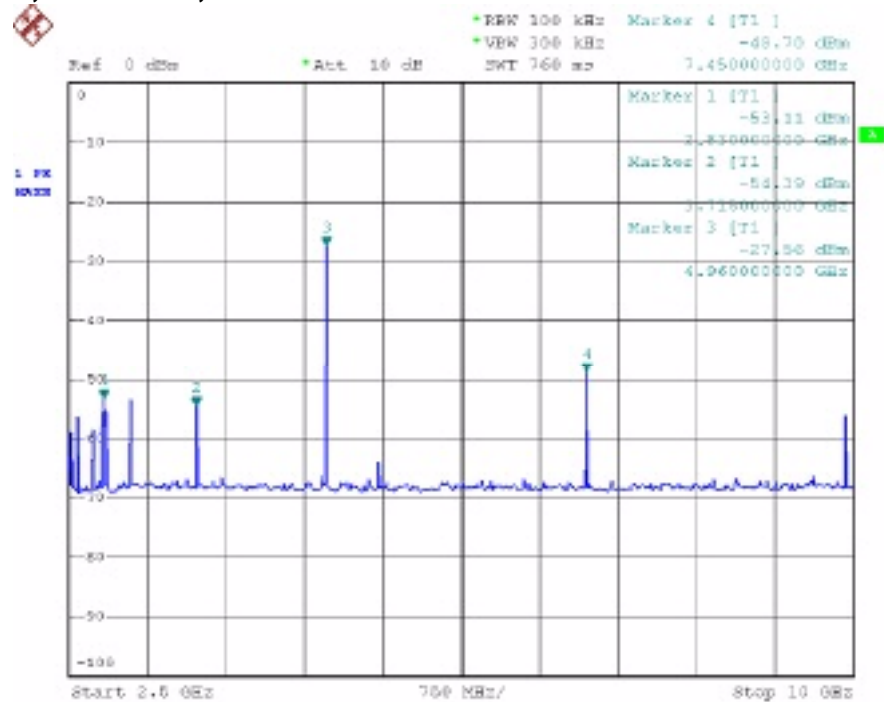

### 2,5 GHz to 10 GHz

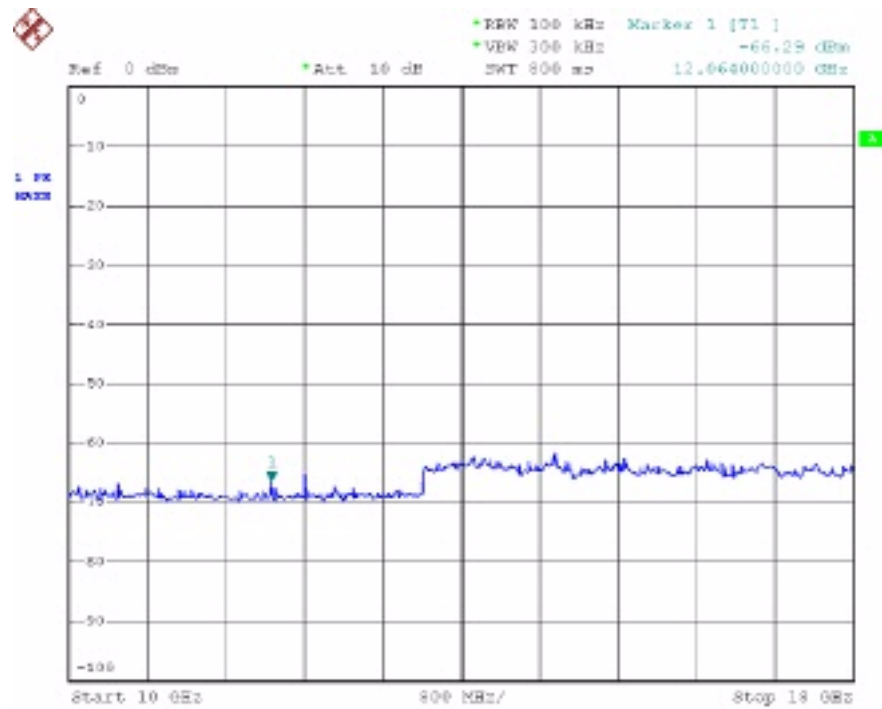

### 10 GHz to 18 GHz

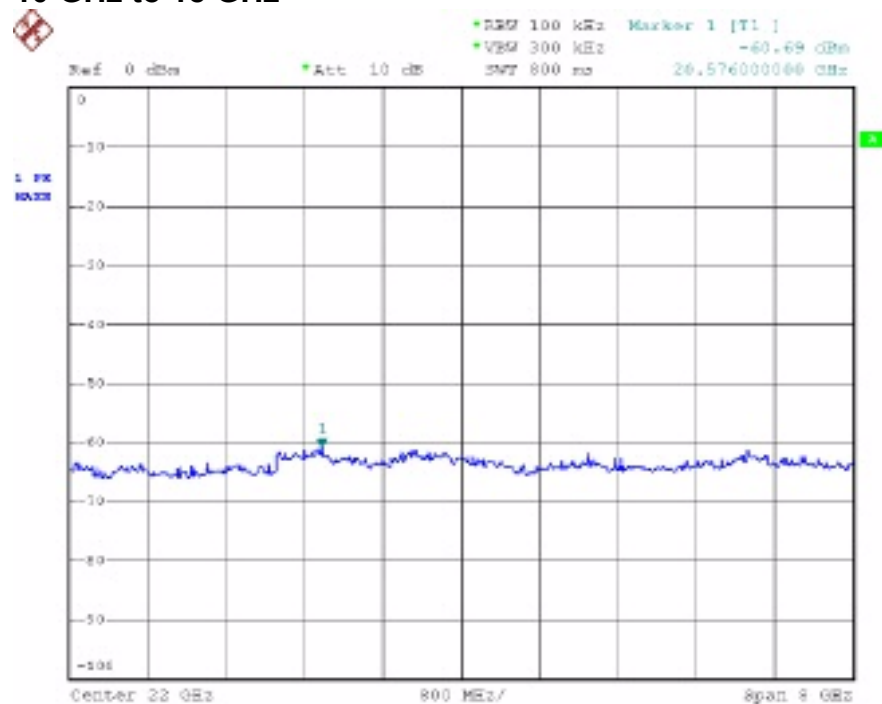

### 18 GHz to 26 GHz

Frequency (MHz)	Measured Level (dBm)	Limit (dBm) Fundamental value – 20dB	Margin (dB)
742,00	-64,28	-23,99	40,29
1239,20	-53,52	-23,99	29,53
1418,60	-65,52	-23,99	41,53
2459,60	-57,57	-23,99	33,58
2480,40 (fundamental)	-3,99	-----	-----
2830,00	-53,11	-23,99	29,12
3715,00	-54,39	-23,99	30,40
4960,00	-27,56	-23,99	3,57
7450,00	-48,70	-23,99	24,71
12064,00	-66,29	-23,99	42,30
20576,00	-60,69	-23,99	36,70

TEST No.7	Title “ Transmitter Power Spectral Density”	47CFR Part 15 Ref. Section
		15.247 (e)
TEST SET-UP & REQUIREMENTS	Spectrum analyzer settings	
	Span	1,5 MHz
	Resolution (or IF) Bandwidth (RBW)	3 kHz
	Video (or Average) Bandwidth (VBW)	30 kHz
	Sweep time	Auto
	Detector function	Peak
	Trace	max hold
	Attenuator	/
	<b>LIMIT</b>	<b>8 dBm</b>

The transmitter output was connected to the spectrum analyzer through a test fixture (radio frequency coupling device associated with the dedicated antenna of the equipment under test)


After trace stabilisation the marker shall be set on the signal peak. The indicated level is the power spectral density.

### Test Result:


Channel (No.)	Power spectral density (dBm)	Plot (No.)
00	-6,47	1
62	-5,93	2
124	-7,86	3




Plot No. 1:

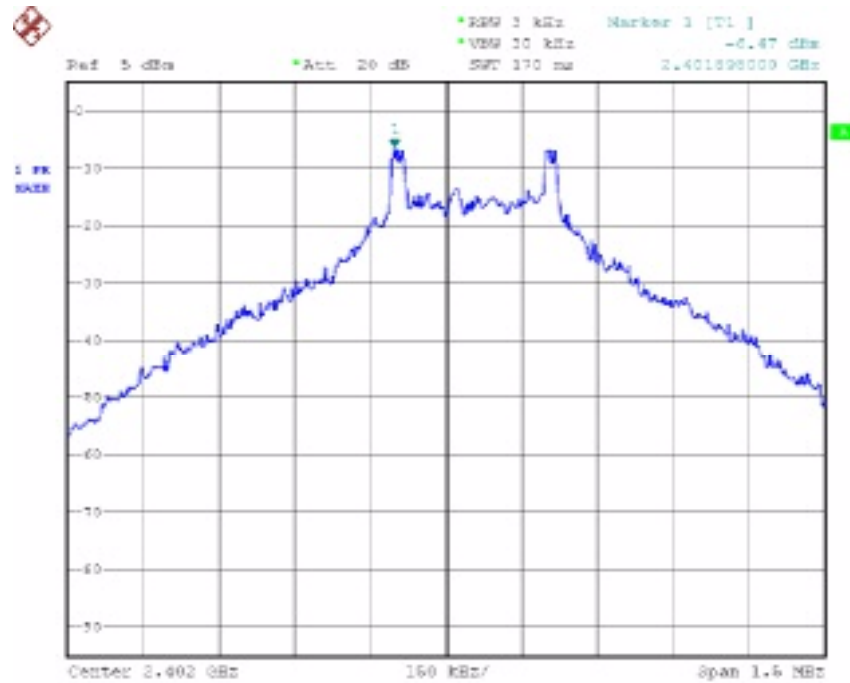

Plot No. 2:

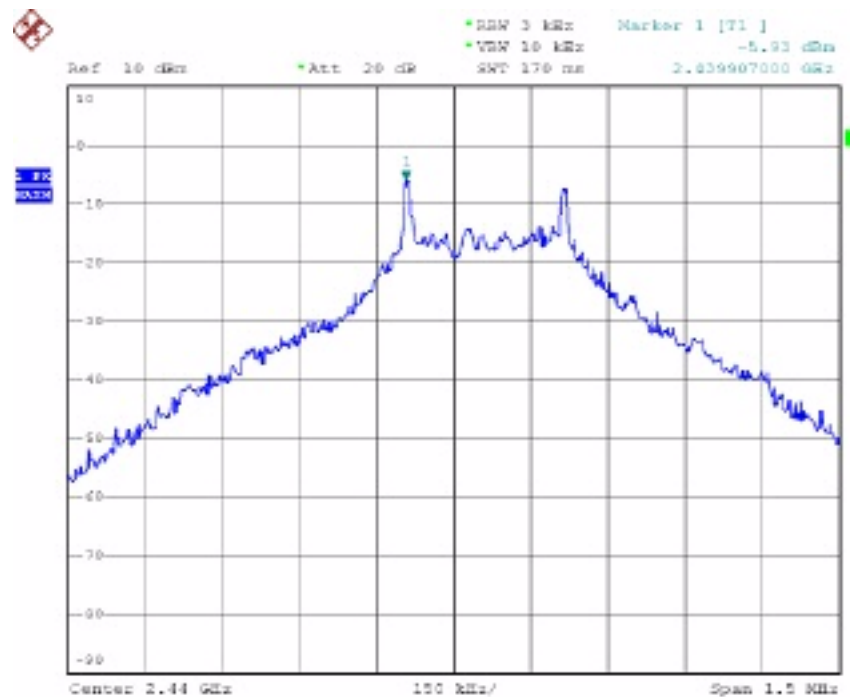

Plot No. 3:

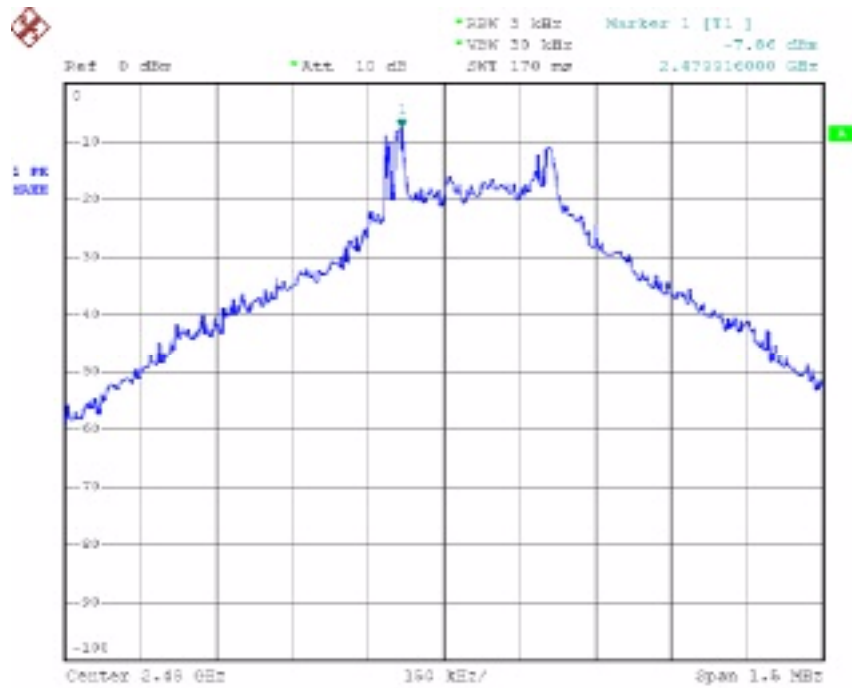

TEST No. 8	Title “RF Exposure Evaluation“	47CFR Part 15 Ref. Section
		15.247 (i)
TEST SET-UP & REQUIREMENTS	Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this Chapter.	
	EUT classification (fixed, mobile or portable devices)	Fixed, mobile or portable
	LIMITS	See table below

#### Limit for maximum permissible Exposure (MPE)

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm <sup>2</sup> )	Average Time (minutes)
<b>(A) Limits for Occupational/Controlled Exposure</b>				
0.3÷3.0	614	1.63	(100)*	6
3.0÷30	1842/f	4.89/f	(900/f <sup>2</sup> )*	6
30÷300	61.4	0.163	1.0	6
300÷1500	--	--	f/300	6
1500÷100,000	--	--	5	6
<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
0.3÷3.0	614	1.63	(100)*	30
3.0÷30	824/f	2.19/f	(180/f <sup>2</sup> )*	30
30÷300	27.5	0.073	0.2	30
300÷1500	--	--	f/1500	30
1500÷100,000	--	--	1.0	30
F = Frequency in MHz      *Plane-wave equivalent power density				

The distance from the device's transmitting antenna where the exposure level reaches the maximum permitted limit is calculated using the general equation:

$$S = P \cdot G / 4\pi R^2$$

Where:

S = Power Density (mW/cm<sup>2</sup>)

P = Conducted power (mW)

G = Linear power gain relative to isotropic radiator (numeric gain)

R = Distance (cm)

### RF Exposure evaluation Distance:

Channel	Frequency	Output power to antenna (Erp)	Power density @ 20 cm	Distance where the exposure level reaches the limit	Limits
(No.)	(MHz)	(dBm)	(mW/cm <sup>2</sup> )	(cm)	(mW/cm <sup>2</sup> )
00	2402,00	-1,82	0,001	0,324	1
62	2440,00	-1,89	0,001	0,321	1
124	2480,00	-3,62	0,001	0,261	1

### Test Result:

The EUT operates at low power level so it does not exceed the Commission's RF exposure guidelines limits; furthermore, Spread spectrum transmitters operate according to the Section 15.247 are categorically excluded from routine environmental evaluation.  
RF exposure limit warning or SAR test are not required.

## 6 ADDITIONAL TECHNICAL INFORMATION

### 6.1 ELECTROMAGNETICALLY RELEVANT COMPONENTS:

Components	N°	Manufacturer	Type – Technical data
Radio Module			
See Technical document			
Host Equipment			
none			

### 6.2 RFI SUPPRESSION DEVICES:

Components	N°	Manufacturer	Type – Technical data
None			

### 6.3 EMI PROTECTION DEVICES:

Components	N°	Manufacturer	Type – Technical data
None			

## 7 TECHNICAL DOCUMENTATION



DOCUMENT	REFERENCE
Bill of materials	WLEMG V03 – RF e Micro - DWS013 2006/01 Rev. 03
Electronic diagram	WLBMAV01 – Drawing n° DWS001...019 2006/01 Date : 10/09/2007
Layout	WLBMA V01.tss Date : 07/18/2005  WLGEN V02.tss Date : 11/07/2005
Zerowire multichannel electromyograph – Operational description	Rev. 1 – 21/09/07

## 8 PHOTOGRAPHIC DOCUMENTATION

### 8.1 EUT IDENTIFICATION




Equipment under test identification

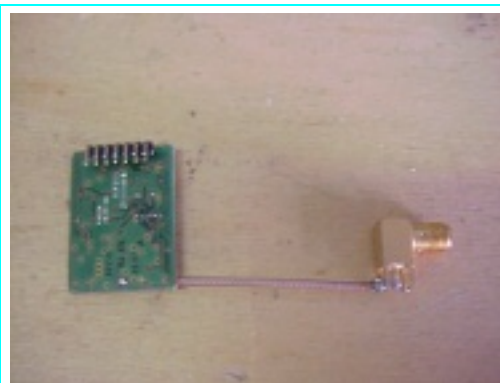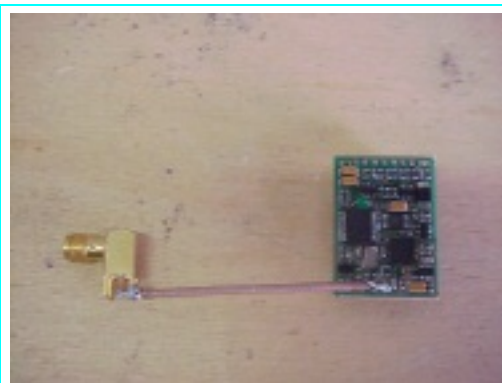

Equipment under test with external antenna connector



## 8.2 TEST SET-UP

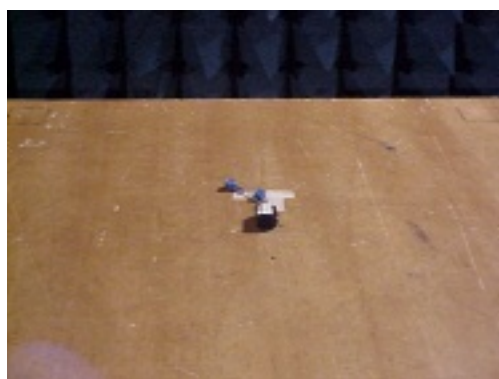

Set up of Radiated emission test

## 9 MEASUREMENT AND TEST EQUIPMENT INSTRUMENTATION

INSTRUMENTS	MANUFACTURER	MODEL	IMQ SERIAL NUMBER	Ref. TEST
Spectrum Analyzer	Rohde & Schwarz	FSP40	S-03629	2÷7
Antenna BilogP	ARA	LPD-2513	S-02385	2
Antenna ridged horn	Schwarzbeck	BBHA9120D	S-03464	2
Pre-amplifier 30-1000 MHz	BONN Elektronik	BLNA 0110-15C35	S-04193	2
Pre-amplifier 1-26GHz	HP	HP 8449 B	S-03542	2
Band Reject Filter 2400÷2483 MHz	Wainwright	WRCG2400/2483	S-04308	2
Highpass Filter 3.4÷18 GHz	Wainwright	WHK3.4/18	S-04309	2