



<b>Prüfbericht - Nr.: 10034649 001</b> <i>Test Report No.:</i>			<b>Seite 1 von 38</b> <i>Page 1 of 38</i>		
<b>Auftraggeber:</b> Vencer Co., Ltd. <i>Client:</i>			20F-1, No.77, Sec. 1, Hsin Tai Wu Rd., Hsi-Chih, Taipei Hsien, Taiwan 22101, R.O.C.		
<b>Gegenstand der Prüfung:</b> Bluetooth Ultimate USB Adapter <i>Test item:</i>					
<b>Bezeichnung:</b> VD-11x4 <i>Identification:</i>		<b>Serien-Nr.:</b> N/A <i>Serial No.:</i>			
<b>Wareneingangs-Nr.:</b> TPE66389 <i>Receipt No.:</i>		<b>Eingangsdatum:</b> 2011/10/17 <i>Date of receipt:</i>			
<b>Prüfört:</b> TÜV Rheinland Taiwan Ltd. <i>Testing location:</i>		11F., No.758, Sec. 4, Bade Rd., Songshan Dist., Taipei City 105 Taiwan <b>FCC Registration No.:</b> 365730			
<b>Prüfgrundlage:</b> <i>Test specification:</i>		FCC CFR47 Part 15: Subpart C Section 15.247 FCC CFR47 Part 15: Subpart C Section 15.209 FCC CFR47 Part 15: Subpart C Section 15.207 FCC CFR47 Part 15: Subpart C Section 15.205			
<b>Prüfergebnis:</b> <i>Test Result:</i>		<b>Der Prüfgegenstand entspricht oben genannter Prüfgrundlage(n).</b> <i>The test item passed the test specification(s).</i>			
<b>Prüflaboratorium:</b> <i>Testing Laboratory:</i>		TÜV Rheinland Taiwan Ltd.			
<b>geprüft/ tested by:</b>			<b>kontrolliert/ reviewed by:</b>		
 2011-12-08 Arvin Ho/Section Manager			 2011-12-14 Rene Charton/Senior Project Manager		
Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>
<b>Sonstiges/ Other Aspects:</b>					
<b>Abkürzungen:</b> P(ass) = entspricht Prüfgrundlage F(ail) = entspricht nicht Prüfgrundlage N/A = nicht anwendbar N/T = nicht getestet			<b>Abbreviations:</b> P(ass) = passed F(ail) = failed N/A = not applicable N/T = not tested		
<b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b> <i>This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.</i>					

## TEST SUMMARY

**5.1.1 ANTENNA REQUIREMENT**

RESULT: *Passed*

**5.1.2 OUTPUT POWER**

RESULT: *Passed*

**5.1.3 6dB BANDWIDTH**

RESULT: *Passed*

**5.1.4 CONDUCTED SPURIOUS EMISSIONS AND FREQUENCY BAND EDGE MEASURED IN 100KHZ BANDWIDTH**

RESULT: *Passed*

**5.1.5 PEAK POWER DENSITY**

RESULT: *Passed*

**5.1.6 SPURIOUS EMISSION**

RESULT: *Passed*

**5.1.7 MAINS CONDUCTED EMISSION**

RESULT: *Passed*

**6.1.1 ELECTROMAGNETIC FIELDS**

RESULT: *Passed*

## Contents

<b>1.</b>	<b>GENERAL REMARKS .....</b>	<b>4</b>
<b>1.1</b>	<b>COMPLEMENTARY MATERIALS .....</b>	<b>4</b>
<b>2.</b>	<b>TEST SITES .....</b>	<b>5</b>
<b>2.1</b>	<b>TEST FACILITIES .....</b>	<b>5</b>
<b>2.2</b>	<b>LIST OF TEST AND MEASUREMENT INSTRUMENTS .....</b>	<b>5</b>
<b>2.3</b>	<b>TRACEABILITY .....</b>	<b>6</b>
<b>2.4</b>	<b>CALIBRATION .....</b>	<b>6</b>
<b>2.5</b>	<b>MEASUREMENT UNCERTAINTY .....</b>	<b>6</b>
<b>3.</b>	<b>GENERAL PRODUCT INFORMATION .....</b>	<b>7</b>
<b>3.1</b>	<b>PRODUCT FUNCTION AND INTENDED USE .....</b>	<b>7</b>
<b>3.2</b>	<b>RATINGS AND SYSTEM DETAILS .....</b>	<b>7</b>
<b>3.3</b>	<b>INDEPENDENT OPERATION MODES .....</b>	<b>8</b>
<b>3.4</b>	<b>NOISE GENERATING AND NOISE SUPPRESSING PARTS .....</b>	<b>9</b>
<b>3.5</b>	<b>SUBMITTED DOCUMENTS .....</b>	<b>9</b>
<b>4.</b>	<b>TEST SET-UP AND OPERATION MODES .....</b>	<b>10</b>
<b>4.1</b>	<b>PRINCIPLE OF CONFIGURATION SELECTION .....</b>	<b>10</b>
<b>4.2</b>	<b>TEST OPERATION AND TEST SOFTWARE .....</b>	<b>10</b>
<b>4.3</b>	<b>SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT .....</b>	<b>10</b>
<b>4.4</b>	<b>COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE .....</b>	<b>11</b>
<b>4.5</b>	<b>TEST SETUP DIAGRAM .....</b>	<b>11</b>
<b>5.</b>	<b>TEST RESULTS .....</b>	<b>13</b>
<b>5.1</b>	<b>TRANSMITTER REQUIREMENT &amp; TEST SUITES .....</b>	<b>13</b>
5.1.1	<i>Antenna Requirement .....</i>	<i>13</i>
5.1.2	<i>Output Power .....</i>	<i>14</i>
5.1.3	<i>6dB Bandwidth .....</i>	<i>17</i>
5.1.4	<i>Conducted spurious emissions and Frequency Band Edge measured in 100kHz Bandwidth .....</i>	<i>20</i>
5.1.5	<i>Peak Power Density .....</i>	<i>23</i>
5.1.6	<i>Spurious Emission .....</i>	<i>26</i>
5.1.7	<i>Mains Conducted Emission .....</i>	<i>27</i>
<b>6.</b>	<b>SAFETY HUMAN EXPOSURE .....</b>	<b>29</b>
<b>6.1</b>	<b>RADIO FREQUENCY EXPOSURE COMPLIANCE .....</b>	<b>29</b>
6.1.1	<i>Electromagnetic Fields .....</i>	<i>29</i>
<b>7.</b>	<b>PHOTOGRAPHS OF THE TEST SET-UP .....</b>	<b>30</b>
<b>8.</b>	<b>LIST OF TABLES .....</b>	<b>32</b>
<b>9.</b>	<b>LIST OF PHOTOGRAPHS .....</b>	<b>32</b>

## 1. General Remarks

### 1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

**Appendix 1: Photo**

(File:10034649APPENDIX1)

**Appendix 2: Test Result of Radiated Emissions**

(File:10034649APPENDIX2)

**Appendix 3: Test Result of Mains Conducted Emissions**

(File:10034649APPENDIX3)

**Test Specifications**

The following standards were applied (in bold: product standards, otherwise: basic standards).

**Table 1: Applied Standard and Test Levels**

<b>Radio</b>
FCC CFR47 Part 15: Subpart <b>C Section 15.247</b> KDB 558074 of March 23, 2005

## 2. Test Sites

### 2.1 Test Facilities

TUV Rheinland Taiwan Ltd.

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.  
Taipei City 105  
Taiwan (R.O.C.)  
FCC Registration No.: 365730

### 2.2 List of Test and Measurement Instruments

Table 2: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Type	S/N	Calibrated until
EMI Test Receiver	R&S	ESCI 7	1166.5950K0 7-100797-Pt	Nov. 09, 2012
Bilog Antenna	TESEQ	CBL6111D	29802	Oct. 01, 2012
Pre-Amplifier	HP	8447F	2805A03335	Jan. 02, 2012
Spectrum Analyzer	R&S	FSV 40	100921	Oct. 12, 2012
Horn Antenna (1GHz~18GHz)	COM-POWER	AHA118	701101	Dec. 27, 2012
Horn Antenna (18GHz~25GHz)	COM-POWER	AH840	101031	Oct. 1, 2012
Power meter	R&S	NRVD	100439	Mar. 25, 2012
Power sensor	R&S	NRV-Z1	100013	Mar. 25, 2012
Temp. & Humid. Chamber	Giant Force	GCT-099-40-S	MAF0103-007	May. 13, 2013

## 2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

## 2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

## 2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements are  $\pm 3\text{dB}$ .

**Table 3:** Emission Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF power, conducted	$\pm 1 \text{ dB}$
Adjacent channel power	$\pm 3 \text{ dB}$
Radiated emission of transmitter, valid up to 26 GHz	$\pm 6 \text{ dB}$
Radiated emission of receiver, valid up to 26 GHz	$\pm 6 \text{ dB}$
Temperature	$\pm 2 \text{ }^{\circ}\text{C}$
Humidity	$\pm 10 \text{ } \%$

### 3. General Product Information

#### 3.1 Product Function and Intended Use

Vencer Bluetooth Ultimate USB Adapter VD-11x4 enables wireless connectivity of your existing PC or notebook using the latest Bluetooth Technology and compliant with Bluetooth Standard 4.0 which support Bluetooth low energy feature. For details refer to the User Guide, Data Sheet and Circuit Diagram.

#### 3.2 Ratings and System Details

**Table 4: Technical Specification of EUT**

Technical Specification	Value
Kind of Equipment	Bluetooth Ultimate USB Adapter
FCC ID	VHVBTV D1154
Type Designation	VD-11x4
Operating Frequency	2402 MHz ~ 2480 MHz
Channel Spacing	1 MHz (BR and EDR Mode), 2Mhz (LE Mode)
Channel number	79 (BR and EDR Mode), 40 (LE Mode)
Extreme Temperature Range	-10°C to 50°C
Operation Voltage	DC 5.0V (from USB Port)
Modulation	GFSK, $\pi/4$ QPSK, 8 DPSK
Antenna gain	-11.27 dBi

**Note:**

This test report is for the LE operation mode.

For the BR and EDR operation mode, please refer to test report No. 10034647 001

### **3.3 Independent Operation Modes**

The basic operation modes are:

- A. Transmitting
  - 1. Low channel
  - 2. Middle channel
  - 3. High channel
- B. Receiving
- C. Standby
- D. Off



### **3.4 Noise Generating and Noise Suppressing Parts**

Refer to the Circuit Diagram.

### **3.5 Submitted Documents**

- |                         |                      |
|-------------------------|----------------------|
| - Bill of Material      | - Circuit Diagram    |
| - PCB Layout            | - Instruction Manual |
| - Photo Document        | - Rating Label       |
| - Technical Description |                      |

## 4. Test Set-up and Operation Modes

### 4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum power level. The test modes were adapted accordingly in reference to the instructions for use.

### 4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 4. All testing were performed according to the procedures in ANSI C63.4: 2003.

Full test was applied on all test modes, but only worst case was shown.

### 4.3 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:


Kind of Equipment	Manufacturer	Model Name	S/N
Laptop	MSI	MSI4532 (CX420MX)	CX420 MX-233TWK 1008000096

## 4.4 Countermeasures to achieve EMC Compliance


The test sample which has been tested contained the noise suppression parts as described in the Constructional Data Form or the Technical Construction File. No additional measures were employed to achieve compliance.

## 4.5 Test Setup Diagram


Diagram of Measurement Configuration for Radiation Test

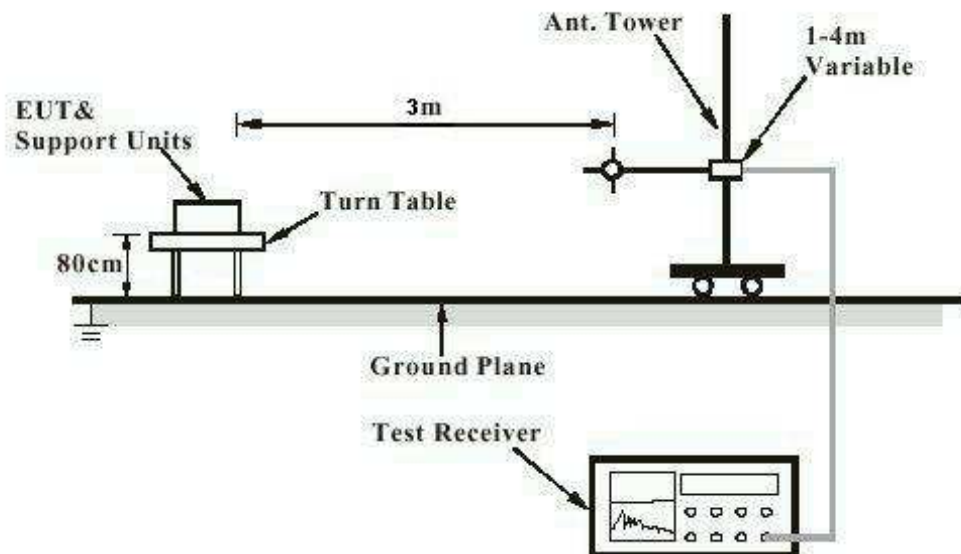

### Diagram of Measurement Equipment Configuration for Mains Conduction Measurement

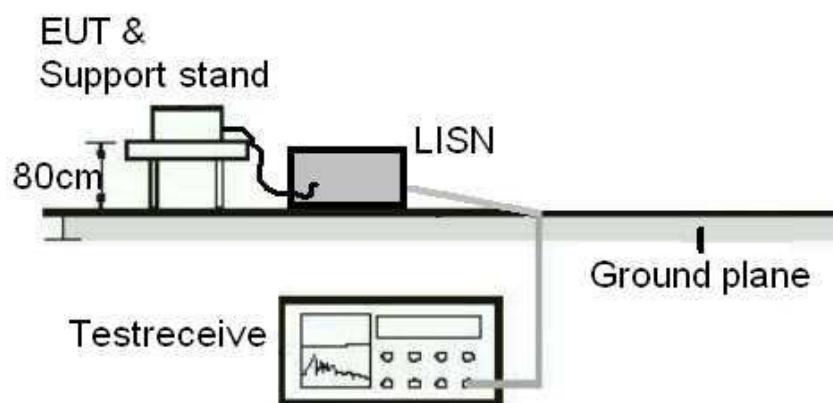

### Diagram of Measurement Equipment Configuration for Conducted Transmitter Measurement

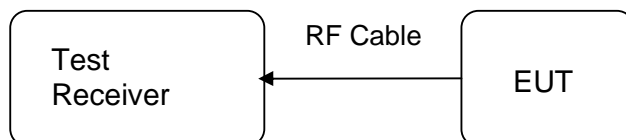

## 5. Test Results

### 5.1 Transmitter Requirement & Test Suites

#### 5.1.1 Antenna Requirement

**RESULT:****Passed**

Test date	:	2011-10-18
Test standard	:	FCC Part 15.247(b)(4) and Part 15.203
Limit	:	the use of antennas with directional gains that do not exceed 6 dBi

According to the manufacturer declaration, the EUT has an internal antenna with an directional gain of -11.27 dBi, and the antenna is a printed PCB trace with no possibility of replacement. Therefore, the EUT is considered to comply the provision.

Refer to EUT photo for details.

## 5.1.2 Output Power

**RESULT:**
**Passed**

Test date : 2011-12-15  
 Test standard : FCC Part 15.247(b)(1)  
 Basic standard : ANSI C63.4: 2003  
 Limit : 1 Watt  
 Kind of test site : Shielded room

**Test setup**


Test Channel : Low/ Middle/ High  
 Operation Mode : A  
 Ambient temperature : 22°C  
 Relative humidity : 52%  
 Atmospheric pressure : 101 kPa

**Table 5: Test result of Output Power, GFSK modulation**

Channel	Channel Frequency (MHz)	Output Power		Limit
		(dBm)	(W)	(W)
Low Channel	2402	5.14	0.0033	1
Middle Channel	2442	7.12	0.0052	1
High Channel	2480	8.19	0.0066	1


## Test Plot of Output Power

### Low Channel

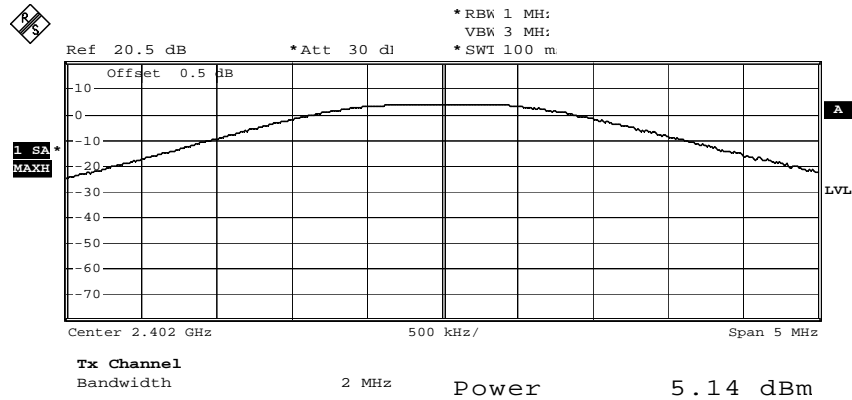

Date: 15.DEC.2011 09:49:24

### Middle Channel

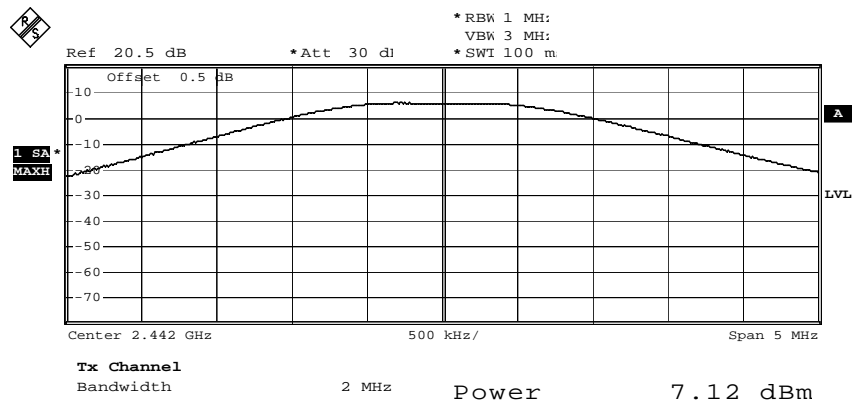


Date: 15.DEC.2011 09:48:58

### High Channel



1 SA  
MAXH

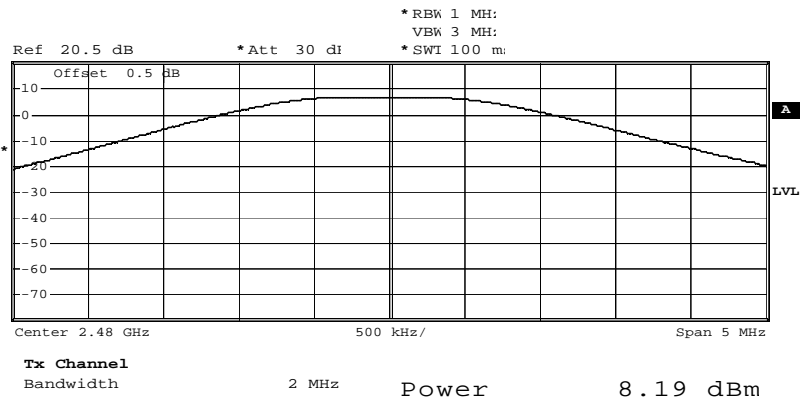

Date: 15.DEC.2011 09:48:28



### 5.1.3 6dB Bandwidth

**RESULT:****Passed**

Date of testing : 2011-11-23  
Test standard : FCC Part 15.247(a)(1)  
Basic standard : ANSI C63.4: 2003  
Kind of test site : Shielded room

**Test setup**


Test Channel : Low/ Middle/ High  
Operation Mode : A  
Ambient temperature : 24°C  
Relative humidity : 53%  
Atmospheric pressure : 101 kPa

**Table 6: Test result of 6dB Bandwidth, GFSK modulation**

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Limit (MHz)	Result
Low Channel	2402	700.4	/	Pass
Mid Channel	2442	703.3	/	Pass
High Channel	2480	720.7	/	Pass


## Test Plot of 6dB Bandwidth

### Low Channel

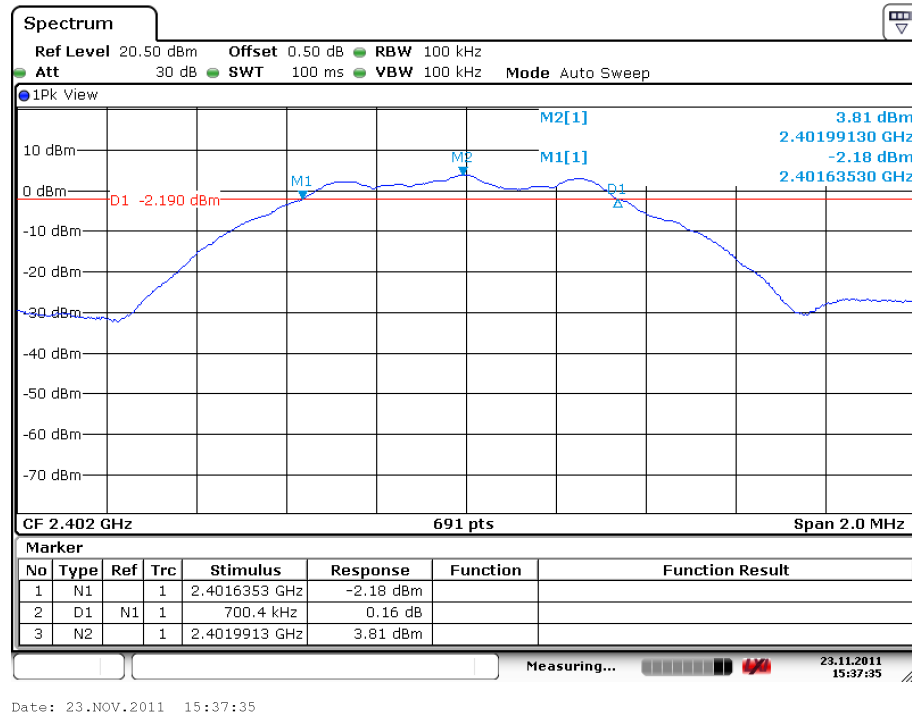


Date: 23.NOV.2011 15:37:35

### Middle Channel

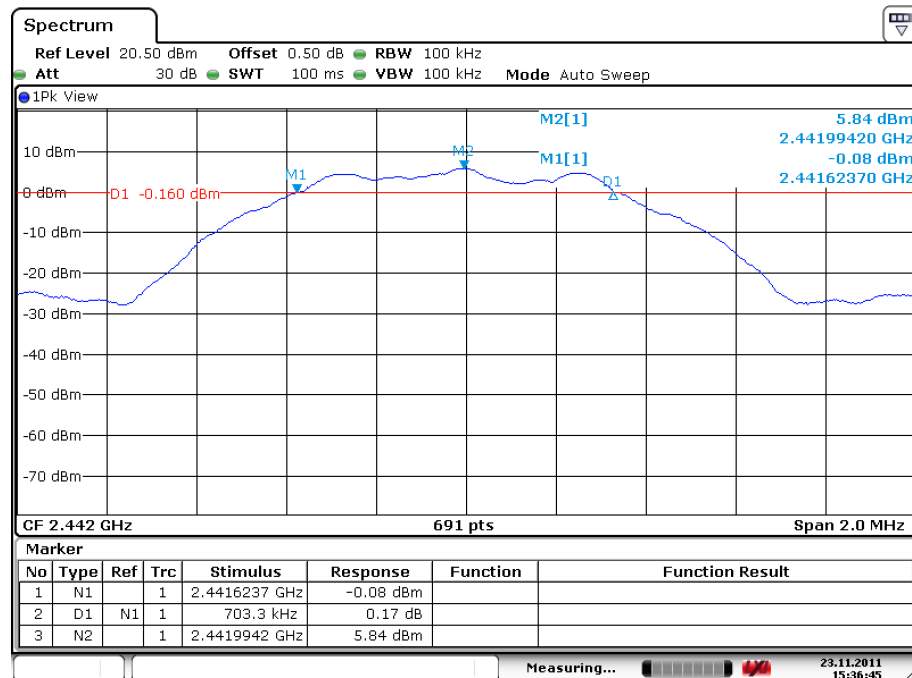

Date: 23.NOV.2011 15:36:45

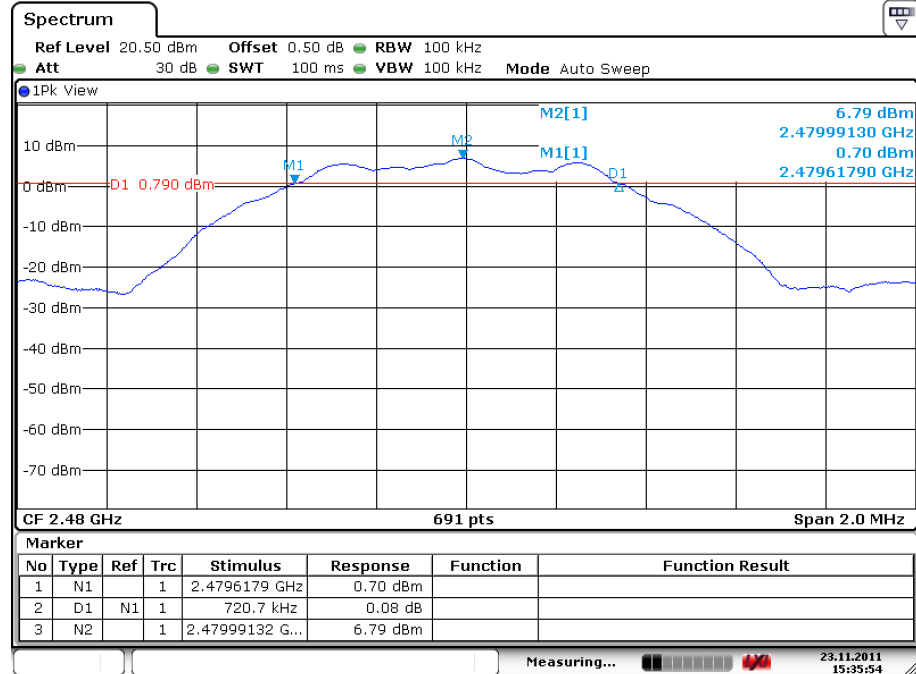**High Channel**


Date: 23.NOV.2011 15:35:54

**5.1.4 Conducted spurious emissions and Frequency Band Edge  
measured in 100kHz Bandwidth****RESULT:****Passed**

Date of testing	:	2011-11-23
Test standard	:	FCC part 15.247(d)
Basic standard	:	ANSI C63.4: 2003
Limit	:	20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power)
Kind of test site	:	Shielded room


**Test setup**

Test Channel	:	Low/ High
Operation mode	:	A
Ambient temperature	:	22°C
Relative humidity	:	52%
Atmospheric pressure	:	101 kPa


All emissions are more than 20dB below fundamental, details refer to following test plot, and compliance is achieved as well.

Due to the small size of the product and that there are no inductive components of significant size, 9kHz to 30MHz frequency range is not tested based on technical judgment.

## Test Plot of 100kHz Conducted Emissions Low Channel

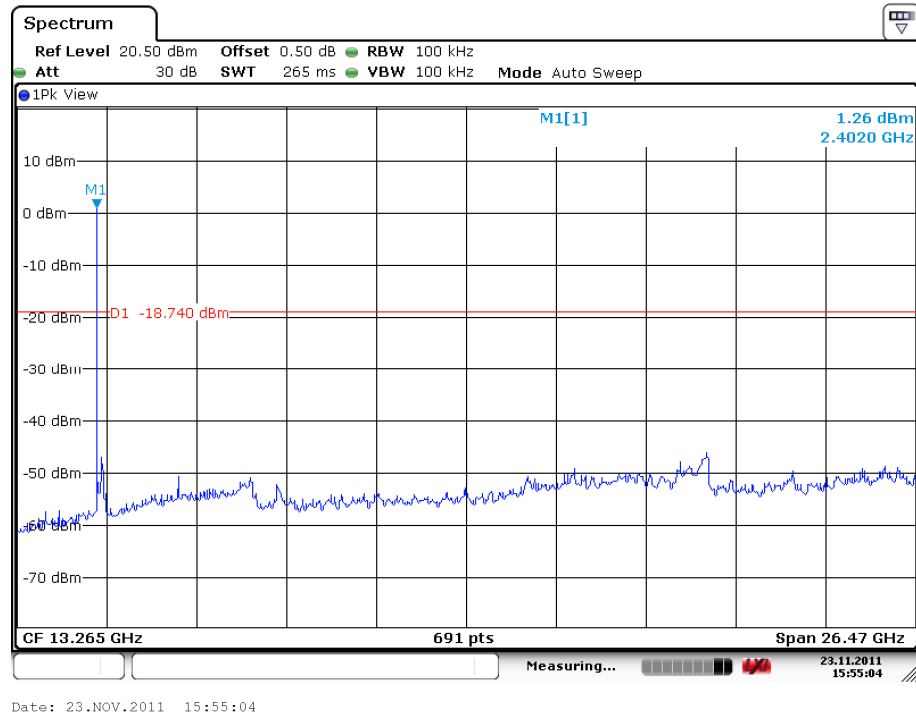


## High Channel

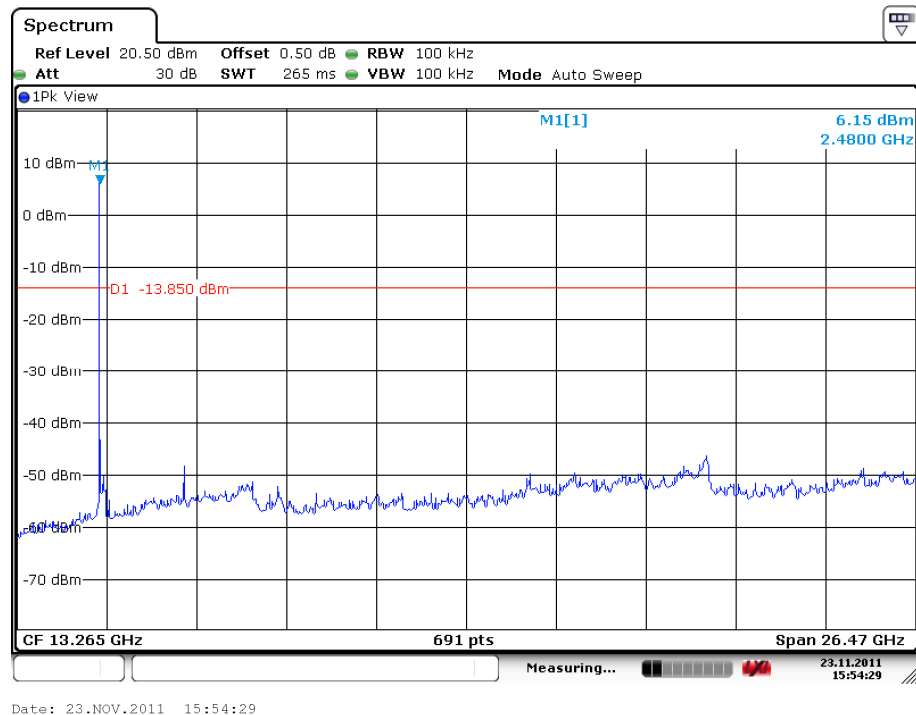


## Test Plot of 100kHz Bandwidth of Frequency Band Edge

### Low Channel

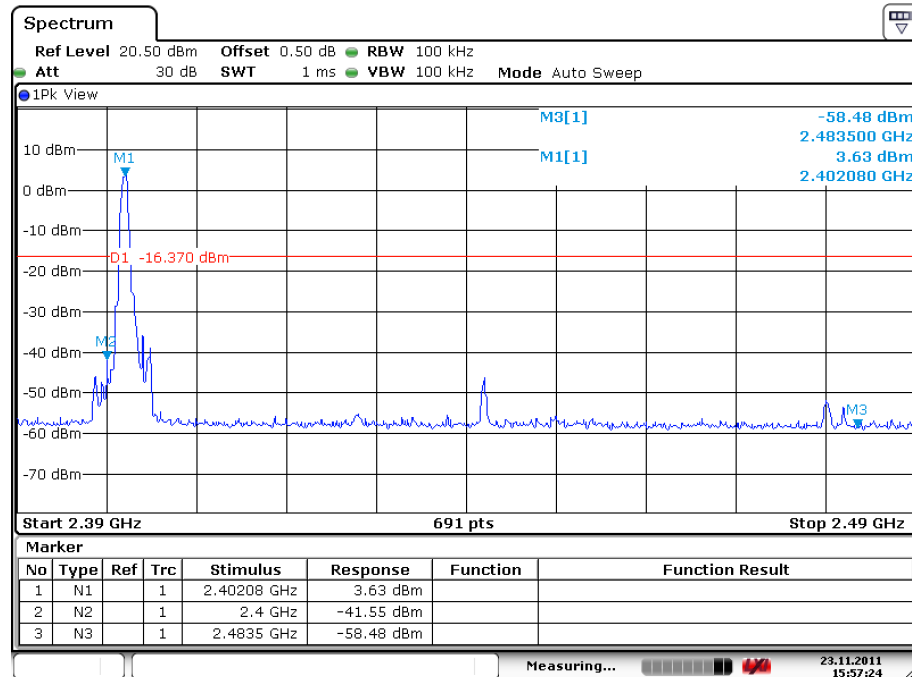

Date: 23.NOV.2011 15:57:24

### High Channel

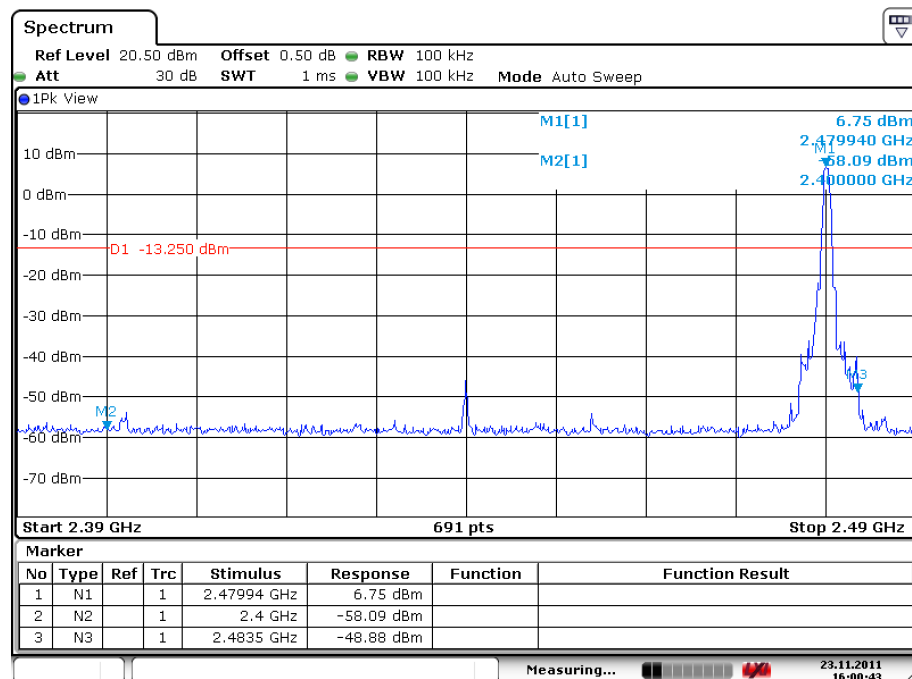

Date: 23.NOV.2011 16:00:43

### 5.1.5 Peak Power Density

**RESULT:****Passed**

Date of testing : 2011-11-23  
Test standard : FCC part 15.247(e)  
Basic standard : ANSI C63.4: 2003  
Limit : 8 dBm (in 3kHz band)

**Test setup**


Test Channel : Low/ Middle/ High  
Operation Mode : A  
Ambient temperature : 24°C  
Relative humidity : 53%  
Atmospheric pressure : 101 kPa

**Table 7: Test result of Peak Power Density, Antenna 1**


Channel	Channel Frequency (MHz)	Peak Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low Channel	2402	-11.71	8	Pass
Mid Channel	2442	-9.7	8	Pass
High Channel	2480	-8.84	8	Pass

## Test Plot of Peak Power Density, Antenna 1

### Low Channel

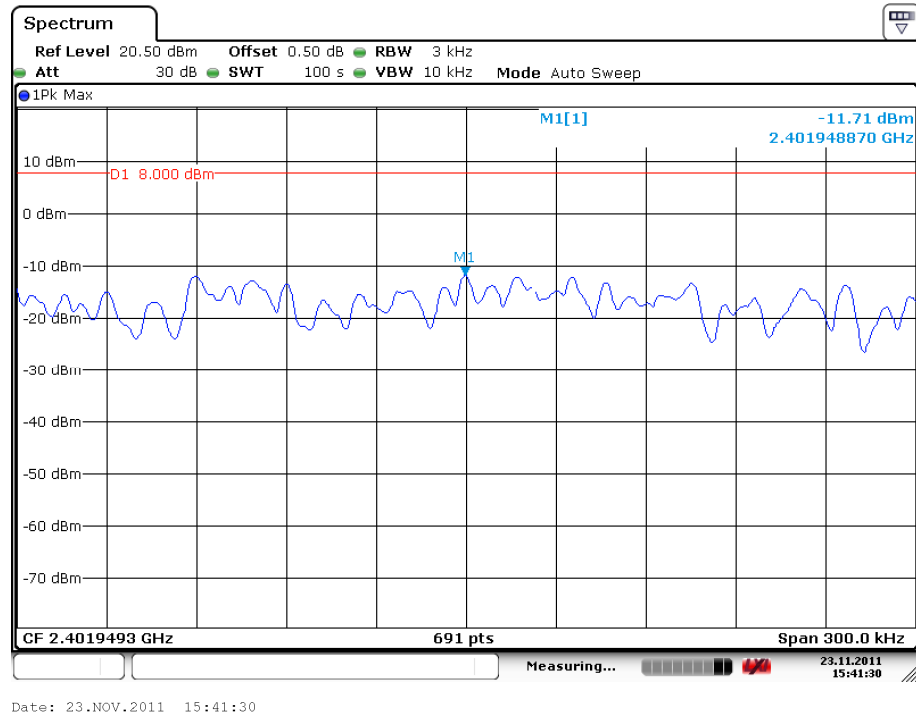


### Middle Channel

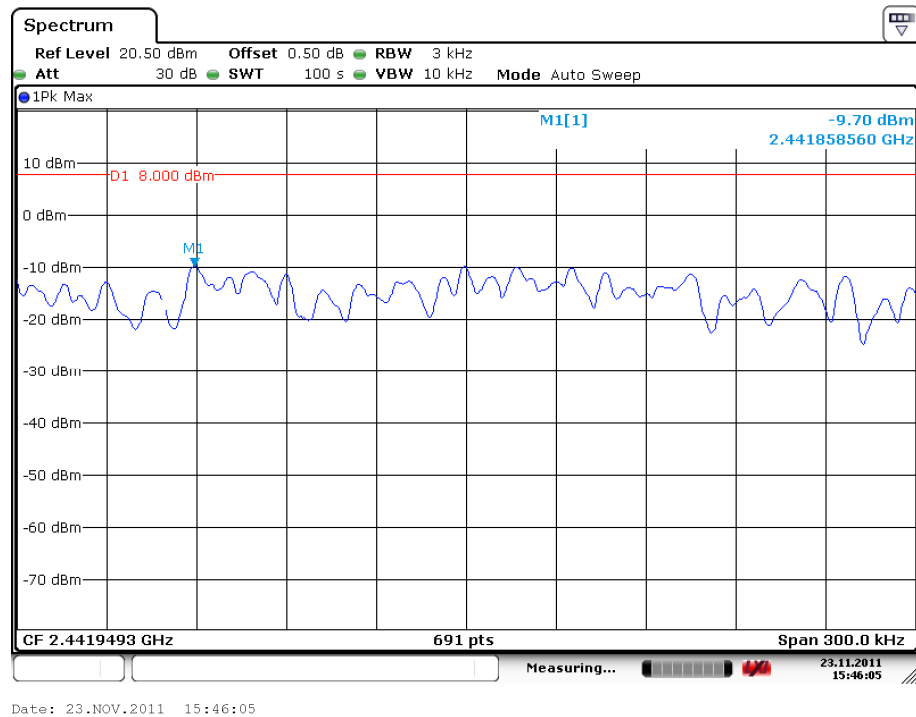



## High Channel

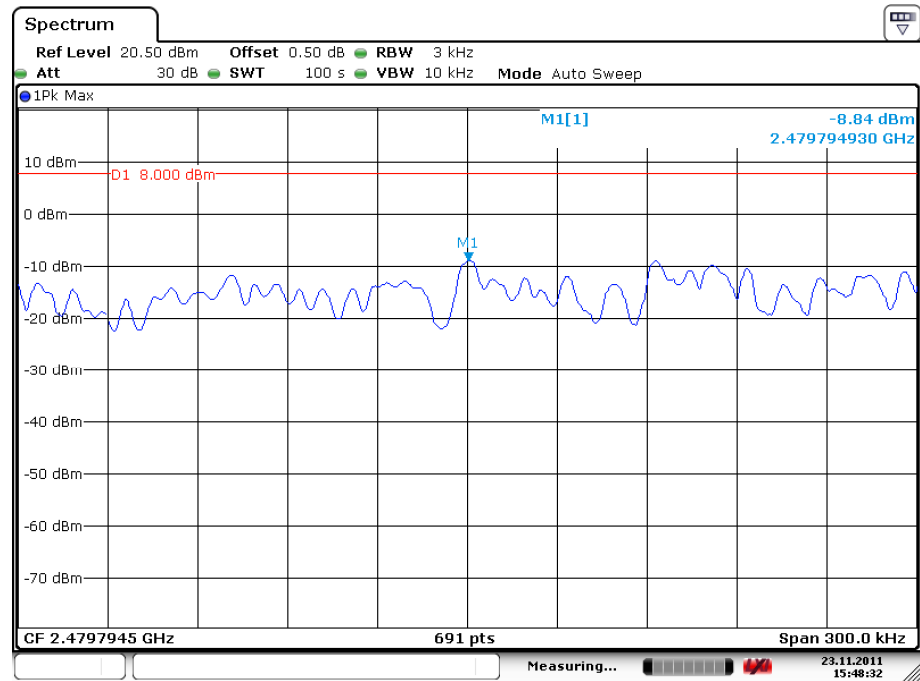

Date: 23.NOV.2011 15:48:32

## 5.1.6 Spurious Emission

**RESULT:****Passed**

Date of testing	:	2011-11-29
Test standard	:	FCC part 15.247(d)
Basic standard	:	ANSI C63.4: 2003
Limits	:	Refer to 15.209(a) of FCC part 15.247(d) In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified in 15.209(a)
Kind of test site	:	3m Semi-Anechoic Chamber

**Test setup**

Test Channel	:	Low/ Middle/ High
Operation mode	:	A, C
Ambient temperature	:	24°C
Relative humidity	:	56%
Atmospheric pressure	:	101 kPa

Remark: Testing was carried out within frequency range 30MHz to the tenth harmonic. For details refer to **Appendix 2**. The Radiated Emissions testing was performed in the X, Y and Z axis orientation. The Z Axis orientation is the worst-case and recorded in this test report. Due to the small size of the product and that there are no inductive components of significant size, 9kHz to 30MHz frequency range is not tested based on technical judgment.

**5.1.7 Mains Conducted Emission****RESULT:****Passed**

Date of testing : 2011-10-24  
Test standard : FCC part 15.207(a)  
Basic standard : ANSI C63.4: 2003  
Limits : Refer to 15.207(a)  
Kind of test site : Shield room

**Test setup**

Test Channel : Hopping  
Operation mode : A, C  
Ambient temperature : 26°C  
Relative humidity : 55%  
Atmospheric pressure : 101 kPa

Remark: For details refer to **Appendix 3**.

**Prüfbericht - Nr.: 10034649 001**  
*Test Report No.*

**Seite 28 von 32**  
*Page 28 of 32*

## 6. Safety Human exposure

### 6.1 Radio Frequency Exposure Compliance

#### 6.1.1 Electromagnetic Fields

**RESULT:****Passed**

Test standard : FCC KDB Publication 447498

Since maximum peak output power of the transmitter is  $<60/f(\text{GHz})\text{mW}$ , i.e.  
 $6.6\text{mW} < 25(=60/2.4)\text{mW}$ , hence the EUT is excluded from SAR evaluation according to FCC  
KDB publication 447498 D01: Mobile Portable RF Exposure.

## 7. Photographs of the Test Set-Up

Photograph 1: Set-up for Spurious Emissions (Front View)



Photograph 2: Set-up for Spurious Emissions (Back View)



**Photograph 3: Set-up for Mains Conducted Emissions (Front View)**



**Photograph 4: Set-up for Mains Conducted Emissions (Back View)**



## 8. List of Tables

Table 1: Applied Standard and Test Levels .....	4
Table 2: List of Test and Measurement Equipment .....	5
Table 3: Emission Measurement Uncertainty.....	6
Table 4: Technical Specification of EUT .....	7
Table 5: Test result of Output Power, GFSK modulation .....	14
Table 6: Test result of 6dB Bandwidth, GFSK modulation.....	17
Table 7: Test result of Peak Power Density, Antenna 1.....	23

## 9. List of Photographs

Photograph 1: Set-up for Spurious Emissions (Front View).....	30
Photograph 2: Set-up for Spurious Emissions (Back View) .....	30
Photograph 3: Set-up for Mains Conducted Emissions (Front View).....	31
Photograph 4: Set-up for Mains Conducted Emissions (Back View) .....	31




Test Report No. 10034649 001

Appendix 1: IUT Photos

(File: 10034649Appendix1)


Product: Bluetooth Ultimate USB Adapter

Type Designation: VD-11x4

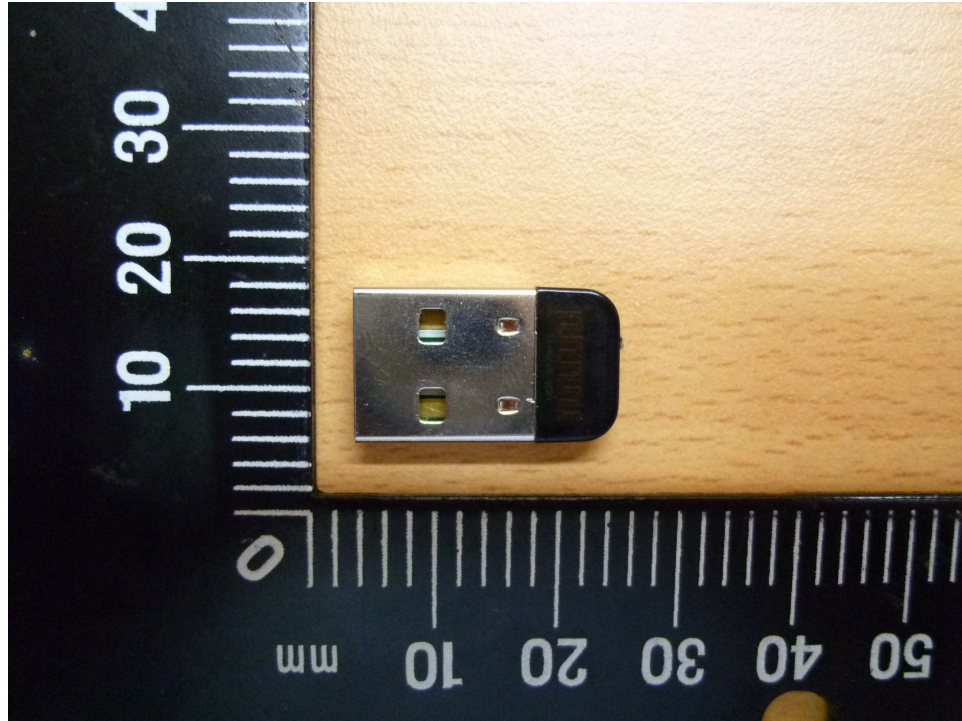

Product: Bluetooth Ultimate USB Adapter



Type Designation: VD-11x4

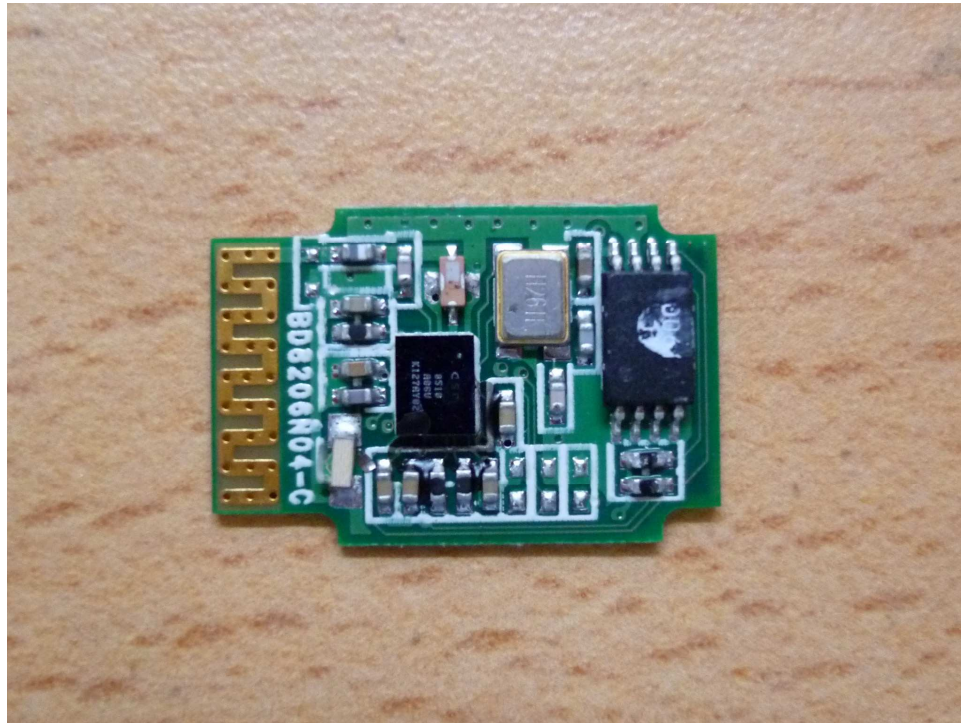



Product: Bluetooth Ultimate USB Adapter


Type Designation: VD-11x4

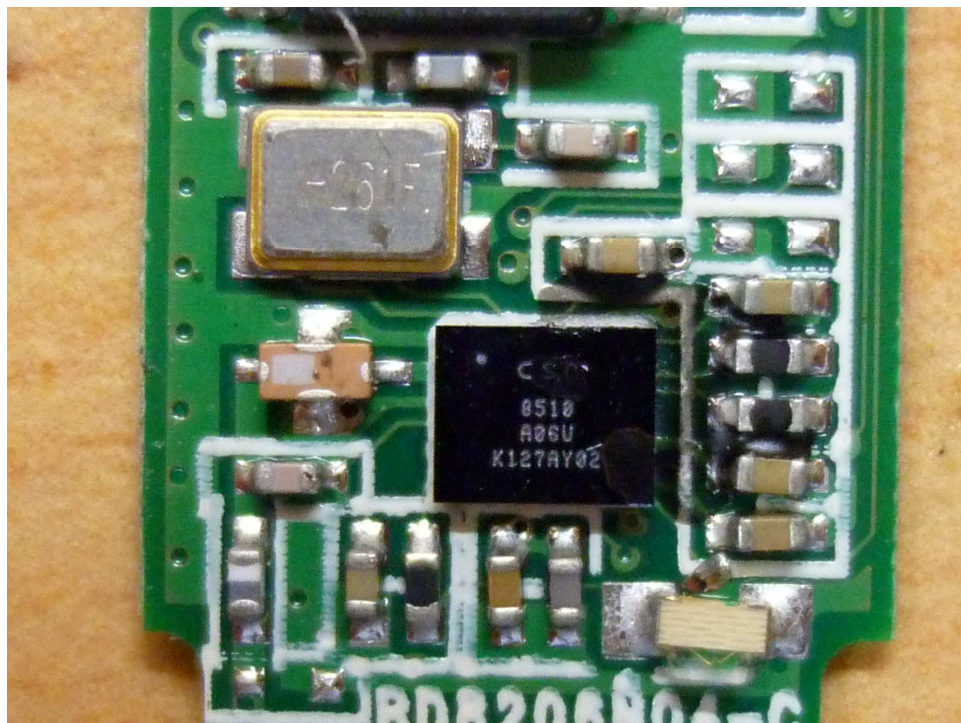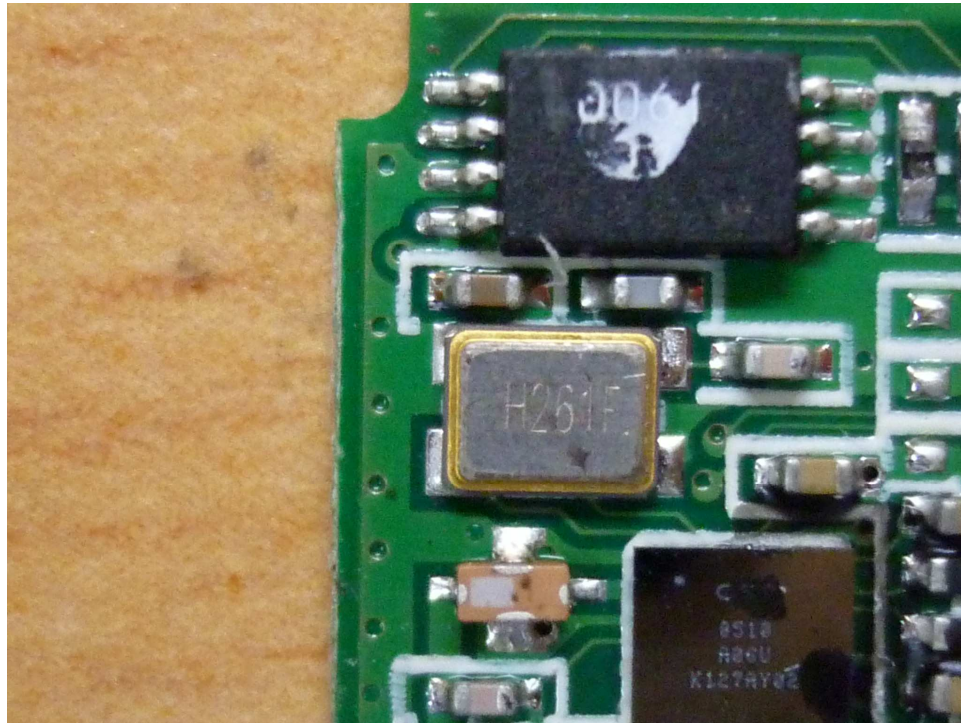

Test Report No. 10034649 001


## Appendix 2: Radiated Spurious Emission

(File: 10034649Appendix2)

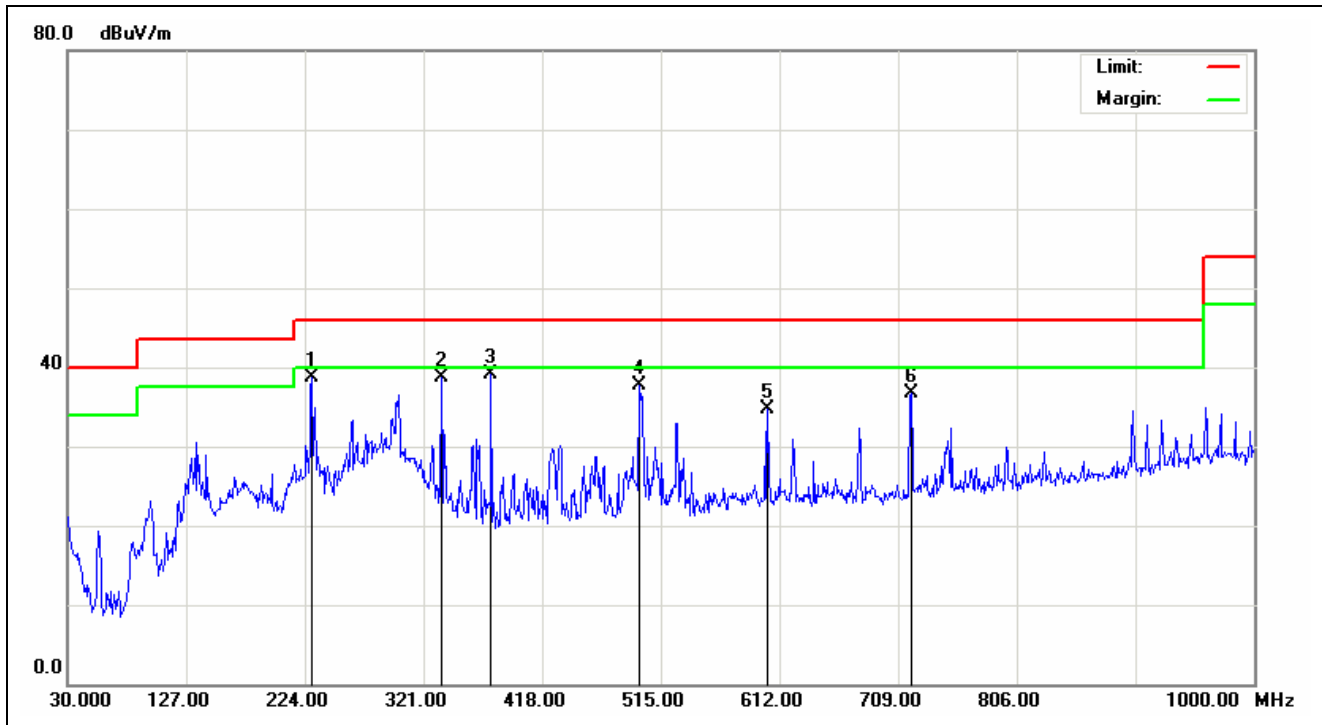


<b>Service No.:</b>	<b>113150235- BT-LE</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test Standard:</b>	<b>FCC Class B 3M Radiation</b>	<b>Ant. Polarization:</b>	<b>Horizontal</b>
<b>Test item:</b>	<b>Radiation Emission</b>	<b>Test Time:</b>	<b>2011/11/29 AM 10:19:14</b>
<b>Applicant:</b>	<b>Vencer</b>	<b>Test Rating:</b>	
<b>Product:</b>	<b>Bluetooth Ultimate USB Adapter</b>	<b>Temp.(°C)/Hum.(%)</b>	<b>24(°C)/57%</b>
<b>Model No.:</b>	<b>VD-1154</b>	<b>Test Engineer:</b>	<b>Howard Lin</b>
<b>Test Mode:</b>			
<b>Remark:</b>	<b>TX</b>		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth ( ° )	Remark
1	229.8200	-14.87	53.64	38.77	46.00	-7.23	QP	300	230	
2	335.5500	-10.50	49.13	38.63	46.00	-7.37	QP	100	265	
3	376.2900	-9.51	48.68	39.17	46.00	-6.83	QP	200	126	
4	497.5400	-7.66	45.31	37.65	46.00	-8.35	QP	100	147	
5	602.3000	-5.84	40.45	34.61	46.00	-11.39	QP	100	7	
6	719.6700	-4.30	40.95	36.65	46.00	-9.35	QP	100	45	

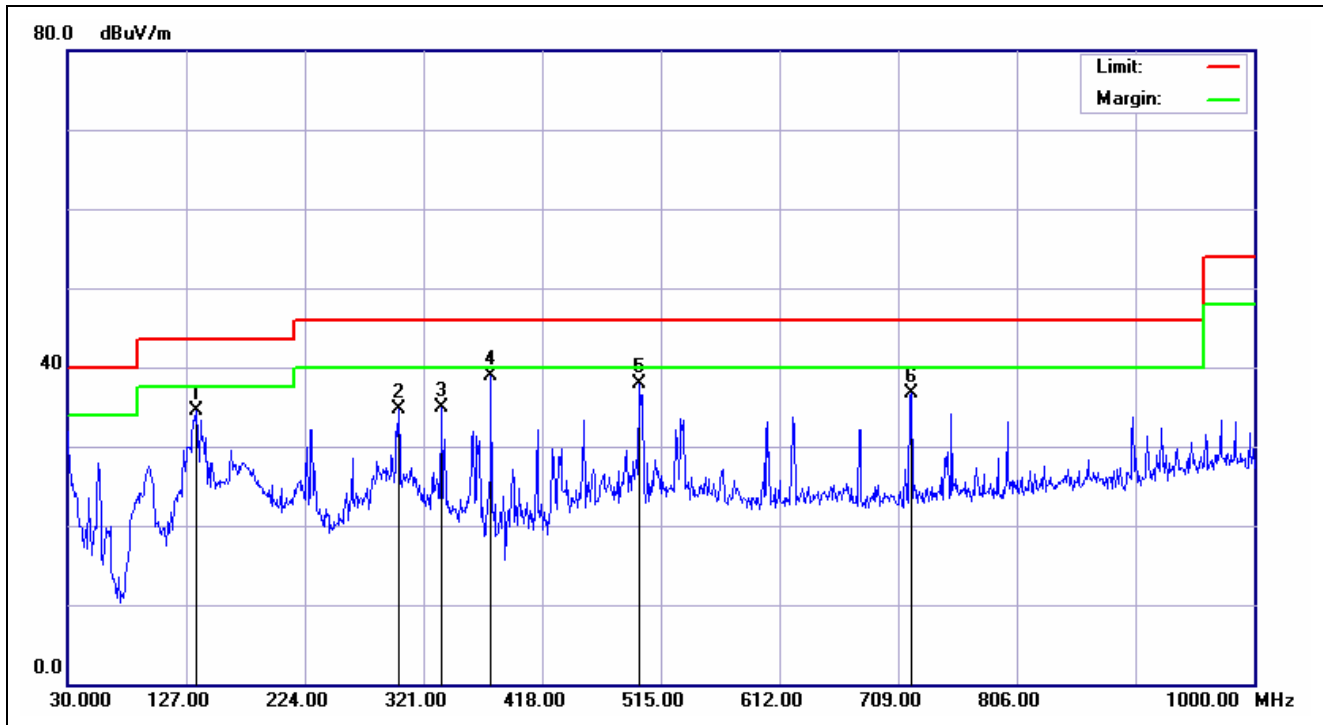

<b>Service No.:</b>	<b>113150235-BT-LE</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test Standard:</b>	<b>FCC Class B 3M Radiation</b>	<b>Ant. Polarization:</b>	<b>Vertical</b>
<b>Test item:</b>	<b>Radiation Emission</b>	<b>Test Time:</b>	<b>2011/11/29 AM 10:26:03</b>
<b>Applicant:</b>	<b>Vencer</b>	<b>Test Rating:</b>	
<b>Product:</b>	<b>Bluetooth Ultimate USB Adapter</b>	<b>Temp.(°C)/Hum.(%)</b>	<b>24(°C)/57%</b>
<b>Model No.:</b>	<b>VD-1154</b>	<b>Test Engineer:</b>	<b>Howard Lin</b>
<b>Test Mode:</b>			
<b>Remark:</b>	<b>TX</b>		


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	134.7600	-13.61	48.18	34.57	43.50	-8.93	QP	100	192	
2	300.6300	-11.27	46.00	34.73	46.00	-11.27	QP	300	271	
3	335.5500	-10.50	45.44	34.94	46.00	-11.06	QP	100	114	
4	376.2900	-9.51	48.41	38.90	46.00	-7.10	QP	100	37	
5	497.5400	-7.66	45.51	37.85	46.00	-8.15	QP	200	257	
6	719.6700	-4.30	40.91	36.61	46.00	-9.39	QP	200	46	

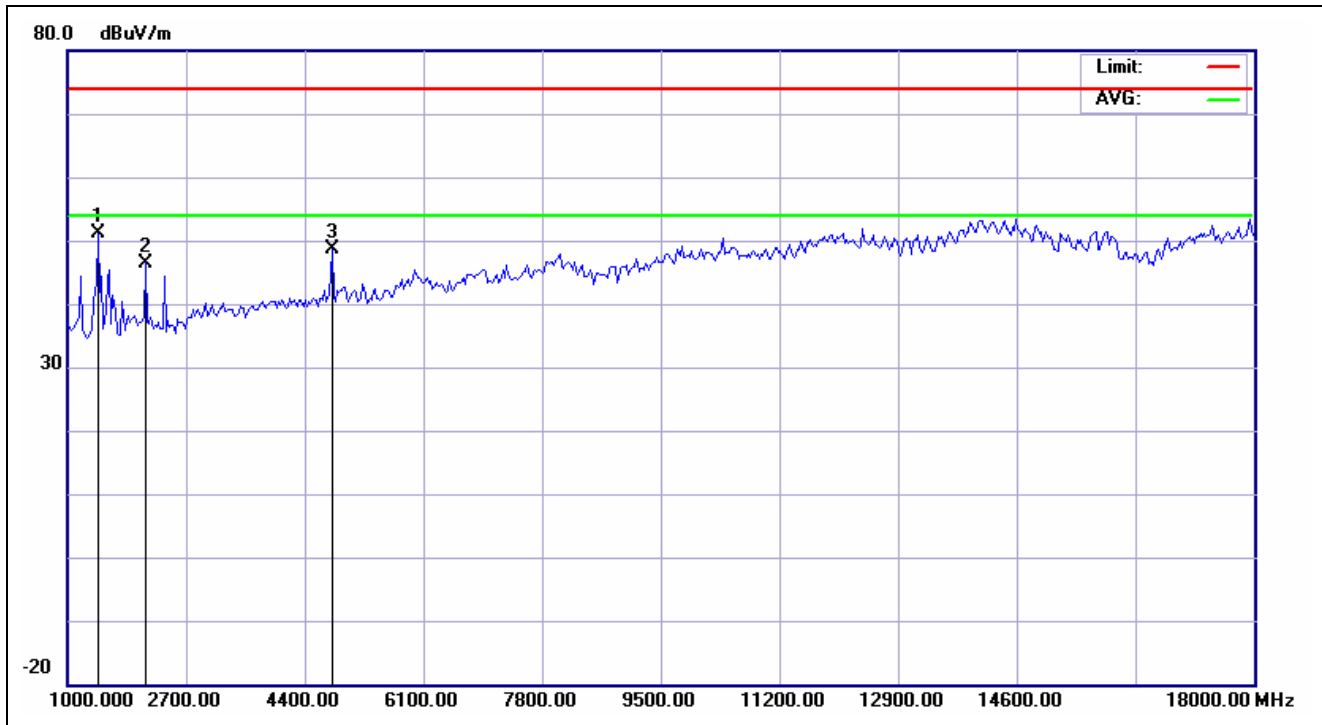

<b>Service No.:</b>	<b>113150235-BT-LE</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test Standard:</b>	<b>FCC above 1G PEAK</b>	<b>Ant. Polarization:</b>	<b>Horizontal</b>
<b>Test item:</b>	<b>Radiation Emission</b>	<b>Test Time:</b>	<b>2011/11/29 AM 11:42:57</b>
<b>Applicant:</b>	<b>Vencer</b>	<b>Test Rating:</b>	
<b>Product:</b>	<b>Bluetooth Ultimate USB Adapter</b>	<b>Temp.(°C)/Hum.(%):</b>	<b>24(°C)/57%</b>
<b>Model No.:</b>	<b>VD-1154</b>	<b>Test Engineer:</b>	<b>Howard Lin</b>
<b>Test Mode:</b>			
<b>Remark:</b>	<b>TX CH0</b>		


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth ( ° )	Remark
1	1435.897	3.76	47.32	51.08	74.00	-22.92	peak			
2	2116.987	7.60	38.90	46.50	74.00	-27.50	peak			
3	4786.859	13.07	35.45	48.52	74.00	-25.48	peak			



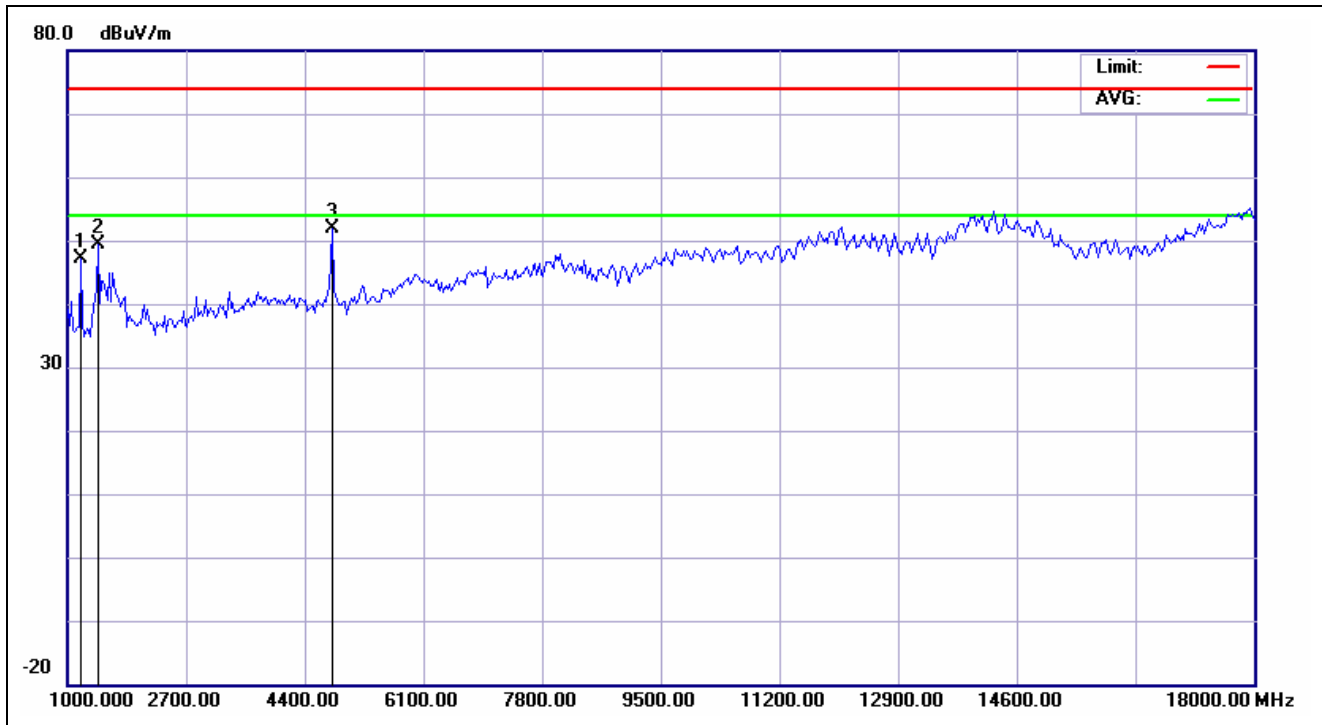


<b>Service No.:</b>	<b>113150235-BT-LE</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test Standard:</b>	<b>FCC above 1G PEAK</b>	<b>Ant. Polarization:</b>	<b>Vertical</b>
<b>Test item:</b>	<b>Radiation Emission</b>	<b>Test Time:</b>	<b>2011/11/29 AM 11:45:08</b>
<b>Applicant:</b>	<b>Vencer</b>	<b>Test Rating:</b>	
<b>Product:</b>	<b>Bluetooth Ultimate USB Adapter</b>	<b>Temp.(°C)/Hum.(%):</b>	<b>24(°C)/57%</b>
<b>Model No.:</b>	<b>VD-1154</b>	<b>Test Engineer:</b>	<b>Howard Lin</b>
<b>Test Mode:</b>			
<b>Remark:</b>	<b>TX CH0</b>		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth ( ° )	Remark
1	1190.705	3.53	43.69	47.22	74.00	-26.78	peak			
2	1435.897	3.76	45.69	49.45	74.00	-24.55	peak			
3	4786.859	13.07	38.87	51.94	74.00	-22.06	peak			

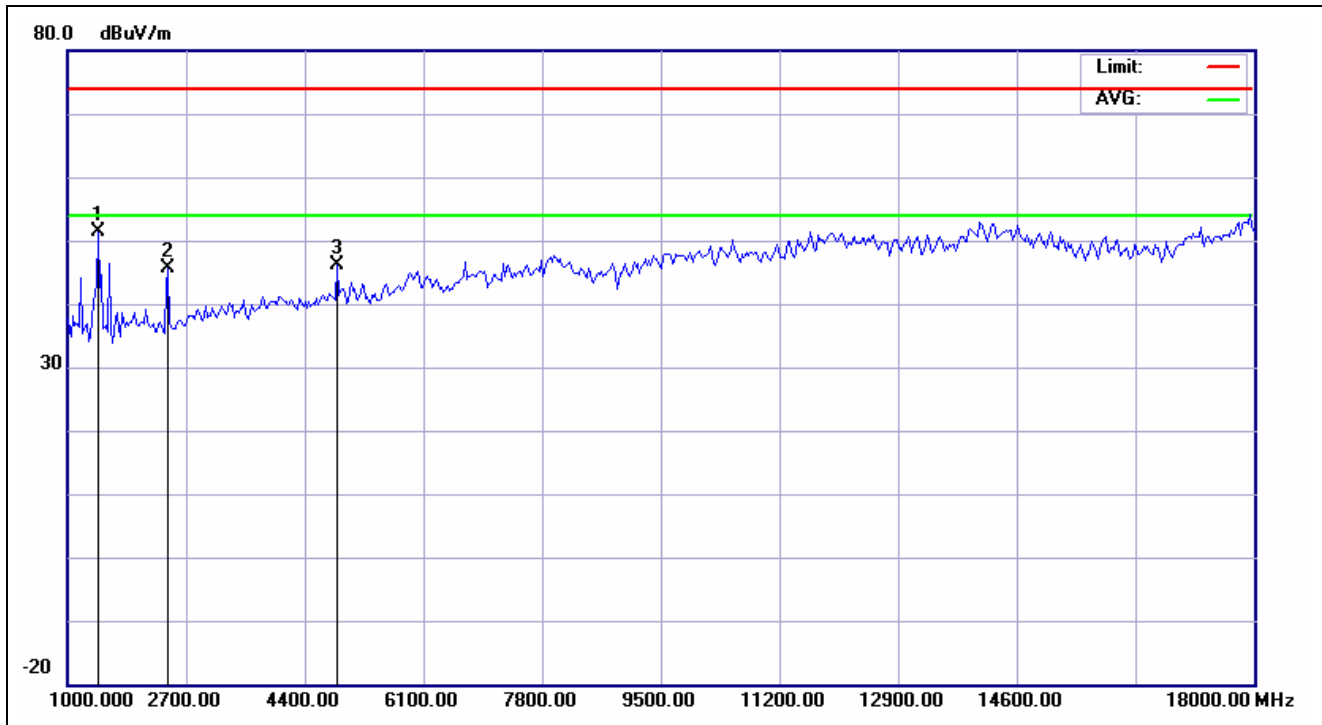


<b>Service No.:</b>	<b>113150235-BT-LE</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test Standard:</b>	<b>FCC above 1G PEAK</b>	<b>Ant. Polarization:</b>	<b>Horizontal</b>
<b>Test item:</b>	<b>Radiation Emission</b>	<b>Test Time:</b>	<b>2011/11/29 AM 11:51:00</b>
<b>Applicant:</b>	<b>Vencer</b>	<b>Test Rating:</b>	
<b>Product:</b>	<b>Bluetooth Ultimate USB Adapter</b>	<b>Temp.(°C)/Hum.(%):</b>	<b>24(°C)/57%</b>
<b>Model No.:</b>	<b>VD-1154</b>	<b>Test Engineer:</b>	<b>Howard Lin</b>
<b>Test Mode:</b>			
<b>Remark:</b>	<b>TX CH20</b>		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1435.897	3.76	47.50	51.26	74.00	-22.74	peak			
2	2443.910	8.17	37.56	45.73	74.00	-28.27	peak			
3	4868.590	13.34	32.86	46.20	74.00	-27.80	peak			

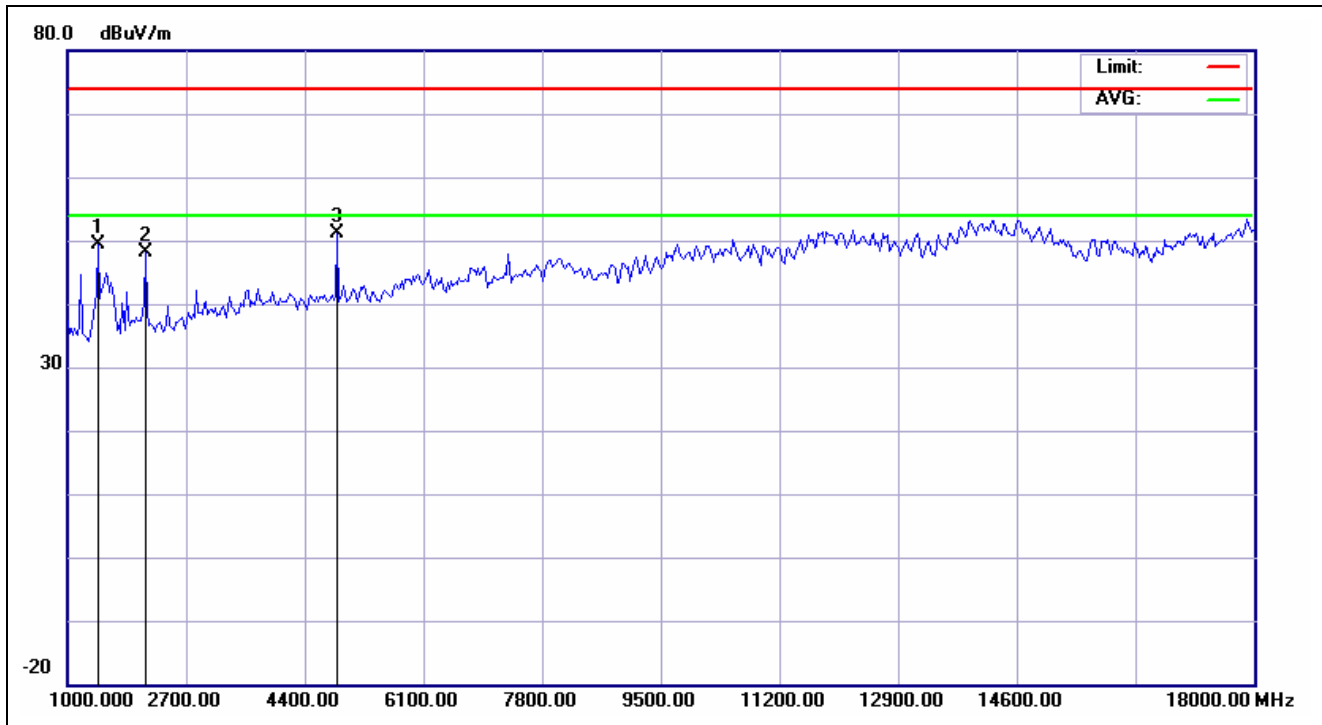


<b>Service No.:</b>	<b>113150235-BT-LE</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test Standard:</b>	<b>FCC above 1G PEAK</b>	<b>Ant. Polarization:</b>	<b>Vertical</b>
<b>Test item:</b>	<b>Radiation Emission</b>	<b>Test Time:</b>	<b>2011/11/29 AM 11:47:44</b>
<b>Applicant:</b>	<b>Vencer</b>	<b>Test Rating:</b>	
<b>Product:</b>	<b>Bluetooth Ultimate USB Adapter</b>	<b>Temp.(°C)/Hum.(%):</b>	<b>24(°C)/57%</b>
<b>Model No.:</b>	<b>VD-1154</b>	<b>Test Engineer:</b>	<b>Howard Lin</b>
<b>Test Mode:</b>			
<b>Remark:</b>	<b>TX CH20</b>		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1435.897	3.76	45.61	49.37	74.00	-24.63	peak			
2	2116.987	7.60	40.45	48.05	74.00	-25.95	peak			
3	4868.590	13.34	37.89	51.23	74.00	-22.77	peak			

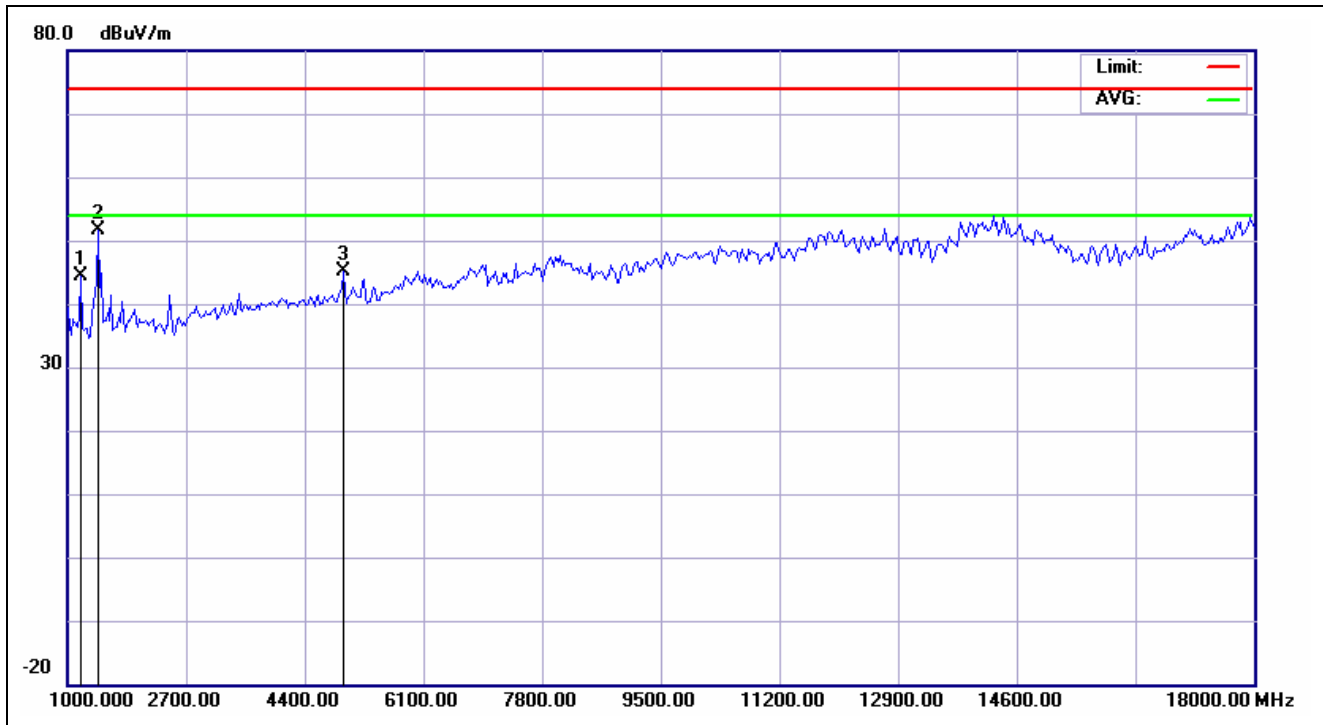


<b>Service No.:</b>	<b>113150235-BT-LE</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test Standard:</b>	<b>FCC above 1G PEAK</b>	<b>Ant. Polarization:</b>	<b>Horizontal</b>
<b>Test item:</b>	<b>Radiation Emission</b>	<b>Test Time:</b>	<b>2011/11/29 AM 11:53:46</b>
<b>Applicant:</b>	<b>Vencer</b>	<b>Test Rating:</b>	
<b>Product:</b>	<b>Bluetooth Ultimate USB Adapter</b>	<b>Temp.(°C)/Hum.(%)</b>	<b>24(°C)/57%</b>
<b>Model No.:</b>	<b>VD-1154</b>	<b>Test Engineer:</b>	<b>Howard Lin</b>
<b>Test Mode:</b>			
<b>Remark:</b>	<b>TX CH39</b>		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth ( ° )	Remark
1	1190.705	3.53	40.94	44.47	74.00	-29.53	peak			
2	1435.897	3.76	47.82	51.58	74.00	-22.42	peak			
3	4950.320	13.60	31.63	45.23	74.00	-28.77	peak			

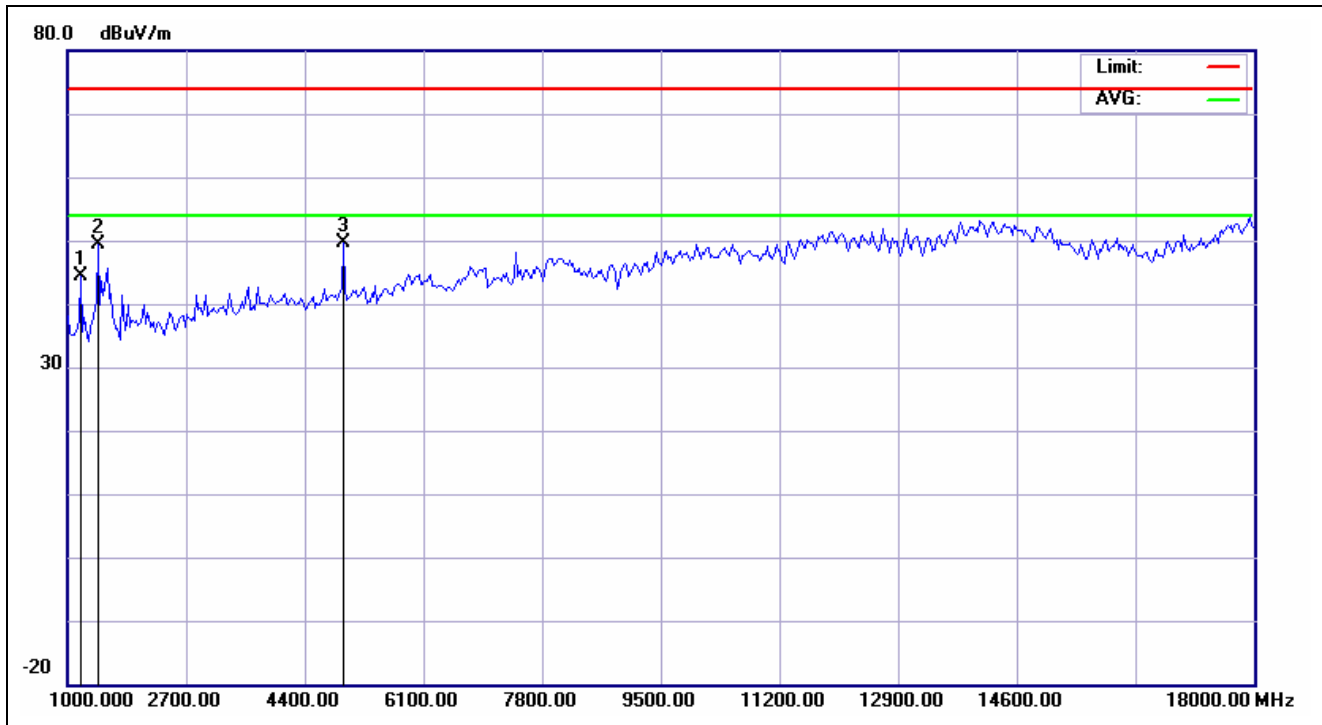


<b>Service No.:</b>	<b>113150235-BT-LE</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test Standard:</b>	<b>FCC above 1G PEAK</b>	<b>Ant. Polarization:</b>	<b>Vertical</b>
<b>Test item:</b>	<b>Radiation Emission</b>	<b>Test Time:</b>	<b>2011/11/29 AM 11:55:51</b>
<b>Applicant:</b>	<b>Vencer</b>	<b>Test Rating:</b>	
<b>Product:</b>	<b>Bluetooth Ultimate USB Adapter</b>	<b>Temp.(°C)/Hum.(%):</b>	<b>24(°C)/57%</b>
<b>Model No.:</b>	<b>VD-1154</b>	<b>Test Engineer:</b>	<b>Howard Lin</b>
<b>Test Mode:</b>			
<b>Remark:</b>	<b>TX CH39</b>		


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth ( ° )	Remark
1	1190.705	3.53	40.92	44.45	74.00	-29.55	peak			
2	1435.897	3.76	45.73	49.49	74.00	-24.51	peak			
3	4950.321	13.60	36.03	49.63	74.00	-24.37	peak			

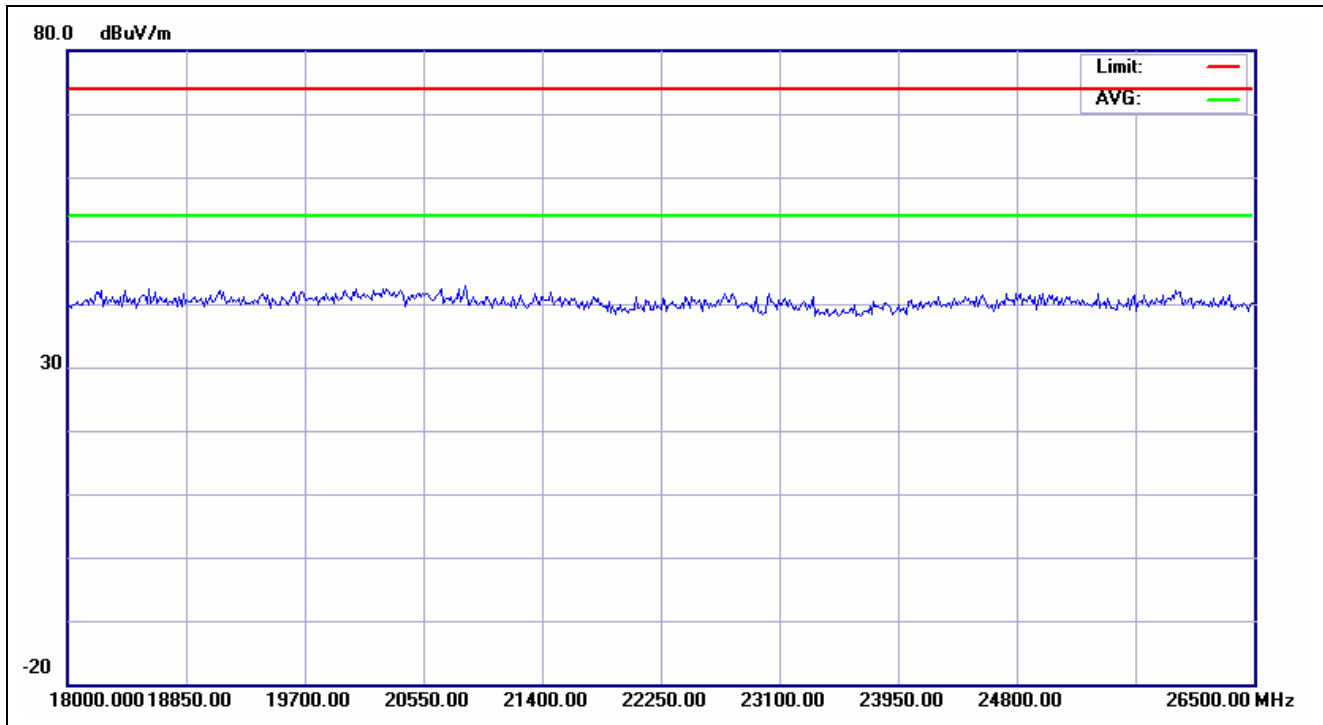

<b>Service No.:</b>	<b>113150235-BT-LE</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test Standard:</b>	<b>FCC above 1G PEAK</b>	<b>Ant. Polarization:</b>	<b>Horizontal</b>
<b>Test item:</b>	<b>Radiation Emission</b>	<b>Test Time:</b>	<b>2011/11/29 PM 02:16:30</b>
<b>Applicant:</b>	<b>Vencer</b>	<b>Test Rating:</b>	
<b>Product:</b>	<b>Bluetooth Ultimate USB Adapter</b>	<b>Temp.(°C)/Hum.(%):</b>	<b>24(°C)/57%</b>
<b>Model No.:</b>	<b>VD-1154</b>	<b>Test Engineer:</b>	<b>Howard Lin</b>
<b>Test Mode:</b>			
<b>Remark:</b>	<b>TX CH0</b>		

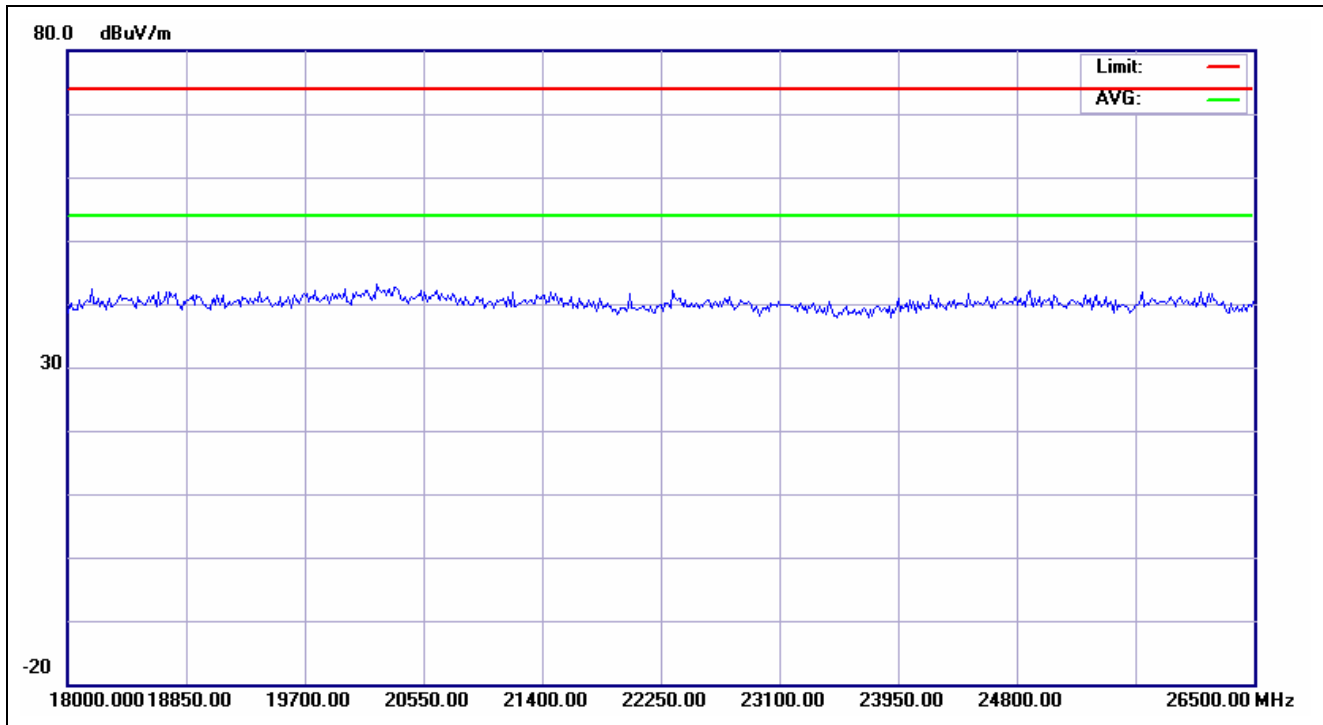


<b>Service No.:</b>	<b>113150235-BT-LE</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test Standard:</b>	<b>FCC above 1G PEAK</b>	<b>Ant. Polarization:</b>	<b>Vertical</b>
<b>Test item:</b>	<b>Radiation Emission</b>	<b>Test Time:</b>	<b>2011/11/29 PM 02:17:15</b>
<b>Applicant:</b>	<b>Vencer</b>	<b>Test Rating:</b>	
<b>Product:</b>	<b>Bluetooth Ultimate USB Adapter</b>	<b>Temp.(°C)/Hum.(%):</b>	<b>24(°C)/57%</b>
<b>Model No.:</b>	<b>VD-1154</b>	<b>Test Engineer:</b>	<b>Howard Lin</b>
<b>Test Mode:</b>			
<b>Remark:</b>	<b>TX CH0</b>		

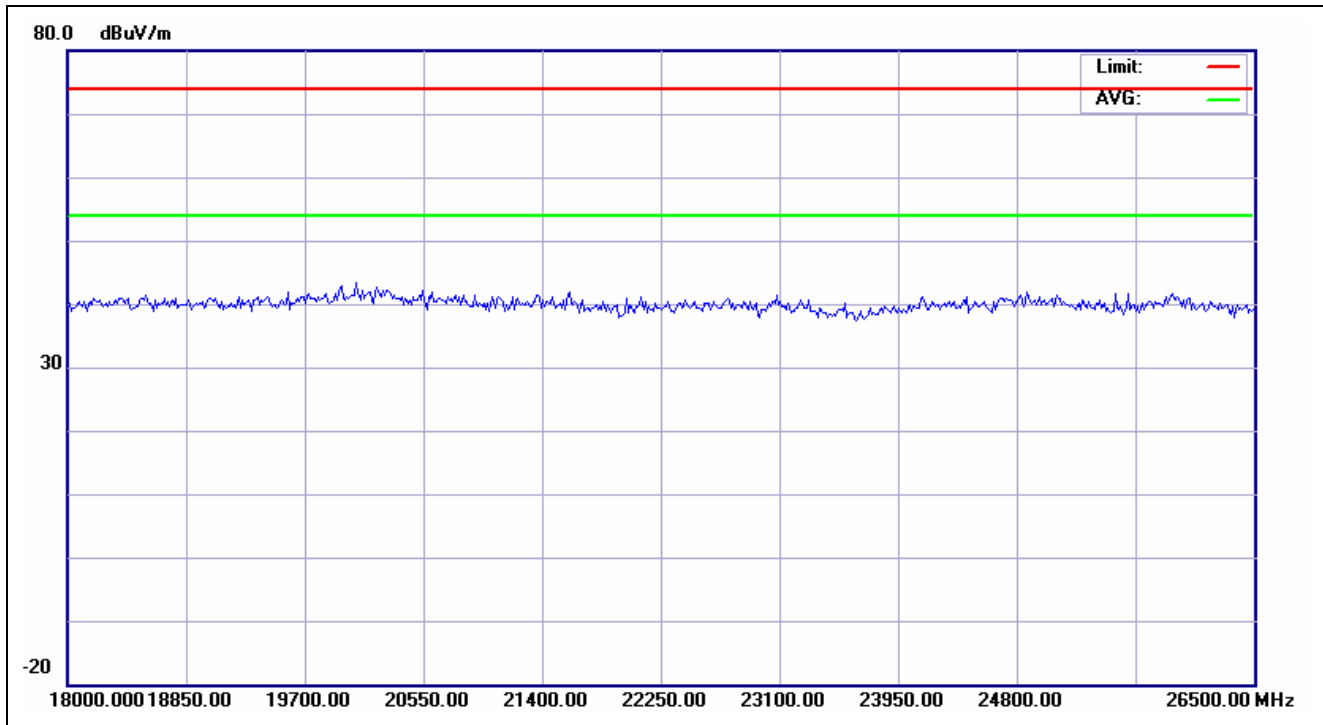


<b>Service No.:</b>	<b>113150235-BT-LE</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test Standard:</b>	<b>FCC above 1G PEAK</b>	<b>Ant. Polarization:</b>	<b>Horizontal</b>
<b>Test item:</b>	<b>Radiation Emission</b>	<b>Test Time:</b>	<b>2011/11/29 PM 02:18:19</b>
<b>Applicant:</b>	<b>Vencer</b>	<b>Test Rating:</b>	
<b>Product:</b>	<b>Bluetooth Ultimate USB Adapter</b>	<b>Temp.(°C)/Hum.(%):</b>	<b>24(°C)/57%</b>
<b>Model No.:</b>	<b>VD-1154</b>	<b>Test Engineer:</b>	<b>Howard Lin</b>
<b>Test Mode:</b>			
<b>Remark:</b>	<b>TX CH20</b>		




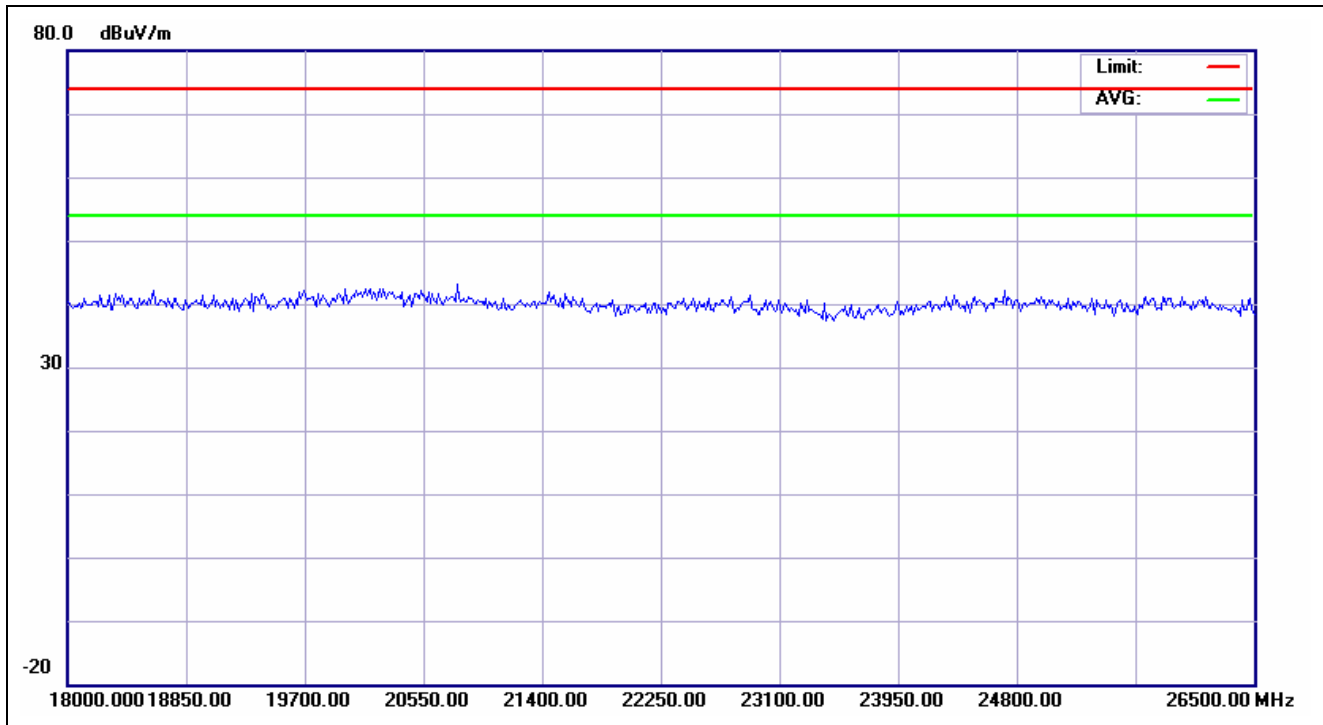

<b>Service No.:</b>	<b>113150235-BT-LE</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test Standard:</b>	<b>FCC above 1G PEAK</b>	<b>Ant. Polarization:</b>	<b>Vertical</b>
<b>Test item:</b>	<b>Radiation Emission</b>	<b>Test Time:</b>	<b>2011/11/29 PM 02:17:45</b>
<b>Applicant:</b>	<b>Vencer</b>	<b>Test Rating:</b>	
<b>Product:</b>	<b>Bluetooth Ultimate USB Adapter</b>	<b>Temp.(°C)/Hum.(%)</b>	<b>24(°C)/57%</b>
<b>Model No.:</b>	<b>VD-1154</b>	<b>Test Engineer:</b>	<b>Howard Lin</b>
<b>Test Mode:</b>			
<b>Remark:</b>	<b>TX CH20</b>		

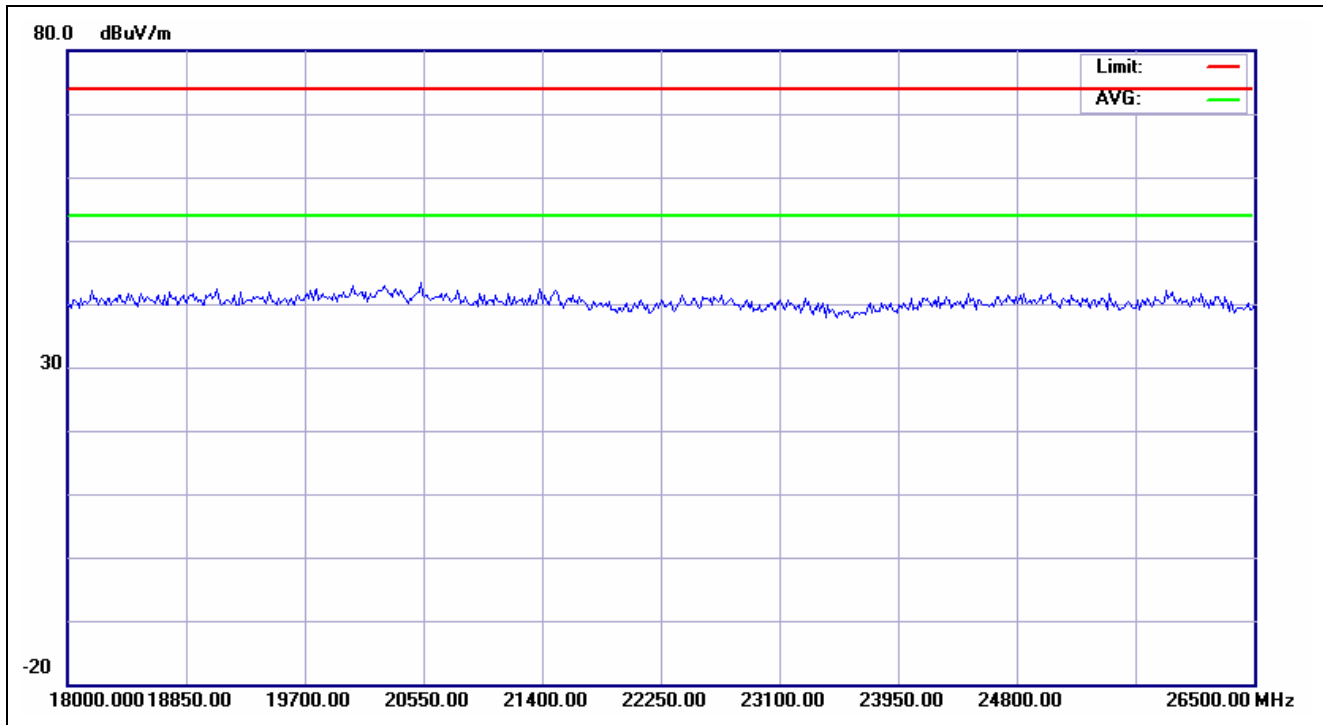


<b>Service No.:</b>	<b>113150235-BT-LE</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test Standard:</b>	<b>FCC above 1G PEAK</b>	<b>Ant. Polarization:</b>	<b>Horizontal</b>
<b>Test item:</b>	<b>Radiation Emission</b>	<b>Test Time:</b>	<b>2011/11/29 PM 02:18:53</b>
<b>Applicant:</b>	<b>Vencer</b>	<b>Test Rating:</b>	
<b>Product:</b>	<b>Bluetooth Ultimate USB Adapter</b>	<b>Temp.(°C)/Hum.(%):</b>	<b>24(°C)/57%</b>
<b>Model No.:</b>	<b>VD-1154</b>	<b>Test Engineer:</b>	<b>Howard Lin</b>
<b>Test Mode:</b>			
<b>Remark:</b>	<b>TX CH39</b>		

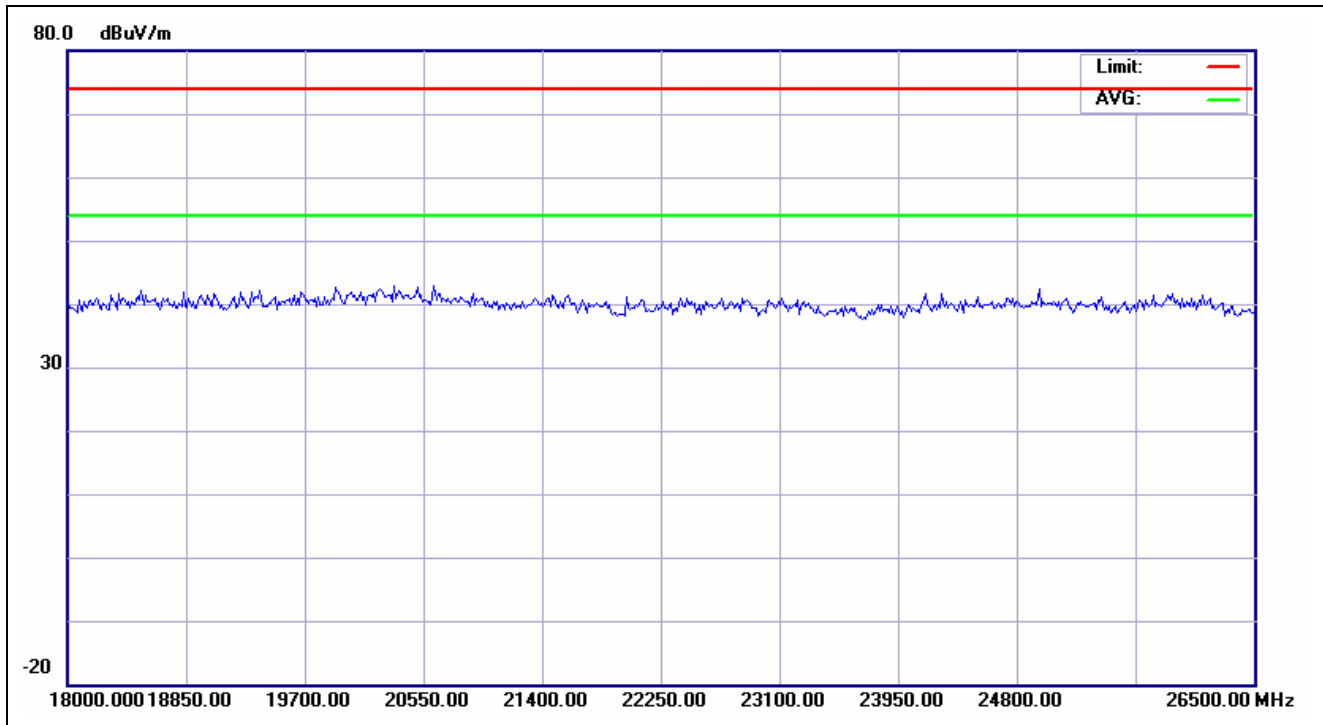

<b>Service No.:</b>	<b>113150235-BT-LE</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test Standard:</b>	<b>FCC above 1G PEAK</b>	<b>Ant. Polarization:</b>	<b>Vertical</b>
<b>Test item:</b>	<b>Radiation Emission</b>	<b>Test Time:</b>	<b>2011/11/29 PM 02:19:22</b>
<b>Applicant:</b>	<b>Vencer</b>	<b>Test Rating:</b>	
<b>Product:</b>	<b>Bluetooth Ultimate USB Adapter</b>	<b>Temp.(°C)/Hum.(%)</b>	<b>24(°C)/57%</b>
<b>Model No.:</b>	<b>VD-1154</b>	<b>Test Engineer:</b>	<b>Howard Lin</b>
<b>Test Mode:</b>			
<b>Remark:</b>	<b>TX CH39</b>		


# Radiated Band edge (GFSK)

CH0-H-PK

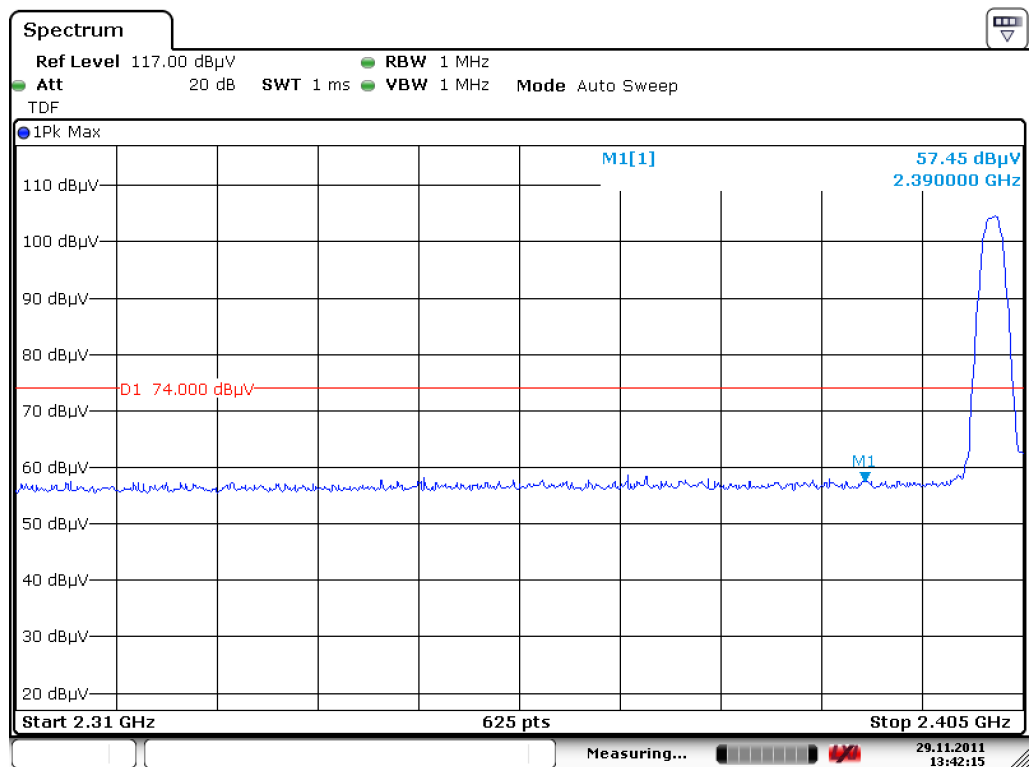


Date: 29.NOV.2011 13:42:15

CH0V-PK

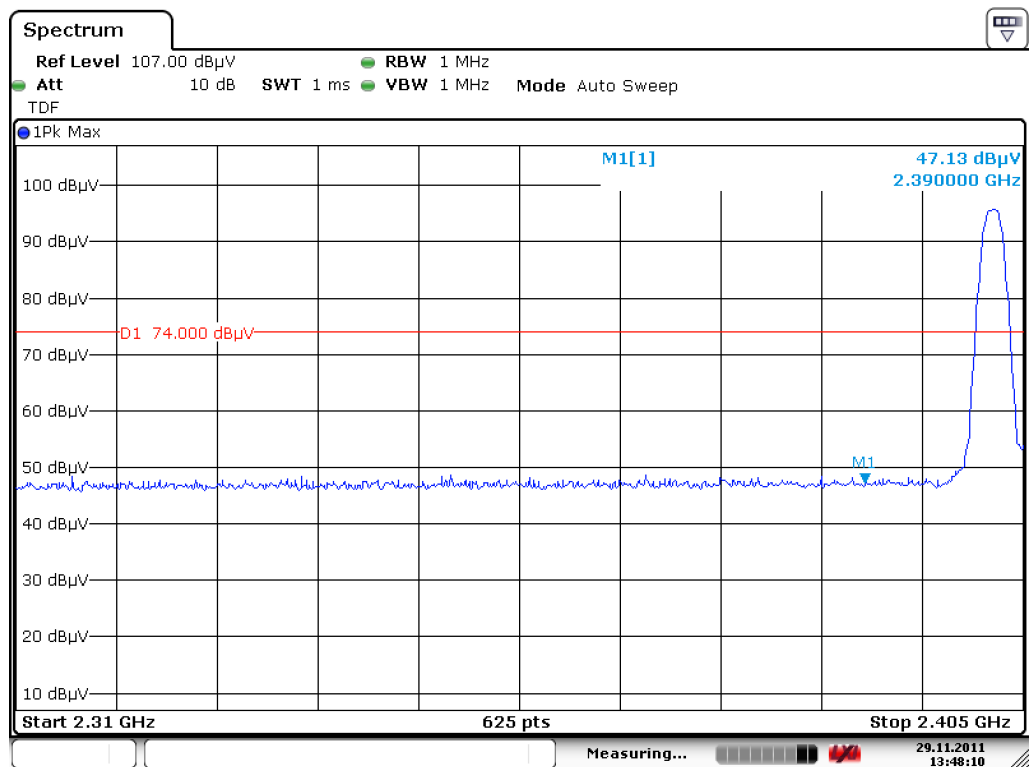


Date: 29.NOV.2011 13:48:09

## CH39-H-PK

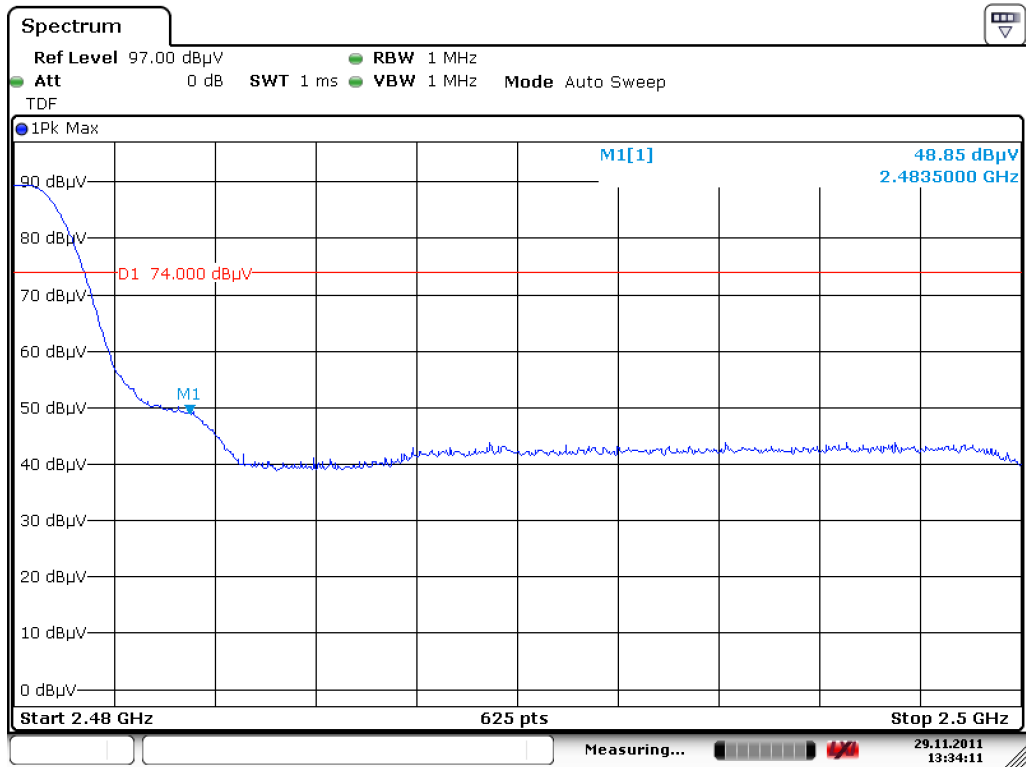

Date: 29.NOV.2011 13:34:11

## CH39-V-PK

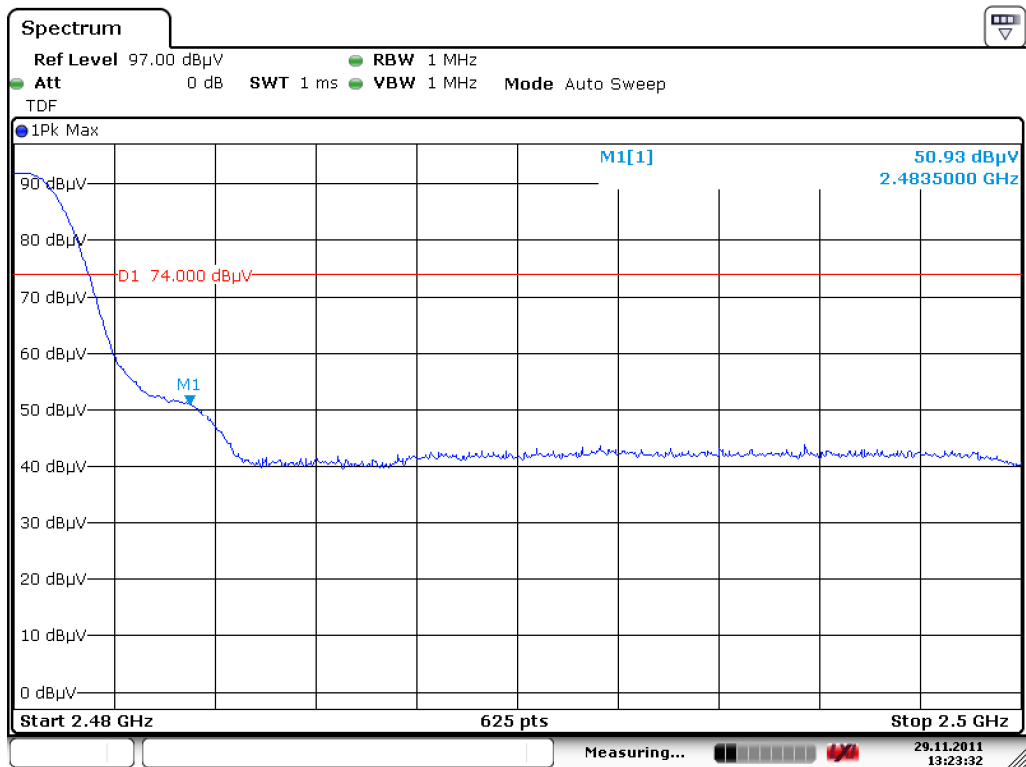


Date: 29.NOV.2011 13:23:32

Test Report No. 10034649 001

Appendix 3: Mains Conducted Emission


(File: 10034649Appendix3)

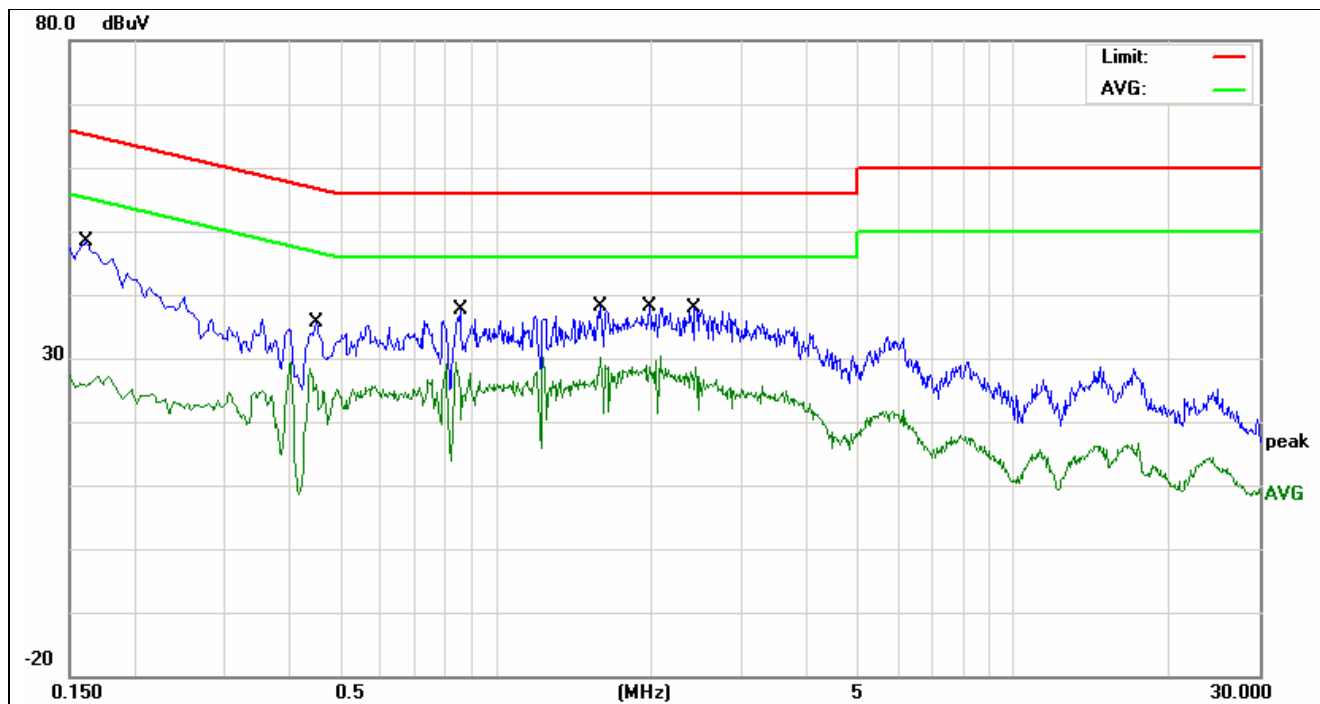

Service No.: 113150235-(301489)  
 Test Standard: CISPR22 Class B Conduction  
 Test item: Conduction Emission  
 Applicant: Vencer  
 Product: Bluetooth Ultimate USB Adapter  
 Model No.: VD-1154  
 Test Mode:  
 Remark:

Probe: L1  
 Test Time: 2011/10/24 PM 04:13:05  
 Test Rating: AC 120V/60Hz  
 Temp.(°C)/Hum.(%): 26(°C)/60%  
 Test Engineer: Howard Lin

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Remark
1	0.1620	9.58	30.10	39.68	65.36	-25.68	QP	
2	0.1620	9.58	16.12	25.70	55.36	-29.66	AVG	
3	0.4500	9.60	24.12	33.72	56.88	-23.16	QP	
4	0.4500	9.60	14.65	24.25	46.88	-22.63	AVG	
5	0.8540	9.61	22.81	32.42	56.00	-23.58	QP	
6	0.8540	9.61	10.52	20.13	46.00	-25.87	AVG	
7	1.5940	9.61	24.10	33.71	56.00	-22.29	QP	
8	1.5940	9.61	17.73	27.34	46.00	-18.66	AVG	
9	1.9900	9.60	24.34	33.94	56.00	-22.06	QP	
10	1.9900	9.60	18.68	28.28	46.00	-17.72	AVG	
11	2.4260	9.62	23.81	33.43	56.00	-22.57	QP	
12	2.4260	9.62	15.32	24.94	46.00	-21.06	AVG	

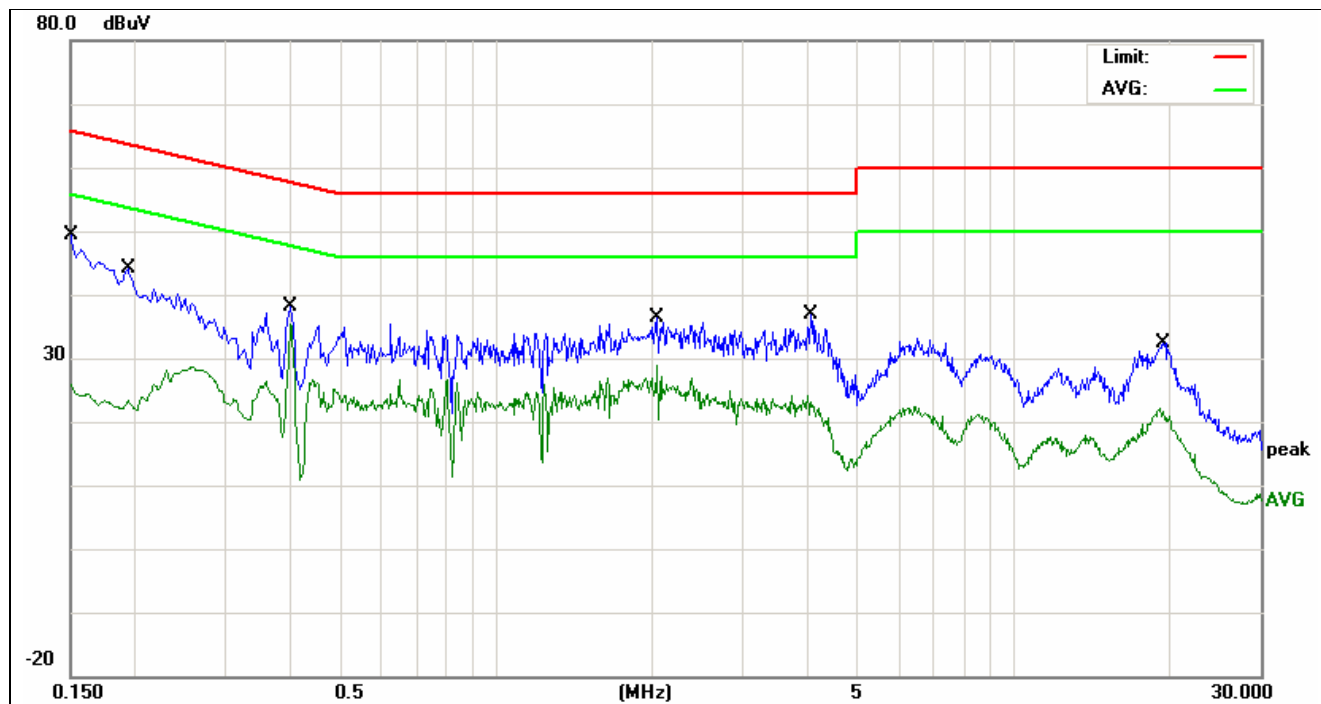

<b>Service No.:</b>	113150235-(301489)	<b>Probe:</b>	L2
<b>Test Standard:</b>	CISPR22 Class B Conduction	<b>Test Time:</b>	2011/10/24 PM 04:16:04
<b>Test item:</b>	Conduction Emission	<b>Test Rating:</b>	AC 120V/60Hz
<b>Applicant:</b>	Vencer	<b>Temp.(°C)/Hum.(%):</b>	26(°C)/60%
<b>Product:</b>	Bluetooth Ultimate USB Adapter	<b>Test Engineer:</b>	Howard Lin
<b>Model No.:</b>	VD-1154		
<b>Test Mode:</b>			
<b>Remark:</b>			

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Remark
1	0.1500	9.65	31.37	41.02	65.99	-24.97	QP	
2	0.1500	9.65	15.98	25.63	55.99	-30.36	AVG	
3	0.1940	9.68	25.52	35.20	63.86	-28.66	QP	
4	0.1940	9.68	12.41	22.09	53.86	-31.77	AVG	
5	0.3980	9.64	26.72	36.36	57.89	-21.53	QP	
6	0.3980	9.64	23.05	32.69	47.89	-15.20	AVG	
7	2.0460	9.62	23.74	33.36	56.00	-22.64	QP	
8	2.0460	9.62	17.78	27.40	46.00	-18.60	AVG	
9	4.0660	9.64	19.32	28.96	56.00	-27.04	QP	
10	4.0660	9.64	10.48	20.12	46.00	-25.88	AVG	
11	19.4580	9.93	15.80	25.73	60.00	-34.27	QP	
12	19.4580	9.93	9.76	19.69	50.00	-30.31	AVG	