
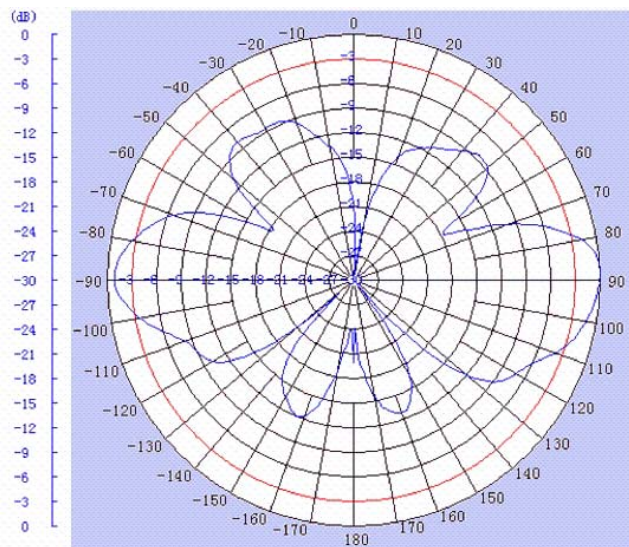



TerraWave Solutions® 4.9 GHz 6 dBi Fiberglass Omnidirectional Antenna with N-Style Jack Connector

TerraWave's 6 dBi fiberglass omnidirectional antenna is designed for 4.9 GHz wireless local area networks for public safety agencies. It features a UV stable, vented radome that provides ultimate sustainability against extreme weather conditions such as high temperature, strong winds and rain. It can be mast or wall mounted.

Specifications	
Model	T49060O10006
Frequency Range	4900 - 5000 MHz
Bandwidth	100 MHz
Gain	6 dBi
Beamwidth	25°
VSWR	-/± 1.5
Impedance	50 Ohms
Polarization	Vertical
Maximum Power	100 Watts
Connector	N-Style
Dimensions	11.6"
Weight	0.5 lbs




E-Plane

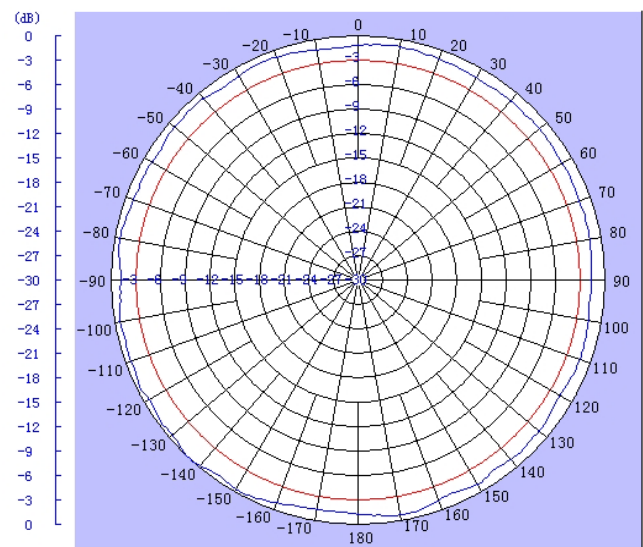

H-Plane

**TerraWave Solutions® Fiberglass Omnidirectional Antennas
Mounting Bracket Information for T49060O10006, T49080O10006, T49100O10006,
T49120O10006, T58060O10006, T58080O10006, T58100O10006 and T58120O10006**

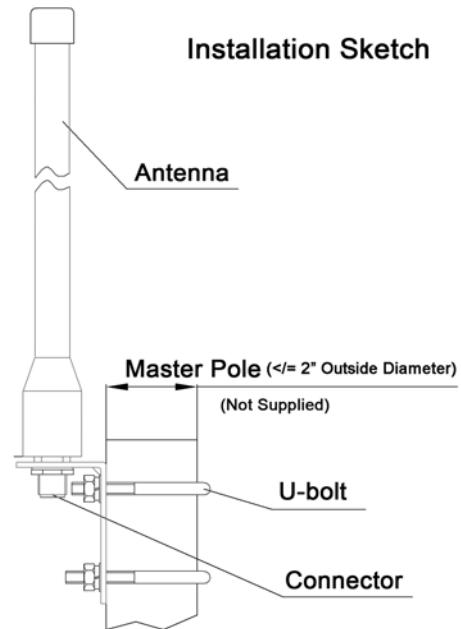

Bracket

