



47 CFR PART 22 SUBPART H

TEST REPORT

of

Pulsare Advanced

Model Name: GD850P
Brand Name: (n.a)
Report No.: SZ07060035E02
FCC ID: VJMGD850P

prepared for

Narbitec LLC

2010 NW 84th Avenue Miami, FL 33122

Shenzhen Electronic Product Quality Testing Center

Morlab Laboratory

3/F, Electronic Testing Building, Shahe Road, Xili,
Nanshan District, Shenzhen, 518055 P. R. China

Tel: +86 755 86130398

Fax: +86 755 86130318



NOTE: This test report can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen Electronic Product Quality Testing Center Morlab Laboratory. Any objections should be raised to us within thirty workdays since the date of issue.

TABLE OF CONTENTS

1.	TEST CERTIFICATION	4
2.	GENERAL INFORMATION	5
2.1	EUT Description	5
2.2	Test Standards and Results	7
2.3	Facilities and Accreditations	8
2.3.1	Facilities	8
2.3.2	Test Environment Conditions	8
3.	47 CFR PART 2, PART 22H REQUIREMENTS	9
3.1	Frequencies	9
3.1.1	Requirement	9
3.1.2	Test Description	9
3.1.3	Test Result	10
3.2	Conducted RF Output Power	12
3.2.1	Requirement	12
3.2.2	Test Description	12
3.2.3	Test Result	12
3.3	20dB Occupied Bandwidth	14
3.3.1	Definition	14
3.3.2	Test Description	14
3.3.3	Test Verdict	14
3.4	Frequency Stability	16
3.4.1	Requirement	16
3.4.2	Test Description	16
3.4.3	Test Verdict	16
3.5	Conducted Out of Band Emissions	18
3.5.1	Requirement	18
3.5.2	Test Description	18
3.5.3	Test Result	18
3.6	Band Edge	22
3.6.1	Requirement	22

3.6.2	Test Description	22
3.6.3	Test Result.....	22
3.7	Transmitter Radiated Power (EIRP/ERP)	24
3.7.1	Requirement	24
3.7.2	Test Description	24
3.7.3	Test Result.....	25
3.8	Radiated Out of Band Emissions	27
3.8.1	Requirement	27
3.8.2	Test Description	27
3.8.3	Test Result.....	27
4.	PHOTOS OF THE EUT.....	30
5.	PHOTOS OF TEST SETUP	39

1. TEST CERTIFICATION

Equipment under Test: Pulsare Advanced

Brand Name: (n.a)

Model Name: GD850P

FCC ID: VJMGD850P

Applicant: Narbitech LLC

2010 NW 84th Avenue Miami, FL 33122

Manufacturer: FUNCTION ATI (HUIZHOU) TELECOMMUNICATIONS CO., LTD.

No.8, Huitai Road, Huitai Industrial Zone, Huizhou, Guangdong Province, China

Test Standards: 47 CFR Part 2

47 CFR Part 22 Subpart H

Test Date(s): August 1, 2007 – August 9, 2007

Test Result: PASS

* We Hereby Certify That:

The equipment under test was tested by Shenzhen Electronic Product Quality Testing Center Morlab Laboratory. The test data, data evaluation, test procedures and equipment configurations shown in this report were made in accordance with the requirement of related FCC rules.

The test results of this report only apply for the tested sample equipment identified above. The test report shall be invalid without all the signatures of the test engineer, the reviewer and the approver.

Tested by:

Luo Biao

Luo Biao

Dated:

2007.08.15

Reviewed by:

Wei Yanquan

Wei Yanquan

Dated:

2007.08.15

Approved by:

Shu Luan

Shu Luan

Dated:

2007.08.15



2. GENERAL INFORMATION

2.1 EUT Description

EUT Type	GSM Wireless telephone		
Model Name	GD850P		
Serial No.....	(n.a, marked #1 by test site)		
IMEI	355689015324958		
Hardware Version	VER:1.0		
Software Version	VER: 2007.7.9 9:25		
Modulation Type.....	GMSK		
Emission Designator.....	300KGXW		
Frequency Range	Tx: 824.20 - 848.80MHz (at intervals of 200kHz); Rx: 869.20 - 893.80MHz (at intervals of 200kHz)		
Power Supply	Battery		
	Mode no.:	NI-MI AA1300mAH	
	Capacitance:	1300mAh	
	Rated voltage:	3.8V	
	Manufacturer:	DESAY BATTERY	
	Manufacturer Address:	Huitai Industrial Zone, Huizhou, Guangdong Province, China	
Ancillary Equipments1	AC Adapter (Charger for Battery)		
	Model Name:	BI13-120100-E	
	Serial No.:	(n.a. marked #1 by test site)	
	Rated Input:	~ 100-240V, 0.2A,50/60Hz	
	Rated Output:	= 5V, 800mA	
	Manufacturer:	Chou Shen Sheng Electronics (Shen Zhen) CO., ltd	
	Manufacturer Address:	3rd B1dg, Xin Wei 2nd Ind, Zone, JIANG Shi, Gong Ming, Bao An, Shen Zhen, Guang Dong, China.	
	Wire Length:	350cm	
Ancillary Equipment 2	Remote Display Unit		
	Model Name:	RC-712	
	Serial No.:	(n.a. marked #1 by test site)	
	Manufacturer:	FUNCTION	ATI (HUIZHOU)
	TELECOMMUNICATIONS CO., LTD.		
	Manufacturer Address:	No.8, Huitai Road, Huitai Industrial Zone, Huizhou, Guangdong Province, China	
	Power Supply:	The Remote Display Unit is powered by Telephone (EUT) via the cable which plug to the RJ-45 port on the back of the telephone (EUT).	

Note 1: The transmitter (Tx) frequency arrangement of the Cellular 850MHz band used by the EUT can be represented with the formula $F(n)=824.2+0.2*(n-128)$, $128 \leq n \leq 251$; the lowest, middle, highest channel numbers (ARFCHs) used and tested in this report are separately 128 (824.2MHz), 190 (836.6MHz) and 251 (848.8MHz).

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

2.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 2, Part 22 for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 2 (10-1-05 Edition)	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	47 CFR Part 22 (10-1-05 Edition)	Public Mobile Services

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	2.106 22.905	Frequencies	PASS
2	2.1046	Conducted RF Output Power	PASS
3	2.1049	20dB Occupied Bandwidth	PASS
4	2.1055 22.355	Frequency Stability	PASS
5	2.1051 2.1057 22.917	Conducted Out of Band Emissions	PASS
6	2.1051 2.1057 22.917	Band Edge	PASS
7	22.913	Transmitter Radiated Power (EIPR/ERP)	PASS
8	2.1053 2.1057 22.917	Radiated Out of Band Emissions	PASS

2.3 Facilities and Accreditations

2.3.1 Facilities

Shenzhen Electronic Product Quality Testing Center Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659.

All measurement facilities used to collect the measurement data are located at Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen 518055 CHINA. The test site is constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22; the FCC registration number is 741109.

2.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	20 - 25
Relative Humidity (%):	40 - 60
Atmospheric Pressure (kPa):	960

3. 47 CFR PART 2, PART 22H REQUIREMENTS

3.1 Frequencies


3.1.1 Requirement

According to FCC section 22.905, the frequency blocks assignment for the cellular radiotelephone service is listed as below:

- (a) Channel Block A:
Mobile 824 - 835MHz, Base 869 - 880MHz;
Mobile 845 - 846.5MHz, Base 890 - 891.5MHz
- (b) Channel Block B:
Mobile 835 - 845 MHz, Base 880 - 890MHz;
Mobile 846.5 - 849 MHz, Base 891.5 - 894MHz

3.1.2 Test Description

1. Test Setup:

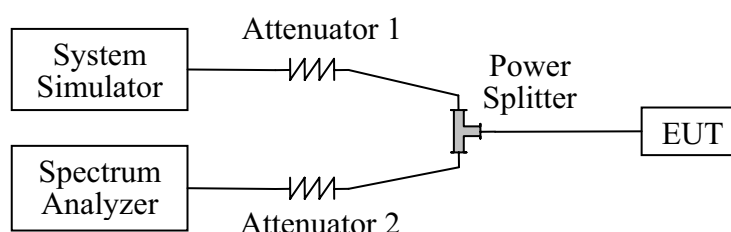

The EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.

2. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Agilent	E5515C	GB43130131	2007.06	1year
Spectrum Analyzer	Agilent	E7405A	US44210471	2007.07	1year
Power Splitter	Weinschel	1506A	NW521	(n.a.)	(n.a.)
Attenuator 1	Resnet	20dB	(n.a.)	(n.a.)	(n.a.)
Attenuator 2	Resnet	3dB	(n.a.)	(n.a.)	(n.a.)

3.1.3 Test Result


The Tx frequency arrangement of the Cellular 850MHz band employed by the EUT should be from 824.2MHz to 848.8MHz (the corresponding frequency block is from 824MHz to 849MHz). Here the lowest and highest channels are tested to verify the EUT's using the frequency block required.

1. Test Verdict:


The required frequency block is employed legally, the verdict is PASS.

Channel	Frequency (MHz)	Measured Carrier (dBm)	Refer to Plot
128	824.2	23.50	Plot A
251	848.8	24.66	Plot B

2. Test Plot:

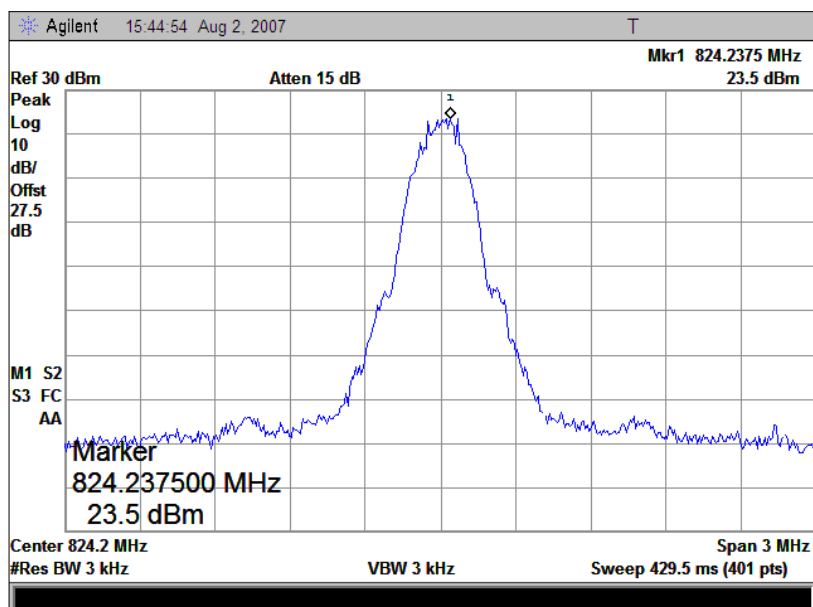

(Plot A: Channel = 128)

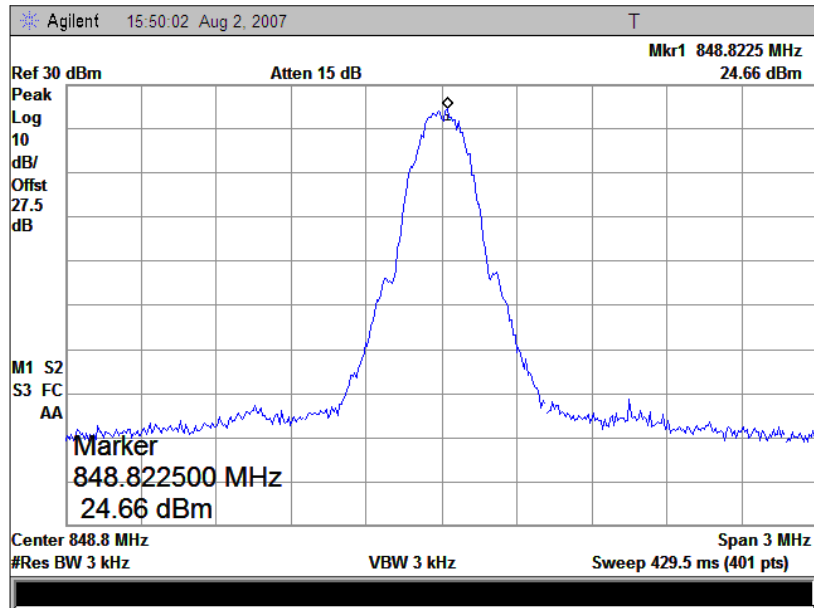

(Plot B: Channel = 251)

3.2 Conducted RF Output Power

3.2.1 Requirement

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

3.2.2 Test Description

See section 3.1.2 of this report.


3.2.3 Test Result

Here the lowest, middle and highest channels are selected to perform testing to verify the conducted RF output power of the EUT. For the mobile phone operates at PCL=5 (where Power Class is 4), the rated conducted RF output power is 33dBm within the tolerance of ± 3 dB.


1. Test Verdict:

Channel	Frequency (MHz)	Measured Output Power		Rated Output Power		Verdict
		dBm	Refer to Plot	dBm	Tolerance (dB)	
128	824.2	32.22	Plot A	33	± 3	PASS
190	836.6	32.47	Plot B			PASS
251	848.8	32.72	Plot C			PASS


2. Test Plot:

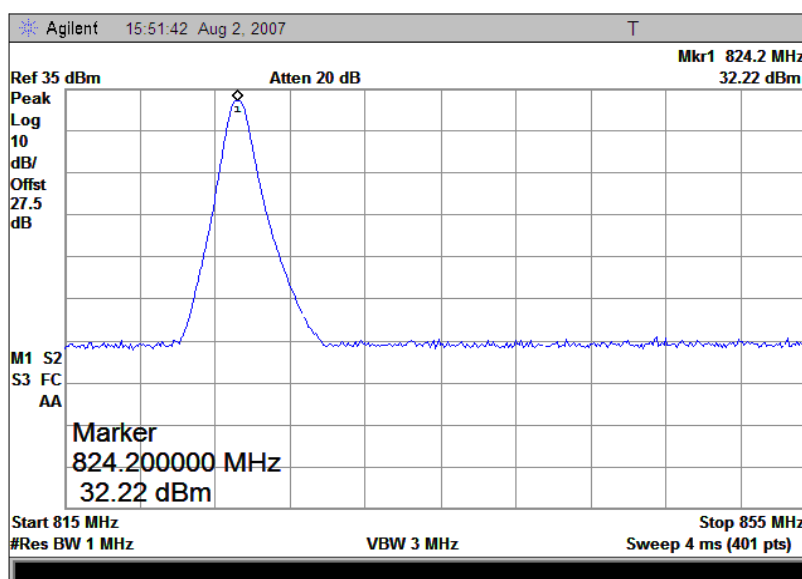

(Plot A: Channel = 128)

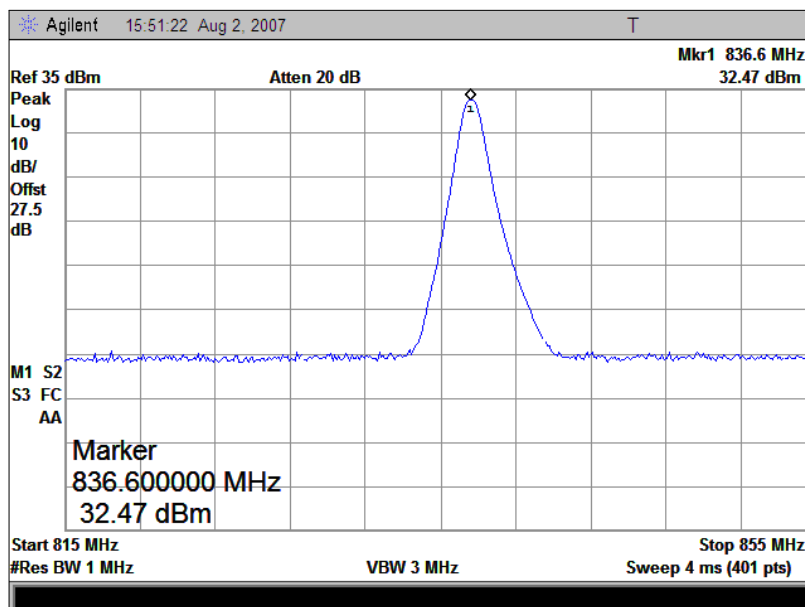

(Plot B: Channel = 190)

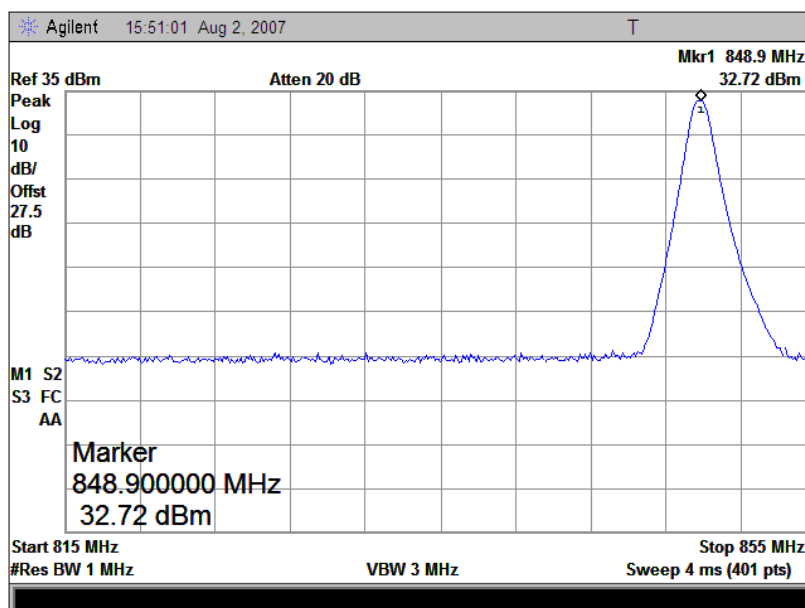

(Plot C: Channel = 251)

3.3 20dB Occupied Bandwidth

3.3.1 Definition

According to FCC section 2.1049, the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Occupied bandwidth is also known as the 99% emission bandwidth, or 20dB bandwidth ($10 \cdot \log 1\% = 20\text{dB}$) taking the total RF output power as reference.

3.3.2 Test Description

See section 3.1.2 of this report.


3.3.3 Test Verdict

Here the lowest, middle and highest channels are tested to record the 20dB occupied bandwidth, it's about 300kHz.


1. Test Verdict:

Channel	Frequency (MHz)	Measured 20dB Occupied Bandwidth (kHz)	Refer to Plot
128	824.2	292.5	Plot A
190	836.6	285.0	Plot B
251	848.8	285.0	Plot C


2. Test Plot:

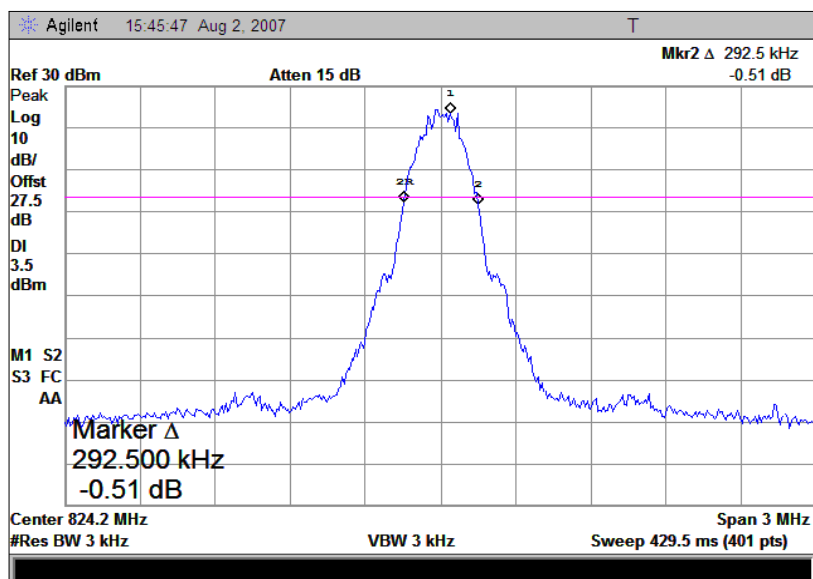

(Plot A: Channel = 128)

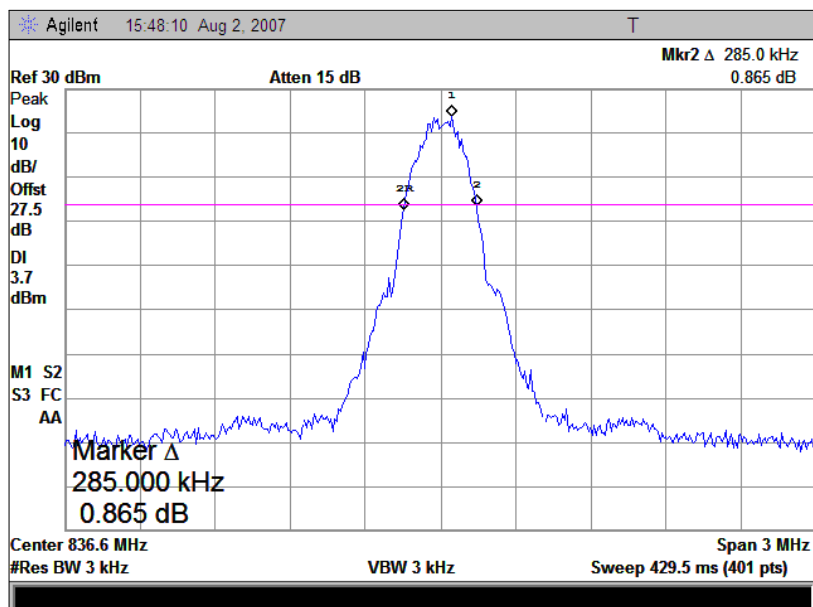

(Plot B: Channel = 190)

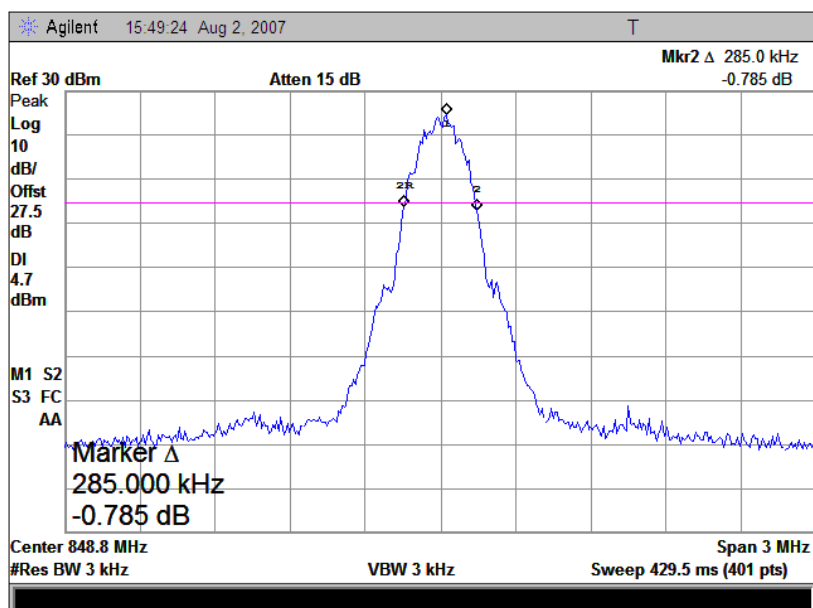

(Plot C: Channel = 251)

3.4 Frequency Stability


3.4.1 Requirement

According to FCC section 22.355, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

- (a) The temperature is varied from -30°C to $+50^{\circ}\text{C}$ at intervals of not more than 10°C .
- (b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacture. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

3.4.2 Test Description

1. Test Setup:

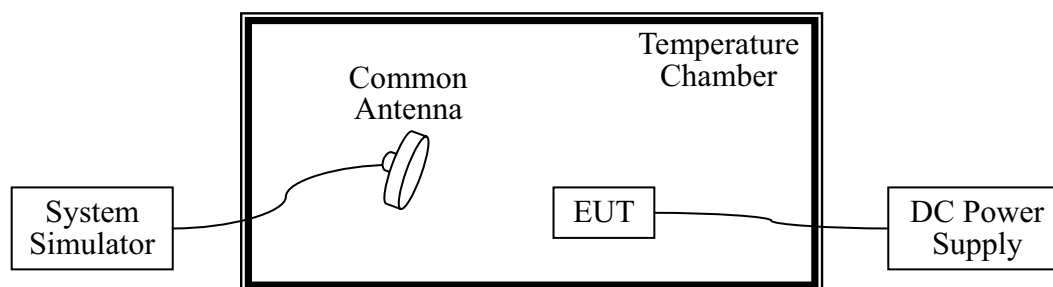

The EUT, which is powered by the DC Power Supply directly, is located in the Temperature Chamber. The EUT is commanded by the System Simulator (SS) to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS via a Common Antenna.

2. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Agilent	E5515C	GB43130131	2007.06	1year
DC Power Supply	Good Will	GPS-3030DD	EF920938	2007.06	2year
Temperature Chamber	YinHe Experimental Equip.	HL4003T	(n.a.)	2007.03	1year

3.4.3 Test Verdict

The nominal, highest and lowest extreme voltages are separately 3.7VDC, 4.2VDC and 3.6VDC, which are specified by the applicant; the normal temperature here used is 25°C . The frequency

deviation limit is ± 2.5 ppm.

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 128 (824.2MHz)		Channel = 190 (836.6MHz)		Channel = 251 (848.8MHz)		
		Hz	Limit	Hz	Limit	Hz	Limit	
3.7	-30	-13.26	±2060.5	15.12	±2091.5	-15.61	±2122.0	PASS
	-20	11.05		-13.08		-12.36		
	-10	13.66		-2.05		13.56		
	0	-14.90		11.22		14.44		
	+10	-17.15		12.36		11.21		
	+20	-12.74		-15.06		15.20		
	+30	16.51		9.87		11.08		
	+40	-8.97		-13.59		12.99		
	+50	-15.28		-15.89		11.46		
4.2	+25	-14.91		-13.39		13.46		
3.6	+25	-13.33		-14.55		13.38		

3.5 Conducted Out of Band Emissions

3.5.1 Requirement

According to FCC section 22.917(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10*\log(P)$ dB. This calculated to be -13dBm.

3.5.2 Test Description

See section 3.1.2 of this report.

3.5.3 Test Result


The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the out of band emissions.

1. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Spurious Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
128	824.2	-23.40	Plot A.1/A.2	-13	PASS
190	836.6	-22.71	Plot B.1/B.2		PASS
251	848.8	-22.48	Plot C.1/C.2		PASS

2. Test Plot for the Whole Measurement Frequency Range:


Note: the power of the EUT transmitting frequency should be ignored.

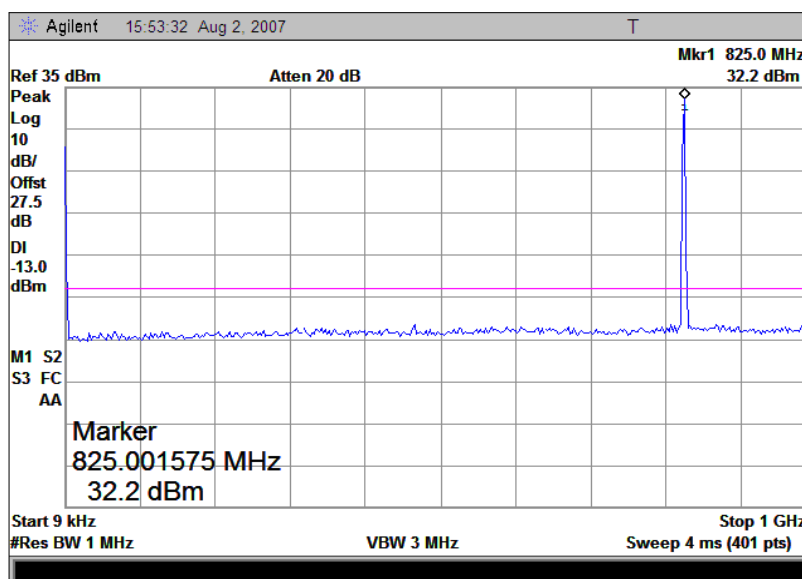


(Plot A.1: Channel = 128, 30MHz to 1GHz)

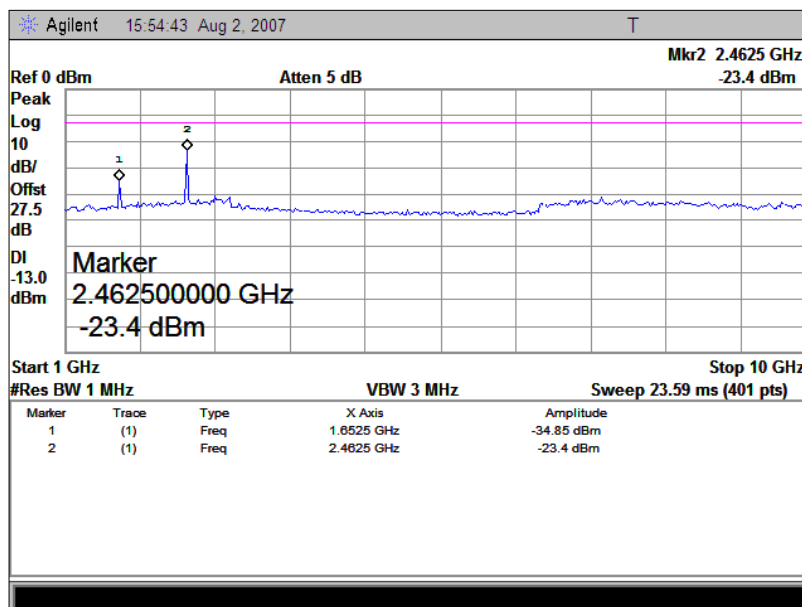


(Plot A.2: Channel = 190, 1GHz to 9GHz)

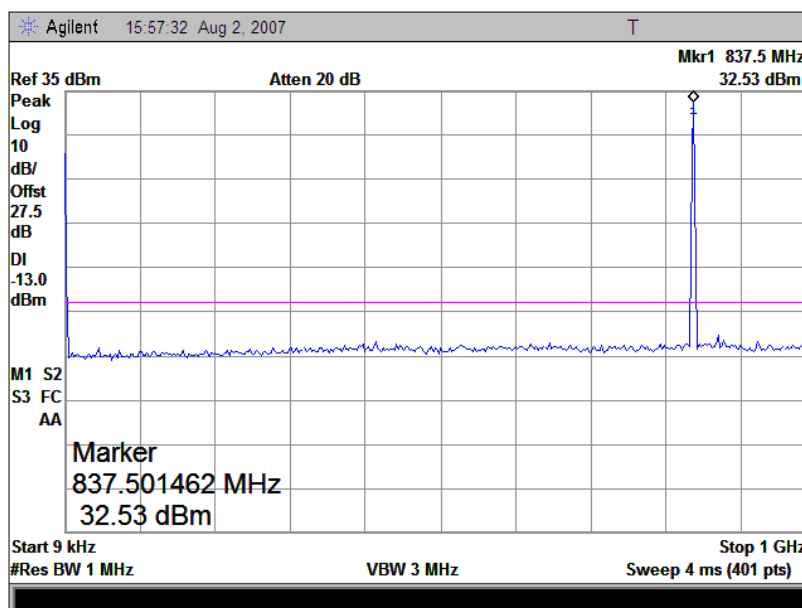


(Plot B.1: Channel = 190, 30MHz to 1GHz)

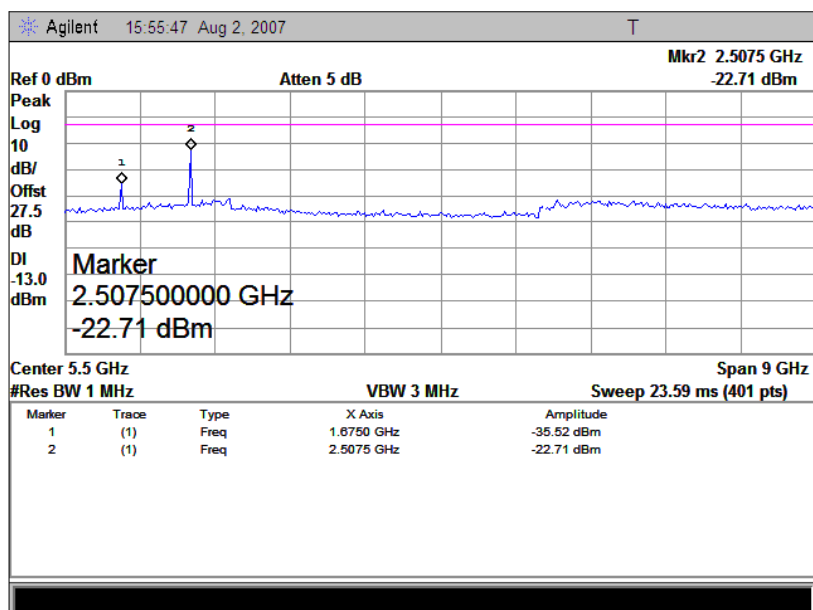

(Plot B.2: Channel = 190, 1GHz to 9GHz)

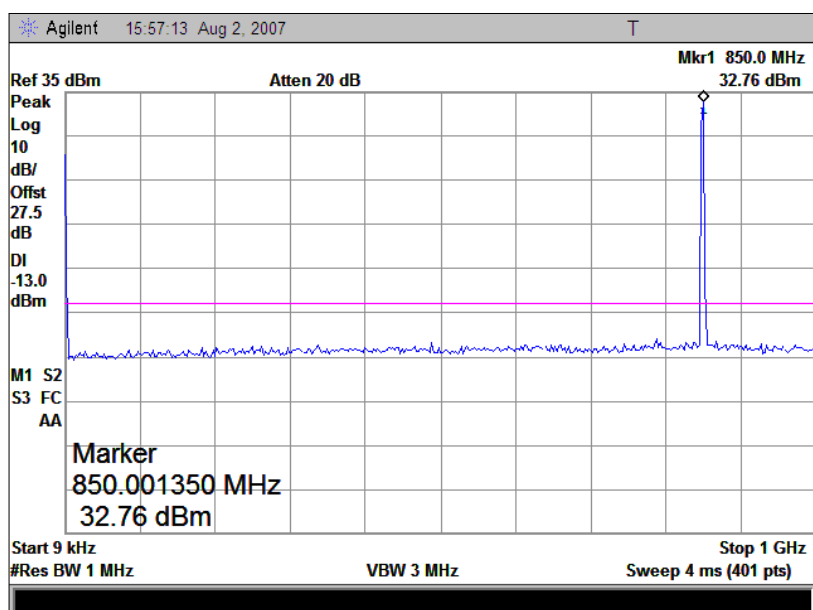

(Plot C.1: Channel = 251, 30MHz to 1GHz)

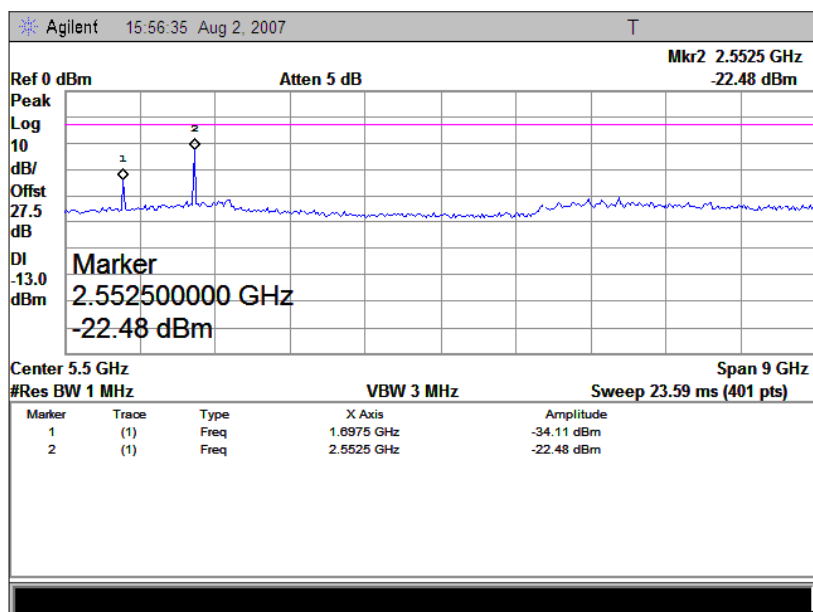

(Plot C.2: Channel = 251, 1GHz to 9GHz)

3.6 Band Edge

3.6.1 Requirement

According to FCC section 22.917(b), in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth (26dB emission bandwidth) of the fundamental emission of the transmitter may be employed.

3.6.2 Test Description

See section 3.1.2 of this report.


3.6.3 Test Result

The lowest and highest channels are tested to verify the band edge emissions.


1. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Band Edge Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
128	824.2	-15.69	Plat A	-13	PASS
251	848.8	-22.98	Plot B		PASS

2. Test Plot:

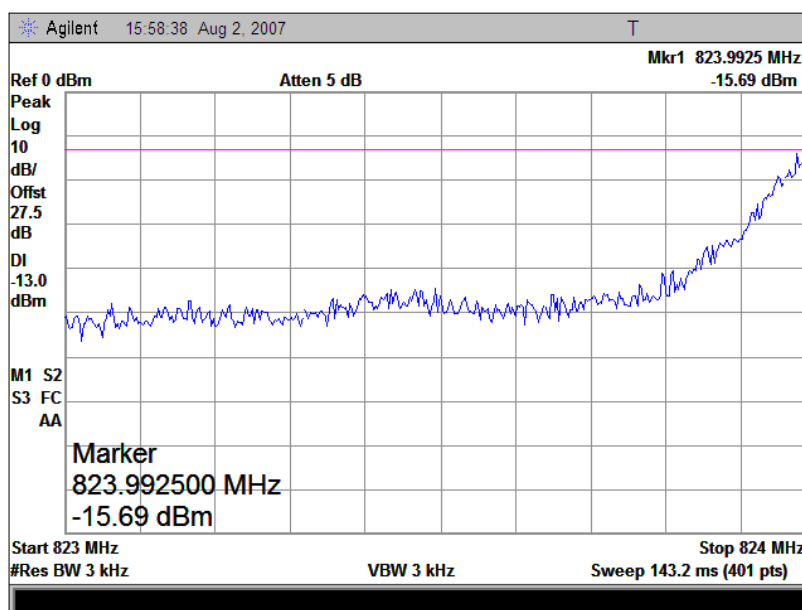

(Plot A: Channel = 128)

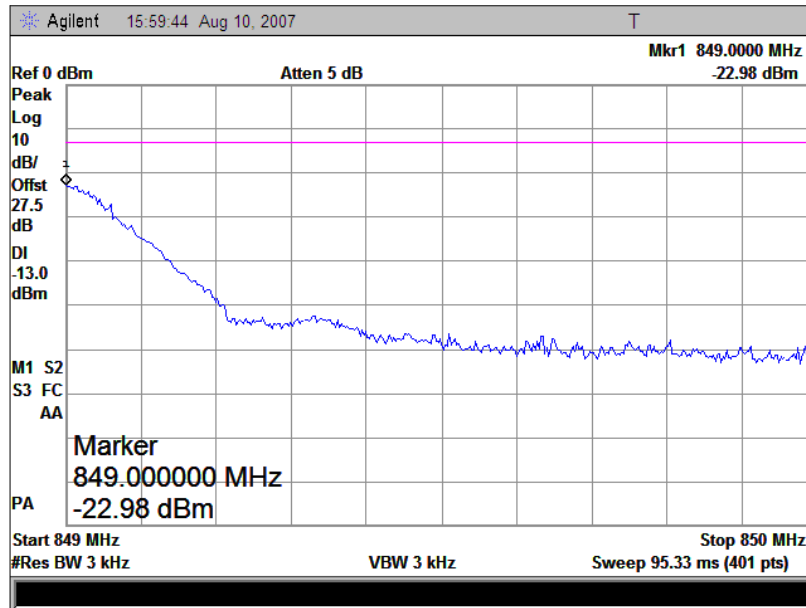

(Plot B: Channel = 251)


3.7 Transmitter Radiated Power (EIRP/ERP)

3.7.1 Requirement

According to FCC section 22.913, the Effective Radiated Power (ERP) of mobile transmitters and auxiliary test transmitters must not exceed 7Watts.

3.7.2 Test Description

1. Test Setup:

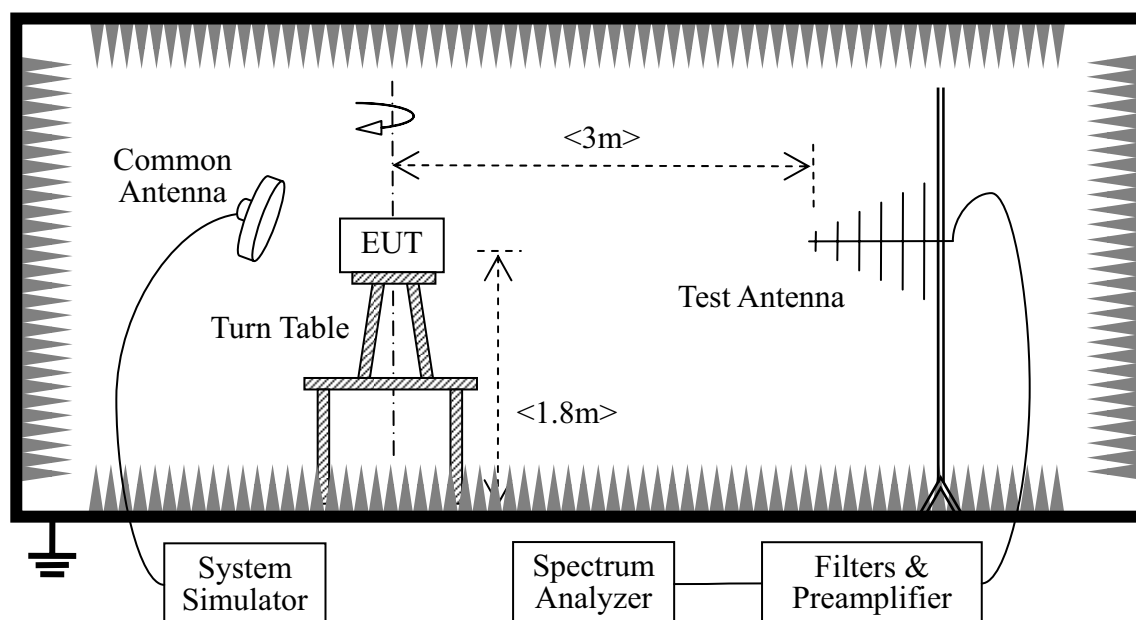

The EUT, which is powered by the Battery charged with the AC Adapter, is located in a 3m Full-Anechoic Chamber; the cable loss, air loss and so on of the site as factors are pre-calibrated using the "Substitution" method, and calculated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS via a Common Antenna.

The Test Antenna is a Bi-Log one (used for 30MHz to 1GHz) or a Horn one (used for above 3GHz), and it's located at the same height as the EUT. The Filters consists of Notch Filters and High Pass Filter.

2. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Agilent	E5515C	GB43130131	2007.06	1year
Spectrum Analyzer	Agilent	E7405A	US44210471	2007.07	1year
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2006.08	2year

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-274	2007.07	1year
Test Antenna - Horn	Schwarzbeck	BBHA 9120C	9120C-384	2007.07	1year


3.7.3 Test Result

The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. The lowest, middle and highest channels are tested.


1. Test Verdict:

Channel	Frequency (MHz)	Measured ERP			Limit		Verdict
		dBm	W	Refer to Plot	dBm	W	
128	824.20	21.64	0.146	Plot A	38.45	7	PASS
190	836.60	22.03	0.160	Plot B			PASS
251	848.80	22.89	0.195	Plot C			PASS


2. Test Plot:

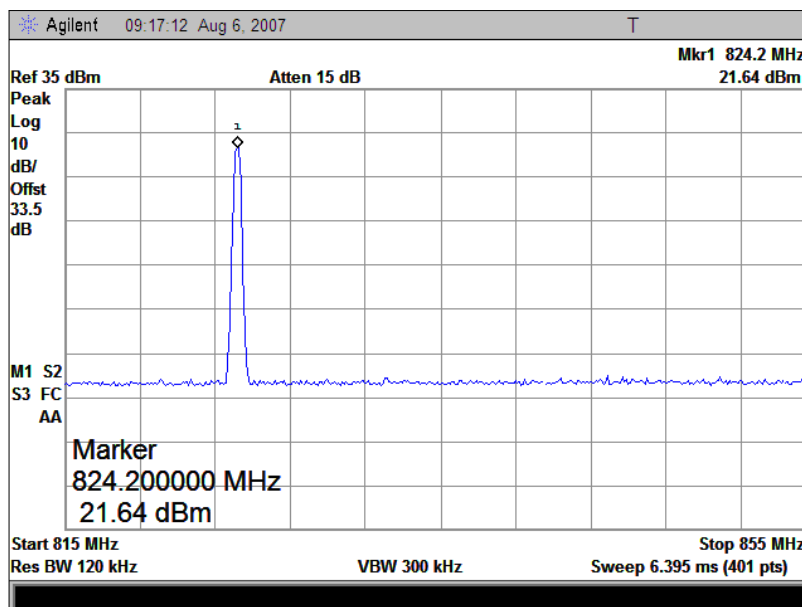

(Plot A: Channel = 128)

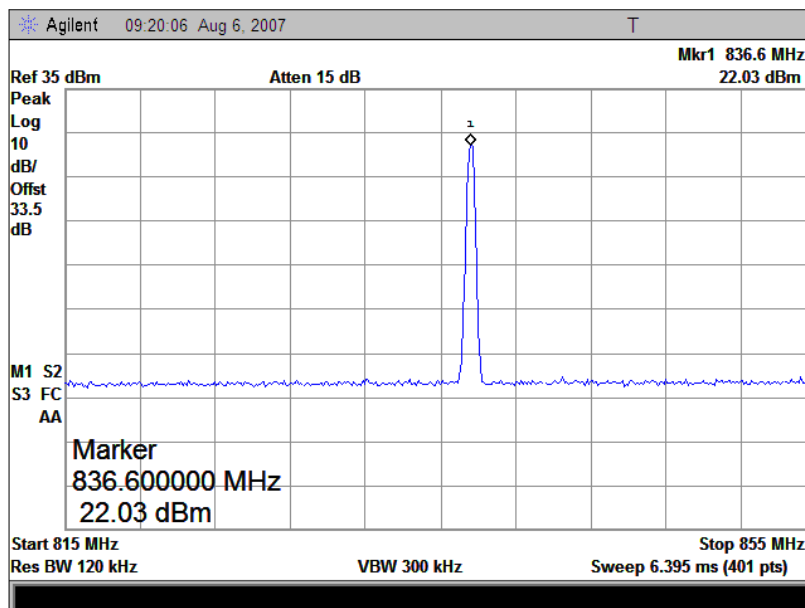

(Plot B: Channel = 190)

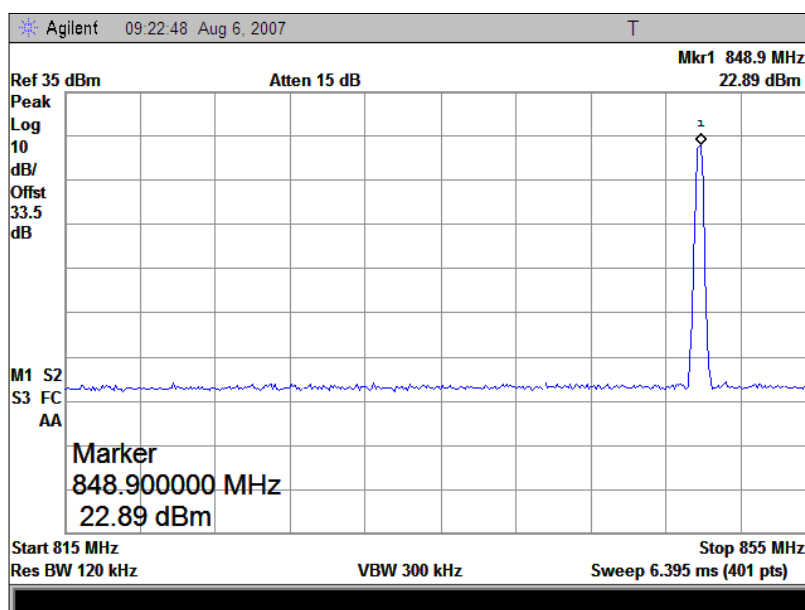

(Plot C: Channel = 251)

3.8 Radiated Out of Band Emissions

3.8.1 Requirement

According to FCC section 22.917(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10*\log(P)$ dB. This calculated to be -13dBm.

3.8.2 Test Description

See section 3.7.2 of this report.

3.8.3 Test Result


The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. The lowest, middle and highest channels are tested to verify the out of band emissions.

1. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Spurious Emission (dBm)		Refer to Plot	Limit (dBm)	Verdict
		Test Antenna Horizontal	Test Antenna Vertical			
128	824.2	< -30	< -30	Plot A.1/A.2	-13	PASS
190	836.6	< -30	< -30	Plot B.1/B.2		PASS
251	848.8	< -30	< -30	Plot C.1/C.2		PASS

2. Test Plot for the Whole Measurement Frequency Range:


Note: the power of the EUT transmitting frequency should be ignored.

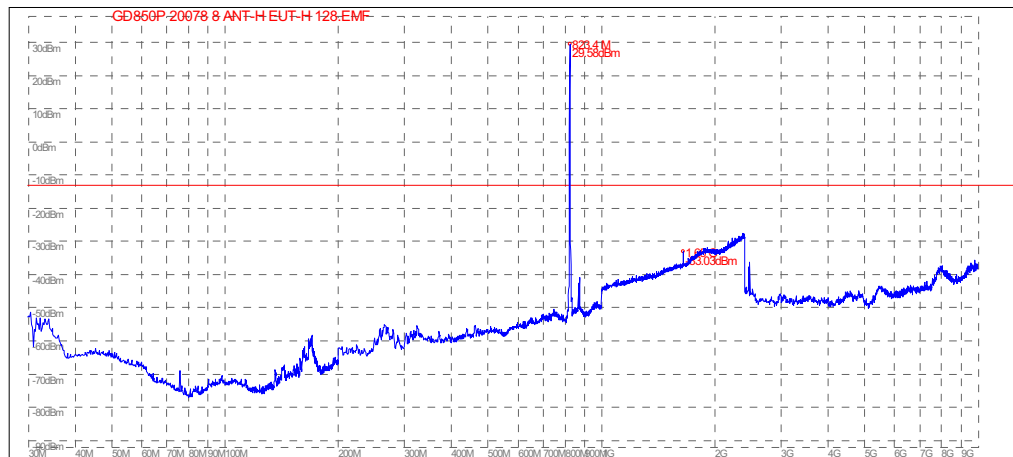


(Plot A.1: Channel = 128, Test Antenna Horizontal)

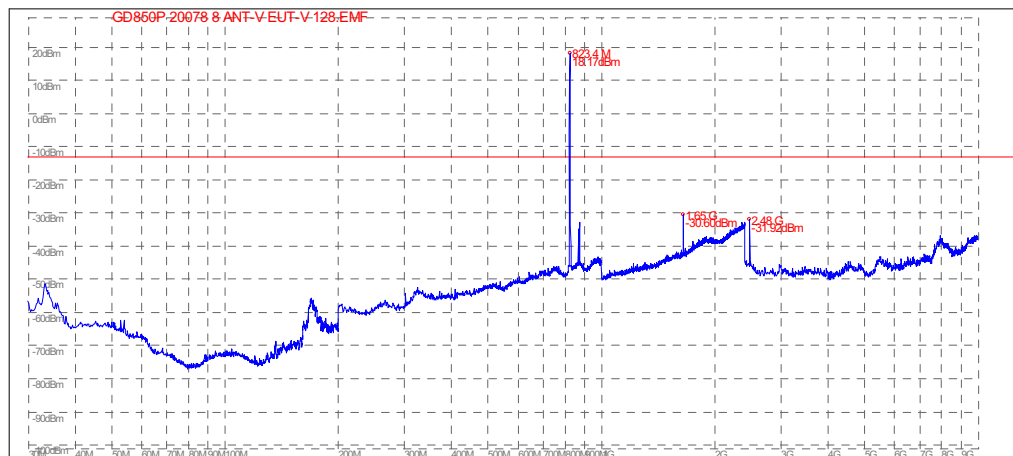


(Plot A.2: Channel = 128, Test Antenna Vertical)

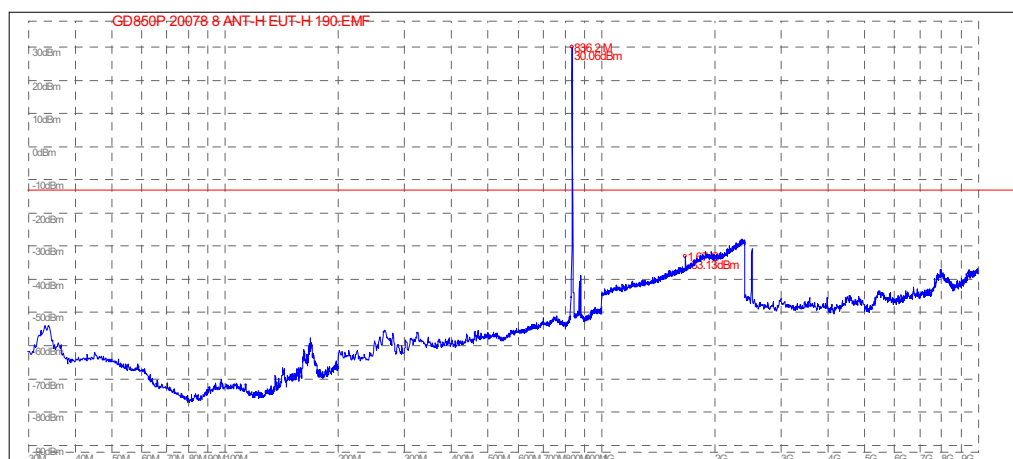


(Plot B.1: Channel = 190, Test Antenna Horizontal)

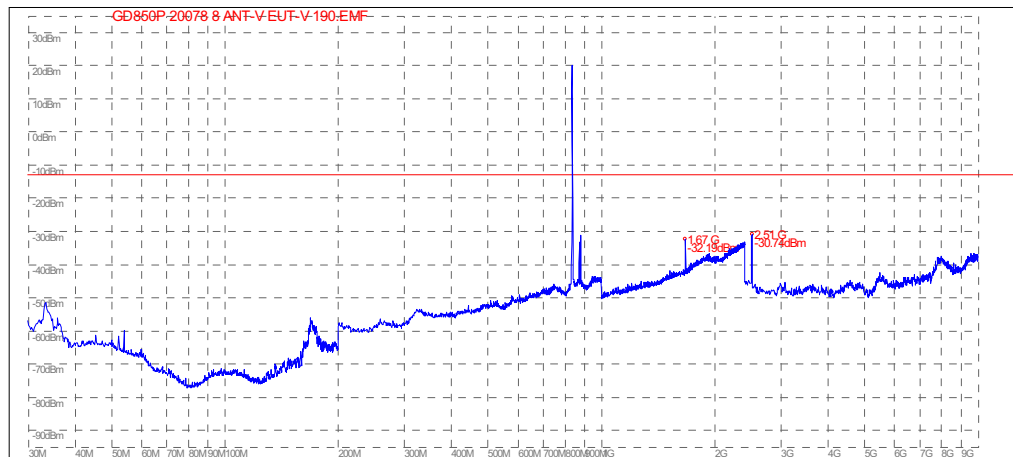

(Plot B.2: Channel = 190, Test Antenna Vertical)

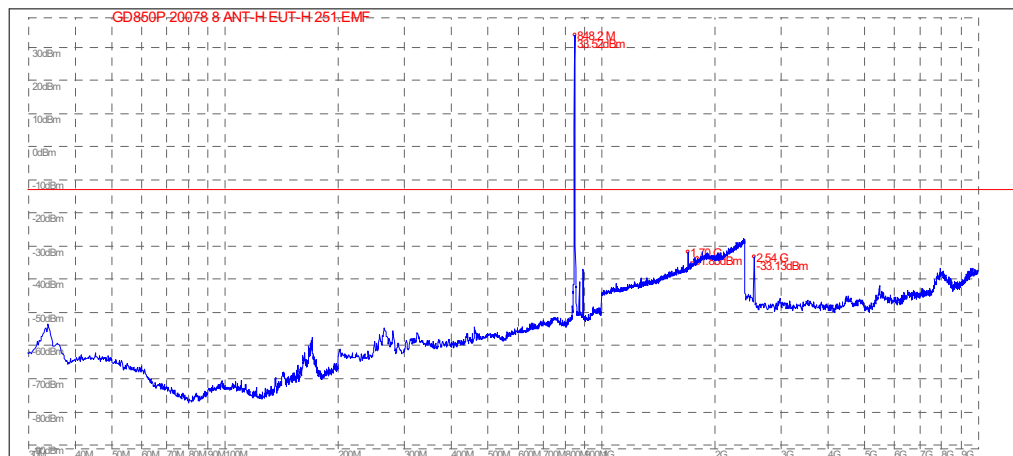

(Plot C.1: Channel = 251, Test Antenna Horizontal)

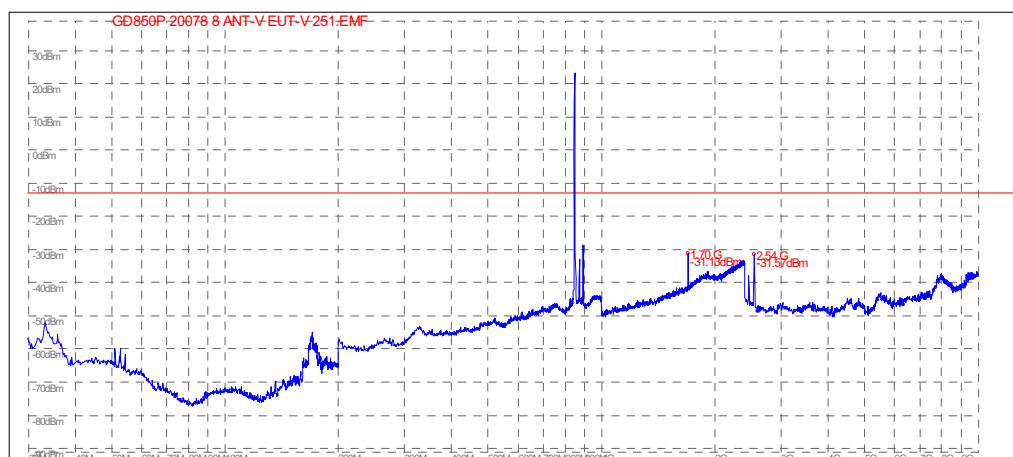

(Plot C.2: Channel = 251, Test Antenna Vertical)

4. PHOTOS OF THE EUT

1. Appearance of the EUT:













2. Accessory and EUT



3. Inside of the EUT

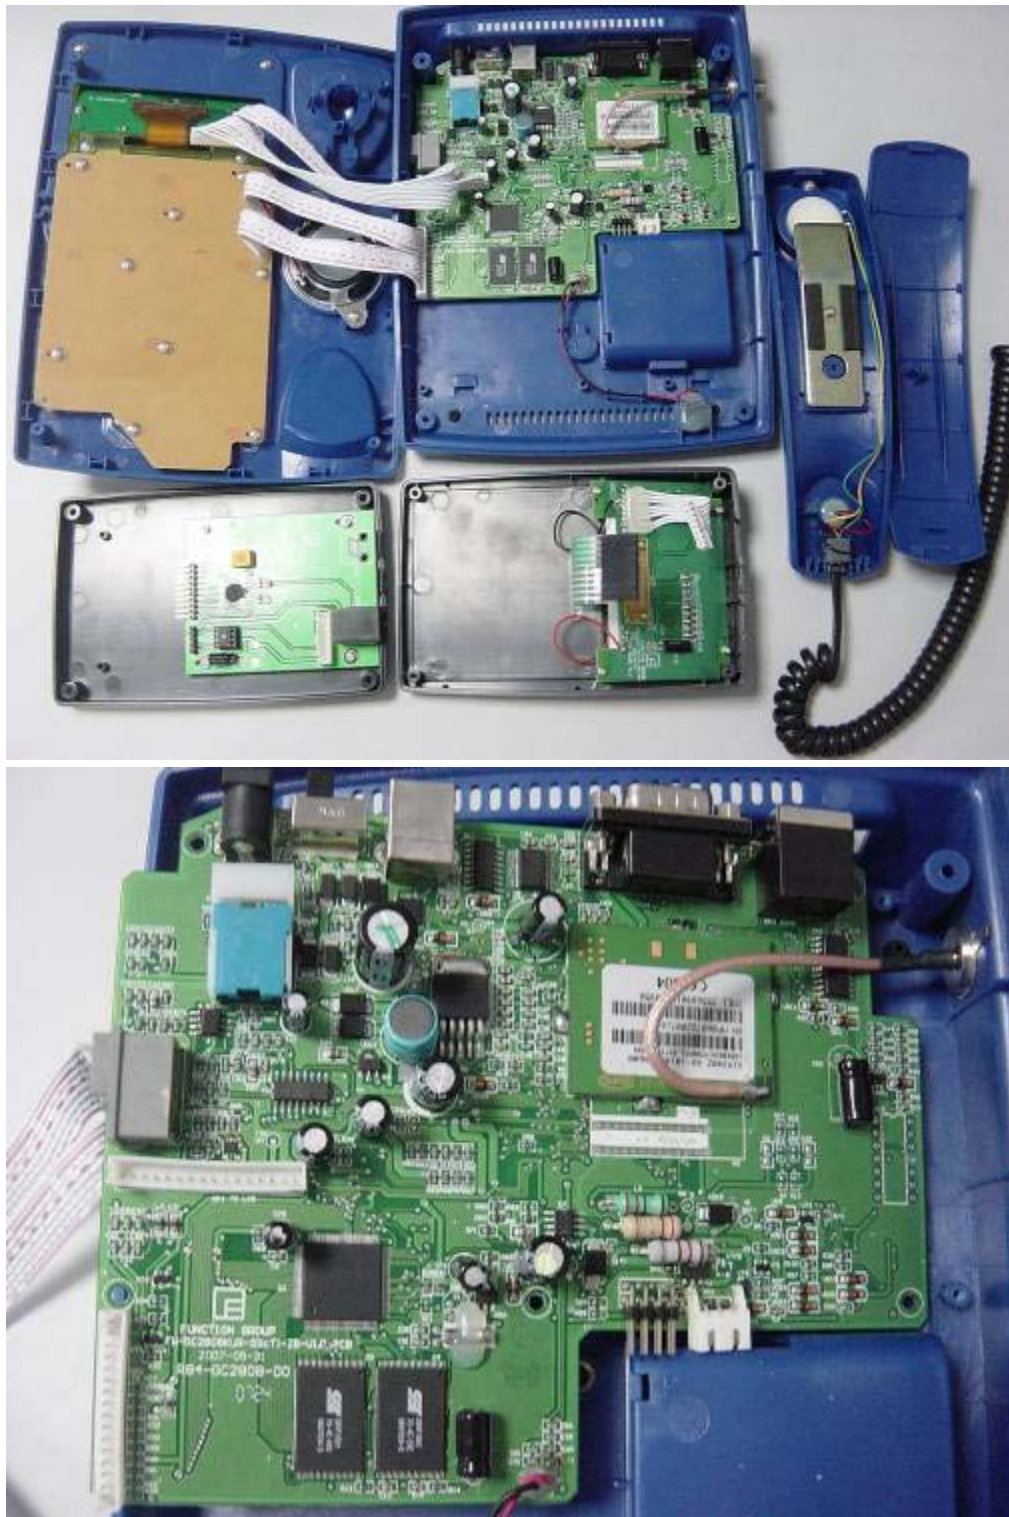



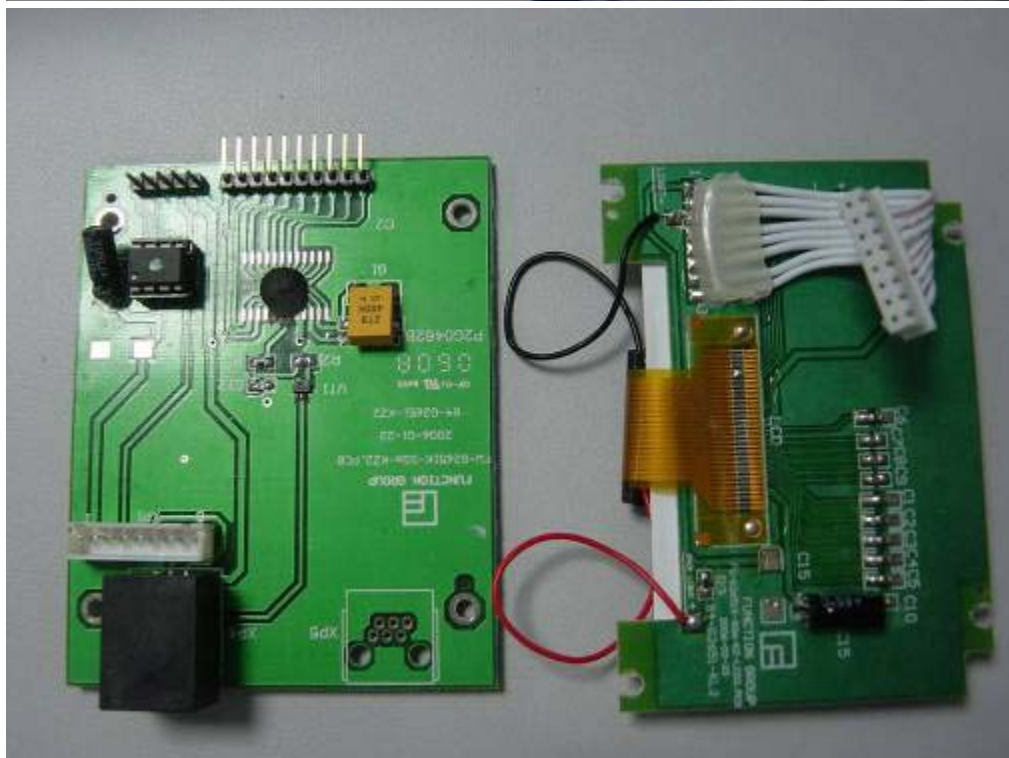



5. PHOTOS OF TEST SETUP

1. RF test photo



**** END OF REPORT ****