

RA-24-07103070-2/A Ed. 0

**FCC CERTIFICATION
RADIO Measurement
Technical Report**

**standard to apply:
FCC Part 15.247**

**Equipment under test:
3M WIRELESS SYSTEM / HEAD SET**

**FCC ID :
VJV-9008323**

**Company:
TES ELECTRONIC SOLUTION**

DISTRIBUTION: Mr LE MERDY

Company: TES ELECTRONIC SOLUTION

Number of pages: 38 including 5 annexes

Ed.	Date	Modified pages	Written by		Technical Verification	
			Name	Visa	Quality Approval	Visa
0	22-Oct-07	Creation	L. BERTHAUD	LB		

Duplication of this test report is only permitted for an integral photographic facsimile. It includes the number of pages referenced here above.

This document is the result of testing a specimen or a sample of the product submitted. It does not imply an assessment of the conformity of the whole manufactured products of the tested sample.



PRODUCT: 3M WIRELESS SYSTEM / HEAD SET

Reference / model: 9008323

Serial number: not communicated

MANUFACTURER: TES ELECTRONIC SOLUTION

COMPANY SUBMITTING THE PRODUCT:

Company: TES ELECTRONIC SOLUTION

Address: Centre d'Affaires l'Odyssée
ZAC de Cicé-Blossac
35170 BRUZ
FRANCE

Responsible: Mr LE MERDY

DATE(S) OF TEST: 11 and 12 July 2007

TESTING LOCATION: EMITECH ATLANTIQUE laboratory at ANGERS (49) FRANCE
EMITECH ATLANTIQUE open area test site in LA POUEZE (49)
FRANCE

Registration Number by FCC: 101696/FRN: 0006 6490 08

TESTED BY: L. BERTHAUD

CONTENTS

TITLE	PAGE
1. INTRODUCTION.....	4
2. PRODUCT DESCRIPTION	4
3. NORMATIVE REFERENCE.....	4
4. TEST METHODOLOGY	5
5. ADD ATTACHMENTS FILES	5
6. TESTS AND CONCLUSIONS	6
7. PEAK OUTPUT POWER.....	7
8. RADIATED EMISSION OF TRANSMITTER.....	9
9. BAND EDGE COMPLIANCE	13
CURVE N° 1.....	14
CURVE N° 2.....	15
CURVE N° 3.....	16
CURVE N° 4.....	17
ANNEX 1: OCCUPIED POWER BANDWIDTH AND CHANNEL SEPARATION	18
ANNEX 2: AVERAGE TIME OF OCCUPANCY ON ANY FREQUENCY	24
ANNEX 3: NUMBER OF HOPPING FREQUENCIES	30
ANNEX 4: PHOTOS OF THE EQUIPMENT UNDER TEST	34
ANNEX 5: TEST SET UP AND OPEN AREA TEST SITE	37

1. INTRODUCTION

This document presents the result of RADIO test carried out on the following equipment: 3M WIRELESS SYSTEM / HEAD SET in accordance with normative reference.

2. PRODUCT DESCRIPTION

Class: B (residential environment)

Antenna type: incorporated antenna

Operating frequency range: from 2401.92 MHz to 2479.68 MHz

Number of channels: 75

Channel spacing: 900 kHz

Modulation: Frequency Hopping Spread Spectrum (FHSS)

☒ Amplitude

☐ Digital

☐ Frequency

☐ Phase

Power source: 3.7 Vd.c. (lithium battery)

Power level, frequency range and channels characteristics are not user adjustable.

The details pictures of the product and the circuit boards are joined with this file.

3. NORMATIVE REFERENCE

The standards and testing methods related throughout this report are those listed below. They are applied on the whole test report even though the extensions (version, date and amendment) are not repeated.

FCC Part 15 (2006) Code of Federal Regulations
Title 47 - Telecommunication
Chapter 1 - Federal Communications Commission
Part 15 - Radio frequency devices
Subpart C - Intentional Radiators

ANSI C63.4 (2003) Methods of Measurement of Radio-Noise Emissions from Low-voltage Electrical and Electronics Equipment in the range of 9 kHz to 40 GHz.

Public Notice DA 00-705 Filing and Measurement Guideline for Frequency Hopping Spread Spectrum Systems.

4. TEST METHODOLOGY

Radio performance tests procedures given in part 15:

- Paragraph 33: frequency range of radiated measurements
- Paragraph 35: measurement detector functions and bandwidths
- Paragraph 203: antenna requirement
- Paragraph 205: restricted bands of operation
- Paragraph 207: conducted limits
- Paragraph 209: radiated emission limits; general requirements
- Paragraph 247: operation within the bands 2400-2483.5 MHz

5. ADD ATTACHMENTS FILES

- “Synoptic “***
- “Block diagram “***
- “External photos and Product labeling “***
- “Assembly of components “***
- “Internal photos “***
- “Layout pcb “***
- “Bil of materials “***
- “Schematics “***
- “Product description “***
- “User guide “***

6. TESTS AND CONCLUSIONS

Test procedure	Description of test	Criteria respected ?				Comment
		Yes	No	NAp	NAs	
FCC Part 15.203	ANTENNA REQUIREMENT	X				Note 1
FCC Part 15.205	RESTRICTED BANDS OF OPERATION	X				
FCC Part 15.207	CONDUCTED LIMITS			X		
FCC Part 15.209	RADIATED EMISSION LIMITS; general requirements	X				Note 2
FCC Part 15.247	OPERATION WITHIN THE BAND 2400-2483.5 MHz					
	(a) (1) <i>hopping systems</i>	X				Note 3
	(a) (1) (i) 902 – 928 MHz			X		
	(a) (1) (ii) 5725 – 5850 MHz			X		
	(a) (1) (iii) 2400 – 2483.5 MHz	X				Note 4
	(a) (2) <i>digital modulation techniques</i>			X		
	(b) <i>max output power</i>	X				Note 5
	(c) <i>operation with directional antenna gains > 6 dBi</i>			X		Note 6
	(d) <i>intentional radiator</i>	X				
	(e) <i>peak power spectral density</i>			X		
	(f) <i>hybrid system</i>			X		
	(g)	X				
	(h)	X				
	(i) <i>RF exposure compliance</i>	X				Note 7
DA 00-705	BAND EDGE COMPLIANCE	X				

NAp: Not Applicable

NAs: Not Asked

Note 1: internal antenna (pcb antenna), see photos in annex 4.

Note 2: see FCC part 15.247 (d).

Note 3: the system hops to channel frequencies from a pseudo randomly ordered list of hopping frequencies. Each frequency is used equally on the average by the transmitter, and separated by a minimum of 20 dB bandwidth of the hopping channel (see annex 1).

Channel 1 = 608.4 kHz

Channel 47 = 606.6 kHz

Channel 91 = 610.2 kHz

Note 4: the frequency hopping system uses 75 channels (see annex 3).

The timing by channel is 836 μ s. During 75 channels \times 0.4 s (part 15) = 30 s, any channel is used 80 times, then 80 \times 836 μ s = 66.88 ms, thus the average time of occupancy on any channel is less than 400 ms within a period of 0.4 s multiplied by the number of hopping channels employed, in normal operating mode (see annex 2).

Note 5: conducted measurement is not possible (integral antenna), so we used the radiated method in open field.

Note 6: the antenna gain is less than 6 dBi.

Note 7: this type of equipment uses less than 0.5 W of output power with a high signal transmitting duty factor (section 3 from Oet 65c).

Conclusion:

The sample of 3M WIRELESS SYSTEM / HEAD SET submitted to the tests complies with the regulations of the standard FCC Part 15 in accordance with the limits or criteria defined in this report.

7. PEAK OUTPUT POWER

Standard: FCC Part 15

Test procedure: paragraph 15.247

Test equipment:

TYPE	BRAND	EMITECH NUMBER
Spectrum analyzer FSP 40	Rohde & Schwarz	4088
Diode detector ODZ0004A	Omniyig	2469
Oscilloscope THS 720	Tektronix	0940
Antenna RGA60	Electrometrics	1938
Antenna RGA60	Electrometrics	1204
Open site	EMITECH	1274
Radio frequency generator SME06	Rohde & Schwarz	1669
High pass filter HPM11630	Micro-tronics	1673
Low-noise amplifier 1 to 18 GHz	ALC	2648
Power meter 8541B	Gigatronics	3479
Power sensor 80401A	Gigatronics	3182
Multimeter 77-2	Fluke	812

Test set up:

The system is tested in an open area test site (OATS).

The test unit is placed on a rotating table, 0.8 m from a ground plane. Zero degree azimuth corresponds to the front of the equipment under test.

We use for this measure outdoor test site and substitution method. The measuring distance between the equipment and the test antenna is 3 m. The test antenna has been oriented in the two polarizations, we have recorded only the highest level.

The spectrum analyzer is first replaced by a diode detector which is connected to the vertical channel of an oscilloscope.

The equipment under test is then substituted by a signal generator with a calibrated double ridged guide antenna, and its level adjusted such that the deviation of the Y-trace of the oscilloscope reaches the level obtained with the E.U.T.

The output power level of the signal generator is finally measured with a calibrated RF power meter.

Then a measurement of the electro-magnetic field is realized, with a resolution bandwidth and video bandwidth adjusted at 1 MHz.

Distance of antenna: 3 meters

Antenna height: 1 to 4 meters

Antenna polarization: vertical and horizontal

Equipment under test operating condition:

The equipment under test is blocked in continuous transmission mode, modulated by internal data signal, at the highest output power level which the transmitter is intended to operate.

Results:

Ambient temperature (°C): 21
Relative humidity (%): 48

We used for the power source the internal battery of the equipment and we noted:

Voltage at the beginning of test (V): 4.18
Voltage at the end of test (V): 3.95

Sample n° 1 Hopping mode

Polarization of test antenna: horizontal (height: 190 cm)
Position of equipment: use position (azimuth: 90 degrees)

		Peak Output Power radiated at these frequencies (W): from 2401.92 MHz to 2479.68 MHz	Limits (W)
Normal test conditions	Nominal power source (V): 3.7	100×10^{-3}	1*

* the frequency hopping systems use at least 75 hopping channel.

Sample n° 1 Channel 1 (2401.92 MHz)

		Level dBμV	Cable loss dB	Antenna factor dB	Electro-magnetic field (dBμV/m):	P* (W)
Normal test conditions	Nominal power source (V): 3.7	81.59	4.98	28.90	115.47	105.71×10^{-3}

Sample n° 1 Channel 47 (2441.66 MHz)

		Level dBμV	Cable loss dB	Antenna factor dB	Electro-magnetic field (dBμV/m):	P* (W)
Normal test conditions	Nominal power source (V): 3.7	80.37	5.05	29	114.42	83×10^{-3}

Sample n° 1 Channel 91 (2479.68 MHz)

		Level dBμV	Cable loss dB	Antenna factor dB	Electro-magnetic field (dBμV/m):	P* (W)
Normal test conditions	Nominal power source (V): 3.7	80.88	5.12	29.10	115.10	97.07×10^{-3}

* $P = (E \times d)^2 / (30 \times G_p)$ with $d = 3$ m and $G_p = 1$

Test conclusion:

RESPECTED STANDARD

8. RADIATED EMISSION OF TRANSMITTER

Standard: FCC Part 15

Test procedure: paragraph 15.205
paragraph 15.209
paragraph 15.247

Test equipment:

TYPE	BRAND	EMITECH NUMBER
Test receiver ESH3	Rohde & Schwarz	1058
Test receiver ESVS 10	Rohde & Schwarz	1219
Spectrum analyzer FSP 40	Rohde & Schwarz	4088
Loop antenna	EMCO	1406
Biconical antenna HP 11966C	Hewlett Packard	728
Log periodic antenna HL 223	Rohde & Schwarz	1999
Open site	Emitech	1274
Antenna RGA-60	Electrometrics	1204
Low-noise amplifier 2 to 18 GHz	Microwave DB	1922
High pass filter HP12/3200-5AA	Filtek	
Antenna WR42	IMC	1939
Low-noise amplifier 18 to 26 GHz	ALC	3036
Multimeter 77-2	Fluke	812

Test set up:

The system is tested in an open area test site (OATS).

The test unit is placed on a rotating table, 0.8 m from a ground plane. Zero degree azimuth corresponds to the front of the equipment under test.

Frequency range: from 9 kHz to harmonic 10 ($F_{\text{carrier}} \leq 10 \text{ GHz}$)

Bandwidth: 120 kHz ($F < 1 \text{ GHz}$) or 100 kHz, following 15.205 or 15.247
1 MHz ($F > 1 \text{ GHz}$) or 100 kHz, following 15.205 or 15.247

Distance of antenna: between 30 m and 3 m according the frequencies and the limits.

Antenna height: 1 to 4 meters

Antenna polarization: vertical and horizontal, only the highest level is recorded.

Equipment under test operating condition:

The equipment under test is blocked in continuous transmission mode, modulated by internal data signal, at the highest output power level which the transmitter is intended to operate.

Results:

Ambient temperature (°C): 19.5
Relative humidity (%): 58

We used for the power source the internal battery of the equipment and we noted:

Voltage at the beginning of test (V): 4.18
Voltage at the end of test (V): 4.13

The polarity column refers to the antenna polarity at which the maximum emissions level is measured.

Channel 1 (2401.92 MHz)

FREQUENCIES (MHz)	Detector QP: Quasi-Peak Avg: Average Pk: Peak	Antenna height (cm)	Azimuth (degree)	Resolution bandwidth (kHz)	Polarization H: Horizontal V: Vertical	Field strength (dBμV/m)	Limits (dBμV/m)	Margin (dB)
199.99	QP	160	180	120	H	42	95.37	53.37
1200.96	Avg	100	30	1000	V	42.85	53.98*	11.13
1200.96	Pk	100	30	1000	V	66.85	73.98*	7.13
3602.47	Avg	120	180	1000	V	34.08	53.98*	19.9
3602.47	Pk	120	180	1000	V	54.96	73.98*	19.02
4803.8	Avg	130	285	1000	H	36.75	53.98*	17.23
4803.8	Pk	130	285	1000	H	72.38	73.98*	1.6
6004.35	Pk	130	340	100	H	51.02	95.37	44.35
7205.62	Pk	220	330	100	V	69.29	95.37	26.08
8406	Avg	190	80	1000	H	42.42	53.98*	11.56
8406	Pk	190	80	1000	H	63.66	73.98*	10.32
9606.96	Pk	190	100	100	H	70.92	95.37	24.45
10809.22	Avg	100	190	1000	H	45.96	53.98*	8.02
10809.22	Pk	100	190	1000	H	64.73	73.98*	9.25
12009.54	Avg	220	0	1000	H	46.85	53.98*	7.13
12009.54	Pk	220	0	1000	H	69.71	73.98*	4.27

Channel 47 (2441.664 MHz)

FREQUENCIES (MHz)	Detector QP: Quasi-Peak Avg: Average Pk: Peak	Antenna height (cm)	Azimuth (degree)	Resolution bandwidth (kHz)	Polarization H: Horizontal V: Vertical	Field strength (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
199.99	QP	160	180	120	H	42	95.37	53.37
1220.08	Avg	110	210	1000	V	43.02	53.98*	10.96
1220.08	Pk	110	210	1000	V	69.89	73.98*	4.09
3662.22	Avg	160	0	1000	V	33.51	53.98*	20.47
3662.22	Pk	160	0	1000	V	56.75	73.98*	17.23
4883.16	Avg	110	350	1000	V	37.18	53.98*	16.8
4883.16	Pk	110	350	1000	V	73.46	73.98*	0.52
7324.52	Avg	220	280	1000	V	41.65	53.98*	12.33
7324.52	Pk	220	280	1000	V	71.36	73.98*	2.62
8545.7	Pk	190	270	100	H	62.95	95.37	32.42
9766.62	Pk	230	0	100	H	62.18	95.37	33.19
10987.26	Avg	100	300	1000	H	46.93	53.98*	7.05
10987.26	Pk	100	300	1000	H	64.59	73.98*	9.39
12208.36	Avg	155	0	1000	H	46.79	53.98*	7.19
12208.36	Pk	155	0	1000	H	70.69	73.98*	3.29

Channel 91 (2479.68 MHz)

FREQUENCIES (MHz)	Detector QP: Quasi-Peak Avg: Average Pk: Peak	Antenna height (cm)	Azimuth (degree)	Resolution bandwidth (kHz)	Polarization H: Horizontal V: Vertical	Field strength (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
199.99	QP	160	180	120	H	42	95.37	53.37
1240.18	Pk	100	0	100	V	71.98	95.37	23.99
3720.58	Avg	115	0	1000	V	33.08	53.98*	20.9
3720.58	Pk	115	0	1000	V	56.22	73.98*	17.76
4961.36	Avg	140	310	1000	V	37.12	53.98*	16.86
4961.36	Pk	140	310	1000	V	70.87	73.98*	3.11
6201.36	Pk	230	270	100	V	48.05	95.37	47.32
7441.1	Avg	110	330	1000	H	43.02	53.98*	10.96
7441.1	Pk	110	330	1000	H	73.7	73.98*	0.28
8681.82	Pk	190	0	100	H	64.9	95.37	30.47
9921.9	Pk	230	0	100	H	59.05	95.37	36.32
11162.3	Avg	110	320	1000	H	46.68	53.98*	7.3
11162.3	Pk	110	320	1000	H	64.27	73.98*	9.71
12402.32	Avg	180	280	1000	H	46.83	53.98*	7.15
12402.32	Pk	180	280	1000	H	70.75	73.98*	3.23

* restricted bands of operation in 15.205, this limit corresponding at the 15.209 section.

Applicable limits: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

The highest level recorded in a 100 kHz bandwidth is 115.37 dB μ V/m on channel 1.

So the applicable limit is **95.37 dB μ V/m**.

In addition, radiated emissions which fall in the restricted band, as defined in section 15.205 (a), must also comply with the radiated emission limits specified in section 15.209 (a) (see section 15.205 (c)).

TEST CONCLUSION:

RESPECTED STANDARD

9. BAND EDGE COMPLIANCE

Standard: FCC Part 15.247

Test procedure: Public Notice DA 00-705, Delta Marker method

Test equipment used:

TYPE	MANUFACTURER	EMITECH NUMBER
Spectrum analyzer FSP 40	Rohde & Schwarz	4088
Antenna RGA-60	Electrometrics	1204
Multimeter 77-2	Fluke	812

Measured condition:

Requirements: Emissions that fall in the restricted bands (part 15.205). These emissions must be less than or equal to 500 $\mu\text{V/m}$ (53.98 dB $\mu\text{V/m}$) Part 15.35b applies in the restricted bands.

Test procedure: An in band field strength measurement of the fundamental Emission using the RBW and detector function required by C63.4-2003 and FCC Rules.

Test operating condition of the equipment:

The equipment is blocked in frequency hopping mode.

Results:

Lower Band Edge: from 2310 MHz to 2390 MHz, CURVE n° 1 and CURVE n° 2

Upper Band Edge: from 2483.5 MHz to 2500 MHz, CURVE n° 3 and CURVE n° 4

Sample n°1:

Fundamental frequency (MHz)	Field Strength Level of fundamental (dB $\mu\text{V/m}$)	Detector (Peak or Average)	Frequency of maximum Band-edges Emission (MHz)	Delta Marker (dB)*	Calculated Max Out of Band Emission Level (dB $\mu\text{V/m}$)**	Limit (dB $\mu\text{V/m}$)	Margin (dB)
2401.92	115.5	Peak	2386.4	-48.41	67.09	73.98	6.89
2401.92	90.35	Average	2383	-44.57	45.78	53.98	8.2
2479.68	114.79	Peak	2483.7	-44.29	70.5	73.98	3.48
2479.68	90.81	Average	2488.98	-53.62	37.19	53.98	16.79

* according to step 2 of Marker-Delta Method DA 00-705.


** according to step 3 of Marker-Delta Method:

Calculated Emission Level = Field Strength Level – Delta Marker Level

Test conclusion:


RESPECTED PUBLIC NOTICE

CURVE N° 1.

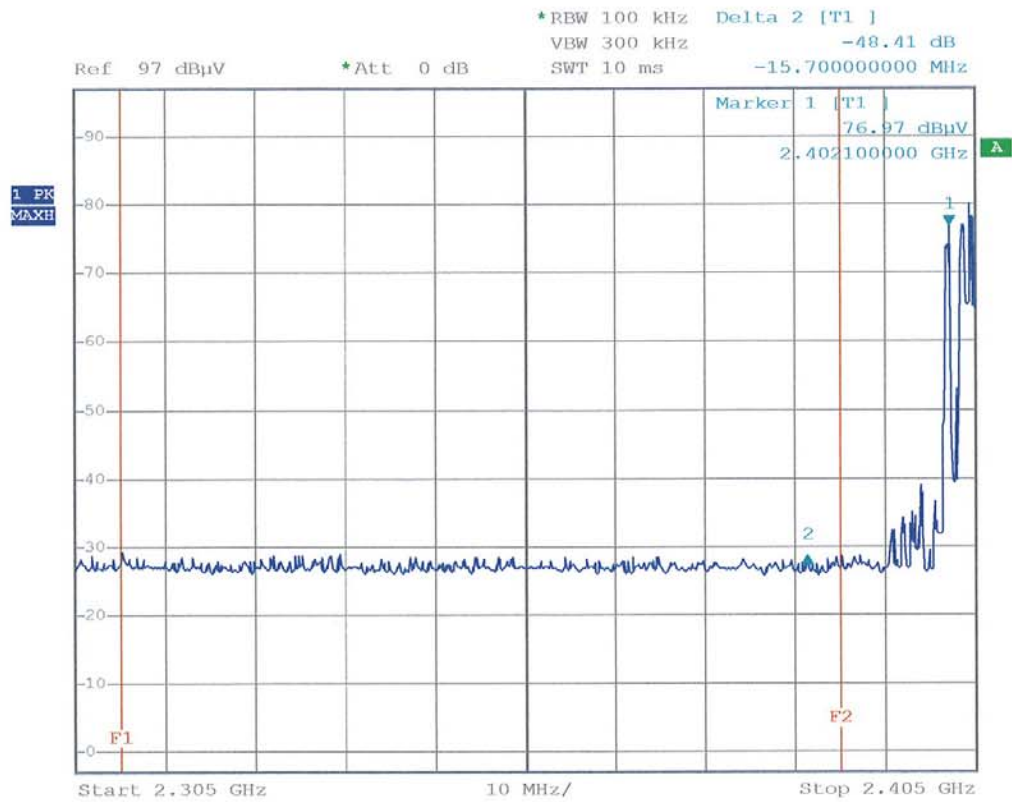


Date: 12.JUL.2007 17:25:39

CURVE N° 2.

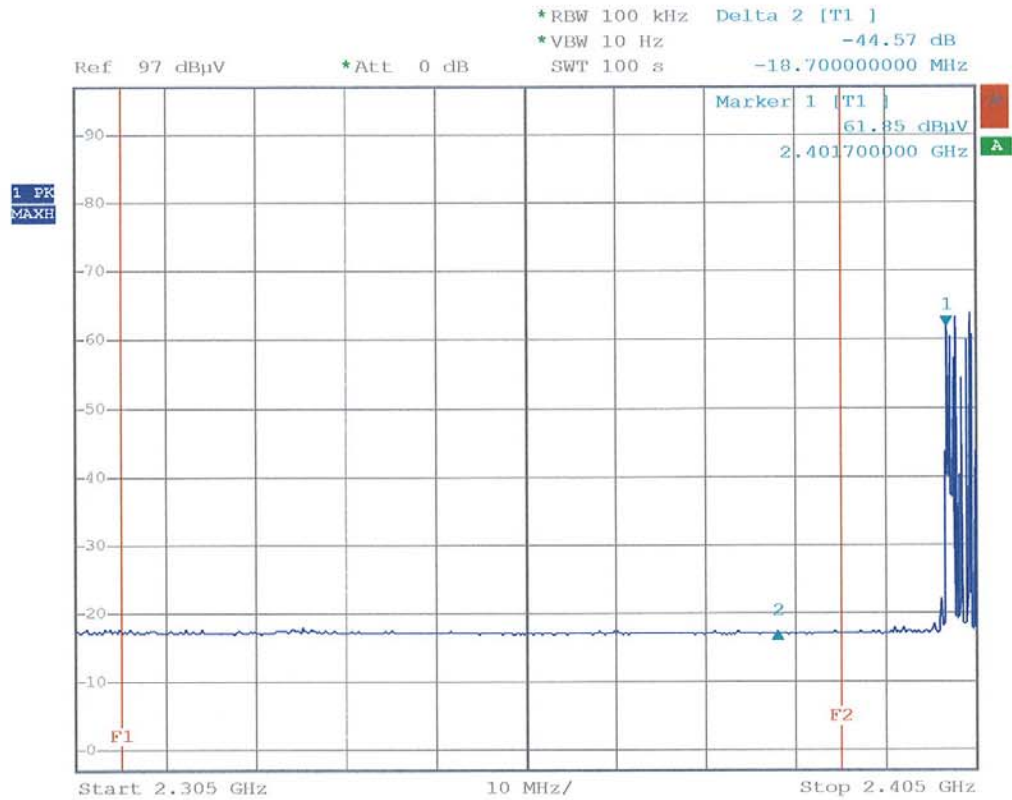


Date: 12.JUL.2007 17:22:47

CURVE N° 3.

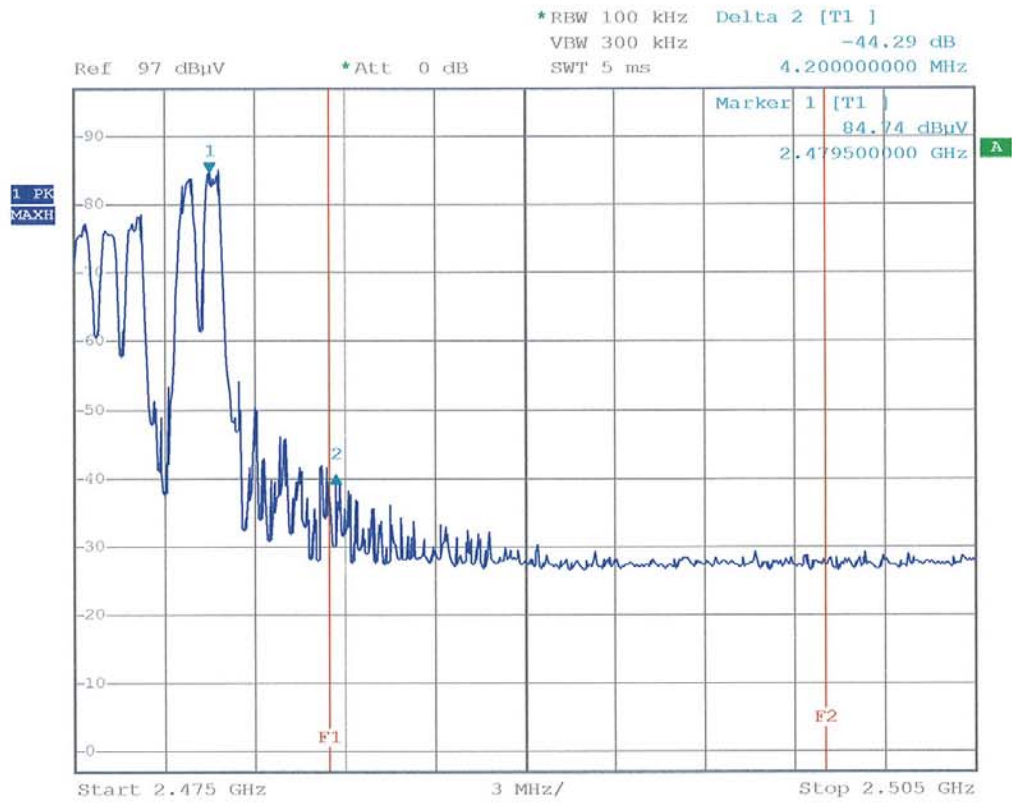


Date: 12.JUL.2007 17:28:46

CURVE N° 4.

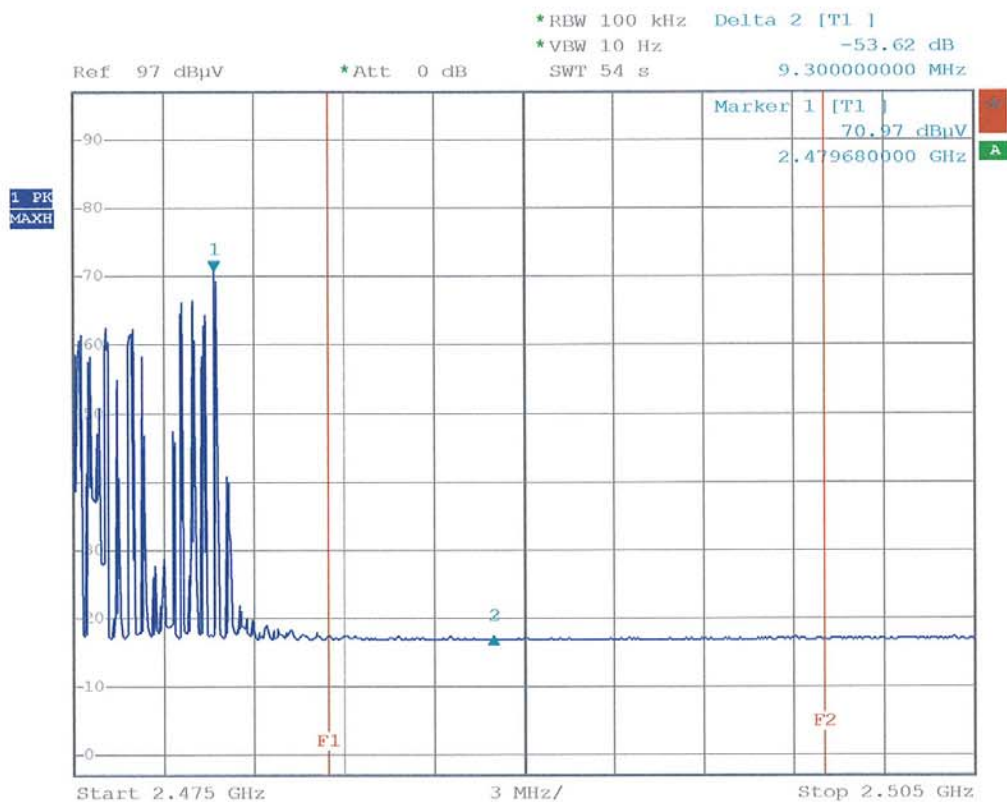


Date: 12.JUL.2007 17:32:42


ANNEX 1: OCCUPIED POWER BANDWIDTH AND CHANNEL SEPARATION

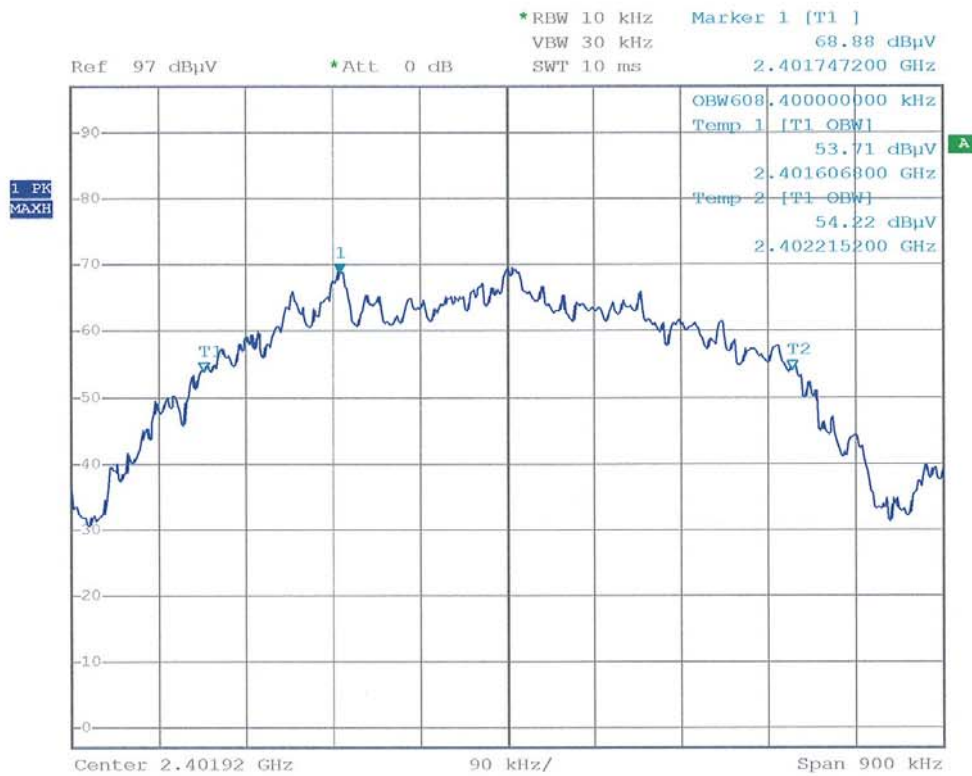


Date: 12.JUL.2007 17:38:19

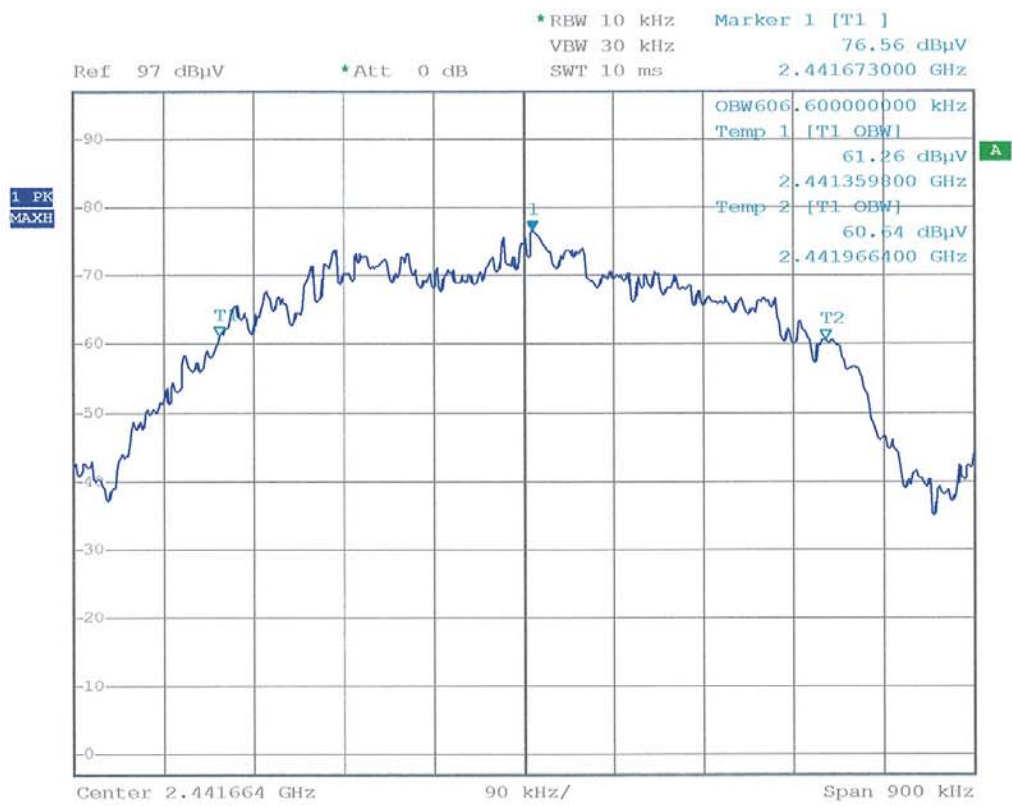


Date: 12.JUL.2007 17:40:58

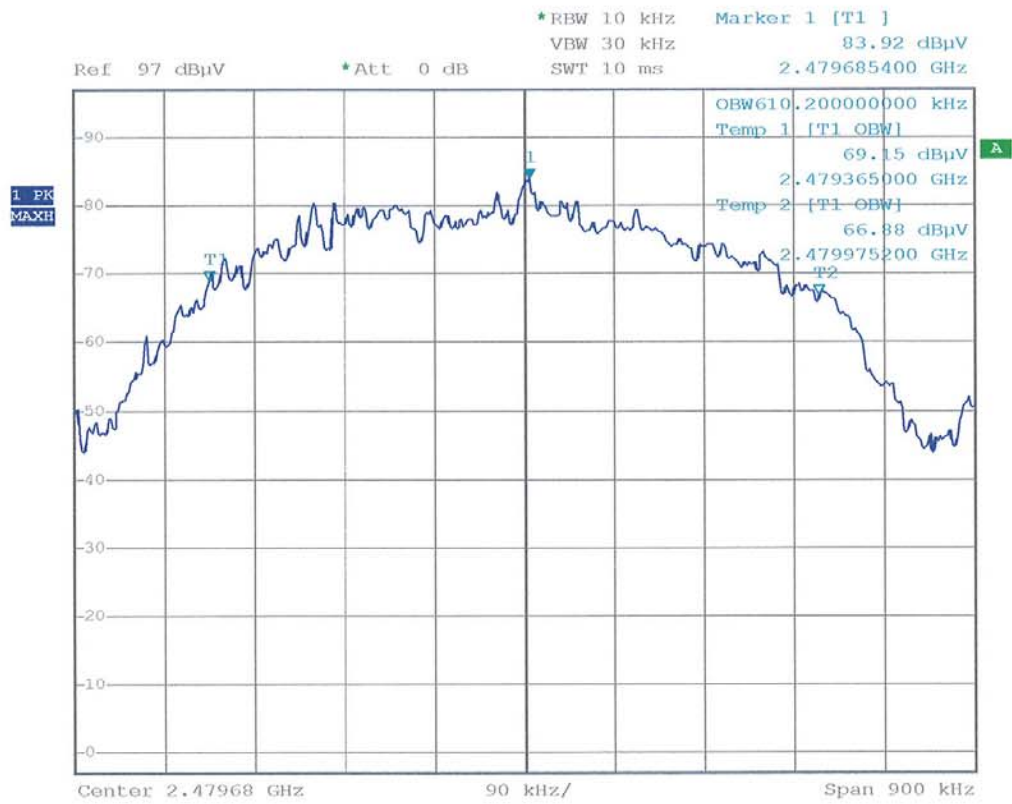


Date: 12.JUL.2007 17:51:32

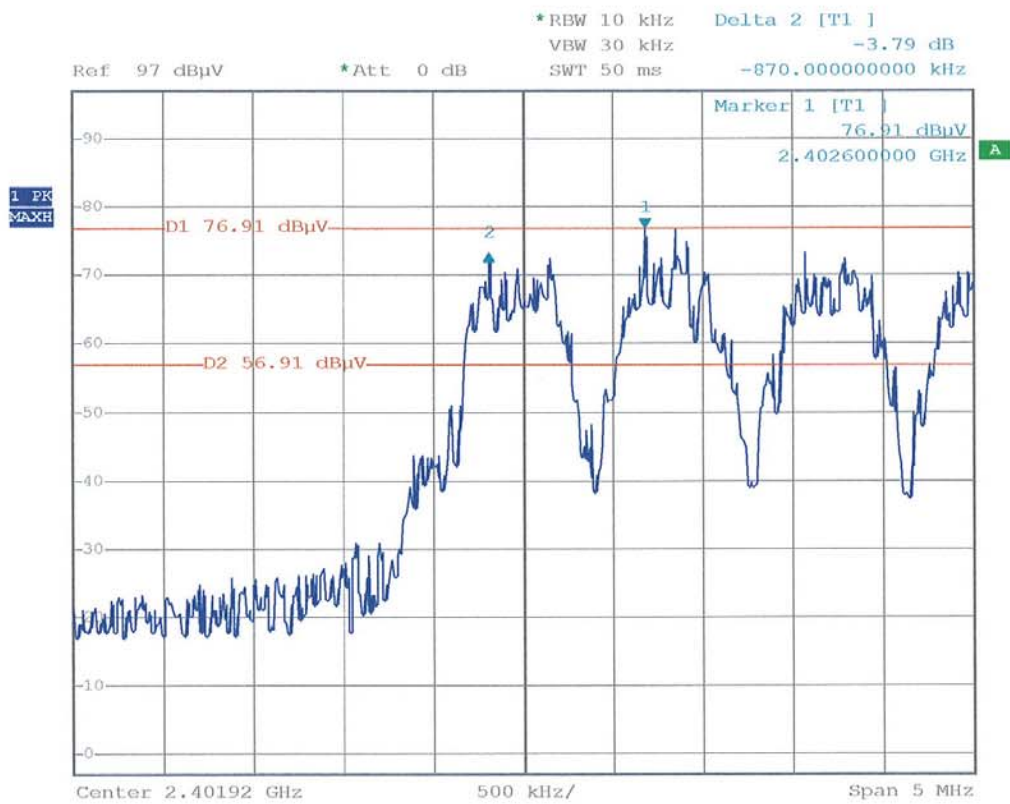

Date: 12.JUL.2007 16:59:17

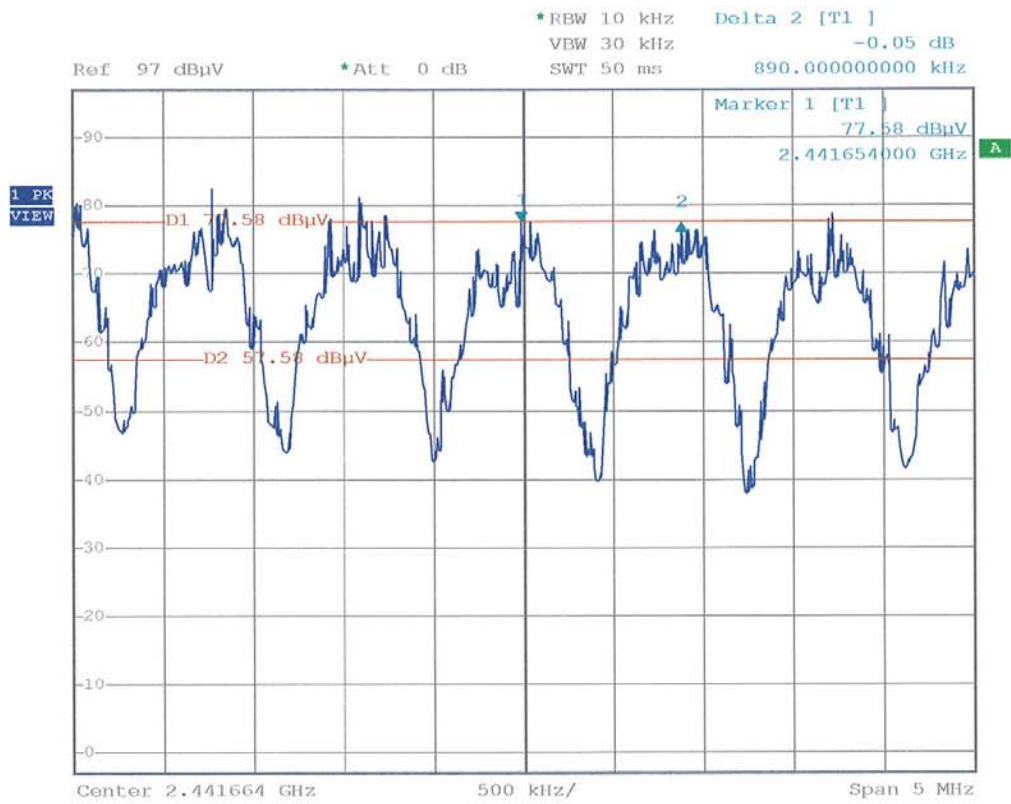


Date: 12.JUL.2007 17:03:01

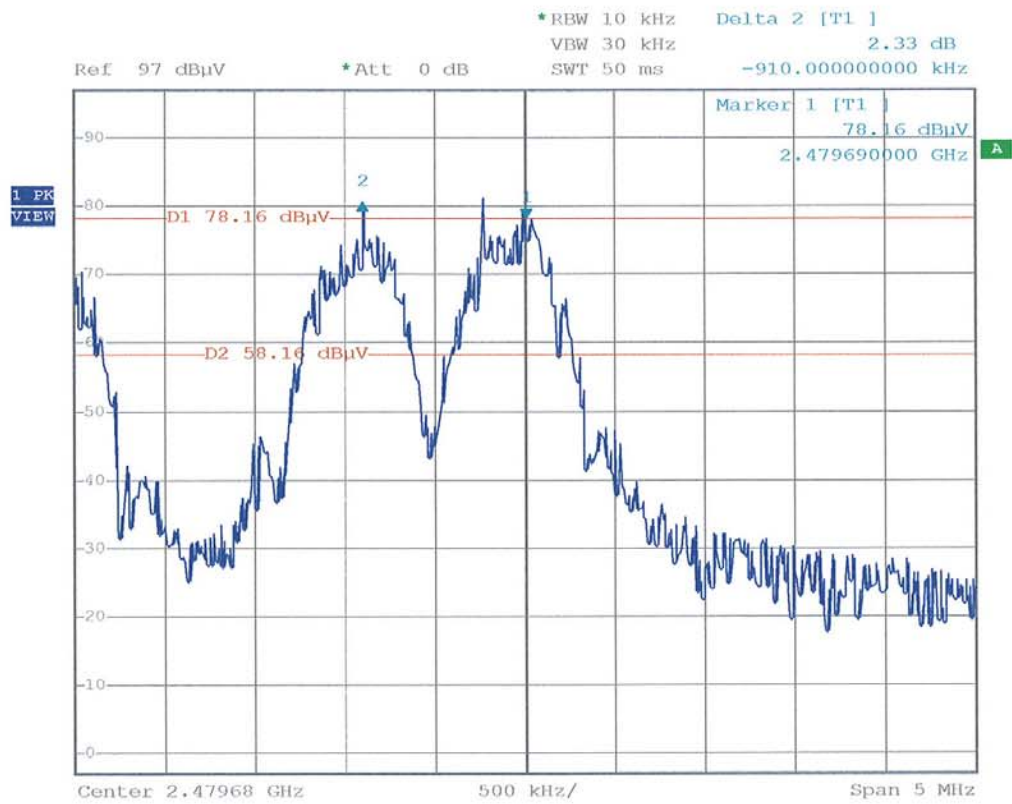


Date: 12.JUL.2007 17:06:18


ANNEX 2: AVERAGE TIME OF OCCUPANCY ON ANY FREQUENCY

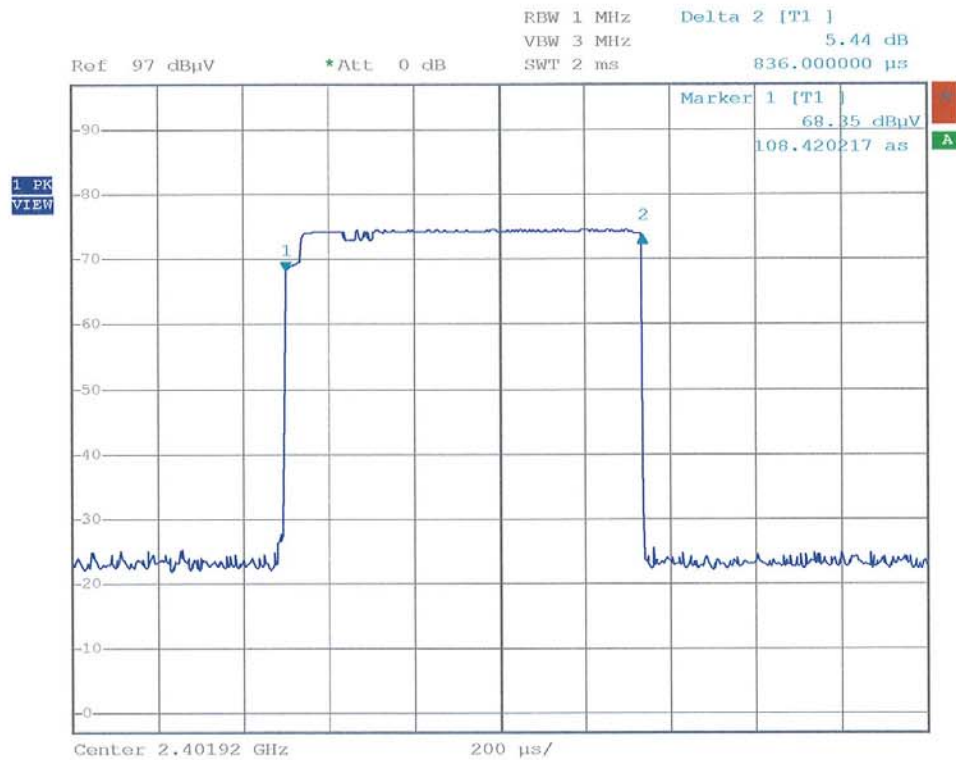


Date: 12.JUL.2007 17:36:42

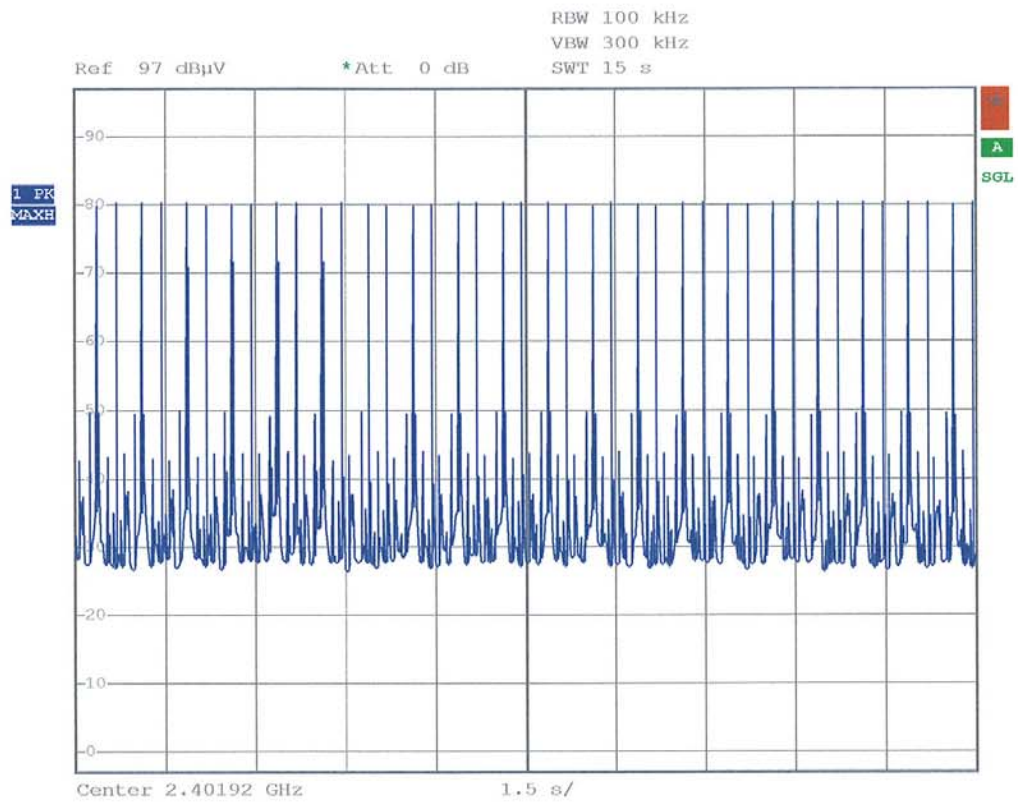


Date: 12.JUL.2007 16:55:11

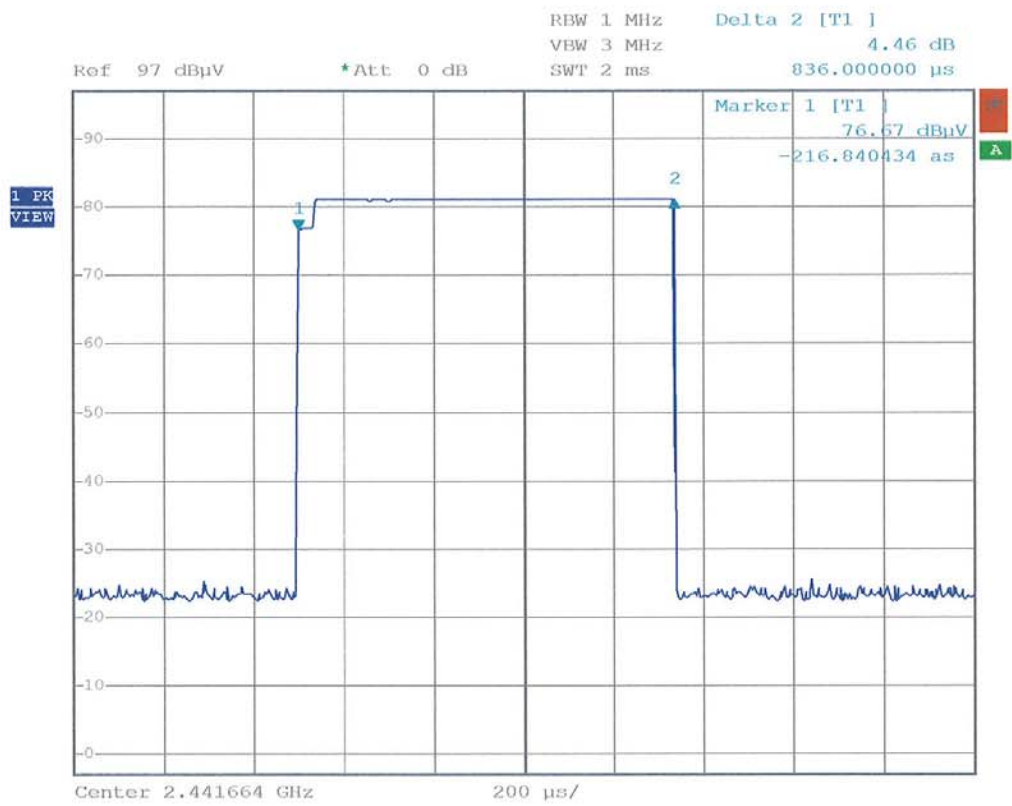


Date: 12.JUL.2007 17:45:13

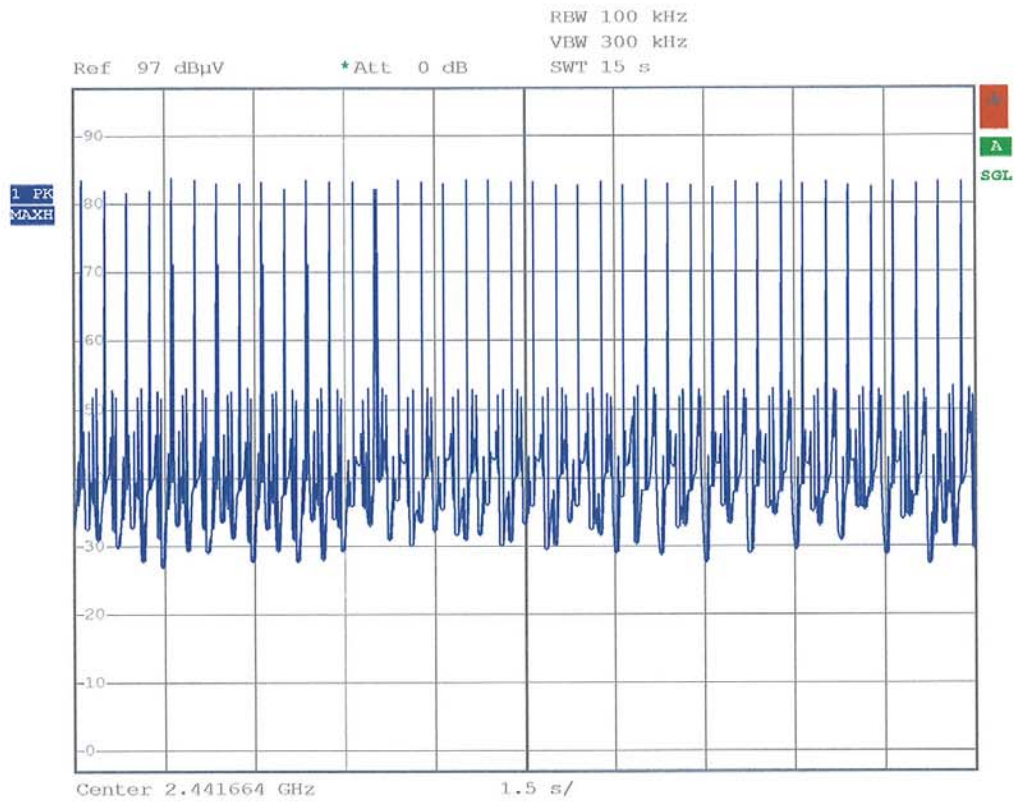

Date: 12.JUL.2007 16:53:01

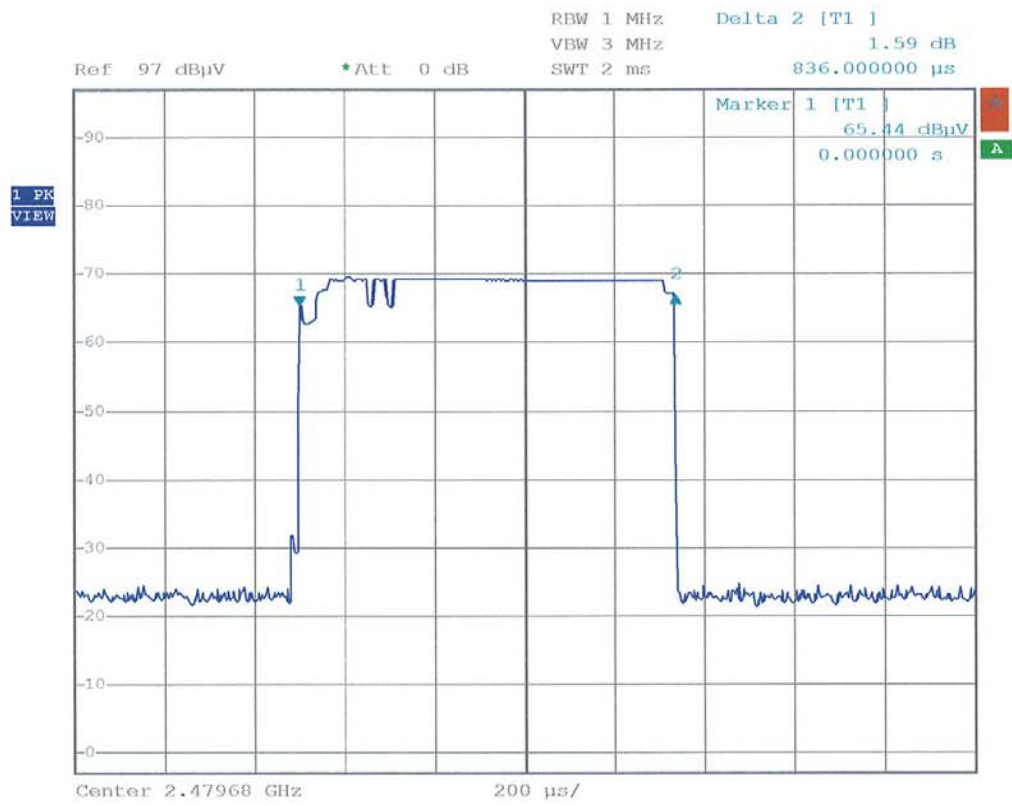


Date: 12.JUL.2007 17:47:09

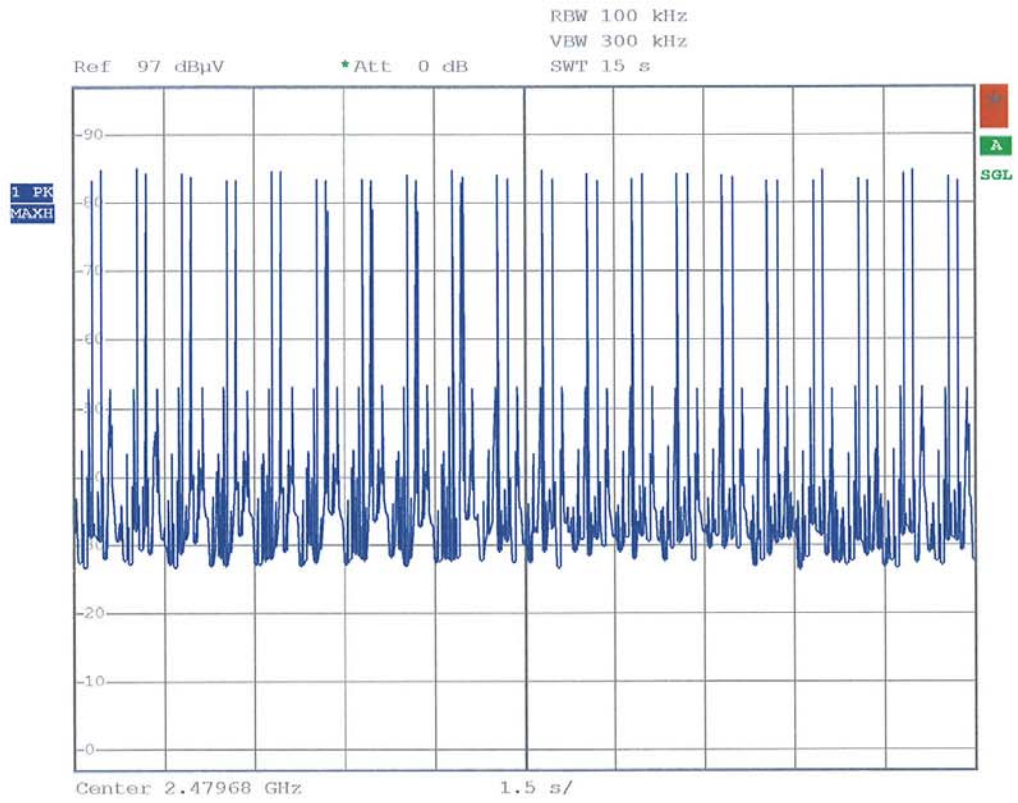


Date: 12.JUL.2007 16:51:03


ANNEX 3: NUMBER OF HOPPING FREQUENCIES

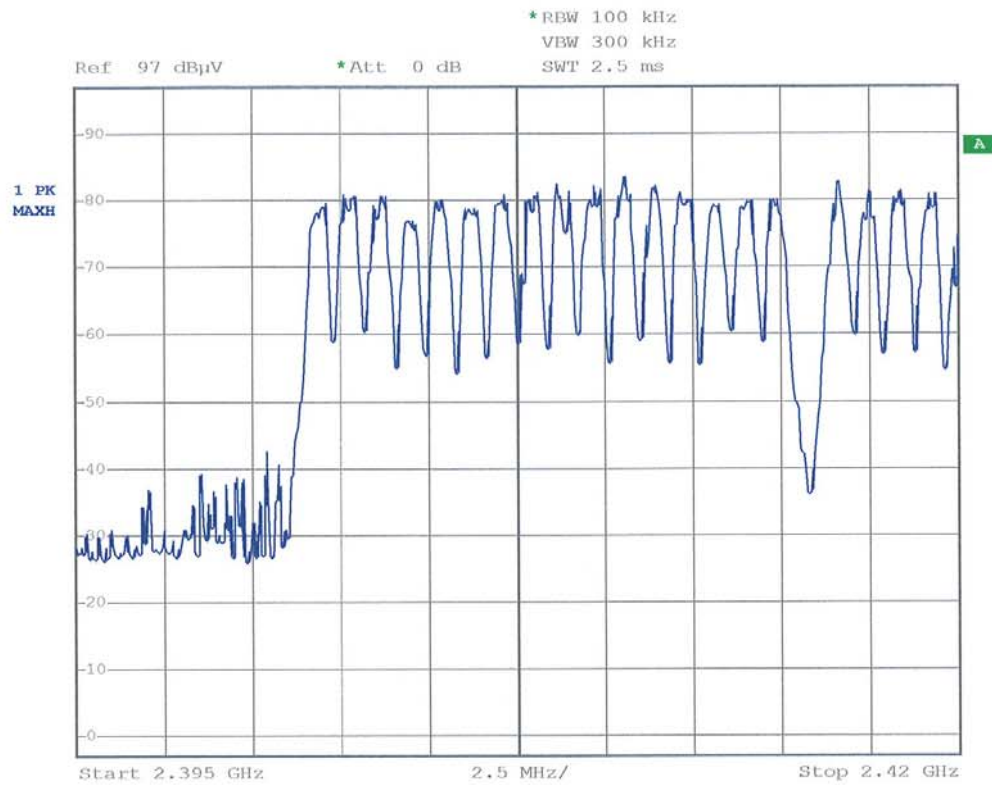


Date: 12.JUL.2007 17:08:36

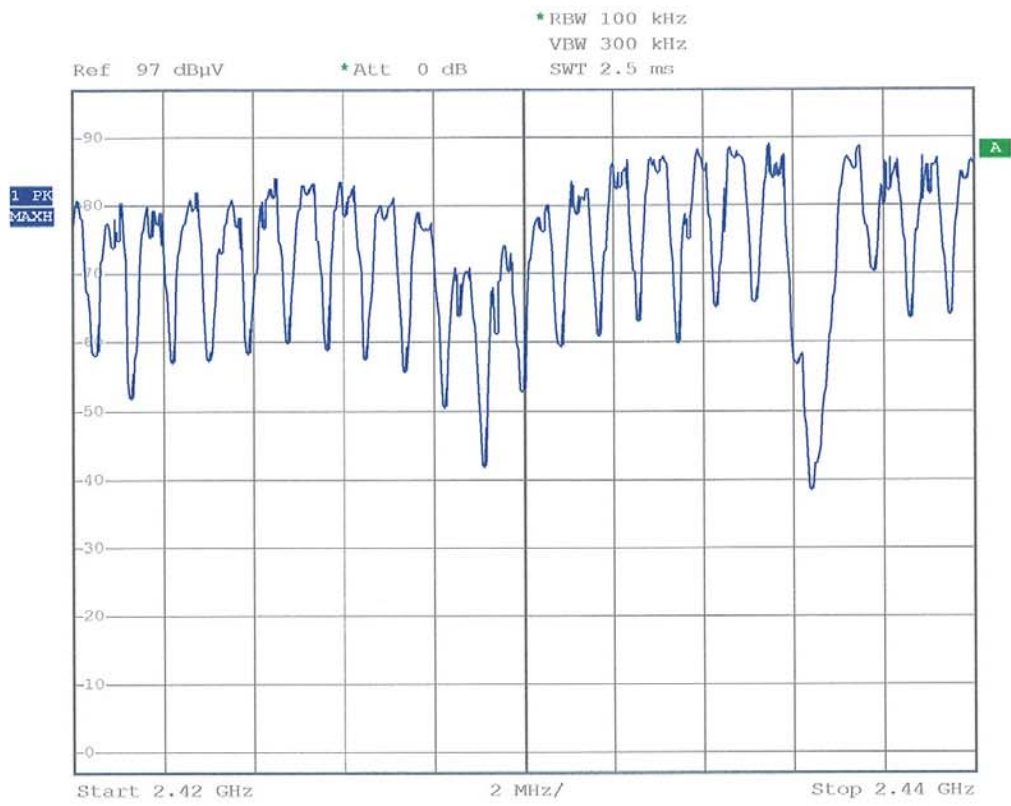

Date: 12.JUL.2007 17:10:44

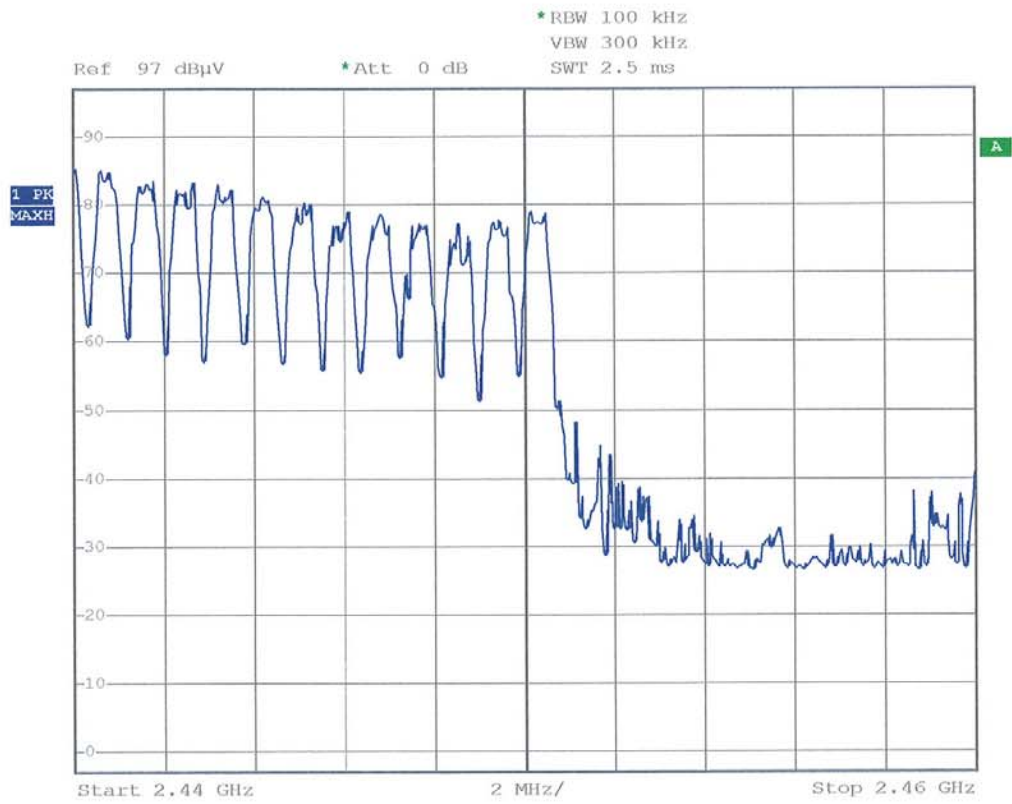

Date: 12.JUL.2007 17:13:37

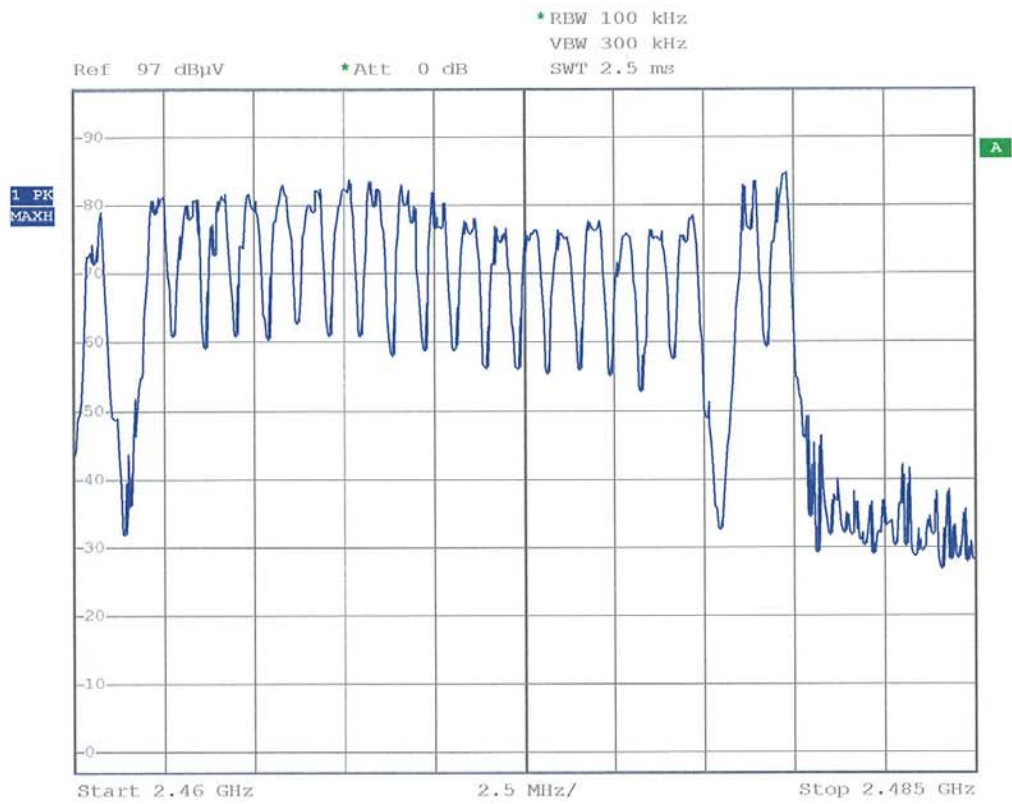


Date: 12.JUL.2007 17:17:11

ANNEX 4: PHOTOS OF THE EQUIPMENT UNDER TEST


GENERAL VIEW




Printed circuit board: face 1

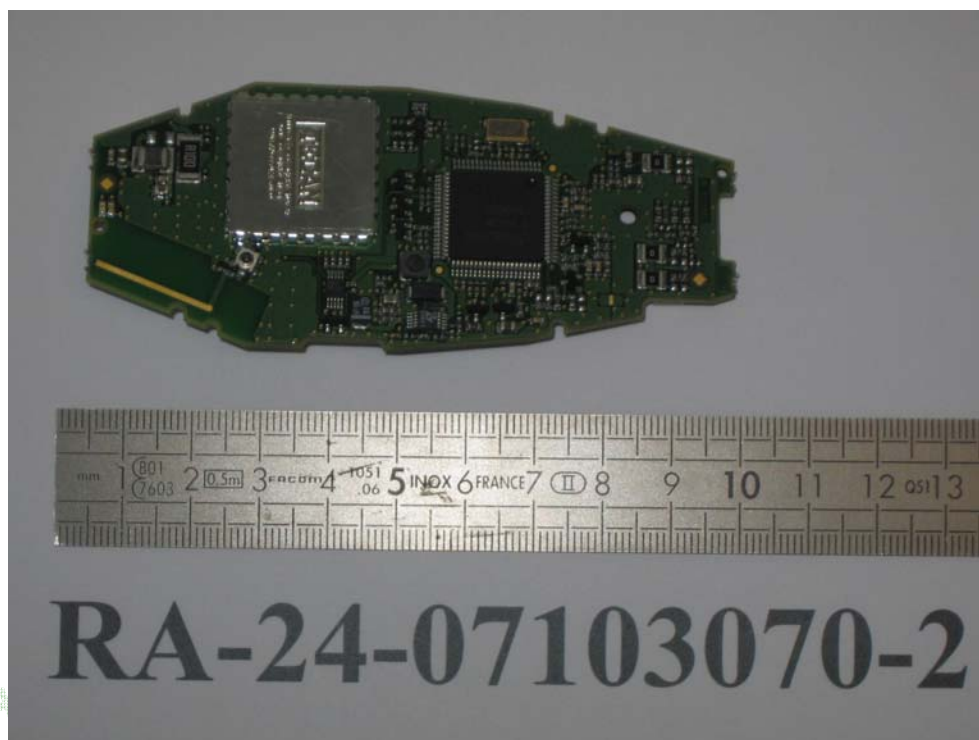

Printed circuit board: face 2

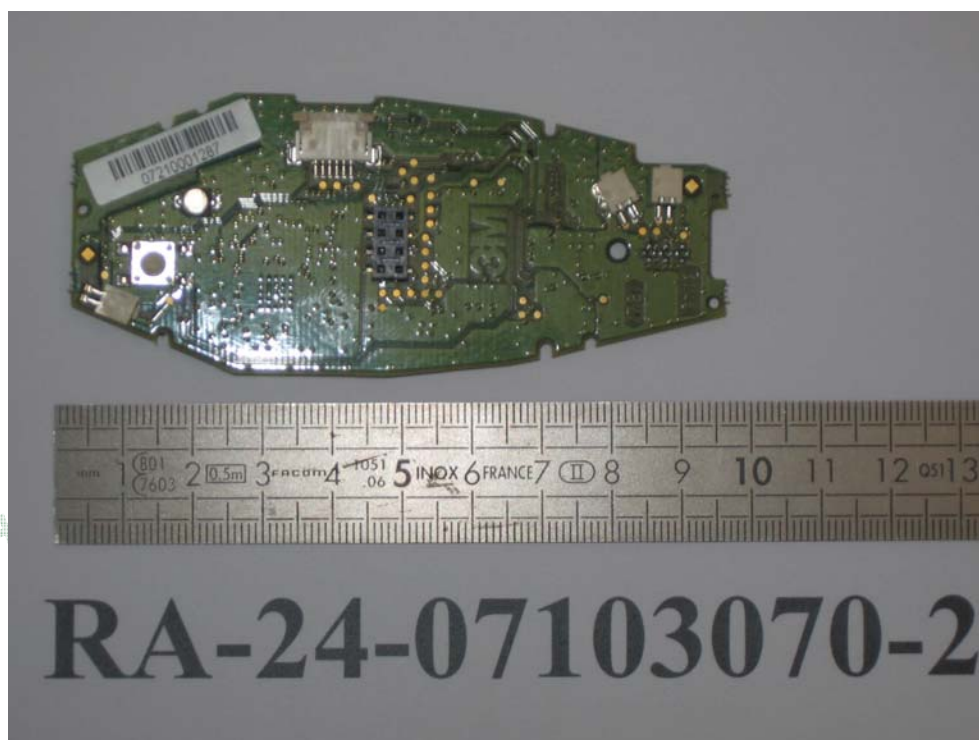

Antenna:

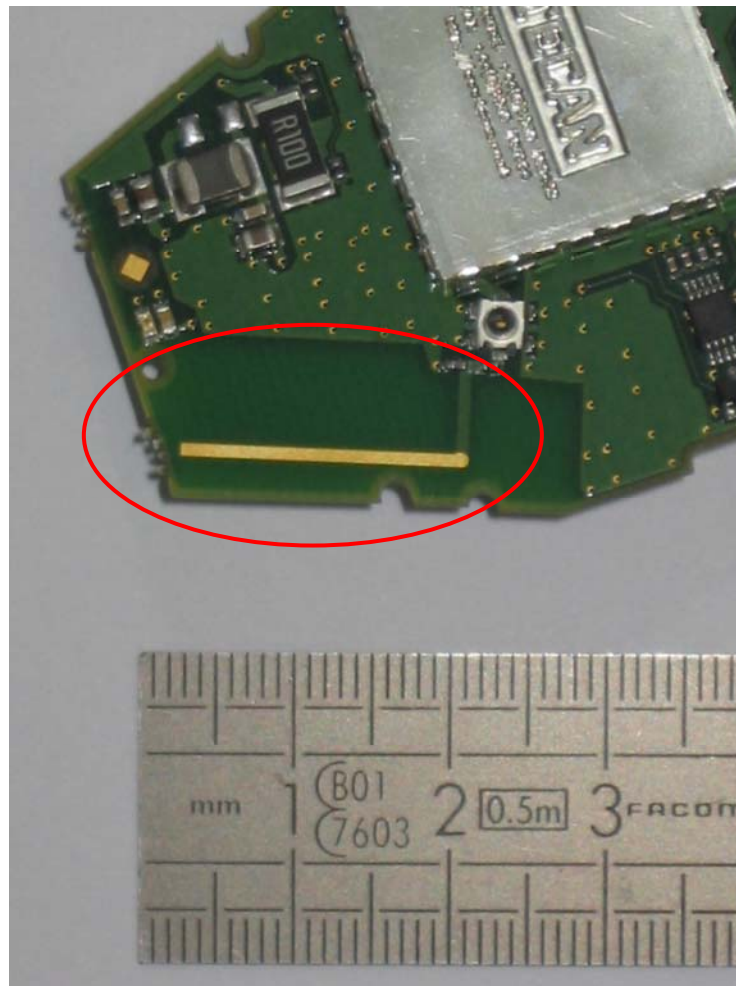

ANNEX 5: TEST SET UP AND OPEN AREA TEST SITE

TEST SET UP



OPEN AREA TEST SITE

