

# ***FCC TEST REPORT***

**FCC ID** : VL2WBT06300

**Applicant** : **Winlite International (HK) Ltd.**  
Unit 1401, Tower A, Tian An Cyber Times, Shennan West Road, Futian  
District, Shenzhen, China

**Equipment Under Test (EUT) :**

Product description : Bluetooth FM Car Kit


Model No. : WBT-BH05

**Standards** : FCC 15 Subpart C Paragraph 15.247  
FCC 15 Subpart C Paragraph 15.239

**Date of Test** : Sep.25, 2007

**Test Engineer** : Tiger Su

**Reviewed By**

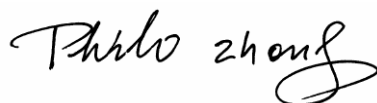

PERPARED BY:

**Waltek Services (Shenzhen) Co., Ltd.**

8C, West Tower, Aidi Building, No.5003 Binhe Rd, Futian District, Shenzhen 518045, Guangdong,  
China.

Tel: 86-755-83551033

Fax: 86-755-83552400

## 2 Contents

	Page
<b>1 COVER PAGE.....</b>	<b>1</b>
<b>2 CONTENTS.....</b>	<b>2</b>
<b>3 TEST SUMMARY.....</b>	<b>4</b>
<b>4 GENERAL INFORMATION.....</b>	<b>5</b>
4.1 CLIENT INFORMATION .....	5
4.2 GENERAL DESCRIPTION OF E.U.T.....	5
4.3 DETAILS OF E.U.T. ....	5
4.4 DESCRIPTION OF SUPPORT UNITS .....	5
4.5 STANDARDS APPLICABLE FOR TESTING.....	5
4.6 TEST FACILITY.....	6
4.7 TEST LOCATION.....	6
<b>5 EQUIPMENT USED DURING TEST .....</b>	<b>7</b>
<b>6 CONDUCTED EMISSION TEST .....</b>	<b>8</b>
6.1 TEST EQUIPMENT.....	8
6.2 TEST PROCEDURE .....	8
6.3 CONDUCTED TEST SETUP .....	9
6.4 EUT OPERATING CONDITION .....	9
6.5 CONDUCTED EMISSION LIMITS .....	10
<b>7 RADIATION EMISSION TEST.....</b>	<b>11</b>
7.1 TEST EQUIPMENT.....	11
7.2 MEASUREMENT UNCERTAINTY.....	11
7.3 TEST PROCEDURE .....	11
7.4 RADIATED TEST SETUP .....	12
7.5 SPECTRUM ANALYZER SETUP.....	12
7.6 CORRECTED AMPLITUDE & MARGIN CALCULATION .....	13
7.7 SUMMARY OF TEST RESULTS.....	13
7.8 EUT OPERATING CONDITION .....	14
7.9 RADIATED EMISSIONS LIMIT.....	14
7.10 RADIATED EMISSIONS TEST RESULT.....	15
7.11 RADIATED EMISSION DATA .....	15
<b>8 MAXIMUM PEAK OUTPUT POWER.....</b>	<b>23</b>
<b>9 HOPPING CHANNEL NUMBER.....</b>	<b>24</b>
<b>10 CARRIER FREQUENCIES SEPARATED.....</b>	<b>25</b>
10.1 CARRIER FREQUENCIES SEPARATED GRAPH .....	26
<b>11 DWELL TIME.....</b>	<b>27</b>
11.1 TEST PROCEDURE.....	27

11.2 TEST RESULTS : PASS .....27

**12 20-DB BANDWITH.....30**

12.1 TEST PROCEDURE .....30

12.2 TEST RESULT .....31

**13 RADIATED SPURIOUS EMISSIONS INTO ADJACENT RESTRICTED BAND .....33**

**14 BAND EDGE .....35**

14.1 TEST EQUIPMENT .....35

14.2 TEST PROCEDURE .....35

14.3 BAND EDGE TEST RESULT .....36

**15 PHOTOGRAPHS OF TESTING.....38**

15.1 BLUETOOTH RADIATION EMISSION TEST VIEW FOR 30MHZ-1000MHZ .....38

15.2 BLUETOOTH RADIATION EMISSION TEST VIEW FOR 1GHZ-25GHZ.....38

15.3 FM RADIATION EMISSION TEST VIEW .....39

**16 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS .....40**

16.1 EUT - FRONT VIEW .....40

16.2 EUT - BACK VIEW .....40

16.3 PCB1 – FRONT VIEW .....41

16.4 PCB 1- BACK VIEW .....41

16.5 PCB 2- FRONT VIEW.....42

16.6 PCB 2- BACK VIEW .....42

**17 FCC ID LABEL.....43**

### 3 Test Summary

#### Bluetooth Part

Test	Test Requirement	Test Method	Class / Severity	Result
Radiated Emission (30MHz to 25GHz)	FCC PART 15: 2003	ANSI C63.4: 2003	Class B	PASS
Conducted Emission (150KHz to 30MHz)	FCC PART 15: 2003	ANSI C63.4: 2003	Class B	N/A

#### FM Part

Test	Test Requirement	Test Method	Class / Severity	Result
Radiated Emission (30MHz to 1GHz)	FCC PART 15: 2003	ANSI C63.4: 2003	Class B	PASS
Conducted Emission (150KHz to 30MHz)	FCC PART 15: 2003	ANSI C63.4: 2003	Class B	N/A

## **4 General Information**

### **4.1 Client Information**

Applicant: **Winlite International (HK) Ltd.**  
Address of Applicant: Unit 1401, Tower A, Tian An Cyber Times, Shennan West Road,  
Futian District, Shenzhen, China

### **4.2 General Description of E.U.T.**

Product description: Bluetooth FM Car Kit  
Model No.: WBT-BH05

### **4.3 Details of E.U.T.**

Power Supply: DC 12V

### **4.4 Description of Support Units**

The EUT has been tested as an independent unit.

### **4.5 Standards Applicable for Testing**

The customer requested FCC tests for a Bluetooth FM Car Kit. The standards used were FCC 15 Paragraph 15.209 and Paragraph 15.239, Paragraph 15.247, Paragraph 15.31, Paragraph 15.33, Paragraph 15.35.

#### **4.6 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC – Registration No.: 556682**  
SGS-CSTC Standards Technical Services Co., Ltd. ShenZhen Branch EMC Lab, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 556682, August 04, 2005.

#### **4.7 Test Location**

All Emissions tests were performed at:-

No.1 Workshop, M-10, Middle Section, Science & Technology Park, ShenZhen, China 518057

## 5 Equipment Used during Test

Equipment	Brand Name	Model	Cal. Int Months	Last Cal. Date
-----------	------------	-------	-----------------	----------------

### 3m Anechoic chamber

EMC Analyzer	Agilent	E7402A	12	2007-08
EMI Test Receiver	R&S	ESS	12	2007-08
Pre Amplifier	Anritsu	MH648A	12	2007-08
Bilog Antenna	SCHAFFNER	CBL6111C	12	2007-08
Loop Antenna	R&S	6108	12	2007-08
Horn Antenna	Schwarzbeck	EPST-E086	12	2007-08
AM/FM Stereo Signal Generator	Panasonic	VP-8122A	12	2007-08
Signal Generator	R&S	SMG	12	2007-08
RF Selector	TOYO	NS4901A	-	-
Turn Disc	HD	DS4150S	-	-
Antenna Mast	HD	MA2400	-	-

### EMI Shielded Room

Spectrum analyzer	ADVANTEST	R3261C	12	2007-08
EMI Test Receiver	R&S	ESS	12	2007-08
Pre Amplifier	Anritsu	MH648A	12	2007-08
LISN	Kyoritsu	KNW-403D	12	2007-08
Absorbing Clamp	R&S	MDS-21	12	2007-08
Distortion Meter	MEGURO	MAK-6578A	12	2007-08
AM/FM Stereo Signal Generator	Panasonic	VP-8122A	12	2007-08
Oscilloscope	LEADER	LS1020	12	2007-08
Function Generator	National	VP-7422A	12	2007-08
Signal Generator	R&S	SMG	12	2007-08
RF Selector	TOYO	NS4000	-	-
Remote Controller	TOYO	MAC	-	-

### Common Equipment

Equipment	Brand Name	Model	Cal.Int Months	Last Cal. Date
MP3 Player	SONY	NWD-B103F	N/A	N/A

**6 Conducted Emission Test**

Test Requirement:	FCC Part15 Paragraph 15.207
Test Method:	Based on FCC Part15 Paragraph 15.207
Test Date:	.....
Frequency Range:	150kHz to 30MHz
Class:	Class B
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

**6.1 Test Equipment**

Please refer to Section 5 this report.


**6.2 Test Procedure**

1. The EUT was tested according to ANSI C63.4:2003. The frequency spectrum from 150kHz to 30MHz was investigated.
2. The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.



### 6.3 Conducted Test Setup


The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 Paragraph 15.207 limits.

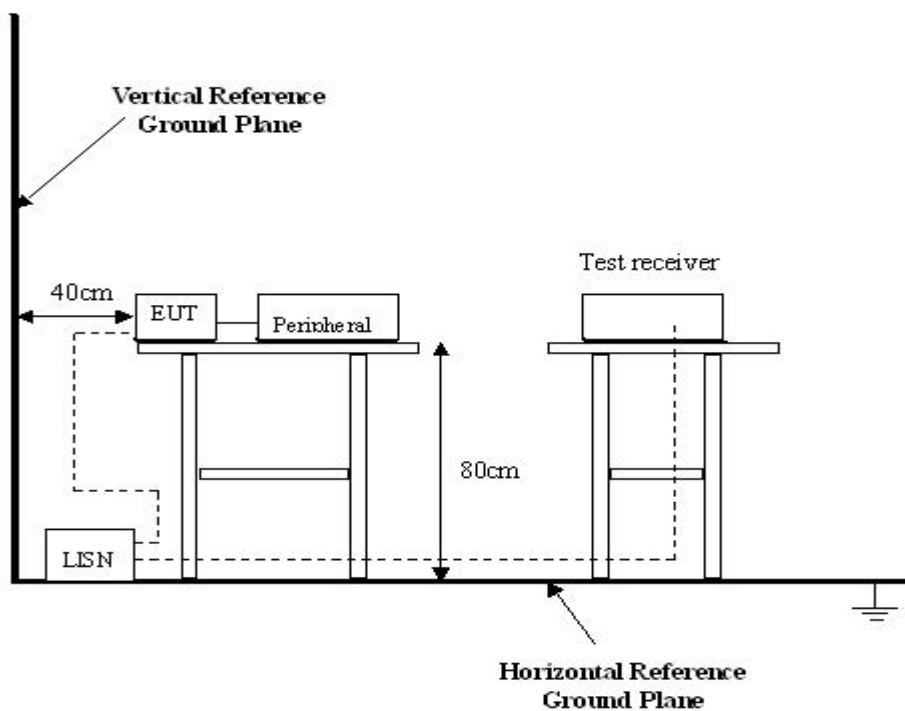

### 6.4 EUT Operating Condition

Operating condition is according to ANSI C63.4:2003.

- Setup the EUT and simulators as shown on follow.
- Enable RF signal and confirm EUT active.
- Modulate output capacity of EUT up to specification.

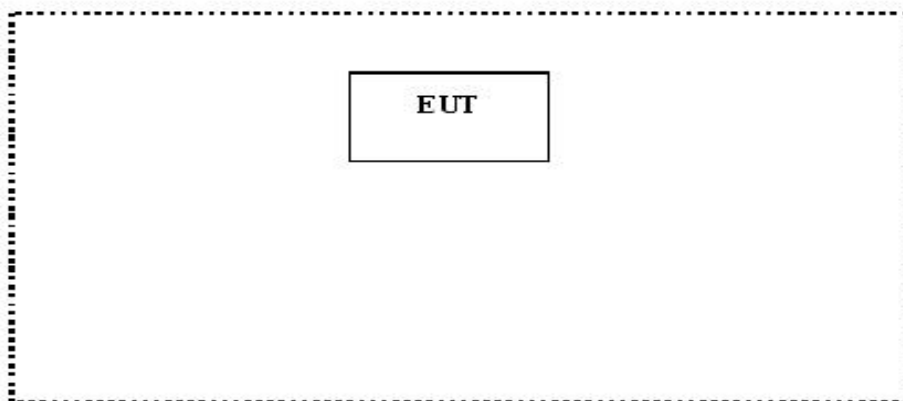

## 6.5 Conducted Emission Limits

66-56 dB $\mu$ V/m between 0.15MHz & 0.5MHz

56 dB $\mu$ V/m between 0.5MHz & 5MHz

60 dB $\mu$ V/m between 5MHz & 30MHz

**Note:** In the above limits, the tighter limit applies at the band edges.

Owing to the DC operation of EUT, this test is not performed.

## 7 Radiation Emission Test

Test Requirement:	FCC Part15 Paragraph 15.209, Paragraph 15.247,
Test Method:	Based on ANSI 63.4:2003
Test Date:	Sep.25, 2007
Frequency Range:	30MHz to 25GHz
Measurement Distance:	3m
Detector:	Peak for pre-scan (120kHz resolution bandwidth) Quasi-Peak if maximised peak within 6dB of limit

### 7.1 Test Equipment

Please refer to Section 5 this report.

### 7.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on ANSI C63.4:2003, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at SGS EMC Lab is +4.0 dB.

### 7.3 Test Procedure

1. For the radiated emissions test, since the EUT does not have a power source, there was no connection to AC outlets.
2. Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combinations.
3. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB $\mu$ V of specification limits), and are distinguished with a "Qp" in the data table.
4. The EUT was under normal mode during the final qualification test and the configuration was used to represent the worst case results.

7.4 Radiated Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 Paragraph 15.209 limits and Paragraph 15.247 limits.

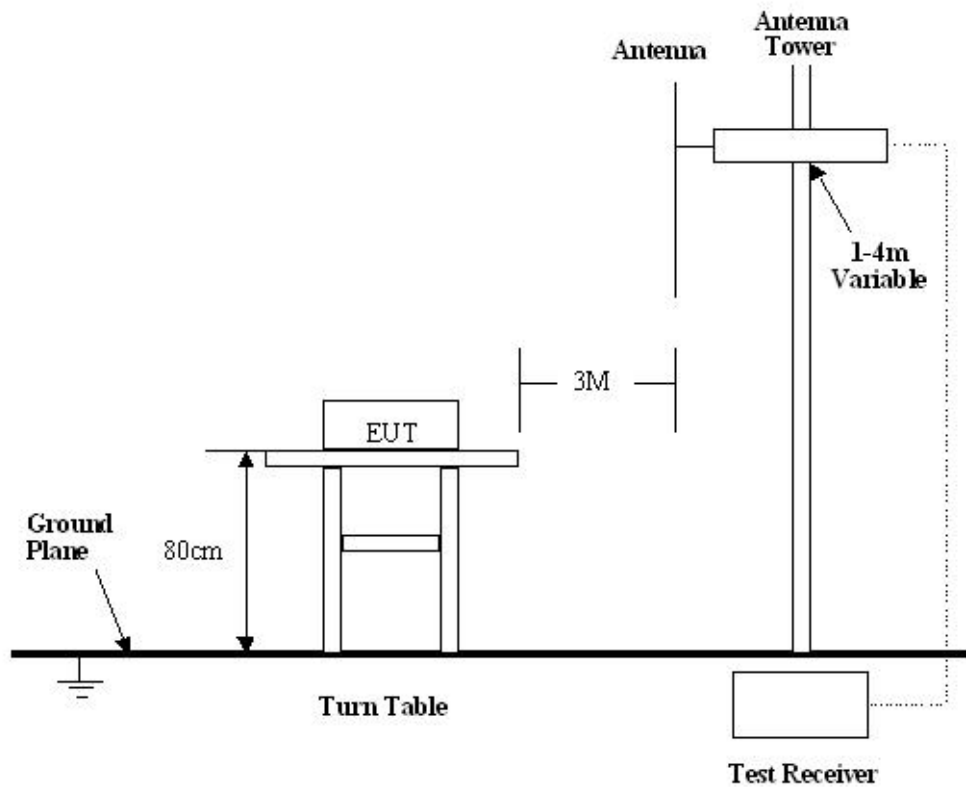

7.5 Spectrum Analyzer Setup

According to FCC Part15 Paragraph 15.247 Rules, the system was tested to 25000 MHz.

- Start Frequency .....30 MHz
- Stop Frequency .....25000 MHz
- Sweep Speed Auto
- IF Bandwidth .....100 kHz
- Video Bandwidth .....1 MHz
- Quasi-Peak Adapter Bandwidth .....120 kHz
- Quasi-Peak Adapter Mode.....Normal
- Resolution Bandwidth .....1MHz

According to FCC Part15 Paragraph 15.239 Rules, the system was tested to 1000 MHz.

Start Frequency .....	30 MHz
Stop Frequency .....	1000 MHz
Sweep Speed	Auto
IF Bandwidth .....	100 kHz
Video Bandwidth .....	1 MHz
Quasi-Peak Adapter Bandwidth .....	120 kHz
Quasi-Peak Adapter Mode.....	Normal
Resolution Bandwidth .....	1MHz

7.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dBμV means the emission is 7dBμV below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$

7.7 Summary of Test Results

According to the data in section 7.10, the EUT complied with the FCC Part15 Paragraph 15.247 and 15.239 standards.

## 7.8 EUT Operating Condition

Same as section 6.4 of this report.

Let the EUT work in test mode(Tx Low/Tx Middle/Tx High) and test it.

## 7.9 Radiated Emissions Limit

### A. FCC Part 15 subpart C Paragraph 15.209 Limit

Frequency(MHZ)	Distance(m)	Field strength(dBuV/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

### B. FCC Part 15 subpart C Paragraph 15.239 Limit

Fundamental Frequency(MHZ)	Field Strength of Fundamental	
	uV/m	dBuV/m
88-108	250	48

- Note:**
- (1) RF Voltage(dBuV)=20 log RF Voltage(uV)
  - (2) In the Above Table,the tighter limit applies at the band edges.
  - (3) Distance refers to the distance in meters between the measuring instrument antenna.
  - (4)The emission limit in this paragraph is based on measurement instrumentaion employing an average detector.Measurement using instrumentation with a peak detector function,corresponding to 20dB above the maximum permitted average limit.
  - (5)Above 1GHz,do a Peak and average measurements for all emissions,Limit for peak is 74dBuV/m,According to Part15.35(b) and average is 54BuvV/m.

**7.10 Radiated Emissions Test Result**

Formula of conversion factors:the field strength at 3m was established by adding  
The meter reading of the spectrum analyzer (which is set to read in units of dBuV)  
To the antenna correction factor supplied by the antenna manufacturer. The antenna  
Correction factors are stated in terms of dB.The gain of the pressletor was accounted  
For in the spectrum analyser meter reading.

Example:

Freq(MHz) Meter Reading +ACF=FS  
33            20dBuV+10.36dB=30.36dBuV/m @3m

**7.11 Radiated Emission Data**

A. Test Item:	Radiated Emission Data
Test Voltage:	12 VDC
Test Mode:	On(Tx Low/Tx Middle/Tx High)
Temperature:	24 °C
Humidity:	52%RH
Test Result:	PASS

## Bluetooth

Frequency(MHz)	Detector	Antenna Polarization	Emission Level (dBuV/m)	FCC 15 Subpart C Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Turntable Angle (°)
Low frequency							
2402.00	AV	Vertical	65.62		(Fund.)	1.5	60
4804.00	AV	Vertical	42.25	54.00	11.75	1.5	90
7206.00	AV	Vertical	43.13	54.00	10.87	1.8	180
9608.00	AV	Vertical	43.66	54.00	10.34	1.5	120
12010.00	AV	Vertical	44.18	54.00	9.82	1.5	60
14412.00	AV	Vertical	44.79	54.00	9.21	1.8	90
16814.00	AV	Vertical	45.10	54.00	8.90	1.8	120
19216.00	AV	Vertical	45.62	54.00	8.38	1.8	45
21618.00	AV	Vertical	45.79	54.00	8.21	1.5	60
24020.00	AV	Vertical	45.93	54.00	8.07	1.0	90
2402.00	AV	Horizontal	64.17		(Fund.)	1.5	120
4804.00	AV	Horizontal	41.66	54.00	12.34	1.6	180
7206.00	AV	Horizontal	42.64	54.00	11.36	1.5	90
9608.00	AV	Horizontal	43.03	54.00	10.97	1.2	120
12010.00	AV	Horizontal	44.11	54.00	9.89	1.8	160
14412.00	AV	Horizontal	44.26	54.00	9.74	1.0	180
16814.00	AV	Horizontal	44.93	54.00	9.07	1.5	45
19216.00	AV	Horizontal	45.59	54.00	8.41	1.5	60
21618.00	AV	Horizontal	45.66	54.00	8.34	1.8	60
24020.00	AV	Horizontal	45.72	54.00	8.28	1.8	90
2402.00	PK	Vertical	70.42		(Fund.)	1.5	120
4804.00	PK	Vertical	47.58	74.00	26.42	1.5	180
7206.00	PK	Vertical	49.26	74.00	24.74	1.8	60
9608.00	PK	Vertical	50.25	74.00	23.75	1.2	45
12010.00	PK	Vertical	51.17	74.00	22.83	1.0	90
14412.00	PK	Vertical	51.55	74.00	22.45	1.5	90
16814.00	PK	Vertical	52.28	74.00	21.72	1.5	120
19216.00	PK	Vertical	52.73	74.00	21.27	1.8	120
21618.00	PK	Vertical	53.37	74.00	20.63	1.8	45
24020.00	PK	Vertical	54.60	74.00	19.40	1.8	60
2402.00	PK	Horizontal	72.12		(Fund.)	1.5	90



4804.00	PK	Horizontal	46.63	74.00	27.37	1.6	120
7206.00	PK	Horizontal	48.89	74.00	25.11	1.5	180
9608.00	PK	Horizontal	49.91	74.00	24.09	1.2	120
12010.00	PK	Horizontal	50.52	74.00	23.48	1.5	180
14412.00	PK	Horizontal	50.93	74.00	23.07	1.8	45
16814.00	PK	Horizontal	51.79	74.00	22.21	1.0	90
19216.00	PK	Horizontal	52.11	74.00	21.89	1.5	120
21618.00	PK	Horizontal	52.88	74.00	21.12	1.5	60
24020.00	PK	Horizontal	53.38	74.00	20.62	1.8	45
Middle frequency							
2441.00	AV	Vertical	66.56		(Fund.)	1.5	45
4882.00	AV	Vertical	43.26	54.00	10.74	1.5	120
7323.00	AV	Vertical	44.42	54.00	9.58	1.6	90
9764.00	AV	Vertical	45.51	54.00	8.49	1.5	60
12205.00	AV	Vertical	45.77	54.00	8.23	1.8	45
14646.00	AV	Vertical	46.23	54.00	7.77	1.5	120
17087.00	AV	Vertical	46.78	54.00	7.22	1.0	120
19528.00	AV	Vertical	46.99	54.00	7.01	1.2	60
21969.00	AV	Vertical	47.43	54.00	6.57	1.6	90
24410.00	AV	Vertical	47.87	54.00	6.13	1.8	90
2441.00	AV	Horizontal	65.51		(Fund.)	1.5	120
4882.00	AV	Horizontal	42.19	54.00	11.81	1.5	120
7323.00	AV	Horizontal	43.38	54.00	10.62	1.8	180
9764.00	AV	Horizontal	44.42	54.00	9.58	1.6	120
12205.00	AV	Horizontal	44.52	54.00	9.48	1.2	90
14646.00	AV	Horizontal	45.92	54.00	8.08	1.5	60
17087.00	AV	Horizontal	46.52	54.00	7.48	1.5	60
19528.00	AV	Horizontal	47.11	54.00	6.89	1.8	90
21969.00	AV	Horizontal	47.72	54.00	6.28	1.8	45
24410.00	AV	Horizontal	47.93	54.00	6.07	1.2	90
2441.00	PK	Vertical	71.83		(Fund.)	1.5	90
4882.00	PK	Vertical	49.52	74.00	24.48	1.5	180
7323.00	PK	Vertical	50.17	74.00	23.83	1.5	90
9764.00	PK	Vertical	51.13	74.00	22.87	1.2	45

12205.00	PK	Vertical	51.62	74.00	22.38	1.8	60
14646.00	PK	Vertical	52.21	74.00	21.79	1.5	120
17087.00	PK	Vertical	53.37	74.00	20.63	1.0	160
19528.00	PK	Vertical	53.78	74.00	20.22	1.2	180
21969.00	PK	Vertical	54.55	74.00	19.45	1.5	90
24410.00	PK	Vertical	55.72	74.00	18.28	1.8	120
2441.00	PK	Horizontal	70.99		(Fund.)	1.5	60
4882.00	PK	Horizontal	49.26	74.00	24.74	1.8	90
7323.00	PK	Horizontal	49.94	74.00	24.06	1.5	120
9764.00	PK	Horizontal	50.55	74.00	23.45	1.2	45
12205.00	PK	Horizontal	50.92	74.00	23.08	1.0	90
14646.00	PK	Horizontal	51.17	74.00	22.83	1.5	90
17087.00	PK	Horizontal	52.26	74.00	21.74	1.5	60
19528.00	PK	Horizontal	52.95	74.00	21.05	1.8	45
21969.00	PK	Horizontal	53.53	74.00	20.47	1.2	120
24410.00	PK	Horizontal	54.48	74.00	19.52	1.0	120
High frequency							
2480.00	AV	Vertical	67.85		(Fund.)	1.5	120
4960.00	AV	Vertical	45.16	54.00	8.84	1.5	180
7440.00	AV	Vertical	46.69	54.00	7.31	1.5	45
9920.00	AV	Vertical	47.11	54.00	6.89	1.5	100
12400.00	AV	Vertical	47.52	54.00	6.48	1.8	180
14880.00	AV	Vertical	47.89	54.00	6.11	1.2	120
17360.00	AV	Vertical	48.25	54.00	5.75	1.6	180
19840.00	AV	Vertical	48.86	54.00	5.14	1.5	90
22320.00	AV	Vertical	49.02	54.00	4.98	1.0	90
24800.00	AV	Vertical	49.52	54.00	4.48	1.2	60
2480.00	AV	Horizontal	65.89		(Fund.)	1.5	60
4960.00	AV	Horizontal	44.27	54.00	9.73	1.5	180
7440.00	AV	Horizontal	45.11	54.00	8.89	1.5	90
9920.00	AV	Horizontal	45.26	54.00	8.74	1.2	60
12400.00	AV	Horizontal	45.76	54.00	8.24	1.5	120
14880.00	AV	Horizontal	46.23	54.00	7.77	1.2	180
17360.00	AV	Horizontal	46.75	54.00	7.25	1.8	120
19840.00	AV	Horizontal	46.87	54.00	7.13	1.6	45

22320.00	AV	Horizontal	47.76	54.00	6.24	1.5	60
24800.00	AV	Horizontal	48.81	54.00	5.19	1.0	90
2480.00	PK	Vertical	68.73		(Fund.)	1.5	120
4960.00	PK	Vertical	46.66	74.00	27.34	1.5	60
7440.00	PK	Vertical	47.89	74.00	26.11	1.5	90
9920.00	PK	Vertical	48.82	74.00	25.18	1.2	120
12400.00	PK	Vertical	49.25	74.00	24.75	1.5	180
14880.00	PK	Vertical	49.77	74.00	24.23	1.8	120
17360.00	PK	Vertical	50.31	74.00	23.87	1.6	45
19840.00	PK	Vertical	51.26	74.00	22.74	1.5	90
22320.00	PK	Vertical	52.12	74.00	21.88	1.2	60
24800.00	PK	Vertical	52.79	74.00	21.21	1.0	120
2480.00	PK	Horizontal	68.72		(Fund.)	1.5	180
4960.00	PK	Horizontal	46.15	74.00	27.85	1.5	120
7440.00	PK	Horizontal	47.71	74.00	26.29	1.5	90
9920.00	PK	Horizontal	48.55	74.00	25.45	1.2	120
12400.00	PK	Horizontal	48.91	74.00	25.09	1.8	60
14880.00	PK	Horizontal	49.23	74.00	24.77	1.8	45
17360.00	PK	Horizontal	49.85	74.00	24.15	1.6	90
19840.00	PK	Horizontal	50.27	74.00	23.73	1.5	90
22320.00	PK	Horizontal	51.16	74.00	22.84	1.2	120
24800.00	PK	Horizontal	52.22	74.00	21.78	1.5	180

## FM

Frequency (MHz)	Detector	Antenna Polarization	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Turntable Angle (°C)
Low Frequency							
88.10	PK	Horizontal	54.1	68.0	13.9	1.0	90
88.10	AV	Horizontal	42.5	48.0	5.5	1.8	120
176.2	QP	Horizontal	36.7	43.5	6.8	1.8	45
264.3	QP	Horizontal	37.1	46.0	8.9	1.5	180
352.4	QP	Horizontal	37.6	46.0	8.4	1.0	90
440.5	QP	Horizontal	38.2	46.0	7.8	1.2	90
528.6	QP	Horizontal	38.5	46.0	7.5	1.5	120
616.7	QP	Horizontal	39.1	46.0	6.9	1.5	45
704.8	QP	Horizontal	39.8	46.0	6.2	1.2	60
792.9	QP	Horizontal	40.3	46.0	5.7	1.5	120
881.0	QP	Horizontal	40.6	46.0	5.4	1.8	45
88.10	PK	Vertical	56.6	68.0	11.4	1.8	45
88.10	AV	Vertical	44.2	48.0	3.8	2.0	90
176.2	QP	Vertical	37.2	43.5	6.3	1.0	180
264.3	QP	Vertical	38.5	46.0	7.5	1.0	120
352.4	QP	Vertical	38.8	46.0	7.2	1.8	45
440.5	QP	Vertical	39.2	46.0	6.8	1.8	60
528.6	QP	Vertical	39.7	46.0	6.3	1.2	120
616.7	QP	Vertical	40.2	46.0	5.8	1.5	180
704.8	QP	Vertical	40.7	46.0	5.3	2.0	180
792.9	QP	Vertical	41.2	46.0	4.8	1.0	120
881.0	QP	Vertical	40.2	46.0	5.8	1.2	90
Middle Frequency							
98.0	PK	Horizontal	53.9	68.0	14.1	1.8	90
98.0	AV	Horizontal	42.1	48.0	5.9	1.8	180
196.0	QP	Horizontal	37.8	43.5	5.7	2.0	90
294.0	QP	Horizontal	38.9	46.0	7.1	2.0	45
392.0	QP	Horizontal	39.1	46.0	6.9	1.0	60
490.0	QP	Horizontal	39.4	46.0	6.6	1.5	90
588.0	QP	Horizontal	40.2	46.0	5.8	1.8	120
686.0	QP	Horizontal	40.7	46.0	5.3	1.2	180

784.0	QP	Horizontal	41.1	46.0	4.9	2.0	120
882.0	QP	Horizontal	41.3	46.0	4.7	1.8	180
980.0	QP	Horizontal	42.6	54.0	11.4	1.2	120
98.0	PK	Vertical	55.6	68.0	12.4	1.5	120
98.0	AV	Vertical	43.3	48.0	4.7	1.0	90
196.0	QP	Vertical	38.2	43.5	5.3	1.8	90
294.0	QP	Vertical	39.9	46.0	6.1	1.8	180
392.0	QP	Vertical	40.2	46.0	5.8	1.0	120
490.0	QP	Vertical	40.6	46.0	5.4	1.2	90
588.0	QP	Vertical	41.1	46.0	4.9	2.0	60
686.0	QP	Vertical	41.7	46.0	4.3	1.2	120
784.0	QP	Vertical	40.2	46.0	5.8	1.5	120
882.0	QP	Vertical	40.6	46.0	5.4	1.8	60
980.0	QP	Vertical	41.5	54.0	12.5	1.8	180
High Frequency							
107.9	PK	Horizontal	57.7	68.0	10.3	1.0	120
107.9	AV	Horizontal	42.2	48.0	5.8	1.8	90
215.8	QP	Horizontal	36.8	43.5	6.7	1.5	45
323.7	QP	Horizontal	37.5	46.0	8.5	2.0	60
431.6	QP	Horizontal	38.2	46.0	7.8	1.8	90
539.5	QP	Horizontal	38.8	46.0	7.2	1.2	45
647.4	QP	Horizontal	39.1	46.0	6.9	1.8	120
755.3	QP	Horizontal	39.7	46.0	6.3	1.5	180
863.2	QP	Horizontal	40.3	46.0	5.7	1.0	120
971.1	QP	Horizontal	42.8	54.0	11.2	2.0	90
1079.0	QP	Horizontal	43.9	54.0	10.1	1.0	60
107.9	PK	Vertical	57.9	68.0	10.1	1.8	180
107.9	AV	Vertical	43.1	48.0	4.9	1.0	120
215.8	QP	Vertical	38.8	43.5	4.7	1.0	180
323.7	QP	Vertical	39.1	46.0	6.9	1.8	180
431.6	QP	Vertical	39.9	46.0	6.1	1.5	120
539.5	QP	Vertical	40.3	46.0	5.7	1.5	180
647.4	QP	Vertical	40.8	46.0	5.2	1.2	60
755.3	QP	Vertical	41.5	46.0	4.5	1.8	90
863.2	QP	Vertical	40.9	46.0	5.1	2.0	45

971.1	QP	Vertical	42.8	54.0	11.2	1.2	45
1079.0	QP	Vertical	44.1	54.0	9.9	1.5	120

**Note:** (1) All Reading Levels below 1GHz are Quasi-Peak, above are peak and average value.

(2) Emission Level = Reading Level + Probe Factor + Cable Loss.

## 8 Maximum Peak Output Power

Test Requirement:	FCC Part15 Paragraph 15.247
Test Method:	Based on ANSI 63.4:2003
Test Date:	Sep.25, 2007
Test mode:	Compliance test in the worse case: Tx Low/Tx Middle/Tx High
Requirements:	Regulation 15.247(b) The limit of Maximum Peak Output Power Measurement is 1W(30dBm)

### Test procedure:

The following test procedure as below:

1. The EUT was powered ON and placed on a table in the chamber. The antenna of the transmitter was extended to its maximum length.
2. The fundamental frequency of the transmitter was maximized on the test receiver display by raising and lowering the receive antenna and by rotating the turntable. After the fundamental emission was maximized, a field strength measurement was made.
3. The device under test has an integral antenna and the power was measured on a radiated basis.

### Test Result:


Test Channel	Fundamental Frequency(GHz)	Output Power (mW)	Limit (W)	Power output level
low	2.402	2.21	1	EIRP
middle	2.441	2.62	1	EIRP
high	2.480	2.27	1	EIRP

**Test Results:** The unit does meet the FCC requirements.

9 Hopping Channel Number

Test Requirement:	FCC Part15 C
Test Method:	Based on FCC Part15 Paragraph 15.247
Test Date:	Sep.25, 2007
Test mode:	The EUT work in test mode(Tx) and test it
Requirements:	Regulation 15.247(a) For frequency hopping systems operating In the 2400-2483.5MHz band employing at least 75 hopping channels.
Test result:	The total number of channels would be 79 channels. The unit does meet the FCC requirements.

Please refer the graph as below:

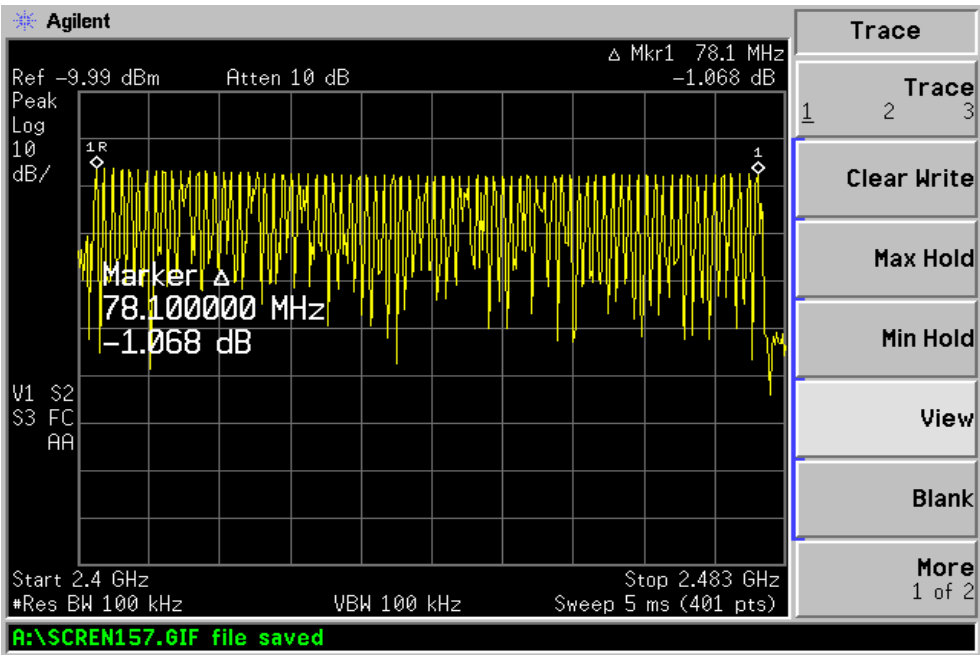



## 10 Carrier Frequencies Separated


Test Requirement: FCC Part15 C  
Test Method: Based on FCC Part15 Paragraph 15.247  
Test Date: Sep. 25, 2007  
Test mode: The EUT work in test mode(Tx) and test it  
Requirements: The bandwidth of the fundamental frequency was measur by spectrum analyser with 100kHz RBW and 100kHz VBW.The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.  
Test result: PASS

### Channel Carrier Frequency Separated

Test Channel	Carrier Frequencies Separated	PASS/FAIL
Lower Channels (channel 1 and channel 2)	1MHz	Pass
Lower Channels (channel 39 and channel 40)	1MHz	Pass
Lower Channels (channel 78 and channel 79)	1MHz	Pass

The unit does meet the FCC requirements.

10.1 Carrier Frequencies Separated graph

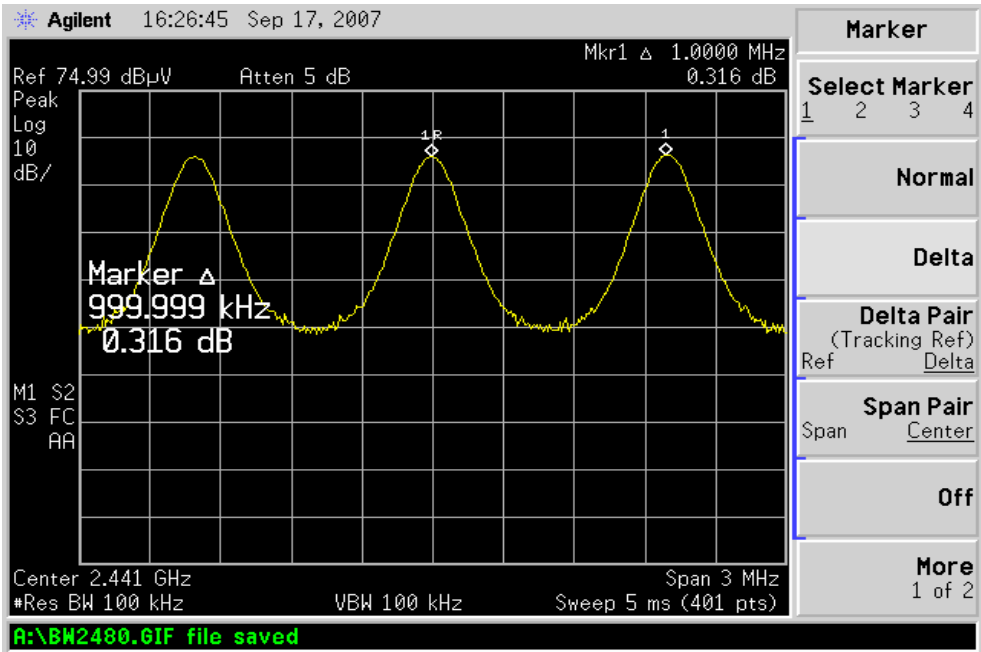

## 11 Dwell Time

Test Requirement:	FCC Part15 C
Test Method:	Based on FCC Part15 Paragraph 15.247
Test Date:	Sep.25, 2007
Test mode:	The EUT work in test mode(Tx) and test it

Requirements: 15.247 a(1)(iii)Frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 non-overlapping channels.The average time of occupancy on any channel shall not greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 11.1 Test procedure

EUT and its simulators are placed on a turn table, the EUT and let it work normally, let EUT working in test mode,then test it.

The bandwidth of the fundamental frequency was measured with the spectrum analyser using 100KHz RBW and 300KHz VBW,set sweep time:20 ms.Span:0Hz.

### 11.2 Test Results : PASS

Number of hopping channels is 79.

A channel was used 107 times within  $0.4 \times 79 = 31.6\text{S}$ .

Dwell time of each occupation in this channel a follows:

1.Low Channel:  $3 \text{ mS} \times 107 = 0.321 \text{ S} < 0.4 \text{ s}$


2.Middle Channel:  $3 \text{ mS} \times 107 = 0.321 \text{ S} < 0.4 \text{ s}$

3.High Channel:  $3.05 \text{ mS} \times 107 = 0.326 \text{ S} < 0.4 \text{ s}$


The Results are not be greater than 0.4 seconds.

Please refer the graph as below:


Channel 0: 2.402GHz

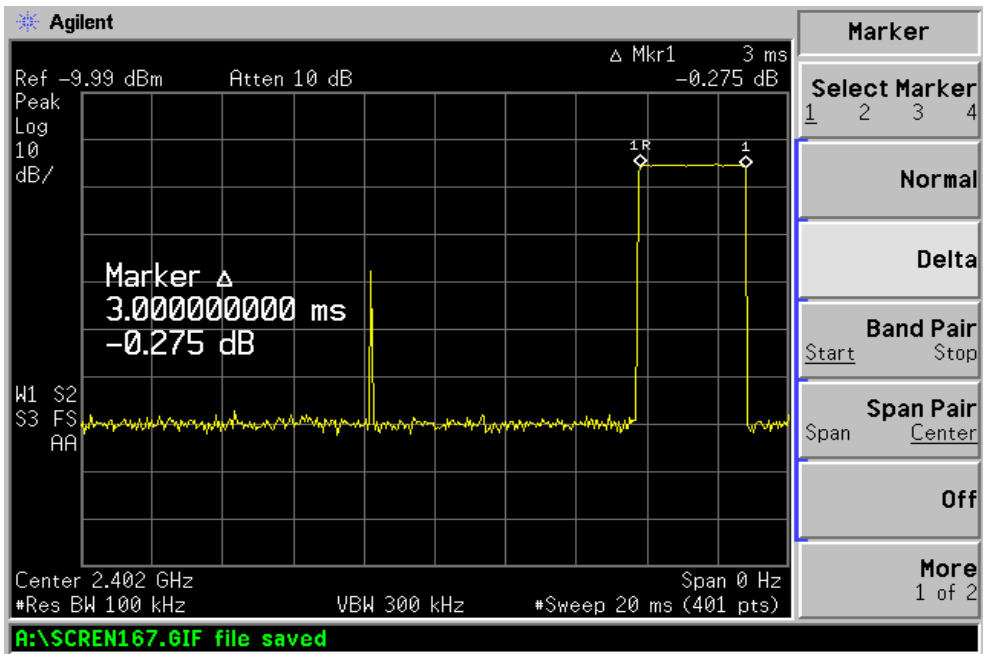

Channel 39: 2.441GHz

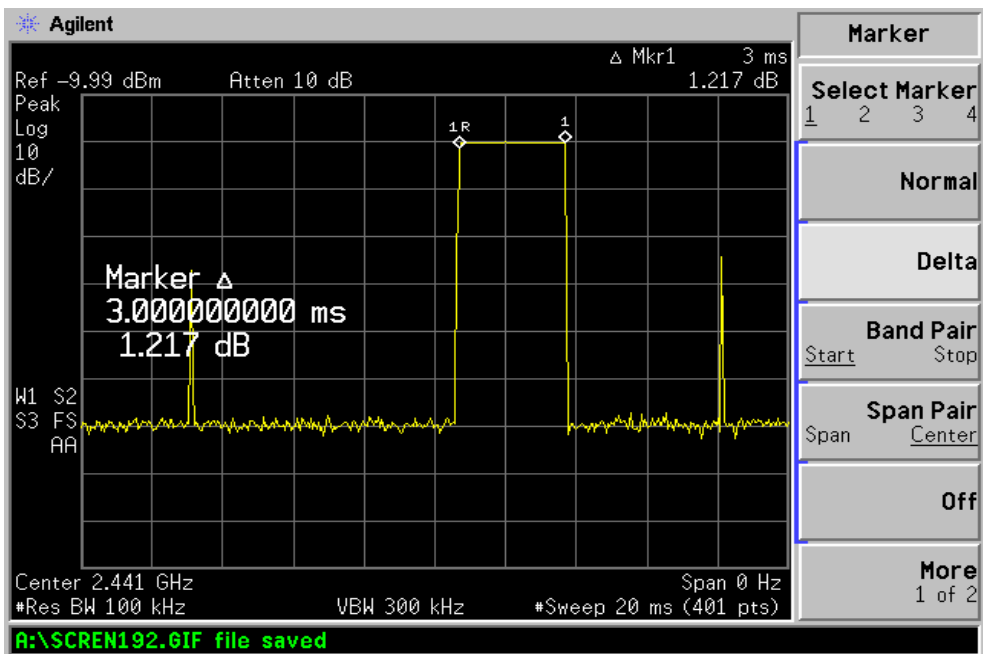

Channel 79: 2.480GHz

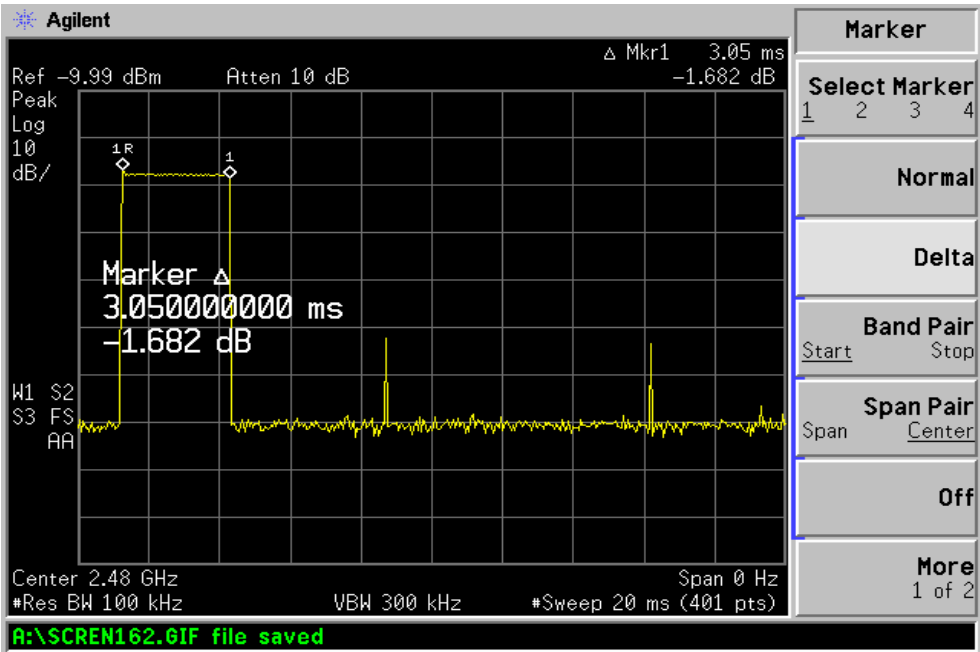

## 12 20-dB Bandwidth

Test Requirement:	FCC Part15 C
Test Method:	Based on FCC Part15 Paragraph 15.247
Test Date:	Sep.25, 2007
Test mode:	The EUT work in test mode(Tx) and test it


### 12.1 Test Procedure

1. The EUT, peripherals were put on the turntable which table size is 1mX1.5m, table high 0.8m. All set up is according to ANSI C63.4:2003.
2. With the EUT's antenna attached, The EUT's radiated emission power was received by the test antenna which was connected to the spectrum analyser with the START and STOP frequencies set to the EUT's operation band. Measurements were made at 3 meters.
3. The antenna high were varied from 1m to 4m high to find the maximum emission for each frequency.
4. The bandwidth of the fundamental frequency was measure by spectrum analyser with 100KHz RBW and 100KHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power 20dB.

12.2 Test Result

Please refer the graph as below:


2402MHz

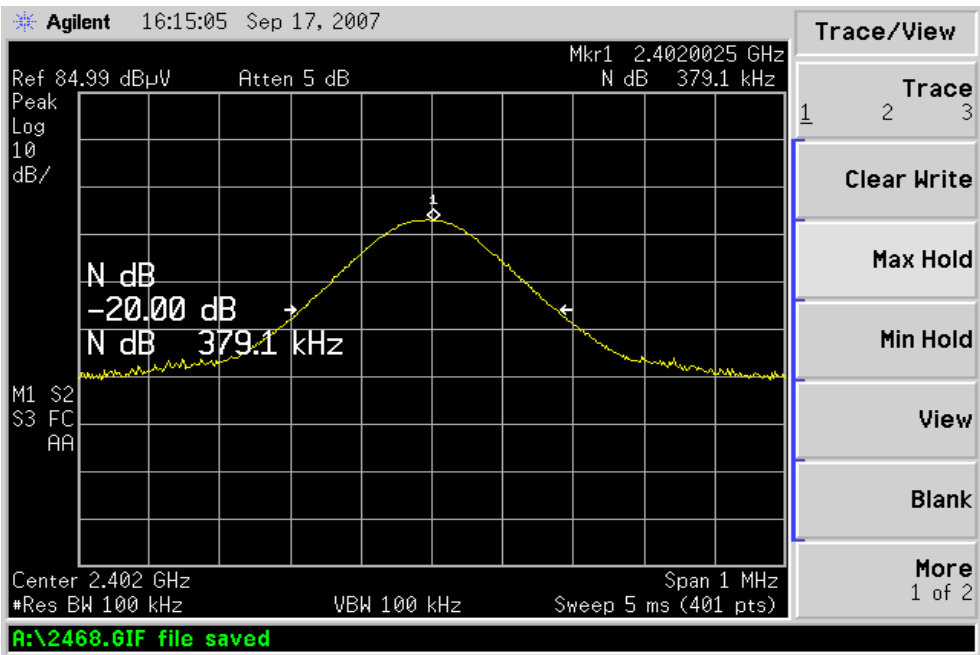

2441MHz



2480MHz

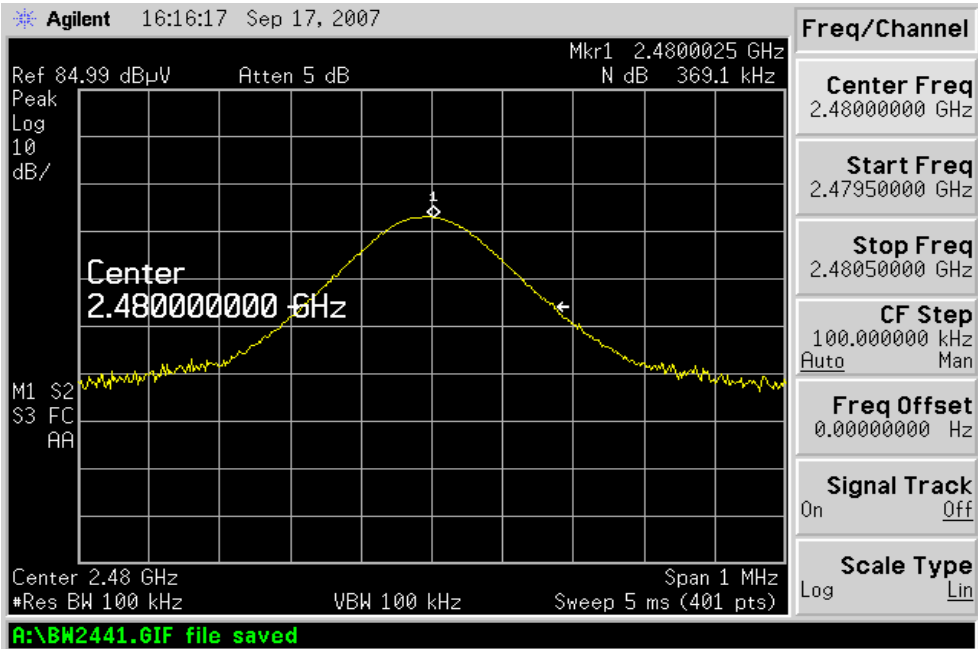




### 13 Radiated spurious emissions into adjacent restricted band

Test Requirement:	FCC Part15 Paragraph 15.205
Test Method:	Based on FCC Part 15 Paragraph 15.247
Test Date:	Sep.25, 2007
Requirements:	The EUT work in test mode(Tx) and test it

**Requiments:**emissions that fall in the restricted bands(15.205).Above 1000MHz, compliance with the emissions limits in section 15.209 shall be demonstrated based on the average value of the measured emissions,The provisions in section 15.35apply to these measurements.


**Test procedure:**An in band field strength measurement of the fundamental emission using the RBW and detector function required by C63.4-2003 and FCC Rules.The procedure was repeated with an average detector and a plot made.The calculated field strength in the adjacent restricted band is presented below.

Lower bandedge/ restricted band (peak value)

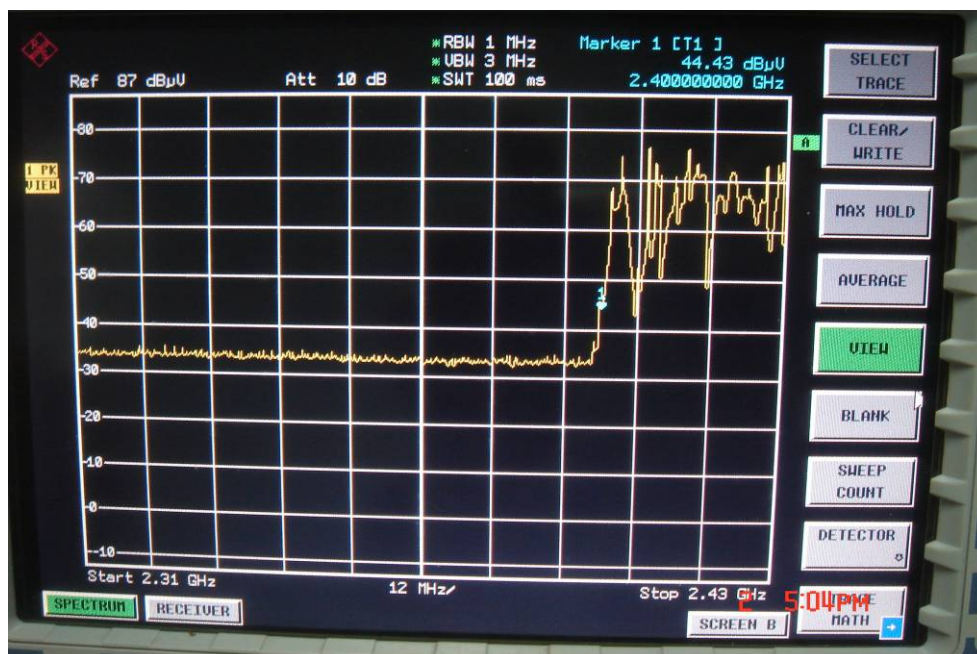

From plot, Reading is 44.43 dBuV/m with TDS has been calculated Peak meets the average value(54 dBuV/m).

Upper bandedge/ restricted band (peak value)

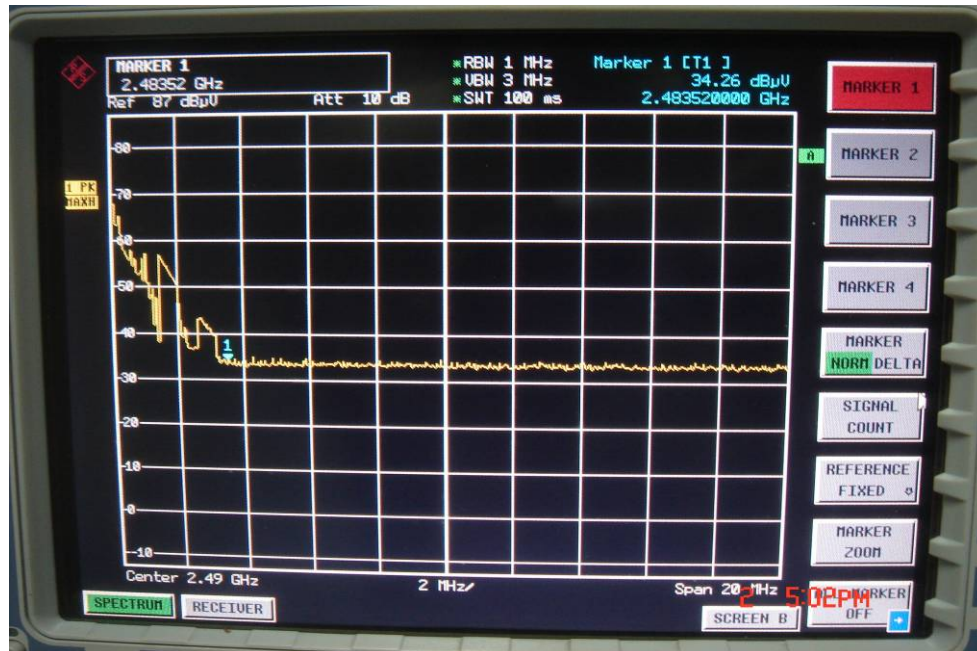

From plot, Reading is 34.26 dBuV/m with TDS has been calculated Peak meets the average value(54 dBuV/m).

## 14 Band Edge

### 14.1 Test Equipment

Please refer to Section 5 this report.

### 14.2 Test Procedure

- 1.The EUT, peripherals were put on the turntable which table size is 1mX1.5m, table high 0.8m. All set up is according to ANSI C63.4:2003.
2. The antenna high were varied from 1m to 4m high to find the maximum emission for each frequency.
3. The field strength of any emissions radiated on any frequency outside of the specified 200kHz band shall not exceed the general radiated emission limits in Section 15.209.
4. This is also the Part 15.239 Occupied Bandwidth Plots showing compliance with the 200kHz Occupied Bandwidth limits.
5. The market sample is tested for low frequency testing at 88.0 MHz, 98MHz and high frequency testing at 107.9 MHz.


Channel	Occupied Bandwith	Limit	Test Result
88.1	80kHz	200kHz	PASS
98.0	80kHz	200kHz	PASS
107.9	80kHz	200kHz	PASS

Note: Please refer to below photos for test result plots.


14.3 Band Edge Test Result

Product Name: Bluetooth FM Car Kit  
Test Item: Band Edge Test  
Test Voltage: DC 12V  
Test Mode: TX ON  
Temperature: 24 °C  
Humidity: 52%RH


88.1 MHz

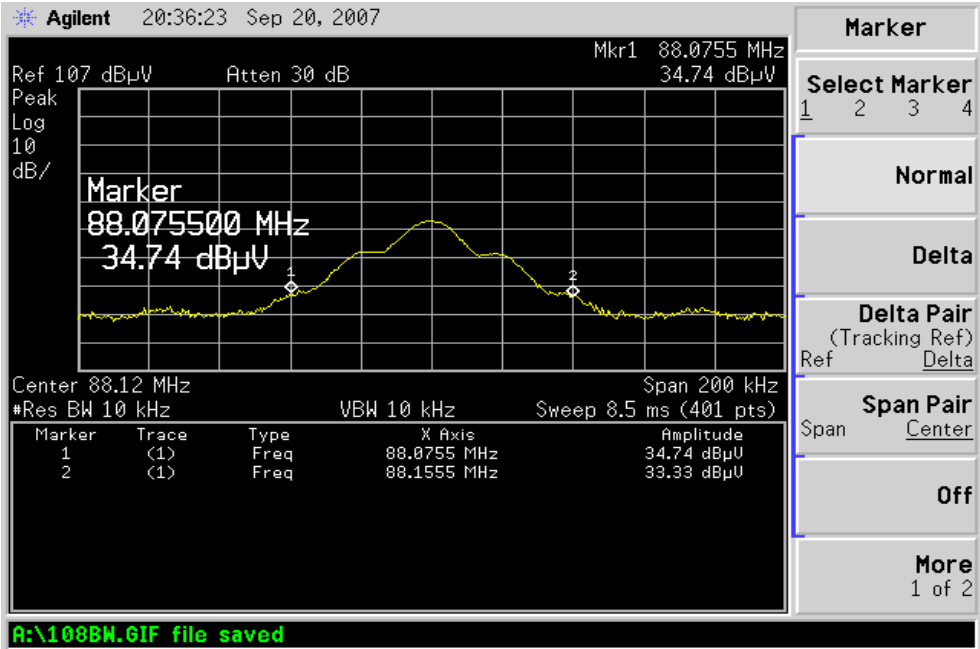

98.0 MHz

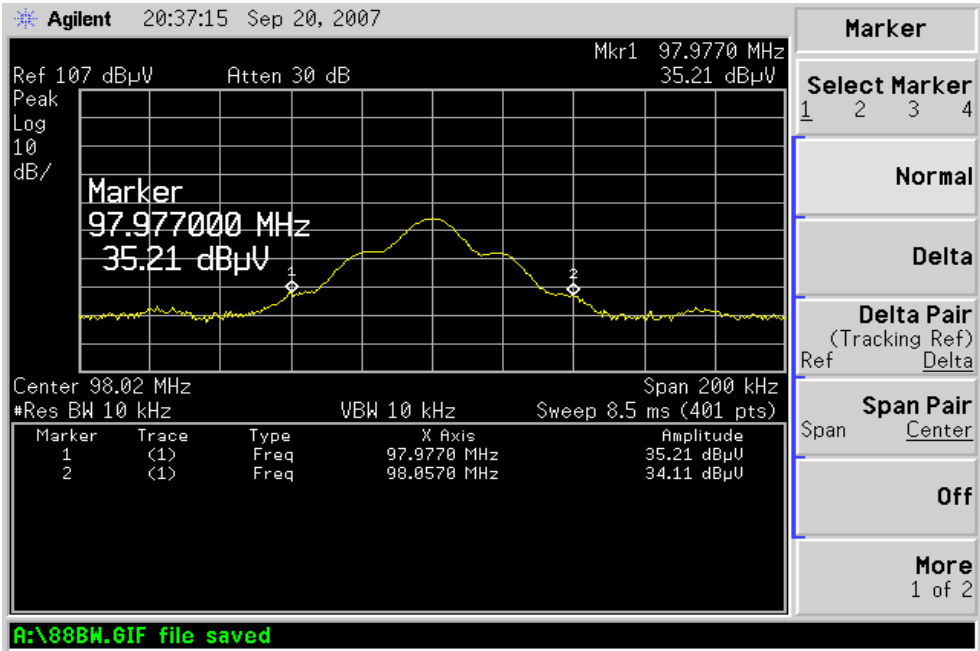

107.9 MHz

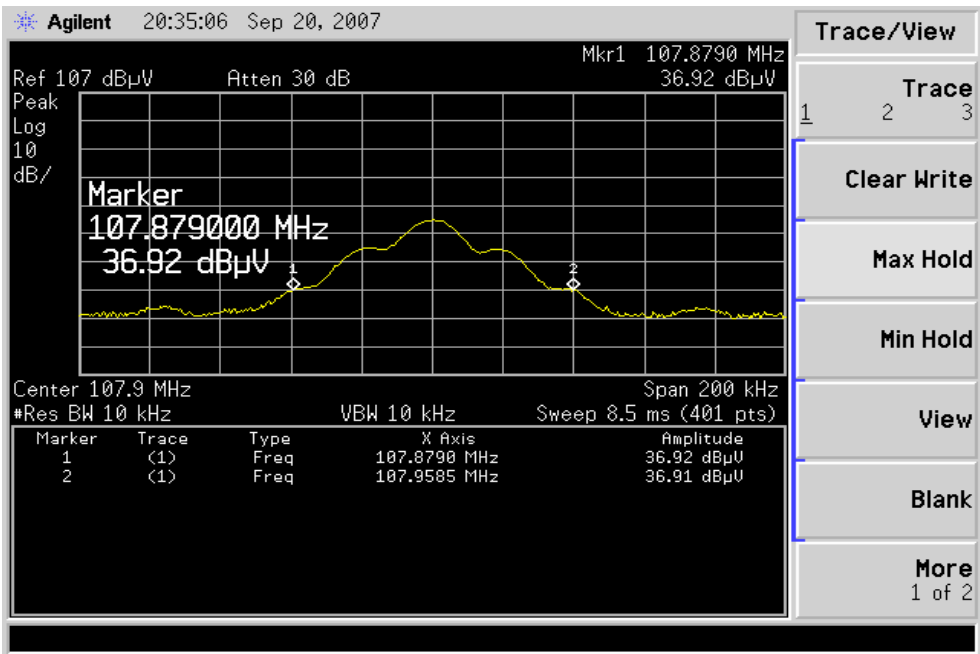


- Note:** (1) The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209.
- (2) The average measurement was not performed when the peak measured data under The limit of average detection.




## 15 Photographs of Testing


### 15.1 Bluetooth Radiation Emission Test View For 30MHz-1000MHz

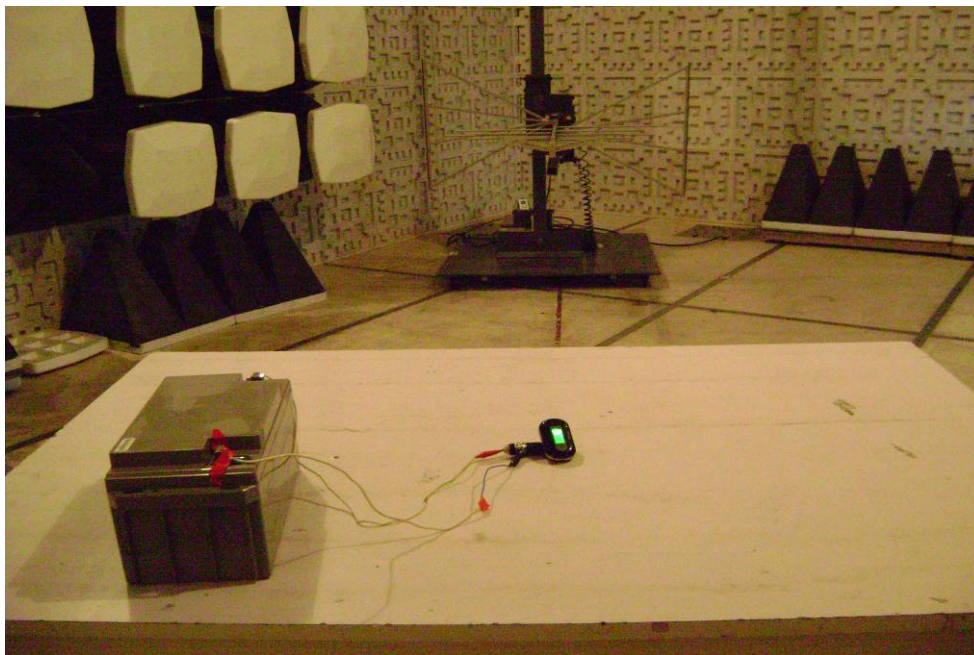

### 15.2 Bluetooth Radiation Emission Test View For 1GHz-25GHz

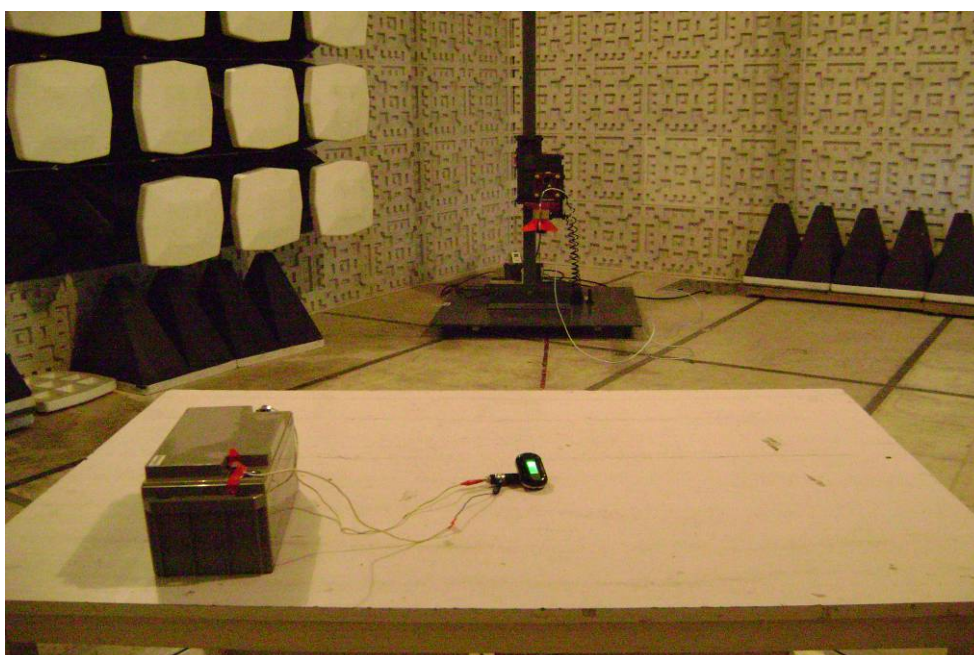

### 15.3 FM Radiation Emission Test View

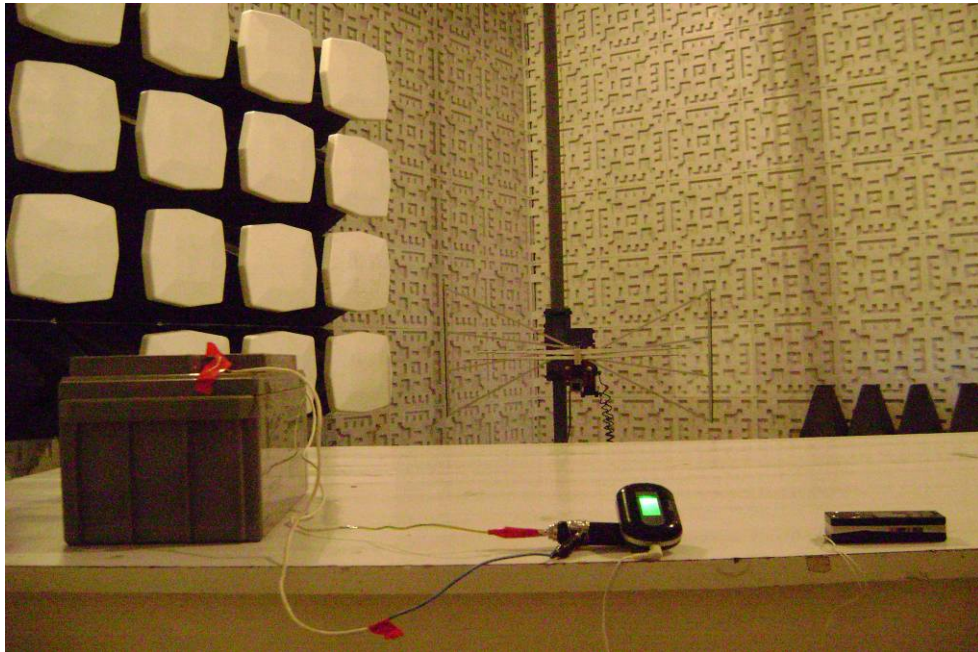

## 16 Photographs - Constructional Details

### 16.1 EUT - Front View




### 16.2 EUT - Back View







### 16.3 PCB1 – Front View

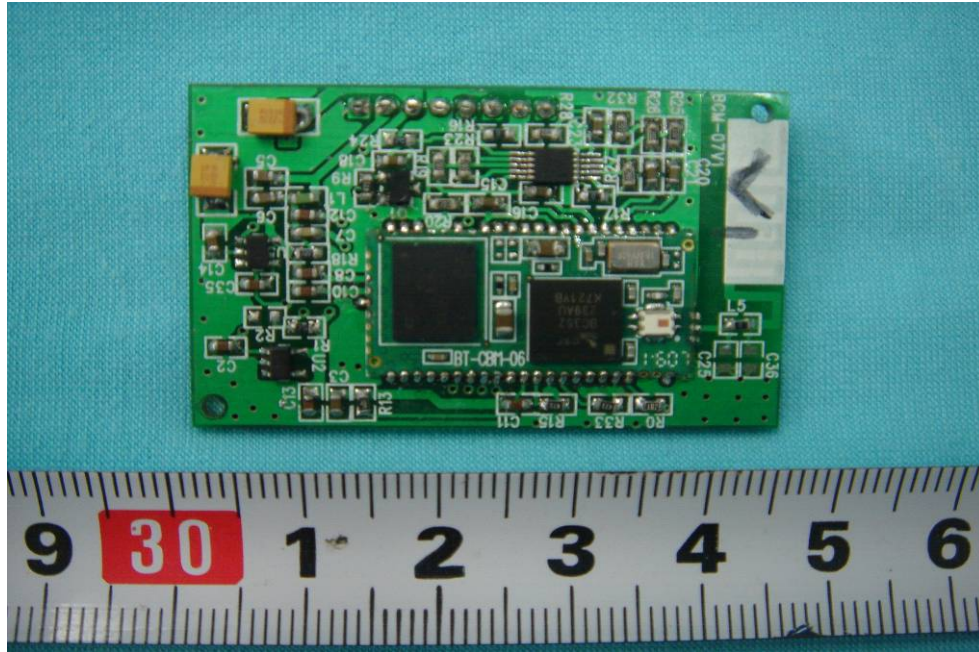


### 16.4 PCB 1- Back View

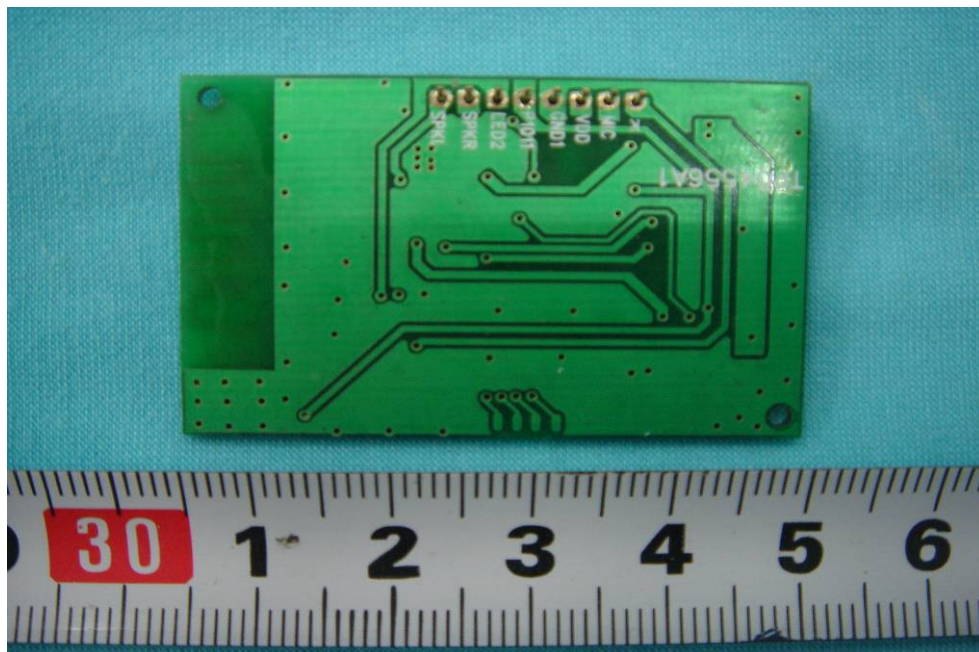

### 16.5 PCB 2- Front View

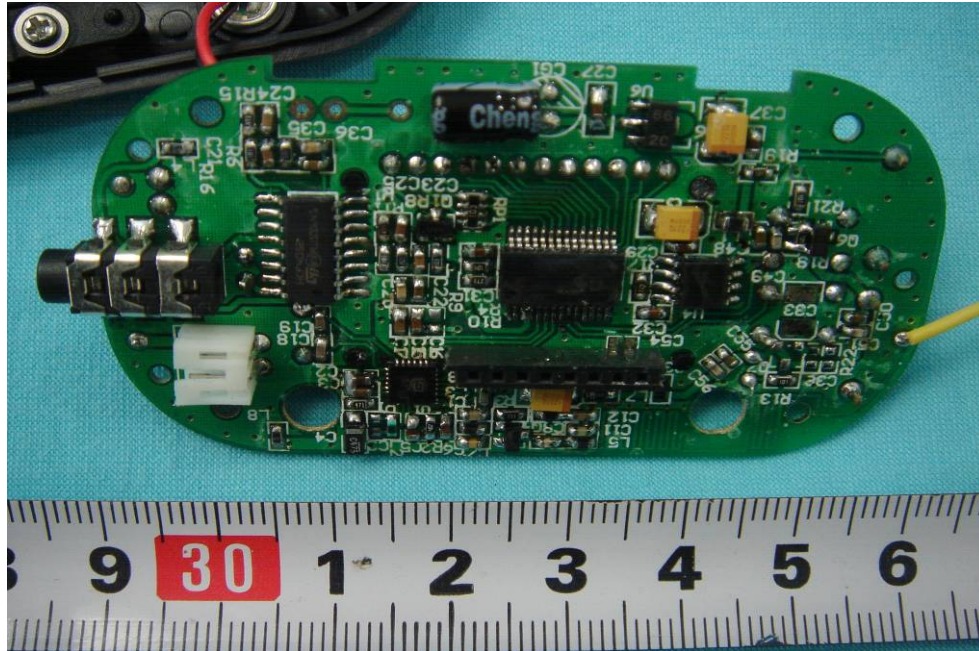

### 16.6 PCB 2- Back View

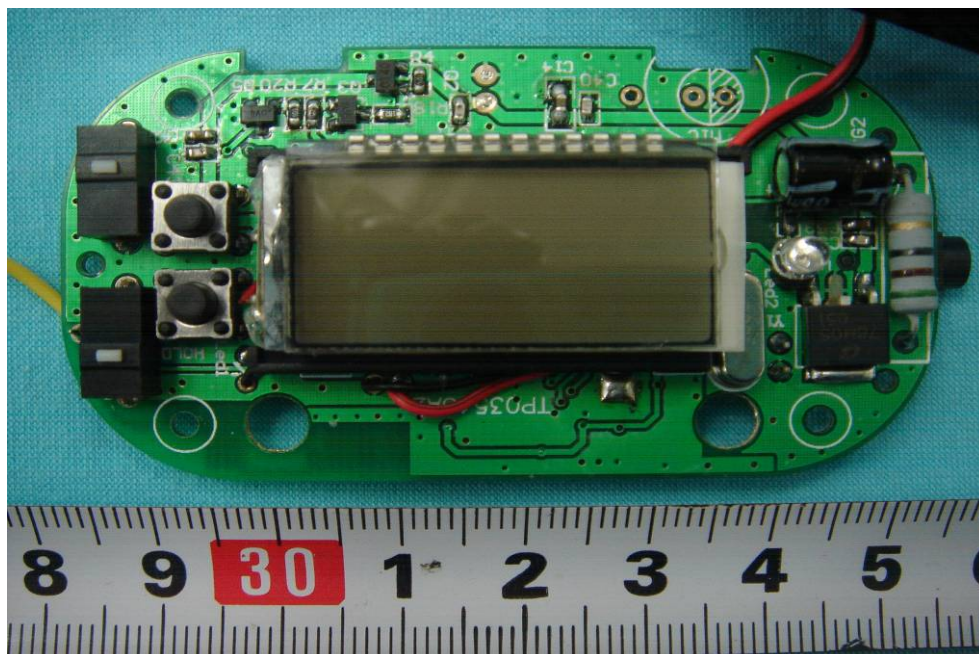



## 17 FCC ID Label

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1)this device may not cause harmful interference,and (2) this device must accept any interference received, including interference that may cause undesired operation.

The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT  
EUT Bottom View/proposed FCC Mark Location

