oller -- Transmitter Model: TX-2

Report Number: B70926D1

FCC PART 15, SUBPART B and C TEST REPORT

for

RF X CONTROLLER - TRANSMITTER

MODEL: TX-2

Prepared for

IAS CORPORATION 17 RESEARCH DRIVE HAMPTON, VIRGINIA 23666

Prepared by:

KYLE FUJIMOTO

Approved by:_

MICHAEL CHRISTENSEN

COMPATIBLE ELECTRONICS INC. 114 OLINDA DRIVE BREA, CALIFORNIA 92823 (714) 579-0500

DATE: OCTOBER 18, 2007

	REPORT		APPENDICES			TOTAL	
	BODY	A	В	С	D	E	
PAGES	16	2	2	2	19	14	55

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.



TABLE OF CONTENTS

Section	n / Title	PAGE
GENE	RAL REPORT SUMMARY	4
SUMM.	ARY OF TEST RESULTS	4
1.	PURPOSE	5
2.	ADMINISTRATIVE DATA	6
2.1	Location of Testing	6
2.2	Traceability Statement	6
2.3	Cognizant Personnel	6
2.4	Date Test Sample was Received	6
2.5	Disposition of the Test Sample	6
2.6	Abbreviations and Acronyms	6
3.	APPLICABLE DOCUMENTS	7
4.	DESCRIPTION OF TEST CONFIGURATION	8
4.1	Description Of Test Configuration - EMI	8
4.1.1	•	9
5.	LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT	10
5.1	EUT and Accessory List	10
5.2	EMI Test Equipment	11
6.	TEST SITE DESCRIPTION	12
6.1	Test Facility Description	12
6.2	EUT Mounting, Bonding and Grounding	12
7.	TEST PROCEDURES	13
7.1	RF Emissions	13
7.1.1		13
7.1.2	, <u>I</u>	14
7.1.3	Radiated Emissions (Spurious and Harmonics) Test (Continued)	15
8.	CONCLUSIONS	16

LIST OF APPENDICES

APPENDIX	TITLE		
A	Laboratory Recognitions		
В	Modifications to the EUT		
С	Additional Models Covered Under This Report		
D	Diagrams, Charts, and Photos		
	Test Setup Diagrams		
	Radiated Emissions Photos		
	Antenna and Effective Gain Factors		
Е	Data Sheets		

LIST OF FIGURES

FIGURE	TITLE
1	Plot Map And Layout of 3 Meter Radiated Site



GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced without the written permission of Compatible Electronics, unless done so in full.

This report must not be used to claim product endorsement by NVLAP, NIST or any other agency of the U.S. Government.

Device Tested: RF X Controller – Transmitter

Model: TX-2 S/N: N/A

Product Description: See Expository Statement

Modifications: The EUT was not modified in order to meet the specifications.

Customer: IAS Corporation

17 Research Drive

Hampton, Virginia 23666

Test Dates: September 24 and 26, 2007

Test Specifications: EMI requirements

CFR Title 47, Part 15 Subpart B; and Subpart C, Sections 15.205, 15.209 and 15.249

Test Procedure: ANSI C63.4

Test Deviations: The test procedure was not deviated from during the testing.

SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Conducted RF Emissions, 150 kHz – 30 MHz	Complies with the Class B limits of CFR Title 47, Part 15, Subpart B; and the limits of CFR Title 47, Part 15, Subpart C, section 15.207.
2	Radiated RF Emissions, 10 kHz – 9300 MHz (Transmitter Portion)	Complies with the limits of CFR Title 47, Part 15, Subpart C, section 15.205, 15.209, and 15.249.
3	Radiated RF Emissions, 10 kHz – 9300 MHz (Digital Portion)	Complies with the Class B limits of CFR Title 47, Part 15, Subpart B.



1. PURPOSE

This document is a qualification test report based on the Electromagnetic Interference (EMI) tests performed on the RF X Controller – Transmitter, Model: TX-2. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the **Class B** specification limits defined by CFR Title 47, Part 15, Subpart B for the digital portion; and the limits defined in Subpart C, sections 15.205, 15.207, 15.209, and 15.249 for the transmitter portion.



Report Number: B70926D1

2. **ADMINISTRATIVE DATA**

2.1 **Location of Testing**

The EMI tests described herein were performed at the test facility of Compatible Electronics, 114 Olinda Drive, Brea, California 92823.

2.2 **Traceability Statement**

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

2.3 **Cognizant Personnel**

IAS Corporation

Kevin Cooley Electrical Engineer

Compatible Electronics, Inc.

Kyle Fujimoto **Test Engineer** Michael Christensen Lab Manager

Date Test Sample was Received 2.4

The test sample was received on September 24, 2007.

2.5 **Disposition of the Test Sample**

The sample was returned to IAS Corporation on October 5, 2007.

2.6 **Abbreviations and Acronyms**

The following abbreviations and acronyms may be used in this document.

RF Radio Frequency

Electromagnetic Interference **EMI** Equipment Under Test **EUT**

P/N Part Number

S/N Serial Number HP Hewlett Packard

ITE Information Technology Equipment

CML Corrected Meter Limit

LISN Line Impedance Stabilization Network



3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this EMI Test Report.

SPEC	TITLE
CFR Title 47, Part 15	FCC Rules – Radio frequency devices (including digital devices)
ANSI C63.4 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz



DESCRIPTION OF TEST CONFIGURATION

4.1 Description Of Test Configuration - EMI

Setup and operation of the equipment under test.

Specifics of the EUT and Peripherals Tested

Transmit Mode: The RF X Controller – Transmitter, Model: TX-2 (EUT) was tested as a stand alone unit as tested in three orthogonal axes. The EUT was transmitting on a continuous basis.

Charging Mode: The RF X Controller – Transmitter, Model: TX-2 (EUT) was connected to an AC Adapter via its charging port. The EUT was having the batteries charged by the AC Adapter on a continuous basis. Please note that the transmitter is shut off when the AC Adapter is plugged into the EUT.

The antenna is located at A1_1 and is soldered onto the PCB. The EUT uses FSK modulation.

The final radiated as well as conducted data was taken in both modes above. Please see Appendix E for the data sheets.



4.1.1 Cable Construction and Termination

<u>Cable 1</u> (For Charging Mode Only)

This is a 2-meter unshielded cable connecting the EUT to the AC Adapter. The cable has a 1/8 inch power connector at the EUT end and is hard wired into the AC Adapter.



5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT

5.1 EUT and Accessory List

EQUIPMENT	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC ID
RF X CONTROLLER – TRANSMITTER (EUT)	IAS CORPORATION	TX-2	N/A	VLQRFXCTX2
AC ADAPTER	CINCON ELECTRONICS COMPANY LIMITED	TR1506	N/A	N/A



5.2 EMI Test Equipment

EQUIPMENT TYPE	MANU- FACTURER	MODEL NUMBER	SERIAL NUMBER	CALIBRATION DATE	CALIBRATION DUE DATE	
GENERAL TEST EQUIPMENT USED FOR ALL RF EMISSIONS TESTS						
Computer	Hewlett Packard	4530	US91912319	N/A	N/A	
EMI Receiver	Rohde & Schwarz	ESIB40	100149	November 15, 2005	Nov. 15, 2007	
Monitor	Hewlett Packard	D5258A	TW74500641	N/A	N/A	
	RF RA	DIATED EMIS	SIONS TEST EQ	QUIPMENT		
Preamplifier	Com Power	PA-102	1017	January 16, 2007	Jan. 16, 2008	
Biconical Antenna	Com Power	AB-900	15227	March 8, 2007	March 8, 2008	
Log Periodic Antenna	Com Power	AL-100	16060	July 9, 2007	July 9, 2008	
Loop Antenna	Com Power	AL-130	17089	September 24, 2007	Sept. 24, 2008	
Horn Antenna	Antenna Research	DRG-118/A	1053	March 6, 2006	March 6, 2008	
Microwave Preamplifier	Com Power	PA-122	181921	Feb. 27, 2007	Feb. 27, 2008	
Antenna Mast	Com Power	AM-100	N/A	N/A	N/A	
	RF CON	DUCTED EMI	SSIONS TEST E	QUIPMENT		
Emissions Program	Compatible Electronics	2.3 (SR19)	N/A	N/A	N/A	
Transient Limiter	Seaward	252A910	1	September 19, 2007	September 19, 2008	
LISN	Com Power	LI-215	12082	September 26, 2007	September 26, 2008	
LISN	Com Power	LI-215	12078	September 26, 2007	September 26, 2008	

X Comrouer -- Transmuter Model: TX-2

6. TEST SITE DESCRIPTION

6.1 Test Facility Description

Please refer to section 2.1 and 7.1 of this report for EMI test location.

6.2 EUT Mounting, Bonding and Grounding

The EUT was mounted on a 1.0 by 1.5 meter non-conductive table 0.8 meters above the ground plane.

The EUT was not grounded.

7. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

7.1 RF Emissions

7.1.1 Conducted Emissions Test

The EMI Receiver was used as a measuring meter. The data was collected with the spectrum analyzer in the peak detect mode with the "Max Hold" feature activated. The quasi-peak was used only where indicated in the data sheets. A transient limiter was used for the protection of the spectrum analyzer input stage, and the offset was adjusted accordingly to read the actual data measured. The LISN output was measured using the spectrum analyzer. The output of the second LISN was terminated by a 50 ohm termination. The effective measurement bandwidth used for this test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The EUT was powered through the LISN, which was bonded to the ground plane. The LISN power was filtered and the filter was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in EN 55022. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The conducted emissions from the EUT were maximized for operating mode as well as cable placement. The final data was collected under program control by the Compatible Electronics software in several overlapping sweeps by running the spectrum analyzer at a minimum scan rate of 10 seconds per octave. The final qualification data is located in Appendix E.

Test Results:

Complies with the **Class B** limits of CFR Title 47, Part 15, Subpart B; and the limits of CFR Title 47, Part 15, Subpart C, section 15.207.

7.1.2 Radiated Emissions (Spurious and Harmonics) Test

The EMI Receiver was used as a measuring meter along with the quasi-peak adapter. Amplifiers were used to increase the sensitivity of the instrument. The Com Power Preamplifier Model: PA-102 was used for frequencies from 30 MHz to 1 GHz, and the Com-Power Microwave Preamplifier Model: PA-122 was used for frequencies above 1 GHz. The EMI Receiver was used in the peak detect mode with the "Max Hold" feature activated. In this mode, the spectrum analyzer or EMI Receiver records the highest measured reading over all the sweeps.

The frequencies above 1 GHz were averaged manually by narrowing the video filter down to 10 Hz and putting the sweep time on AUTO on the EMI Receiver to keep the amplitude reading calibrated.

The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE	EFFECTIVE MEASUREMENT BANDWIDTH	TRANSDUCER
9 kHz to 150 kHz	200 Hz	Active Loop Antenna
150 kHz to 30 MHz	9 kHz	Active Loop Antenna
30 MHz to 300 MHz	120 kHz	Biconical Antenna
300 MHz to 1 GHz	120 kHz	Log Periodic Antenna
1 GHz to 9.3 GHz	1 MHz	Horn Antenna

The open field test site of Compatible Electronics, Inc. was used for radiated emission testing. This test site is set up according to ANSI C63.4. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength). The gunsight method was used when measuring with the horn antenna in order to ensure accurate results. The loop antenna was also rotated in the horizontal and vertical axis in order to ensure accurate results.

7.1.3 Radiated Emissions (Spurious and Harmonics) Test (Continued)

The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT. The EUT was tested at a 3 meter test distance to obtain the final test data. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with the **Class B** limits of CFR Title 47, Part 15, Subpart B; and CFR Title 47, Part 15, Subpart C, sections 15.205, 15.209, and 15.249.

8. CONCLUSIONS

The RF X Controller – Transmitter, Model: TX-2 meets all of the **Class B** specification limits defined in CFR Title 47, Part 15, Subpart B for the digital portion; and the limits defined in Subpart C, sections 15.205, 15.207, 15.209, and 15.249 for the transmitter portion.



APPENDIX A

LABORATORY RECOGNITIONS



LABORATORY RECOGNITIONS

Compatible Electronics has the following agency accreditations:

National Voluntary Laboratory Accreditation Program - Lab Code: 200528-0

Voluntary Control Council for Interference - Registration Numbers: R-983, C-1026, R-984 and C-1027

Bureau of Standards and Metrology Inspection - Reference Number: SL2-IN-E-1031

Conformity Assessment Body for the EMC Directive Under the US/EU MRA Appointed by NIST

Compatible Electronics is recognized or on file with the following agencies:

Federal Communications Commission

Industry Canada

Radio-Frequency Technologies (Competent Body)



APPENDIX B

MODIFICATIONS TO THE EUT



MODIFICATIONS TO THE EUT

The modifications listed below were made to the EUT to pass FCC 15.249 or FCC Class B specifications.

All the rework described below was implemented during the test in a method that could be reproduced in all the units by the manufacturer.

No modifications were made to the EUT.



APPENDIX C

ADDITIONAL MODELS COVERED UNDER THIS REPORT



ADDITIONAL MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

RF X Controller – Transmitter Model: TX-2 S/N: N/A

There were no additional models covered under this report.






APPENDIX D

DIAGRAMS, CHARTS, AND PHOTOS


FIGURE 1: CONDUCTED EMISSIONS TEST SETUP

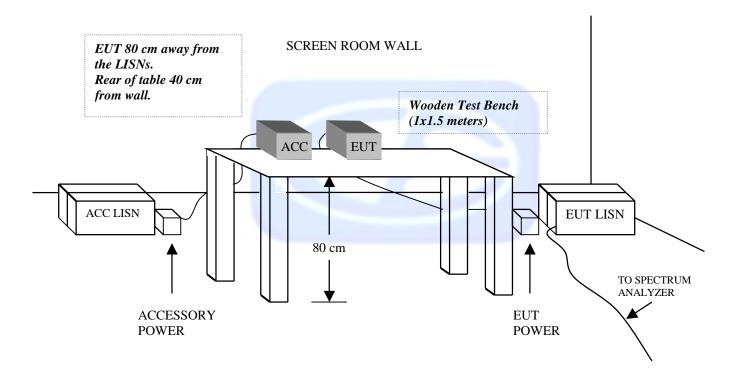

OPEN LAND > 15 METERS

FIGURE 2: PLOT MAP AND LAYOUT OF 3 METER RADIATED SITE

OPEN LAND > 15 METERS

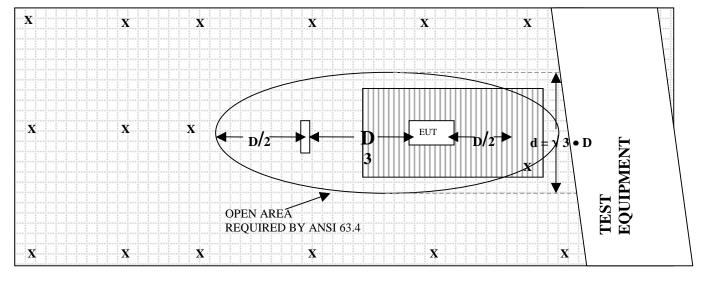

OPEN LAND > 15 METERS

X = GROUND RODS = GROUND SCREEN

D = TEST DISTANCE (meters) = WOOD COVER



COM-POWER AB-900

BICONICAL ANTENNA

S/N: 15227

CALIBRATION DATE: MARCH 8, 2007

FREQUENCY	FACTOR	FREQUENCY	FACTOR
(MHz)	(dB)	(MHz)	(dB)
30	12.6	100	12.3
35	10.0	120	14.7
40	9.5	140	13.0
45	9.2	160	13.7
50	9.4	180	16.4
60	7.4	200	17.2
70	6.5	250	14.6
80	7.0	275	19.0
90	8.0	300	22.3

COM-POWER AL-100

LOG PERIODIC ANTENNA

S/N: 16060

CALIBRATION DATE: JULY 9, 2007

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
300	13.5	700	20.5
400	15.8	800	21.6
500	17.0	900	21.3
600	19.2	1000	22.2

COM-POWER PA-102

PREAMPLIFIER

S/N: 1017

CALIBRATION DATE: JANUARY 16, 2007

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
(IVIIIZ)	` ,	,	` /
30	38.4	300	38.2
40	38.3	350	38.2
50	38.2	400	38.1
60	38.3	450	37.8
70	38.4	500	37.8
80	38.6	550	38.1
90	38.3	600	37.8
100	38.4	650	37.8
125	38.3	700	37.6
150	38.2	750	37.9
175	38.4	800	37.6
200	38.4	850	37.2
225	38.4	900	37.4
250	38.3	950	37.0
275	38.3	1000	37.2

COM-POWER PA-122

PREAMPLIFIER

S/N: 181921

CALIBRATION DATE: FEBRUARY 27, 2007

FREQUENCY	FACTOR	FREQUENCY	FACTOR
(GHz)	(dB)	(GHz)	(dB)
1.0	36.2	10.0	35.1
1.5	35.4	10.5	34.8
2.0	34.7	11.0	33.5
2.5	34.8	11.5	33.9
3.0	34.8	12.0	34.0
3.5	34.6	12.5	34.4
4.0	34.2	13.0	34.4
4.5	34.1	13.5	34.7
5.0	34.1	14.0	36.0
5.5	34.7	14.5	35.7
6.0	35.6	15.0	36.1
6.5	36.8	15.5	35.6
7.0	36.7	16.0	35.4
7.5	34.9	16.5	35.3
8.0	33.3	17.0	34.9
8.5	33.6	17.5	33.7
9.0	34.6	18.0	33.3
9.5	35.9		



ANTENNA RESEARCH DRG-118/A

HORN ANTENNA

S/N: 1053

CALIBRATION DATE: MARCH 6, 2006

FREQUENCY	FACTOR	FREQUENCY	FACTOR (dB)
(GHz)	(dB)	(GHz)	(dB)
1.0	24.46	10.0	39.55
1.5	25.05	10.5	39.86
2.0	28.42	11.0	38.49
2.5	29.91	11.5	40.71
3.0	31.46	12.0	40.59
3.5	31.91	12.5	40.17
4.0	31.55	13.0	39.70
4.5	31.94	13.5	40.84
5.0	32.90	14.0	41.58
5.5	34.07	14.5	45.14
6.0	35.69	15.0	42.20
6.5	33.11	15.5	39.42
7.0	36.51	16.0	38.80
7.5	37.27	16.5	41.08
8.0	37.21	17.0	44.11
8.5	37.16	17.5	46.29
9.0	38.27	18.0	41.61
9.5	39.73		

COM-POWER AL-130

LOOP ANTENNA

S/N: 17089

CALIBRATION DATE: SEPTEMBER 24, 2007

FREQUENCY	MAGNETIC	ELECTRIC
(MHz)	(dB/m)	(dB/m)
0.009	-41.27	10.23
0.01	-41.96	9.54
0.02	-41.73	9.77
0.05	-42.0	9.5
0.07	-41.5	10.0
0.1	-41.43	10.07
0.2	-43.9	7.9
0.3	-41.43	10.07
0.5	-41.40	10.1
0.7	-41.13	10.37
1	-40.83	10.67
2	-40.30	11.20
3	-40.60	10.90
4	-41.00	10.50
5	-40.20	11.30
10	-40.40	11.10
15	-41.67	9.83
20	-41.10	10.40
25	-42.80	8.70
30	-42.80	8.70



FRONT VIEW

IAS CORPORATION
RF X CONTROLLER – TRANSMITTER
MODEL: TX-2

FCC SUBPART B AND C - RADIATED EMISSIONS - LAB B - STAND ALONE MODE



REAR VIEW

IAS CORPORATION
RF X CONTROLLER – TRANSMITTER
MODEL: TX-2

FCC SUBPART B AND C - RADIATED EMISSIONS - LAB B - STAND ALONE MODE



FRONT VIEW

IAS CORPORATION
RF X CONTROLLER – TRANSMITTER
MODEL: TX-2

FCC SUBPART B AND C - RADIATED EMISSIONS - LAB D - STAND ALONE MODE



REAR VIEW

IAS CORPORATION
RF X CONTROLLER – TRANSMITTER
MODEL: TX-2
FCC SUBPART B AND C – RADIATED EMISSIONS – LAB D – STAND ALONE MODE



FRONT VIEW

IAS CORPORATION
RF X CONTROLLER – TRANSMITTER
MODEL: TX-2

FCC SUBPART B AND C - RADIATED EMISSIONS - LAB B - CHARGING MODE

Model: TX-2



REAR VIEW

IAS CORPORATION
RF X CONTROLLER – TRANSMITTER
MODEL: TX-2
FCC SUBPART B AND C – RADIATED EMISSIONS – LAB B – CHARGING MODE



FRONT VIEW

IAS CORPORATION
RF X CONTROLLER – TRANSMITTER
MODEL: TX-2
FCC SUBPART B AND C – RADIATED EMISSIONS – LAB D – CHARGING MODE

Model: TX-2



REAR VIEW

IAS CORPORATION
RF X CONTROLLER – TRANSMITTER
MODEL: TX-2
FCC SUBPART B AND C – RADIATED EMISSIONS – LAB D – CHARGING MODE

Model: TX-2



FRONT VIEW

IAS CORPORATION
RF X CONTROLLER – TRANSMITTER
MODEL: TX-2
FCC SUBPART B AND C – CONDUCTED EMISSIONS LAB D – CHARGING MODE



REAR VIEW

IAS CORPORATION
RF X CONTROLLER – TRANSMITTER
MODEL: TX-2
FCC SUBPART B AND C – CONDUCTED EMISSIONS LAB D – CHARGING MODE



Report Number: **B70926D1 FCC Part 15 Subpart B** and **FCC Section 15.249** Test Report *RF X Controller -- Transmitter*

Model: TX-2

APPENDIX E

DATA SHEETS



RADIATED EMISSIONS

DATA SHEETS

IAS Corporation Date: 09/24/07 RF X Controller - Transmitter Labs: B and D

Model:TX-2 Tested By: Kyle Fujimoto

X-Axis Transmit Mode

					Peak /	Ant.	Table	
Freq.	Level				QP/	Height	Angle	
(MHz)	(dBuV)	Pol (v/h)	Limit	Margin	Avg	(m)	(deg)	Comments
916.45	89.42	V	94	-4.58	Peak	1	90	
1833.04	52.71	V	74	-21.29	Peak	1	135	
1833.04	47.65	V	54	-6.35	Avg	1	135	
2749.56	47.16	V	74	-26.84	Peak	2.46	125	
2479.56	39.73	V	54	-14.27	Avg	2.46	125	
3666.08	55.46	V	74	-18.54	Peak	2.49	125	
3666.08	53.03	V	54	-0.97	Avg	2.49	125	
4500.0	40.00		7.4	05.47	D I -	4.05	405	
4582.6	48.83	V	74	-25.17	Peak	1.65	125	
4582.6	42.96	V	54	-11.04	Avg	1.65	125	
5499.12		V	74		Peak			no emission found
5499.12		V	54		Avg			no emission found
3499.12		V	34		Avy			
6415.64		V	74		Peak			no emission found
6415.64		V	54		Avg			
7332.16		V	74		Peak			no emission found
7332.16		V	54		Avg			
8248.68		V	74		Peak			no emission found
8248.68		V	54		Avg			
9165.2		V	74		Peak			no emission found
9165.2		V	54		Avg			

IAS Corporation RF X Controller - Transmitter

Model:TX-2

X-Axis Transmit Mode Date: 09/24/07 Labs: B and D

Tested By: Kyle Fujimoto

					Peak /	Ant.	Table	
Freq.	Level				QP/	Height	Angle	
(MHz)	(dBuV)	Pol (v/h)	Limit	Margin	Avg	(m)	(deg)	Comments
916.45	89.05	Н	94	-4.95	Peak	1	90	
1833.04	50.92	Н	74	-23.08	Peak	2.34	125	
1833.04	48.11	Н	54	-5.89	Avg	2.34	125	
0740.50	44.00		7.4	00.74	Deel	0.04	405	
2749.56	44.26	Н	74	-29.74	Peak	2.34	125	
2479.56	38.12	Н	54	-15.88	Avg	2.34	125	
3666.08	50.87	Н	74	-23.13	Peak	2.54	125	
3666.08	48.15	Н	54	-5.85	Avg	2.54	125	
					· ·			
4582.6	44.04	Н	74	-29.96	Peak	2.06	125	
4582.6	31.34	Н	54	-22.66	Avg	2.06	125	
5499.12		Н	74		Peak			no emission found
5499.12		Н	54		Avg			
6415.64		Н	74		Peak			no emission found
6415.64		Н	54		Avg			
7332.16		Н	74		Peak			no emission found
7332.16		Н	54		Avg			
8248.68		Н	74		Peak			no emission found
8248.68		Н	54		Avg			omiosion round
					_			
9165.2		Н	74		Peak			no emission found
9165.2		Н	54		Avg			

IAS Corporation Date: 09/24/07 RF X Controller - Transmitter Labs: B and D

Model:TX-2 Tested By: Kyle Fujimoto

Y-Axis Transmit Mode

					Peak /	Ant.	Table	
Freq.	Level				QP/	Height	Angle	
(MHz)	(dBuV)	Pol (v/h)	Limit	Margin	Avg	(m)	(deg)	Comments
916.45	93.18	V	94	-0.82	Peak	1	0	
1833.04	55.41	V	74	-18.59	Peak	2.51	135	
1833.04	52.91	V	54	-1.09	Avg	2.51	135	
2749.56	49.53	V	74	-24.47	Peak	1.93	125	
2479.56	44.07	V	54	-9.93	Avg	1.93	125	
0000.00	54.00		7.4	40.00	Deed	0.00	405	
3666.08	54.68	V	74	-19.32	Peak	2.23	135	
3666.08	51.09	V	54	-2.91	Avg	2.23	135	
4582.6	47.49	V	74	-26.51	Peak	2.19	125	
4582.6	38.73	V	54	-15.27	Avg	2.19	125	
4302.0	30.73	V	57	10.21	Avg	2.10	120	
5499.12		V	74		Peak			no emissions found
5499.12		V	54		Avg			
6415.64		V	74		Peak			no emissions found
6415.64		V	54		Avg			
7332.16		V	74		Peak			no emissions found
7332.16		V	54		Avg			
8248.68		V	74		Peak			no emissions found
8248.68		V	54		Avg			
9165.2		V	74		Dook			na amiasiana faus d
9165.2		V	74 54		Peak			no emissions found
9100.2		V	54		Avg			

IAS Corporation RF X Controller - Transmitter

Model:TX-2

Y-Axis Transmit Mode Date: 09/24/07 Labs: B and D

Tested By: Kyle Fujimoto

				1	Peak /	Ant.	Table	
Freq.	Level				QP/	Height	Angle	
(MHz)	(dBuV)	Pol (v/h)	Limit	Margin	Avg	(m)	(deg)	Comments
916.45	88.67	Н	94	-5.33	Peak	1.5	90	
1833.04	55.01	Н	74	-18.99	Peak	1.91	125	
1833.04	52.53	Н	54	-1.47	Avg	1.91	125	
2749.56	50.19	Н	74	-23.81	Peak	1.89	125	
2479.56	42.54	Н	54	-11.46	Avg	1.89	125	
3666.08	55.58	Н	74	-18.42	Peak	2.31	135	
3666.08	52.19	Н	54	-1.81	Avg	2.31	135	
4582.6	47.82	Н	74	-26.18	Peak	1.92	125	
4582.6	43.36	Н	54	-10.64	Avg	1.92	125	
5499.12	42.23	Н	74	-31.77	Peak	2.21	125	
5499.12	29.71	Н	54	-24.29	Avg	2.21	125	
0445.04			7.4		Deel			
6415.64 6415.64		H	74 54		Peak			no emissions found
0413.04		П	34		Avg			
7332.16		Н	74		Peak			no emissions found
7332.16		Н	54		Avg			
8248.68		Н	74		Peak			no emissions found
8248.68		H	54		Avg			no emissions tourid
9165.2		Н	74		Peak			no emissions found
9165.2		Н	54		Avg			

IAS Corporation Date: 09/24/07 RF X Controller - Transmitter Labs: B and D

Model:TX-2 Tested By: Kyle Fujimoto

Z-Axis Transmit Mode

					Peak /	Ant.	Table	
Freq.	Level				QP/	Height	Angle	
(MHz)	(dBuV)	Pol (v/h)	Limit	Margin	Avg	(m)	(deg)	Comments
916.45	90.45	V	94	-3.55	Peak	1.25	90	
1833.04	55.85	V	74	-18.15	Peak	2.01	125	
1833.04	53.29	V	54	-0.71	Avg	2.01	125	
2749.56	47.39	V	74	-26.61	Peak	2.36	125	
2479.56	35.98	V	54	-18.02	Avg	2.36	125	
3666.08	55.21	V	74	-18.79	Peak	2.47	125	
3666.08	52.24	V	54	-1.76	Avg	2.47	125	
4582.6	46.67	V	74	-27.33	Peak	2.47	125	
4582.6	33.11	V	54	-20.89	Avg	2.47	125	
5499.12		V	74	-74	Peak			no emissions found
5499.12		V	54	-54	Avg			
6415.64		V	74		Peak			no emissions found
6415.64		V	54		Avg			
7332.16		V	74		Peak			no emissions found
7332.16		V	54		Avg			
00.40.60			7.4		D 1			
8248.68		V	74		Peak			no emissions found
8248.68		V	54		Avg			
0405.0		\/	7.4		Daali			
9165.2		V	74		Peak			no emissions found
9165.2		V	54		Avg			

IAS Corporation RF X Controller - Transmitter

Model:TX-2

Z-Axis Transmit Mode Date: 09/24/07 Labs: B and D

Tested By: Kyle Fujimoto

					Peak /	Ant.	Table	
Freq.	Level				QP/	Height	Angle	
(MHz)		Pol (v/h)	Limit	Margin	Avg	(m)	(deg)	Comments
916.45	90.25	H	94	-3.75	Peak	1	90	
1833.04	53.91	Н	74	-20.09	Peak	1.91	125	
1833.04	49.65	Н	54	-4.35	Avg	1.91	125	
0740.50	47.07		7.4	00.70	Б.	4.00	405	
2749.56	47.27	Н	74	-26.73	Peak	1.83	125	
2479.56	33.01	Н	54	-20.99	Avg	1.83	125	
3666.08	53.83	Н	74	-20.17	Peak	2.37	125	
3666.08	49.76	Н	54	-4.24	Avg	2.37	125	
					· ·			
4582.6	49.95	Н	74	-24.05	Peak	2.67	125	
4582.6	44.03	Н	54	-9.97	Avg	2.67	125	
5499.12	47.70	Н	7.4	00.04	Daale	0.00	405	
5499.12	47.76 35.86	H	74 54	-26.24 -18.14	Peak Avg	2.36 2.36	125 125	
3499.12	33.00	1.1	34	-10.14	Avg	2.30	123	
6415.64		Н	74		Peak			no emissions found
6415.64		Н	54		Avg			
7332.16		Н	74		Peak			no emissions found
7332.16		Н	54		Avg			no emissions found
7 332.10		11	34		Avg			
8248.68		Н	74		Peak			no emissions found
8248.68		Н	54		Avg			
0405.0			7.4		Deel			
9165.2		H	74		Peak			no emissions found
9165.2		Н	54		Avg			

IAS Corporation
RF X Controller - Transmitter

Model:TX-2

Labs: B and D Tested By: Kyle Fujimoto

Date: 09/24/07

X-Axis (Worst Case) Transmit Mode

					Peak /	Ant.	Table	
Freq.	Level				QP/	Height	Angle	
(MHz)	(dBuV)	Pol (v/h)	Limit	Margin	Avg	(m)	(deg)	Comments
152.632	31.14	V V	43.5	-12.36	Peak	1	180	33111131113
155.53	30.43	V	43.5	-13.07	Peak	1	180	
147.47	46.94	H	43.5	3.44	Peak	2.5	135	
147.48	42.45	H	43.5	-1.05	QP	2.5	135	
224.9	23.03	H	46	-22.97	Peak	2.5	135	
246.8	31.04	H	46	-14.96	Peak	2.5	135	
240.0	31.04	1.1	40	-14.30	1 Can	2.0	133	
								No Emissions Detected
								from 246.81 MHz to 9300 MHz
								for the Digital Portion
								for both the Vertical and
								Horizontal Polarizations.
								Honzontari dianzations.
								No Emissions Detected
								from 10 kHz to 9300 MHz
								for the Non-Harmonic
								Emissions from the Tx for the
								EUT for both the Vertical and
								Horizontal Polarizations.
								Honzontari dianzatione.

CONDUCTED EMISSIONS


DATA SHEETS

Model: Tx-2

FCC Class B - Black Lead

Charging Mode

Tested By: Kyle Fujimoto

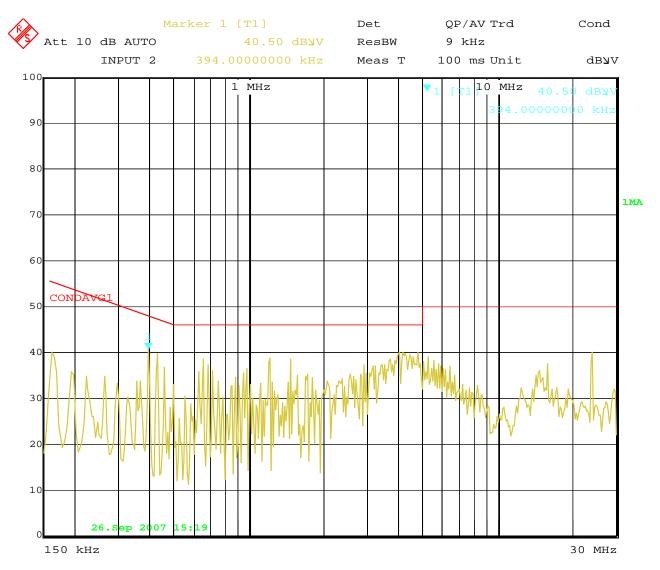

Date: 26.SEP.2007 15:19:27

Model: Tx-2

FCC Class B – Black Lead

Charging Mode

Tested By: Kyle Fujimoto

		EDIT PEAK LIST	(Final Results)	
Tra	cel: CONDAVO	31	Trace2:	
Tra	.ce3:		Trace4:	
	TRACE	FREQUENCY	LEVEL dB1/V	DELTA LIMIT dB
1	Max Peak	394.0000 kHz	40.50	-7.47
1	Max Peak	426.0000 kHz	39.53	-7.79
1	Max Peak	654.0000 kHz	38.31	-7.68
1	Max Peak	1.2140 MHz	38.60	-7.40
1	Max Peak	1.4740 MHz	38.35	-7.64
1	Max Peak	3.6860 MHz	38.02	-7.97
1	Max Peak	3.7100 MHz	38.42	-7.57
1	Max Peak	3.8620 MHz	38.02	-7.97
1	Max Peak	3.9500 MHz	38.83	-7.17
1	Max Peak	3.9940 MHz	39.65	-6.35
1	Max Peak	4.0620 MHz	39.79	-6.20
1	Max Peak	4.1900 MHz	39.79	-6.20
1	Max Peak	4.2140 MHz	39.23	-6.76
1	Max Peak	4.2580 MHz	39.51	-6.48
1	Max Peak	4.2820 MHz	39.23	-6.76
1	Max Peak	4.2940 MHz	38.57	-7.42
1	Max Peak	4.3260 MHz	38.96	-7.03
1	Max Peak	4.3900 MHz	37.90	-8.09
1	Max Peak	4.4540 MHz	39.37	-6.62
1	Max Peak	4.4780 MHz	38.70	-7.29


Date: 26.SEP.2007 15:19:52

Model: Tx-2

FCC Class B - White Lead

Charging Mode

Tested By: Kyle Fujimoto

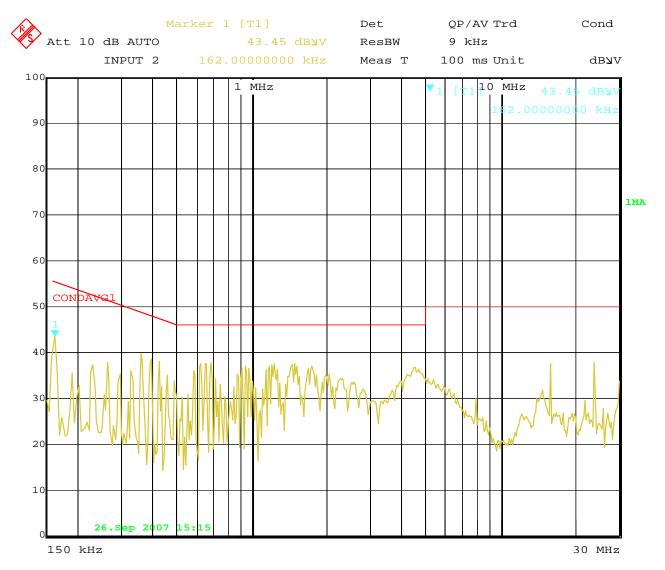

Date: 26.SEP.2007 15:15:54

Model: Tx-2

FCC Class B - White Lead

Charging Mode

Tested By: Kyle Fujimoto

F		EDIT PEAK LIST	(Final Results)	
Tra	ce1: CONDAVO	3 1	Trace2:	
Tra	.ce3:		Trace4:	
	TRACE	FREQUENCY	LEVEL dB1/V	DELTA LIMIT dB
1	Max Peak	358.0000 kHz	39.73	-9.04
1	Max Peak	394.0000 kHz	38.34	-9.63
1	Max Peak	422.0000 kHz	37.80	-9.60
1	Max Peak	622.0000 kHz	37.25	-8.74
1	Max Peak	650.0000 kHz	37.38	-8.61
1	Max Peak	682.0000 kHz	37.65	-8.34
1	Max Peak	910.0000 kHz	36.48	-9.51
1	Max Peak	942.0000 kHz	36.85	-9.14
1	Max Peak	974.0000 kHz	36.48	-9.51
1	Max Peak	1.1460 MHz	36.13	-9.86
1	Max Peak	1.1780 MHz	36.86	-9.13
1	Max Peak	1.2060 MHz	37.12	-8.87
1	Max Peak	1.2340 MHz	37.26	-8.73
1	Max Peak	1.2660 MHz	36.14	-9.85
1	Max Peak	1.4380 MHz	36.76	-9.23
1	Max Peak	1.4580 MHz	36.64	-9.36
1	Max Peak	1.4660 MHz	37.14	-8.85
1	Max Peak	1.4940 MHz	37.41	-8.58
1	Max Peak	1.5260 MHz	36.88	-9.11
1	Max Peak	1.6980 MHz	36.28	-9.71

Date: 26.SEP.2007 15:16:26