







ISO/IEC17025 Accredited Lab.

Report No: FCC 0810104 File reference No: 2008-10-29

Applicant: ZHONG SHAN FAMA ELECTRONIC TECHNOLOGY

CO.,LTD

Product: Remote with password

Model No: FG002

Trademark: Ikey

Test Standards: FCC Part 15 Subpart C, Paragraph 15.231

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4&FCC Part 15 Subpart C,

Paragraph 15.231 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung Manager

Dated: Oct. 29,2008

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt ar

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District, Shenzhen,CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 0810104 Page 2 of 29

Date: 2008-10-29



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.:899988.

IC- Registration No.: IC5205A-01

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration No.: IC 5205A-01.

Page 3 of 29

Report No: 0810104 Date: 2008-10-29



Test Report Conclusion Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	5
1.6	Test Uncertainty	5
1.7	Test By	5
2.0	List of Measurement Equipment	5
3.0	Technical Details	6
3.1	Summary of Test Results	6
3.2	Test Standards	6
4.0	EUT Modification	6
5.0	Power Line Conducted Emission Test.	7
5.1	Schematics of the Test	7
5.2	Test Method and Test Procedure	7
5.3	Configuration of the EUT	7
5.4	EUT Operating Condition.	8
5.5	Conducted Emission Limit.	8
5.6	Test Result	8
6.0	Radiated Emission test	9
6.1	Test Method and Test Procedure.	9
6.2	Configuration of the EUT	9
6.3	EUT Operation Condition.	9
6.4	Radiated Emission Limit	10
6.5	Test Result.	10
7.0	20dB Bandwidth Test	16
8.0	Deactivate Test	18
9.0	Duty Cycle	20
9.0	FCC ID Label	24
10.0	Photo of Testing.	25

Report No: 0810104 Page 4 of 29

Date: 2008-10-29



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

Address: 5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao, FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-01

For 3m & 10 m OATS

1.2 Applicant Details

Applicant: ZHONG SHAN FAMA ELECTRONIC TECHNOLOGY CO.,LTD

Address: D2 Fu Wan Industrial Park, East District, Shiqi, Zhongshan City, Guangdong, China

Telephone: 0760-87337092 Fax: 0760-87337093

1.3 Description of EUT

Product: Remote with password

Brand Name: Ikey
Model Number: FG002

Additional Model Name Ikey001/002/003

Additional Trade Name N/A

Rating: Voltage:6V DC (Batteries)

Operation Frequency 433.92

Antenna Designation A permanent fixed antenna, designed as an indispensable part of the EUT.

1.4 Submitted Sample

2 Sample

Page 5 of 29

Report No: 0810104 Date: 2008-10-29



1.5 Test Duration

2008-10-22 to 2008-10-29

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB Radiated Emissions Uncertainty = 4.7dB

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

2.0	Test Equipments					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date	
Ultra Broadband ANT	ROHDE&SCHWARZ	HL562	100157	2008-12-05	2009-12-04	
ESPI Test Receiver	ROHDE&SCHWARZ	ESPI 3	100379	2007-12-05	2008-12-04	
System Controller	CT	SC100	-	2008-02-18	2009-02-17	
ESPI Test Receiver	ROHDE&SCHWARZ	ESI26	838786/013	2008-02-18	2009-02-17	
3m OATS			N/A	2008-02-18	2009-02-17	
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170265	2008-08-16	2009-08-15	

Page 6 of 29

Report No: 0810104 Date: 2008-10-29



3.0 Technical Details

3.1 Summary of test results

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.207	Conducted	N/A	N/A
	Emission Test		
FCC Part 15, Paragraph 15.209	General	PASS	Compliant
	Requirement	11100	
FCC Dark 15, Davis and 15 221 (b)	Radiated	PASS	G1:t
FCC Part 15, Paragraph 15.231 (b)	Emission Test	PASS	Compliant
FCC Part 15, Paragraph 15.231 (c)	20dB	PASS	Compliant
	Bandwidth		
	Testing		
FCC Part 15, Paragraph 15.231 (a) (1)	Deactivate	PASS	Compliant
	Testing		

3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.231

4.0 EUT Modification


No modification by Shenzhen Timeway Technology Consulting Co., Ltd

Report No: 0810104 Date: 2008-10-29



5. Power Line Conducted Emission Test

5.1 Schematics of the test




EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2003.

Block diagram of Test setup

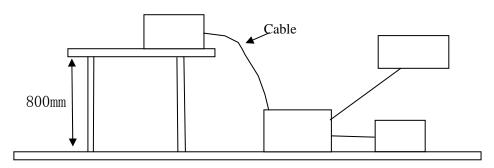

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2003. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model	FCC ID

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable
N/A				

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 0810104 Page 8 of 29

Date: 2008-10-29



5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2003.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

<u> </u>						
Frequency		Class A Lim	its (dB μ V)	Class B Lim	nits (dB \mu V)	
	(MHz) Quasi-peak Level		Average Level	Quasi-peak Level	Average Level	
(0.15 ~ 0.50	79.0	66.0	66.0~56.0*	56.0~46.0*	
($0.50 \sim 5.00$	73.0	60.0	56.0	46.0	
1	$5.00 \sim 30.00$	73.0	60.0	60.0	50.0	

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Note: This test isn't performed because the EUT is powered by battery

Page 9 of 29

Report No: 0810104 Date: 2008-10-29



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.
- (3) The frequency spectrum from 30 MHz to 1 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization : Vertical polarization and Horizontal polarization.

Block diagram of Test setup Distance = 3m Computer Pre -Amplifier EUT Turn-table Receiver

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition

 Same as section 5.4 of this report.

Page 10 of 29

Report No: 0810104 Date: 2008-10-29



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

A FCC Part 15 Subpart C Paragraph 15.231 Limit

Fundamental Frequency (MHz)	Field Strength of		Field Strength of Spurious	
	Fundamental		Emission	
	uV/m dBuV/m u		uV/m	dBuV/m
40.66-40.70	2250	67.04	225	47.04
70-130	1250	61.94	125	41.94
130-174	1250-3370	61.94-70.55	125-375	41.94-51.48
174-260	3750	71.48	375	51.48
260-470	3750-12500	71.48-81.94	375-1250	51.48-61.94
Above 470	12500	81.94	1250	61.94

Note:

- 1. RF Field Strength (dBuV) = 20 log RF Voltage (uV)
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.
- 4. Linear interpolations for frequency ranges 130-174MHz and 260-470MHz
- 5.the above field strength limits are specified at a distance of 3-meters and the tighter limits apply at the band edges

B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

		<u> </u>
Frequency Range (MHz)	Distance (m)	Field strength (dB \(\mu \) V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 5. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-4G, the final emission level got using PK detector. And Average Value = peak(dBuV/m)+duty cycle factor(dB)
- 6. New batteries were installed in the equipment under test for radiated emission testing.

Page 11 of 29

Report No: 0810104 Date: 2008-10-29



6.5 Test result

Radiated Emission Data

Product:	Remote with password	Test Mode:	Keeping Tx transmitting
Test Voltage:	6V	Humidity:	56%
Test Result:	Pass		

Radiation Emission for Fundamental

	Frequency (MHz)	Emission PK/AV (dBuV/m)	Antenna Polarity (H/V)	Limits PK/AV (dBuV/m)	Results	Remarks
	433.92	76.72 / 72.72	Н	100.8 / 80.8	PASS	Fundamental
Ī	433.92	75.20 / 71.20	V	100.8 / 80.8	PASS	Fundamental

Note: Average = Peak value + Duty cycle factor

Duty cycle factor=-4.0

Spurious Emission (Below 1GHz)

Frequency (MHz)	Emission PK/AV (dBuV/m)	Antenna Polarity (H/V)	Limits PK/AV (dBuV/m)	Results	Remarks
867.84	50.95 / 46.95	Н	80.8 / 60.8	PASS	Spurious
867.84	59.47 / 55.47	V	80.8 / 60.8	PASS	Spurious

Note: Average = Peak value + Duty cycle factor

Duty cycle factor=-4.0

Spurious Emission (Above 1GHz)

Frequency (GHz)	Emission PK/AV (dBuV/m)	Antenna Polarity (H/V)	Limits PK/AV (dBuV/m)	Results	Remarks
2.1703	47.81 / 43.81	Н	80.8 / 60.8	PASS	Spurious
1.2965	48.30 / 44.30	V	80.8 / 60.8	PASS	Spurious

Note: Average = Peak value + Duty cycle factor


Duty cycle factor=-4.0

Report No: 0810104 Date: 2008-10-29




Test Plots for below 1GHz

Horizontal

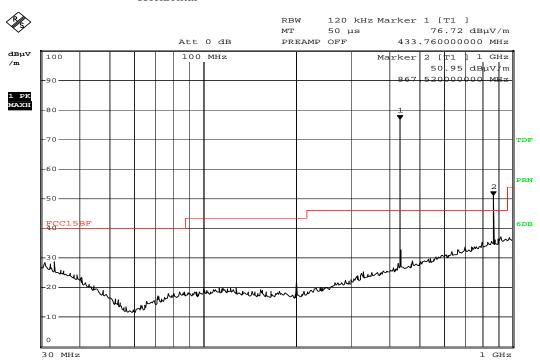

Date: 23.OCT.2008 15:18:15

Vertical

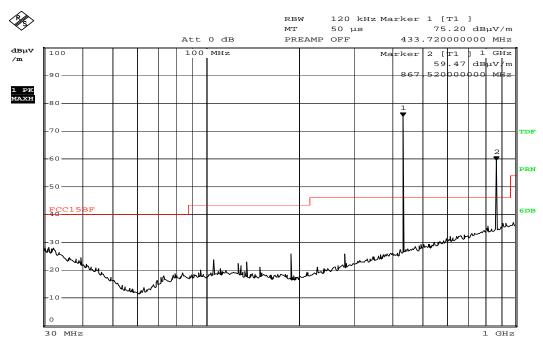

Date: 23.OCT.2008 15:20:10

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 13 of 29

Report No: 0810104 Date: 2008-10-29



Test Plots for above 1GHz

Horizontal

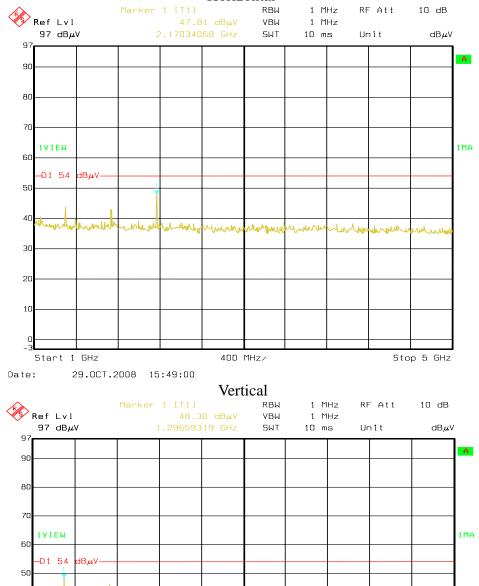

40

30

20

Date:

The report refers only to the sample tested and does not apply to the bulk.

29.0CT.2008

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

400 MHz/

Stop 5 GHz

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 0810104 Page 14 of 29

Date: 2008-10-29



7.0 20dB Bandwidth Testing

7.1 Requirement

Per 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

7.2 Test Procedure

With the EUT's antenna attached, the EUT's 20dB Bandwidth power was received by the test antenna which was connected to the spectrum analyzer with the START and STOP frequencies set to the EUT's operation band.

7.3 Test Data

Frequency (MHz)	20dB Bandwidth Emission (kHz)	Limit (kHz)	Result
433.92	366.7335	1084.8	Pass

Limit=Frequency x 0.25%=433.92 x 0.25%=1.0848MHz


Refer to attached plots:

Page 15 of 29

Report No: 0810104 Date: 2008-10-29



TEST PLOTS:

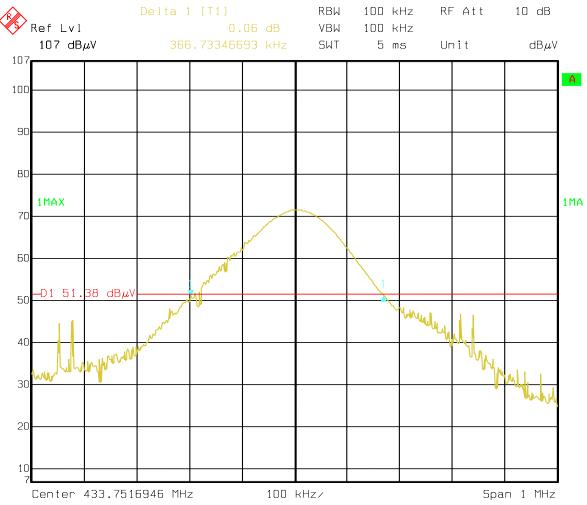

Date: 23.0CT.2008 15:17:23

Page 16 of 29

Report No: 0810104 Date: 2008-10-29




8.0 Deactivate Test

8.1 Requirement

Per 15.231(a) (1), a manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

8. 2 Radiated Test Setup

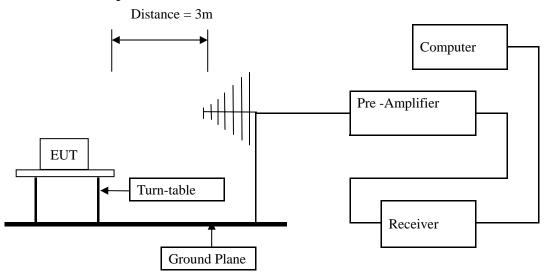

For the actual test configuration, please refer to the related items – Photos of Testing The deactivation test was performed in the 3 meters chamber B test site, using the setup accordance with the ANSI C63.4 - 2003. The specification used was the FCC 15.231(a) limits.

8.3 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

8.4 Test Data

Deactivate time=0.24s (not more than 5 seconds)


Test results: PASS

Page 17 of 29

Report No: 0810104 Date: 2008-10-29



Test Plots:

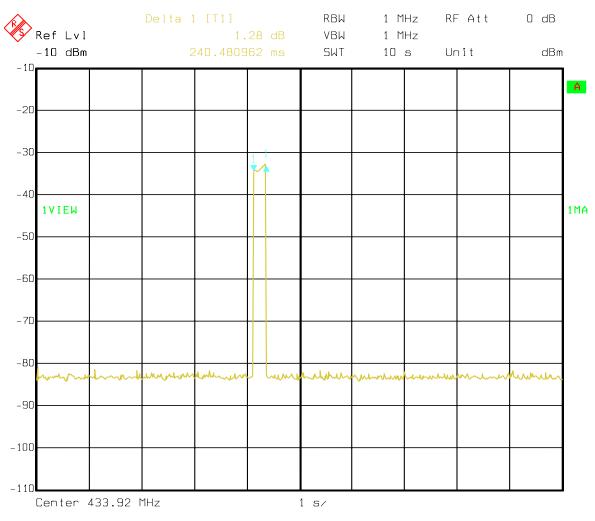

Date: 28.0CT.2008 16:12:42

Report No: 0810104 Page 18 of 29

Date: 2008-10-29



9.0 Duty Cycle

9.1 Limit

No dedicated limit specified in the Rules

9.2 Test Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer=operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=1MHz, Span=0Hz, Adjust Sweep=200ms.
- 5. Repeat above procedures until all frequency measured were complete.

9.3 Test Data

Base on the worst case

Tp = 100 ms

Ton = (0.627*4)*25 = 62.7 (ms)

Duty cycle=Ton/Tp=0.627


Duty cycle factor = $20 * \log (\text{duty cycle}) = 20 * \log (0.627) = -4 dB$

Page 19 of 29

Report No: 0810104 Date: 2008-10-29




Testing Plots:

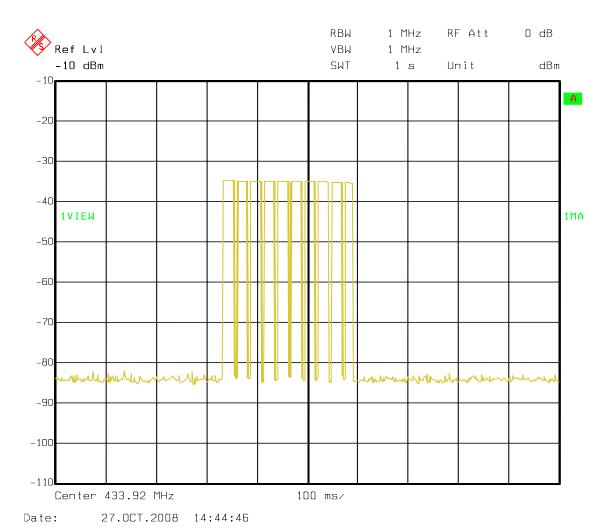

Page 20 of 29

Report No: 0810104 Date: 2008-10-29



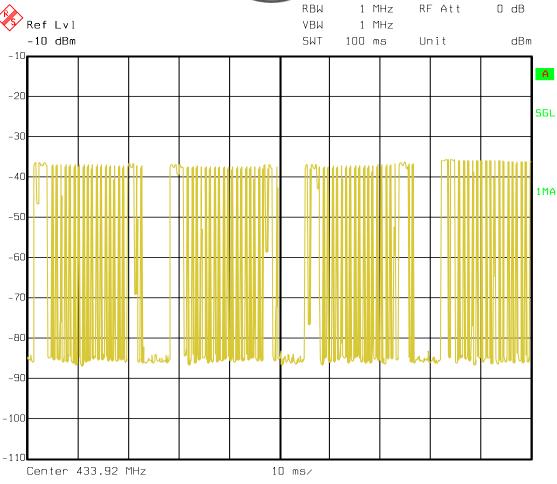


Date: 27.0CT.2008 14:51:28

Page 21 of 29

Report No: 0810104 Date: 2008-10-29

Date:



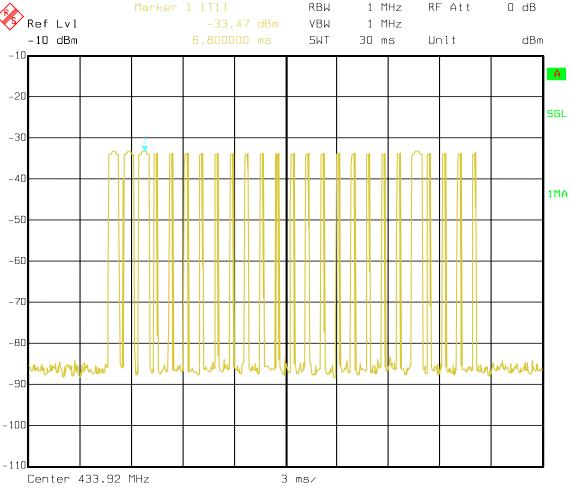

27.0CT.2008


14:53:26

Page 22 of 29

Report No: 0810104 Date: 2008-10-29

Date:



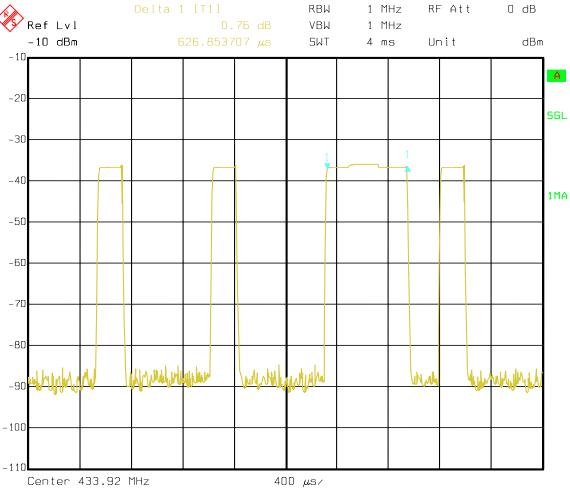


27.0CT.2008 14:57:00

Page 23 of 29

Report No: 0810104 Date: 2008-10-29



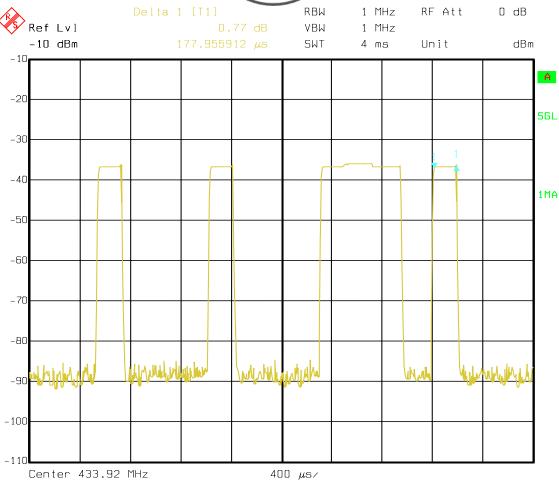

Date: 27.0CT.2008 14:58:06

10.0 FCC ID Label

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 24 of 29


Report No: 0810104 Date: 2008-10-29



This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

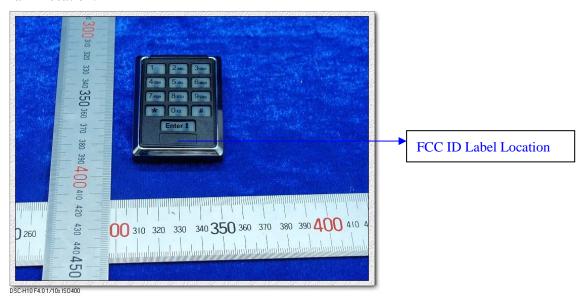

11.0. Photo of testing

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 0810104 Date: 2008-10-29



11.1 Conducted test View—N/A

11.2 Radiated emission test view

Below 1GHz



DSC-H10 F9.0 1/320s ISO125

Above 1GHz



11.3 Photo for the EUT

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 26 of 29

Report No: 0810104 Date: 2008-10-29





Back view of EUT

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 27 of 29

Report No: 0810104 Date: 2008-10-29



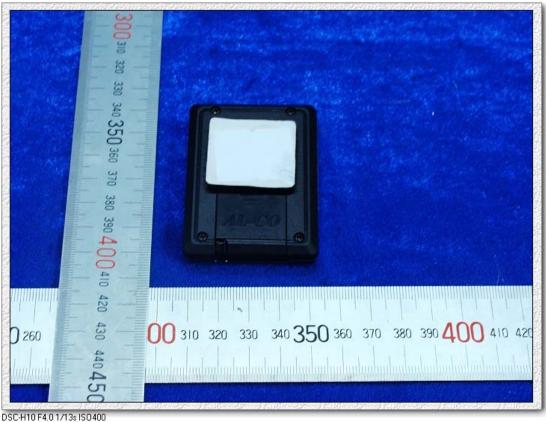

Inside view 1 of EUT

Page 28 of 29

Report No: 0810104 Date: 2008-10-29





DSC-H10 F4.0 1/10s ISO 400

Inside view 2 of EUT

Page 29 of 29

Report No: 0810104 Date: 2008-10-29





DSC-H10 F3.5 1/10s ISO 400

End of the report