



Most Technology Service Co., Ltd.
Tel:(86) 755-26825180 Fax:(86) 755-86170310
Http:// www. szmost.com Email: szmost@szmost.com

Test Report

Product Name: Measurement of RF Interference from a Model 10100S00,
0.5W UHF Transmitter

FCC ID: VMH-10100S00

MODEL NO. : 10100S00

Applicant:

Innovation Specialties
11869 Teale Street,Culver City,California,USA

Date Received: 06/25/2009

Date Tested: 06/23-24/2009

APPLICANT: Innovation Specialties
FCC ID: VMH-10100S00

Cover Sheet



Most Technology Service Co., Ltd.
Tel:(86) 755-26825180 Fax:(86) 755-86170310
Http:// www. szmost.com Email: szmost@szmost.com

TABLE OF CONTENTS

APPLICANT: INNOVATION SPECIALTIES

FCC ID: VMH-10100S00

TEST REPORT CONTAINING:

PAGE 1.....TEST EQUIPMENT LIST
PAGE 2.....TEST PROCEDURE
PAGE 3-7.....POWER LINE CONDUCTED INTERFERENCE AND PLOTS
PAGE 8-9.....RADIATION INTERFERENCE TEST DATA

EXHIBIT INCLUDED:

PAGE 1.....BLOCK DIAGRAM
PAGE 2.....SCHEMATIC
PAGE 3.....USERS MANUAL
PAGE 4.....LABEL SAMPLE
PAGE 5.....LABEL LOCATION
PAGE 6.....EXTERNAL PHOTOGRAPHS
PAGE 7.....INTERNAL PHOTOGRAPHS
PAGE 8.....OPERATIONAL DESCRIPTION
PAGE 9.....TEST SET UP PHOTOGRAPHS

APPLICANT: Innovation Specialties
FCC ID: VMH-10100S00

TABLE OF CONTENTS



Most Technology Service Co., Ltd.

Tel: (86) 755-26825180 Fax: (86) 755-86170310

Http:// www. szmost.com Email: szmost@szmost.com

EMC Equipment List

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	100492	Mar 10,2009	1 Year
LISN	ROHDE&SCHWARZ	ENV216	100093	Mar 10,2009	1Year
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	101202	Mar 10,2009	1 Year
Spectrum Analyzer	ANRITSU	MS2651B	6200238316	Mar 10,2009	1 Year
50 Coaxial Switch	ANRITSU CORP	MP59B	6200283933	Mar 10,2009	1 Year
Bilog Antenna	Sunol	JB3	A121206	Mar 10,2009	1 Year
Horn Antenna	EMCO	3115	640201028-06	Mar 10,2009	1 Year
50 Coaxial Switch	ANRITSU CORP	MP59B	6200283933	Mar 10,2009	1 Year
Cable	Resenberger	N/A	NO.1	Mar 10,2009	1 Year
Cable	SCHWARZBECK	N/A	NO.2	Mar 10,2009	1 Year
Cable	SCHWARZBECK	N/A	NO.3	Mar 10,2009	1 Year
Single Phase Power Line Filter	Kikusui	LIN40MA-PC R-L	LM002352	Mar 10,2009	1Year
AC Power Source	Kikusui	AC40MA	LM003232	Mar 10,2009	1Year
Test analyzer	Kikusui	KHA1000	LM003720	Mar 10,2009	1Year
ESD Tester	Kikusui	KES4021	LM003537	Mar 10,2009	1 Year
Signal Generator	IFR	2032	203002/100	Mar 10,2009	1 Year
Amplifier	A&R	150W1000	301584	NCR	NCR
Dual Directional Coupler	A&R	DC6080	301508	Mar 10,2009	1 Year
Power Head	A&R	PH2000	301193	Mar 10,2009	1 Year
Power Meter	A&R	PM2002	302799	Mar 10,2009	1 Year
Field Monitor	A&R	FM5004	300329	Mar 10,2009	1 Year
Field Probe	A&R	FP5000	300221	Mar 10,2009	1 Year
EMC PRO System	EM Test	UCS-500-M4	V0648102026	Mar 10,2009	1 Year
EMC PRO System	EM Test	UCS-500-M4	V0648102026	Mar 10,2009	1 Year

Remark:

Test Firm Name: Most Technology Service Co., Ltd.

Test Firm Address:

No. 5, 2nd Langshan Road, North District, Hi-tech Industrial Park, Nanshan, Shenzhen, Guangdong, China

FCC Registered Test Site Number: 490827

APPLICANT: Innovation Specialties

FCC ID: VMH-10100S00



Most Technology Service Co., Ltd.
Tel: (86) 755-26825180 Fax: (86) 755-86170310
Http:// www. szmost.com Email: szmost@szmost.com

TEST PROCEDURE

GENERAL: This report shall NOT be reproduced except in full without the written approval of MOST TECHNOLOGY SERVICE CO., LTD. The EUT was transmitting a test signal during the testing.

POWER LINE CONDUCTED INTERFERENCE: The test procedure used was ANSI Standard C63.4-2003 using a 50 UH LISN. Both Lines were observed. The bandwidth of the receiver was 10kHz with an appropriate sweep speed. The ambient temperature of the EUT was 25 with a humidity of 58%.

RADIATION INTERFERENCE: The test procedure used was ANSI Standard C63.4-2003 using a ANRITSU spectrum analyzer with a pre-selector. The analyzer was calibrated in dB above a micro volt at the output of the antenna. The resolution bandwidth was 100 kHz and the video bandwidth was 300 kHz up to 1 GHz and 1 MHz with a video BW of 3 MHz above 1 GHz. The ambient temperature of the EUT was 25 with a humidity of 58%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer and cable loss. The antenna correction factors and cable loss are stated in terms of dB. The gain of the Pre-selector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz) METER READING + ACF + CABLE = FS
33 20 dBuV + 10.36 dB + 0.9 dB= 31.26 dBuV/m @ 3m

ANSI STANDARD C63.4-2003 10.1.7 MEASUREMENT PROCEDURES: The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The EUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to 10th harmonic of the fundamental.

Peak readings were taken in three (3) orthogonal planes and the highest readings were converted to average readings based on the duration of "ON" time.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

The situation was similar for the conducted measurement except that the table did not rotate. The EUT was setup as described in ANSI Standard C63.4-2003 10.1.7 with the EUT 40 cm from the vertical ground wall.



Most Technology Service Co., Ltd.
Tel:(86) 755-26825180 Fax:(86) 755-86170310
Http:// www. szmost.com Email: szmost@szmost.com

APPLICANT: INNOVATION SPECIALTIES
FCC ID: VMH-10100S00
NAME OF TEST: POWER LINE CONDUCTED INTERFERENCE
RULES PART NUMBER: 15.107

REQUIREMENTS:


Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.


TEST PROCEDURE: ANSI STANDARD C63.4-2003

BLOCK DIAGRAM OF TEST SETUP:

Test Mode: Running(EUT Connect GPS)



Test Mode: Running(EUT Connect PC System)

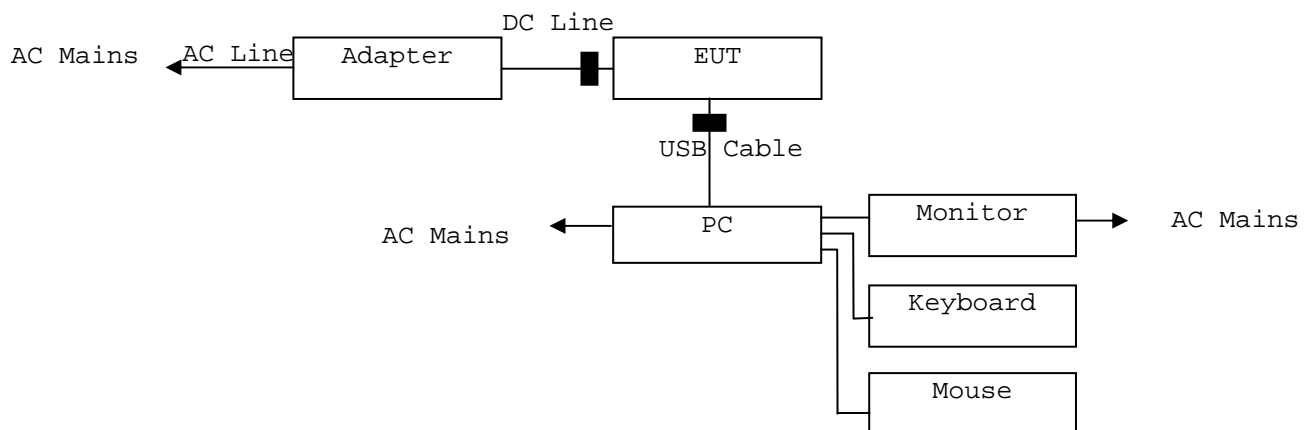

Note: 1.USB Cable: Shielded, Detachable, 1.1m
2." " is ferrite core.
3.AC Line, Unshielded, Detachable, 1.3m
DC Line, Unshielded, Undetachable, 1.85m

Conducted Emission Measurement


File: 10100S00

Data: #1

Date: 09/06/24/

Time: 10/42/28

80.0 dBuV

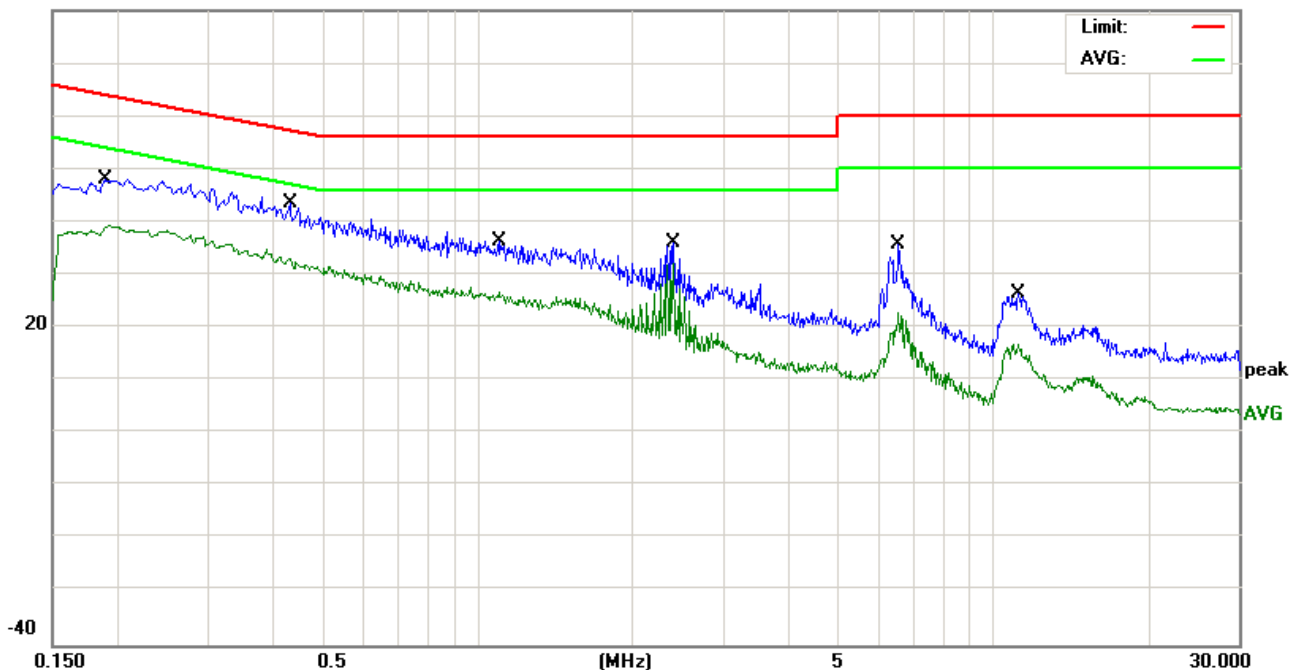

Site site MOST 3M

Phase: L1

Temperature: 26

Limit: FCC Part15 B Class B QP

Power: DC10V Adaptor AC 120V/60Hz

Humidity: 60 %

EUT: Measurement of RF Interference from a Model 10100S00,UHF Transmitter

M/N: 10100S00

Mode: Running(EUT Connect GPS)

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1900	36.60	11.40	48.00	64.03	-16.03	QP	
2	*	0.4340	33.01	10.44	43.45	57.18	-13.73	QP	
3		1.1019	26.57	9.90	36.47	56.00	-19.53	QP	
4		2.3980	26.78	9.40	36.18	56.00	-19.82	QP	
5		6.5860	24.83	11.05	35.88	60.00	-24.12	QP	
6		11.2299	17.35	9.00	26.35	60.00	-33.65	QP	

*:Maximum data x:Over limit !:over margin

Conducted Emission Measurement


File: 10100S00

Data: #2

Date: 09/06/24/

Time: 10/44/10

80.0 dBuV

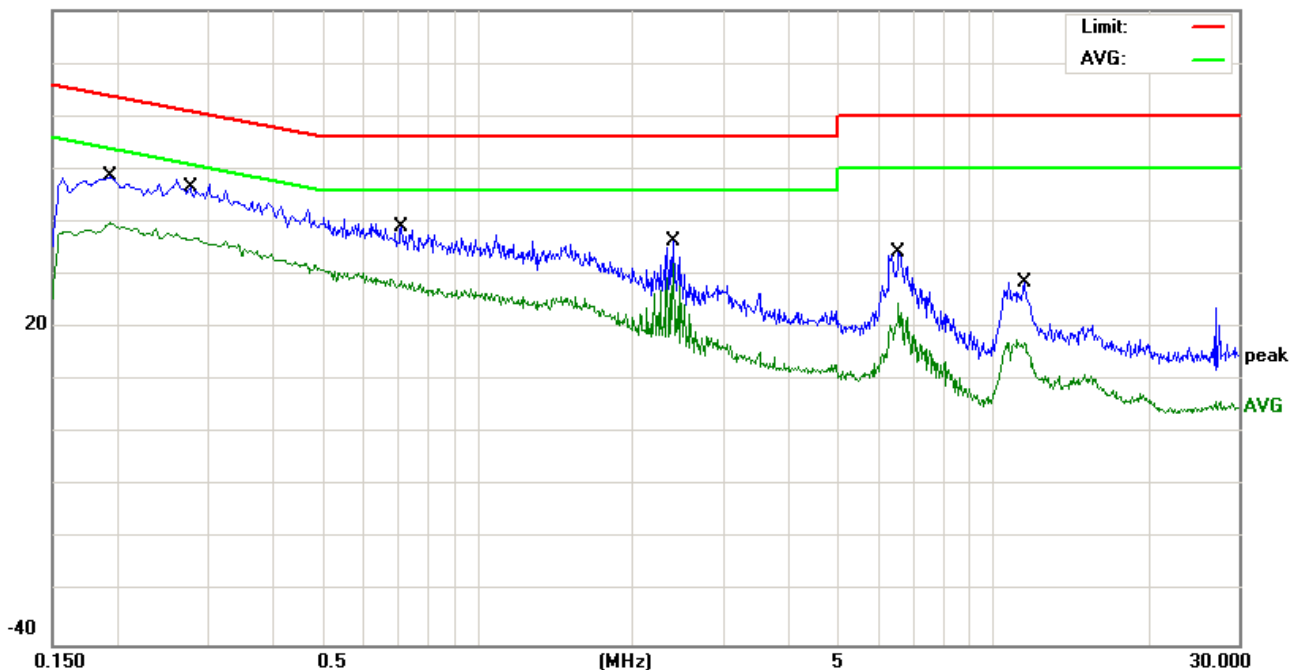

Site site MOST 3M

Phase: **N**

Temperature: 26

Limit: FCC Part15 B Class B QP

Power: DC10V Adaptor AC 120V/60Hz

Humidity: 60 %

EUT: Measurement of RF Interference from a Model 10100S00, UHF Transmitter

M/N: 10100S00

Mode: Running(EUT Connect GPS)

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1940	36.87	11.64	48.51	63.86	-15.35	QP	
2	*	0.2779	35.14	11.48	46.62	60.88	-14.26	QP	
3		0.7140	28.95	10.00	38.95	56.00	-17.05	QP	
4		2.3980	26.94	9.40	36.34	56.00	-19.66	QP	
5		6.5860	23.20	11.05	34.25	60.00	-25.75	QP	
6		11.5420	19.55	9.00	28.55	60.00	-31.45	QP	

*:Maximum data x:Over limit !:over margin

Conducted Emission Measurement


File: 10100S00

Data: #3

Date: 2009/06/24

Time: 10:51:09

80.0 dBuV

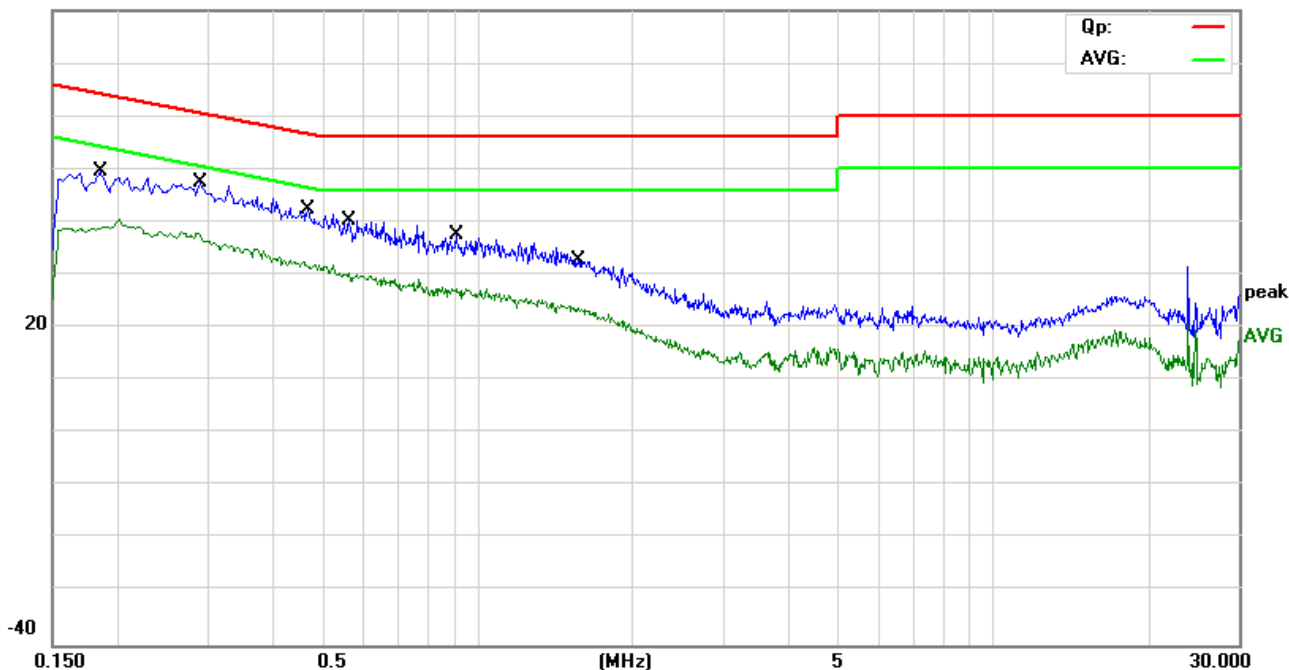

Site site #1

Phase: **L1**

Temperature: 26

Limit: FCC Part15 B Class B QP

Power: DC10V Adaptor AC 120V/60Hz Humidity: 60 %

EUT: Measurement of RF Interference from a Model 10100S00, UHF Transmitter

M/N: 10100S00

Mode: Running (EUT Connect PC System)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1860	38.50	11.16	49.66	64.21	-14.55	QP	
2	*	0.2900	36.05	11.40	47.45	60.52	-13.07	QP	
3		0.4700	32.26	10.20	42.46	56.51	-14.05	QP	
4		0.5660	30.31	10.00	40.31	56.00	-15.69	QP	
5		0.9100	27.48	10.00	37.48	56.00	-18.52	QP	
6		1.5740	23.34	9.43	32.77	56.00	-23.23	QP	

*: Maximum data x: Over limit !: over margin

Conducted Emission Measurement


File: 10100S00

Data: #4

Date: 2009/06/24

Time: 10:55:02

80.0 dBuV

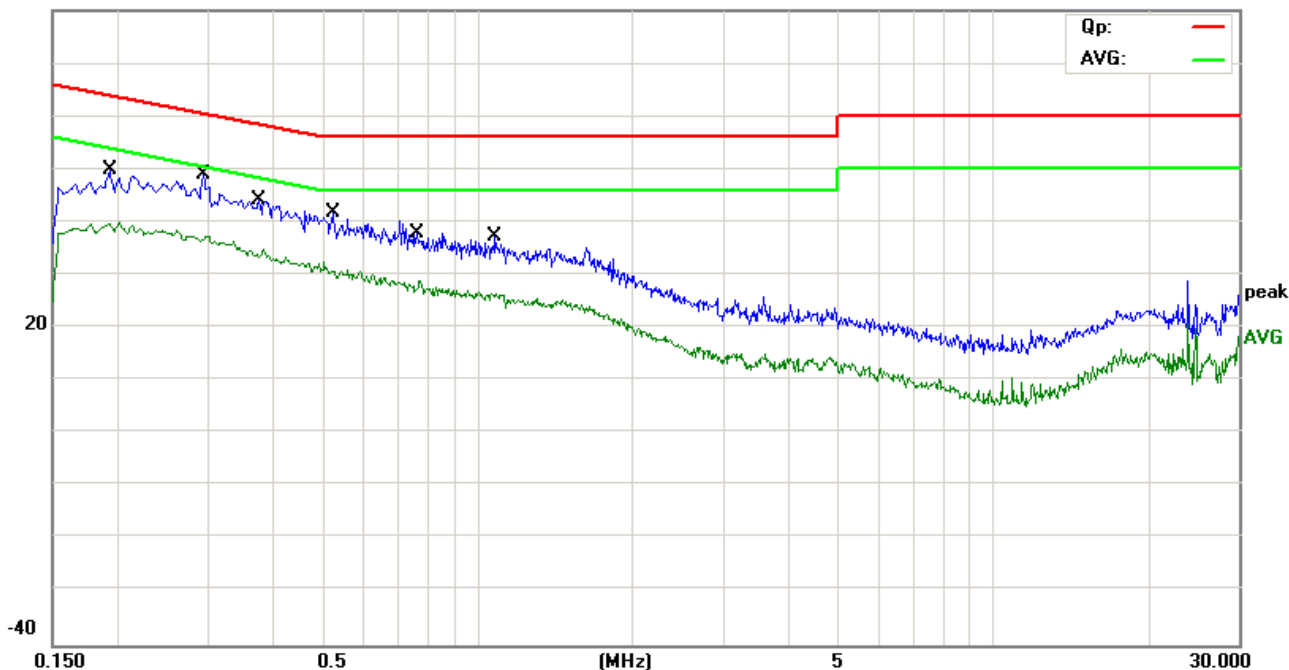

Site site #1

Phase: **N**

Temperature: 26

Limit: FCC Part15 B Class B QP

Power: DC10V Adaptor AC 120V/60Hz Humidity: 60 %

EUT: Measurement of RF Interference from a Model 10100S00, UHF Transmitter

M/N: 10100S00

Mode: Running (EUT Connect PC System)

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1940	38.18	11.64	49.82	63.86	-14.04	QP	
2	*	0.2940	37.58	11.37	48.95	60.41	-11.46	QP	
3		0.3780	33.37	10.81	44.18	58.32	-14.14	QP	
4		0.5260	31.84	10.00	41.84	56.00	-14.16	QP	
5		0.7660	27.76	10.00	37.76	56.00	-18.24	QP	
6		1.0860	27.46	9.91	37.37	56.00	-18.63	QP	

*: Maximum data x: Over limit !: over margin



Most Technology Service Co., Ltd.
Tel: (86) 755-26825180 Fax: (86) 755-86170310
Http:// www. szmost.com Email: szmost@szmost.com

APPLICANT: INNOVATION SPECIALTIES

FCC ID: VMH-10100S00

NAME OF TEST: RADIATION INTERFERENCE

RULES PART NUMBER: 15.109


REQUIREMENTS:

S15.109
30 - 88 MHz 40 dBuV/m @3M
88 - 216 MHz 43.5
216 - 960 MHz 46
ABOVE 960 MHz 54dBuV/m


Test Data:

REMARK: Emissions attenuated more than 20 dB below the permissible value are not reported.

Test Mode: Running(EUT Connect GPS)



Test Mode: Running(EUT Connect PC System)

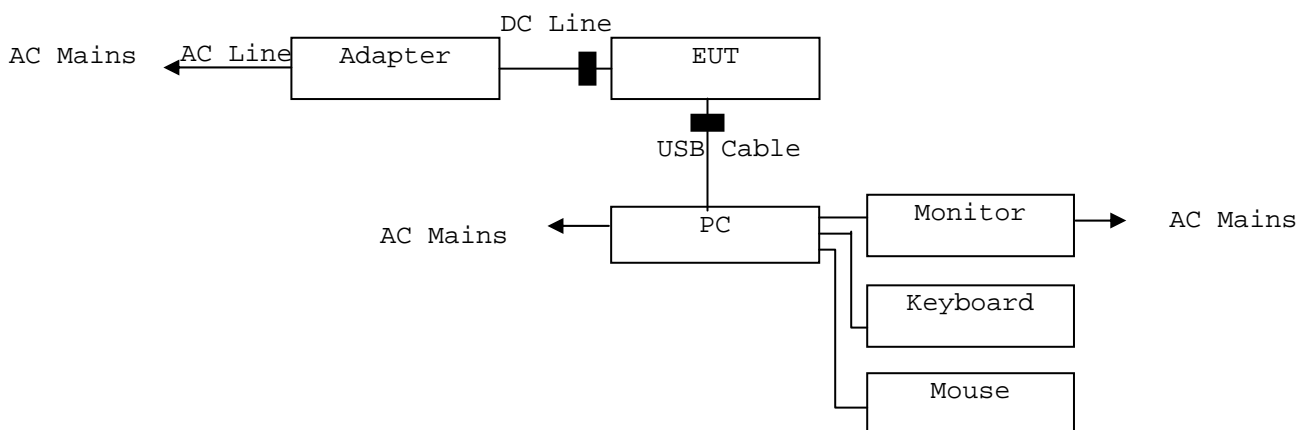

Note: 1. USB Cable: Shielded, Detachable, 1.1m
2. " " is ferrite core.
3. AC Line, Unshielded, Detachable, 1.3m
DC Line, Unshielded, Undetachable, 1.85m



Most Technology Service Co., Ltd.
Tel: (86) 755-26825180 Fax: (86) 755-86170310
Http:// www. szmost.com Email: szmost@szmost.com

Test Mode: Running (EUT Connect GPS)

Frequency (MHz)	Antenna Polarization	Emission Level (dBuV/m)			FCC 15 Subpart B Limit (dBuV/m)
		Avg	QP	Peak	
33.58	Horizontal	--	31.04	--	40.0
90.34	Horizontal	--	30.62	--	43.5
132.53	Horizontal	--	29.11	--	43.5
411.90	Horizontal	--	38.90	--	46.0
54.62	Vertical	--	33.73	--	40.0
96.89	Vertical	--	28.62	--	43.5
134.20	Vertical	--	32.49	--	43.5
320.03	Vertical	--	29.27	--	46.0

Test Mode: Running (EUT Connect PC System)

Frequency (MHz)	Antenna Polarization	Emission Level (dBuV/m)			FCC 15 Subpart B Limit (dBuV/m)
		Avg	QP	Peak	
33.58	Horizontal	--	30.81	--	40.0
89.05	Horizontal	--	29.34	--	43.5
134.76	Horizontal	--	30.12	--	43.5
326.78	Horizontal	--	31.91	--	46.0
54.62	Vertical	--	32.75	--	40.0
97.90	Vertical	--	27.22	--	43.5
136.79	Vertical	--	30.50	--	43.5
309.43	Vertical	--	31.43	--	46.0