







# ISO/IEC17025 Accredited Lab.

Report No: FCC 0805081 File reference No: 2008-12-02

Applicant: Intraco Trading BV.

Product: MailMania

Model No: 1061

Trademark: N/A

Test Standards: FCC Part 15 Subpart C, Paragraph 15.231

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4&FCC Part 15 Subpart C, Paragraph 15.231 regulations for the evaluation of

raragraph 13.231 regulations for the evaluation (

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung Manager

Dated: Dec 02,2008

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

# SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District, Shenzhen,CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 0805081 Page 2 of 33

Date: 2008-12-02



# **Special Statement:**

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

# **CNAS-LAB Code: L2292**

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

# FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.:899988.

# IC- Registration No.: IC5205A-01

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration No.: IC 5205A-01.

Page 3 of 33

Report No: 0805081 Date: 2008-12-02



# **Test Report Conclusion** Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	5
1.6	Test Uncertainty	5
1.7	Test By	5
2.0	List of Measurement Equipment	5
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards	7
4.0	EUT Modification	7
5.0	Power Line Conducted Emission Test.	7
5.1	Schematics of the Test.	7
5.2	Test Method and Test Procedure.	7
5.3	Configuration of the EUT	7
5.4	EUT Operating Condition.	8
5.5	Conducted Emission Limit	8
5.6	Test Result	8
6.0	Radiated Emission test	9
6.1	Test Method and Test Procedure.	9
6.2	Configuration of the EUT	9
6.3	EUT Operation Condition.	9
6.4	Radiated Emission Limit	10
6.5	Test Result.	10
7.0	20dB Bandwidth Test	16
8.0	Deactivate Test	18
9.0	Duty Cycle	20
10.0	FCC ID Label	26
11.0	Photo of Testing.	27

Report No: 0805081 Page 4 of 33

Date: 2008-12-02



### 1.0 General Details

### 1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

Address: 5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-01

For 3m & 10 m OATS

# 1.2 Applicant Details

Applicant: Intraco Trading BV.

Address: Noorddijk 88. 1521 PD Wormerveer, The Netherlands

Telephone: 0031 (0) 75 6475420 Fax: 0031 (0) 75 6475420

# 1.3 Description of EUT

Product: MailMania

Brand Name: N/A
Model Number: 1061
Additional Model Name N/A
Additional Trade Name N/A

Rating: 3V (Powered by two pcs AAA batteries)

Operation Frequency 868.5MHz

Antenna Designation A permanent fixed antenna, designed as an indispensable part of the EUT.

# 1.4 Submitted Sample

1 Sample

Page 5 of 33

Report No: 0805081 Date: 2008-12-02



1.5 Test Duration

2008-11-12 to 2008-11-20

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB Radiated Emissions Uncertainty = 4.7dB

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

2.0	Test Equipments					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date	
Ultra Broadband ANT	ROHDE&SCHWARZ	HL562	100157	2007-12-05	2008-12-04	
System Controller	CT	SC100	-	2008-02-18	2009-02-17	
Power Amplifier	AR	150W1000	300999	2008-02-18	2009-02-17	
ESPI Test Receiver	ROHDE&SCHWARZ	ESI26	838786/013	2008-02-18	2009-02-17	
3m OATS			N/A	2008-02-18	2009-02-17	
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-631	2008-04-26	2009-04-25	

Page 6 of 33

Report No: 0805081 Date: 2008-12-02



# 3.0 Technical Details

# 3.1 Summary of test results

# The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.207	Conducted	PASS	N/A
	Emission Test		
FCC Part 15, Paragraph 15.209	General Requirement	PASS	Compliant
FCC Part 15, Paragraph 15.231 (b)	Radiated Emission Test	PASS	Compliant
FCC Part 15, Paragraph 15.231 (c)	20dB	PASS	Compliant
	Bandwidth		
	Testing		
FCC Part 15, Paragraph 15.231 (a) (2)	Deactivate	PASS	Compliant
	Testing		

# 3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.231

# 4.0 EUT Modification


No modification by Shenzhen Timeway Technology Consulting Co.,Ltd

Report No: 0805081 Date: 2008-12-02



# 5. Power Line Conducted Emission Test

### 5.1 Schematics of the test




**EUT: Equipment Under Test** 

# 5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 500hm/50uH as specified by section 5.1 of ANSI C63.4 –2003.

# Block diagram of Test setup

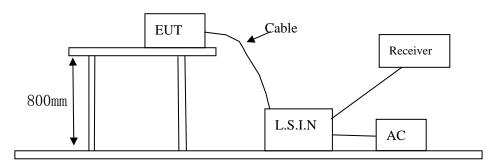

# 5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2003. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

# A. EUT

Device	Manufacturer	Model	FCC ID
MailMania	Intraco Electronics Ltd.	1061	VN31061R

# B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

# C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable
N/A				

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 0805081 Page 8 of 33

Date: 2008-12-02



# 5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2003.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

# 5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Class A Limits (dB µ V)		Class B Limits (dB µ V)		
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0	
5.00 ~ 30.00	73.0	60.0	60.0	50.0	

Notes:

- 1. \*Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

### 5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz. (The average detector is necessary when the Quasi-peak emission level beyond the average Limit.)

Note: Due to DC operation, this test item not applicable.

Page 9 of 33

Report No: 0805081 Date: 2008-12-02



# 6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.
- (3) The frequency spectrum from 30 MHz to 1 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "**QP**" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

# Block diagram of Test setup Distance = 3m Computer Pre -Amplifier EUT Turn-table Receiver

- 6.2 Configuration of The EUT

  Same as section 5.3 of this report
- 6.3 EUT Operating Condition
  Same as section 5.4 of this report.

Page 10 of 33

Report No: 0805081 Date: 2008-12-02



### 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

# A FCC Part 15 Subpart C Paragraph 15.231(e) Limit

Fundamental Frequency (MHz)	Field Strength of		Field Strength of Spurious	
	Fundamental		Emission	
	uV/m	dBuV/m	uV/m	dBuV/m
40.66-40.70	1000	60.00	100	40.00
70-130	500	53.98	50	33.98
130-174	500-1500	53.98-63.52	50-150	33.98-43.52
174-260	1500	63.52	150	43.52
260-470	1500-5000	63.52-73.98	150-500	43.52-53.98
Above 470	5000	73.98	500	53.98

Note:

- 1. RF Field Strength  $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.
- 4. Linear interpolations for frequency ranges 130-174MHz and 260-470MHz
- 5.the above field strength limits are specified at a distance of 3-meters and the tighter limits apply at the band edges

# B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage  $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz. As to 1G-9G, the final emission level got using PK detector. And Average =  $peak(dBuV/m) duty\ cycle(dB)$

Report No: 0805081 Page 11 of 33

Date: 2008-12-02



### 6.5 Test result

### **Fundamental Radiated Emission Data** $\mathbf{A}$

Product:	MailMania	Test Mode:	Keeping Tx transmitting
Test Item:	Fundamental Radiated Emission and Spurious Emission Data	Temperature:	25℃
Test Voltage:	5V	Humidity:	56%
Test Result:	Pass		

Frequency	Emission PK/AV	Horiz /	Limits PK/AV	Margin
(MHz)	(dBuV/m)	Vert	(dBuV/m)	(dB)
868.5	72.60/64.19	Horizontal	93.98/73.98	-21.38/-9.79
868.5	74.87/66.46	Vertical	93.98/73.98	-19.11/-7.52
1737	52.65/44.24	Horizontal	73.98/53.98	-21.33/-9.74
1737	57.01/48.60	Vertical	73.98/53.98	-16.97/-5.38
2605.5	55.28/46.87	Horizontal	73.98/53.98	-18.7/-7.11
2605.5	60.28/51.87	Vertical	73.98/53.98	-13.7/-2.11
3474	49.67/41.26	Horizontal	73.98/53.98	-24.31/-12.72
3474	52.19/43.78	Vertical	73.98/53.98	-21.79/-10.2
4342.5		H/V	73.98/53.98	
5211		H/V	73.98/53.98	
6079.5		H/V	73.98/53.98	
6948		H/V	73.98/53.98	
7816.5		H/V	73.98/53.98	
8685		H/V	73.98/53.98	

Note: Average = peak(dBuV/m) - duty cycle(dB)

Page 12 of 33

Report No: 0805081 Date: 2008-12-02

# B. General Radiated Emission Data and Harmonics Radiated Emission Data


# Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx Transmitting

**Results:** Pass


Please refer to following diagram for individual

### Radiated Emission Measurement

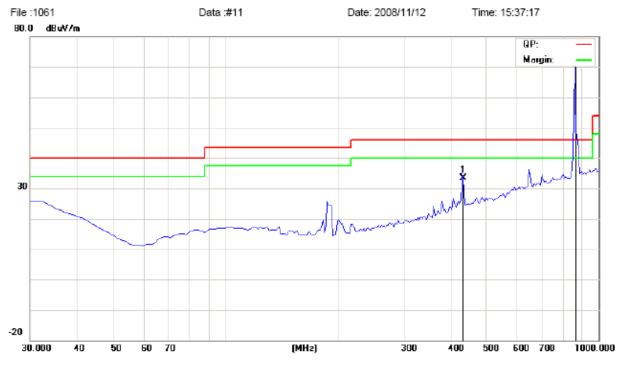

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
434.208	33.46	Н	46.00

Page 13 of 33



# B. General Radiated Emission Data and Harmonics Radiated Emission Data


# Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx Transmitting

**Results:** Pass

Please refer to following diagram for individual

### Radiated Emission Measurement

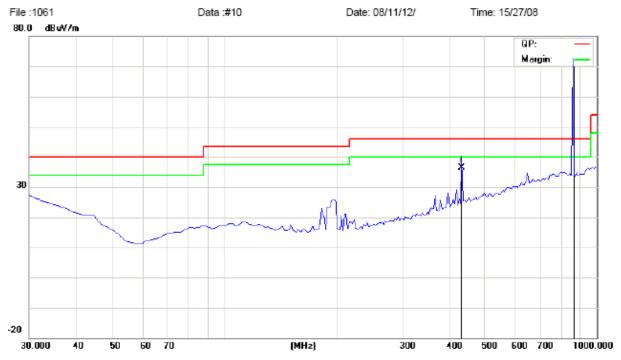


Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
434.208	36.43	V	46.00

Report No: 0805081 Date: 2008-12-02



Test Plot above 1G

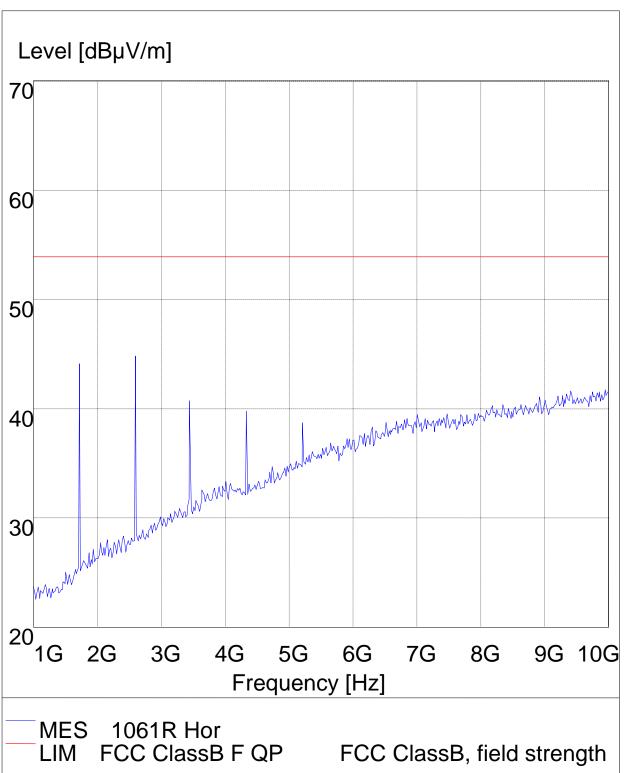


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 0805081 Date: 2008-12-02



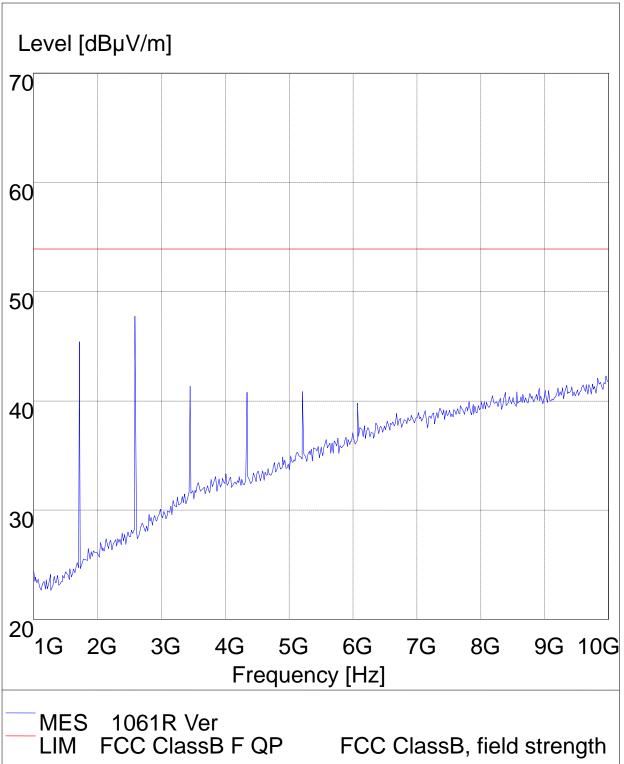

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 0805081 Page 16 of 33

Date: 2008-12-02



# 7.0 20dB Bandwidth Testing

# 7.1 Requirement

Per 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

# 7.2 Test Procedure

With the EUT's antenna attached, the EUT's 20dB Bandwidth power was received by the test antenna which was connected to the spectrum analyzer with the START and STOP frequencies set to the EUT's operation band.

# 7.3 Test Data

Frequency (MHz	20dB Bandwidth Emission (kHz)	Limit (kHz)	Result
868.5	372.00	2170.25	Pass


Limit=Frequency x 0.25%=868.5x 0.25%=2170.25kHz

Refer to attached plots:

Page 17 of 33

Report No: 0805081 Date: 2008-12-02



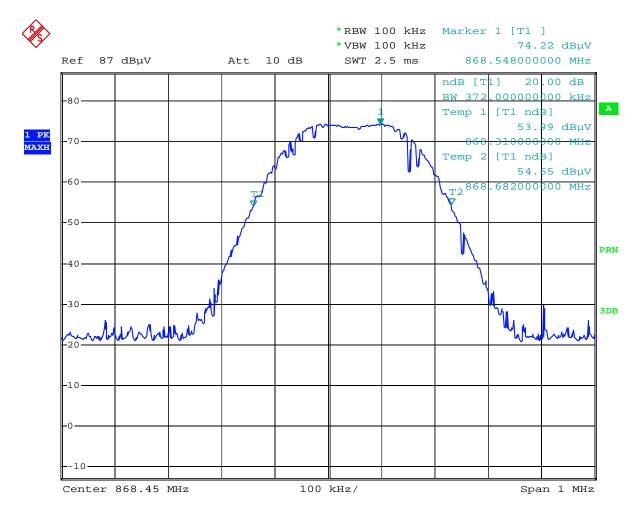

Date: 13.NOV.2008 17:54:54

Page 18 of 33

Report No: 0805081 Date: 2008-12-02




# 8.0 Deactivate Test

# 8.1 Requirement

Per 15.231(e)

Devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

# 8. 2 Radiated Test Setup

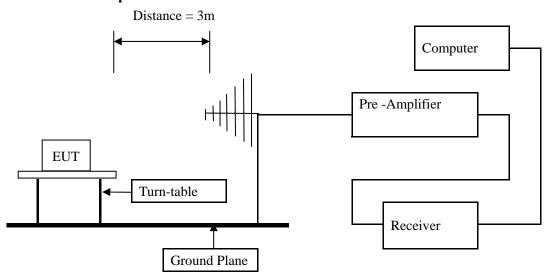

For the actual test configuration, please refer to the related items – Photos of Testing The deactivation test was performed in the 3 meters chamber B test site, using the setup accordance with the ANSI C63.4 - 2003. The specification used was the FCC 15.231(a) limits.

# 8.3 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.


Page 19 of 33

Report No: 0805081 Date: 2008-12-02



# 8.4 Test Data

# Refer to attached plots:

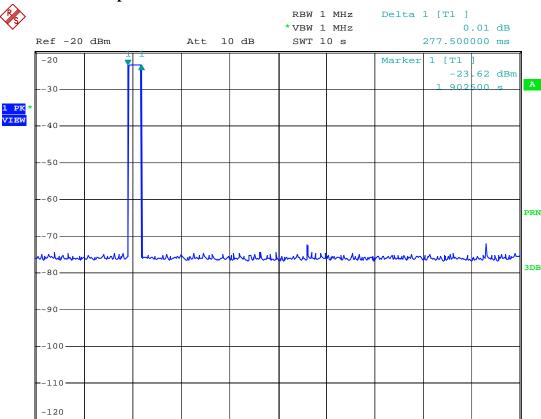

1 s/


Date: 4.DEC.2008 09:43:59

Center 868.358 MHz

Report No: 0805081 Date: 2008-12-02



# 8.4 Test Data Refer to attached plots:

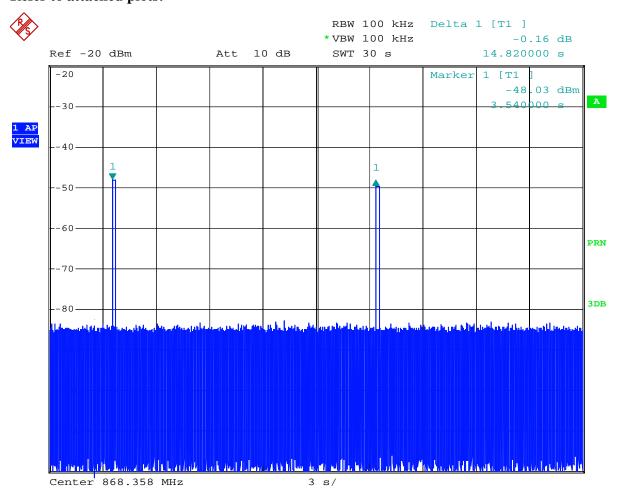

Date: 19.FEB.2009 19:17:05

# 8.5 Test Result

**Pass** 

Report No: 0805081 Page 21 of 33

Date: 2008-12-02



# 9.0 Duty Cycle

# **9.1** Limit

Nil (No dedicated limit specified in the Rules).

# 9.2 Test Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer=operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=100kHz, Span=0Hz, Adjust Sweep=100ms.
- 5. Repeat above procedures until all frequency measured were complete.

# 9.3 Test Data

Tp = 9.279 ms

 $Ton_1 = 0.1*2 = 0.2$  (ms)

 $Ton_2 = 0.34*3 = 1.02(ms)$ 

 $Ton_3 = 0.922*1 = 0.922$  (ms)


 $Ton_4 = 0.1.383*1 = 1.383 \text{ (ms)}$ 

 $Ton = Ton1 + Ton_2 + Ton_3 + Ton_4 = 3.525$ 

Factor =  $20 * \log (Ton / Tp) = 20 * \log (3.525/9.279) = -8.41dB$ 


# Refer to attached plots for details:



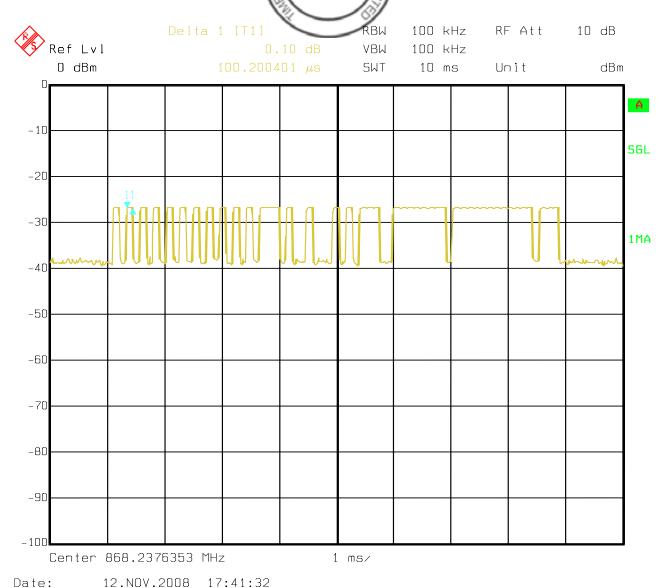


Date: 12.Nov.2000 11.41.52



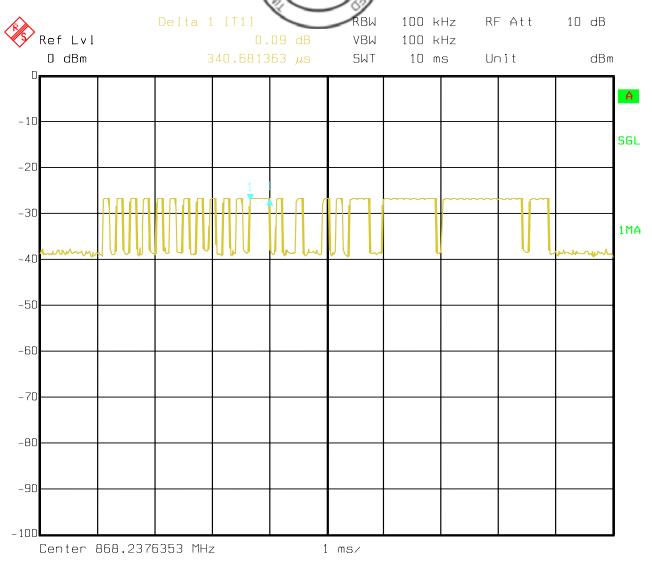


Date: 12.NOV.2008 17:42:47



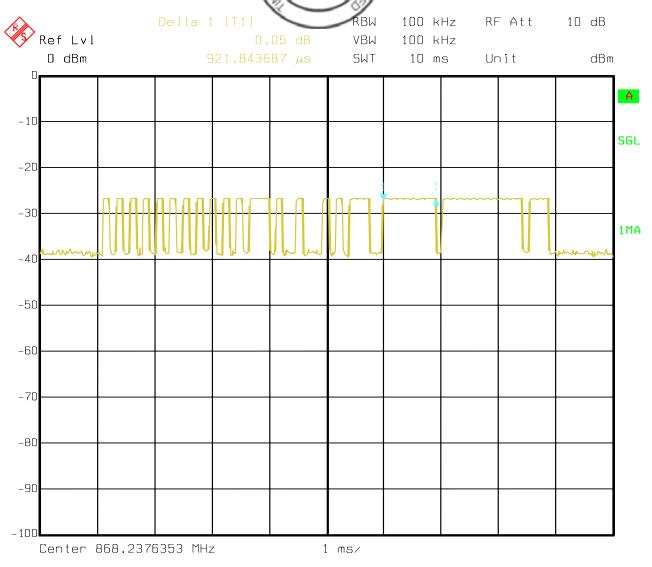


Date: 12.NOV.2008 17:44:06



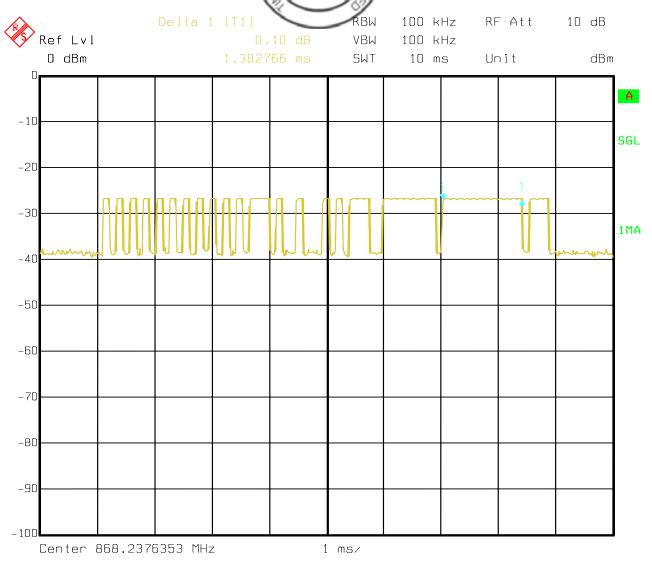

Date: 12.NOV.2008 17:45:16



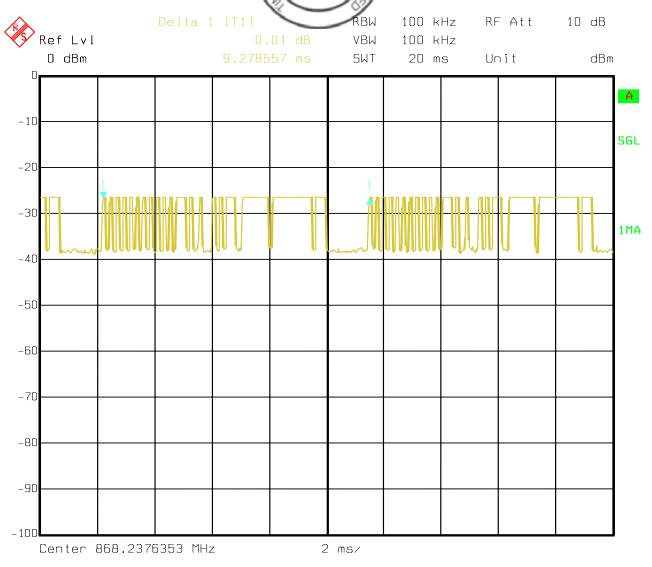

Date: 12.NOV.2008 17:48:34

Page 27 of 33

Report No: 0805081 Date: 2008-12-02




# 10.0 FCC ID Label

**FCC ID: VN31061R** 

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

### Mark Location:

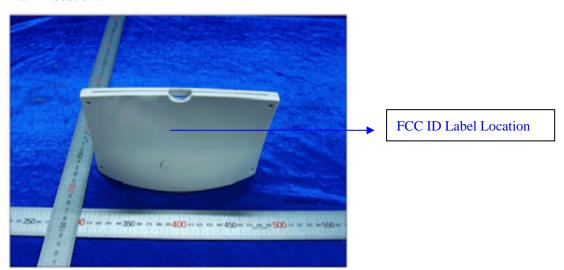

Page 28 of 33

Report No: 0805081 Date: 2008-12-02



### 11.0. Photo of testing

### 11.1 Conducted test View-N/A

### 11.2 Radiated emission test view



Page 29 of 33

Report No: 0805081 Date: 2008-12-02




# 11.3 Photo for the EUT



Page 30 of 33



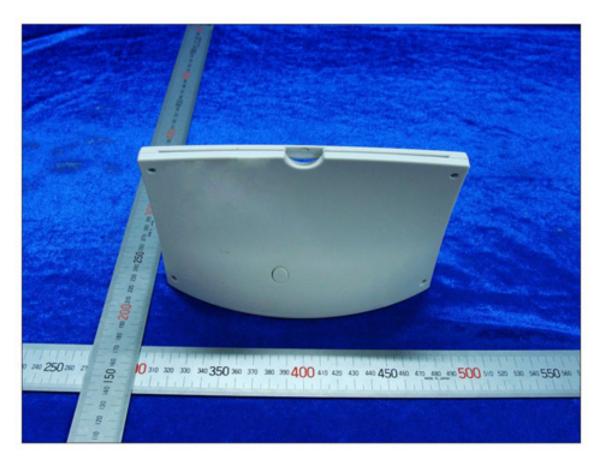


Page 31 of 33






Page 32 of 33



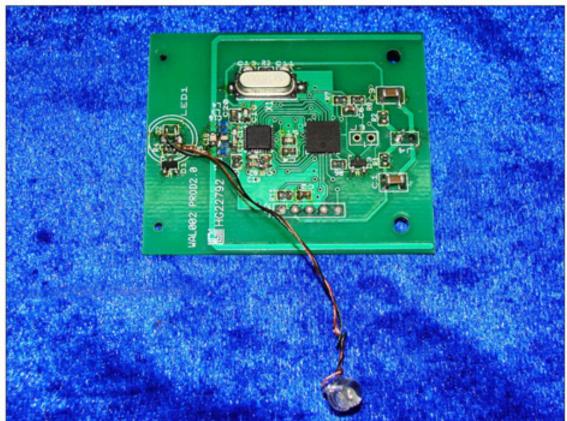

Page 33 of 33



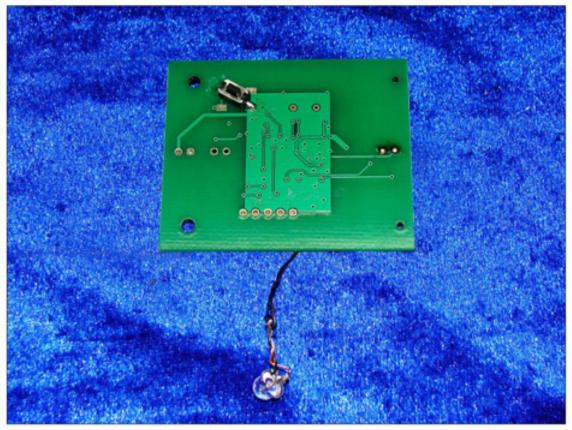

-- End of the report--