

TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXC1402-0026RF03

Page 131 of 259



LTE Band 7 16QAM Bandwidth = 20MHz CH21350, RB 100

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXC1402-0026RF03

Page 132 of 259

LTE Band 17							
Bandwidth	Modulation	Channel	RB	RB Start	Reference value (dBm)	Limit(dBm)	Conclusion
5MHz	QPSK	CH23755	1	0	-15.026	-13	Pass
			12	0	-24.685	-13	Pass
			25	0	-27.417	-13	Pass
		CH23825	1	24	-13.913	-13	Pass
			12	13	-25.893	-13	Pass
			25	0	-27.169	-13	Pass
	16QAM	CH23755	1	0	-15.297	-13	Pass
			12	0	-26.062	-13	Pass
			25	0	-26.564	-13	Pass
		CH23825	1	24	-15.151	-13	Pass
			12	13	-26.638	-13	Pass
			25	0	-27.916	-13	Pass
10MHz	QPSK	CH23780	1	0	-16.664	-13	Pass
			25	0	-26.722	-13	Pass
			50	0	-29.200	-13	Pass
		CH23800	1	49	-14.310	-13	Pass
			25	25	-28.993	-13	Pass
			50	0	-28.488	-13	Pass
	16QAM	CH23780	1	0	-16.682	-13	Pass
			25	0	-27.346	-13	Pass
			50	0	-28.677	-13	Pass
		CH23800	1	49	-15.141	-13	Pass
			25	25	-27.404	-13	Pass
			50	0	-29.438	-13	Pass

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXC1402-0026RF03

Page 133 of 259



LTE Band 17 QPSK Bandwidth = 5MHz CH23755,RB 1




LTE Band 17 QPSK Bandwidth = 5MHz CH23755,RB 12


TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXC1402-0026RF03

Page 134 of 259

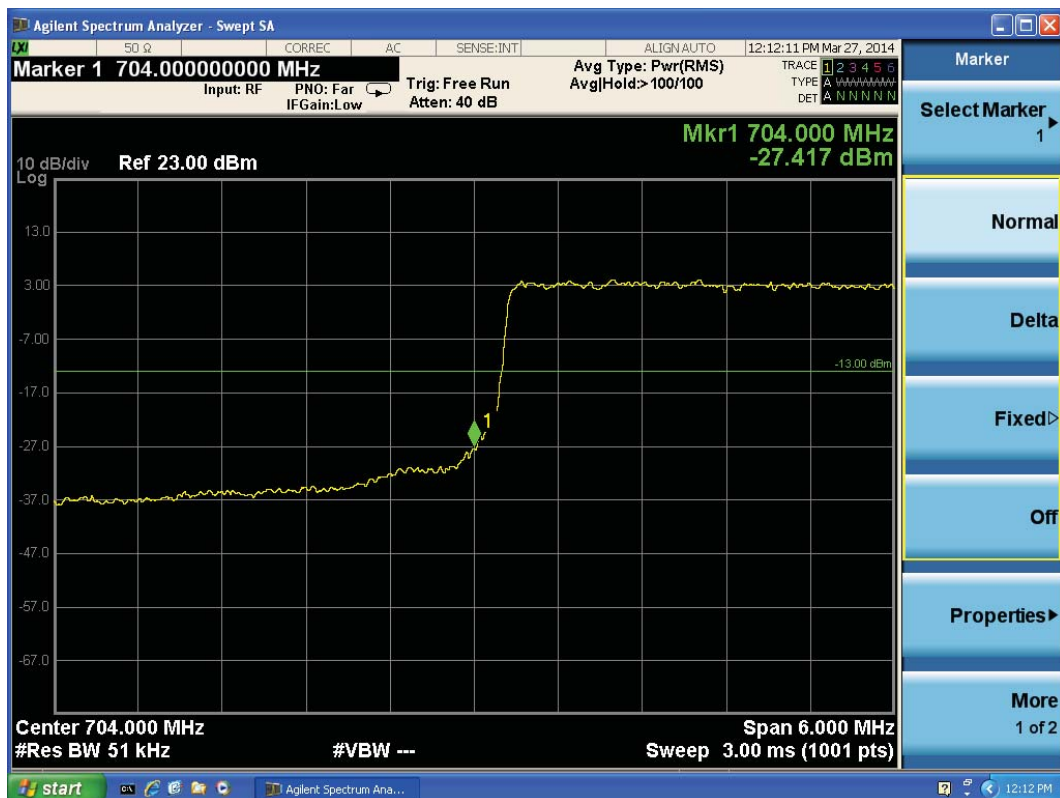

LTE Band 17 QPSK Bandwidth = 5MHz CH23755, RB 25

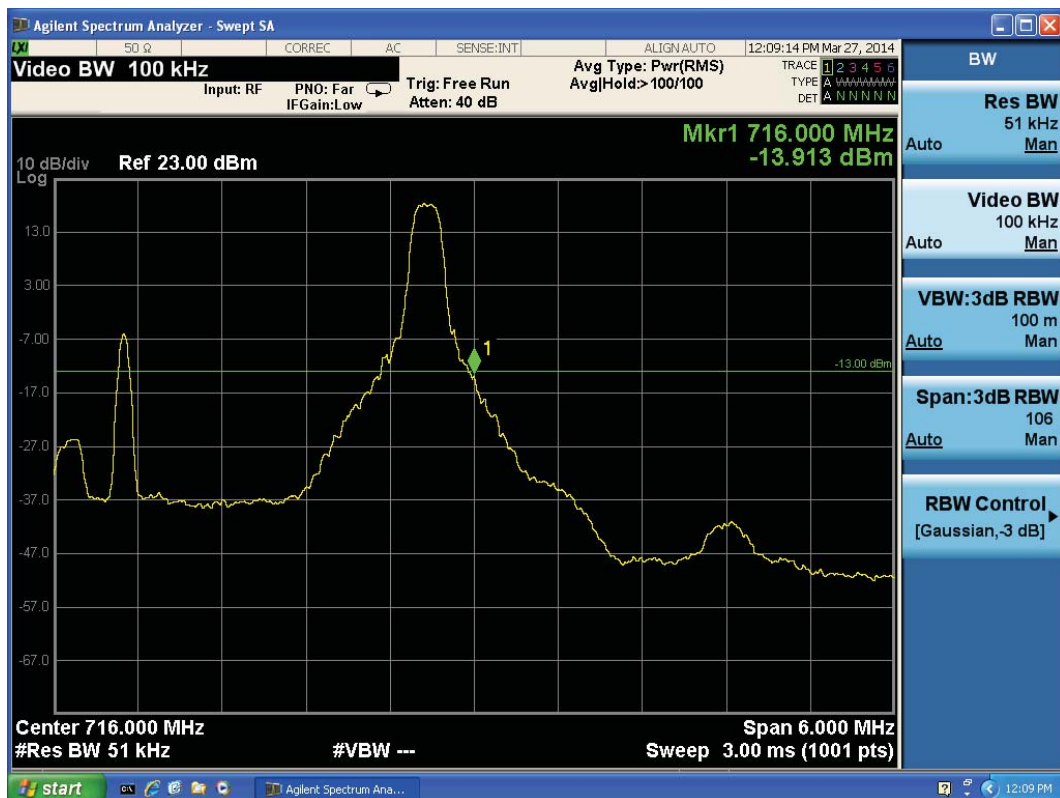

LTE Band 17 QPSK Bandwidth = 5MHz CH23825, RB 1

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXC1402-0026RF03

Page 135 of 259



LTE Band 17 QPSK Bandwidth = 5MHz CH23825,RB 12



LTE Band 17 QPSK Bandwidth = 5MHz CH23825,RB 25

TA Technology (Shanghai) Co., Ltd.


Test Report

Report No.: RXC1402-0026RF03

Page 136 of 259



LTE Band 17 QPSK Bandwidth = 10MHz CH23780,RB 1

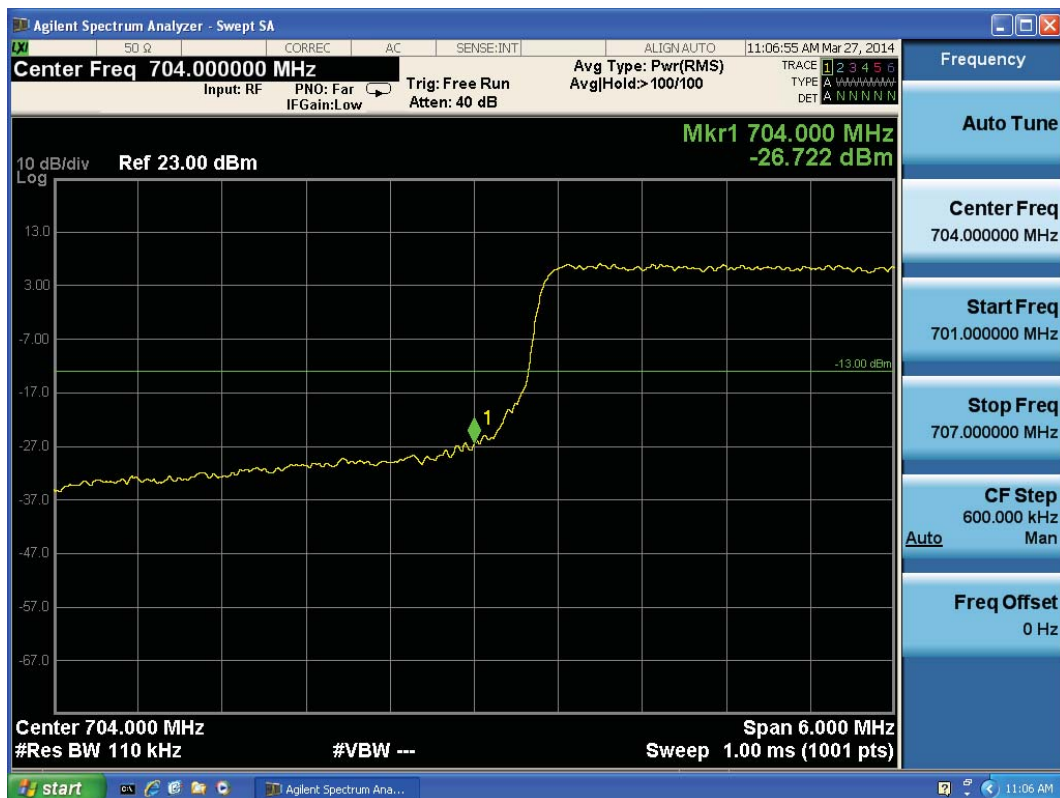


LTE Band 17 QPSK Bandwidth = 10MHz CH23780,RB 25

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXC1402-0026RF03

Page 137 of 259

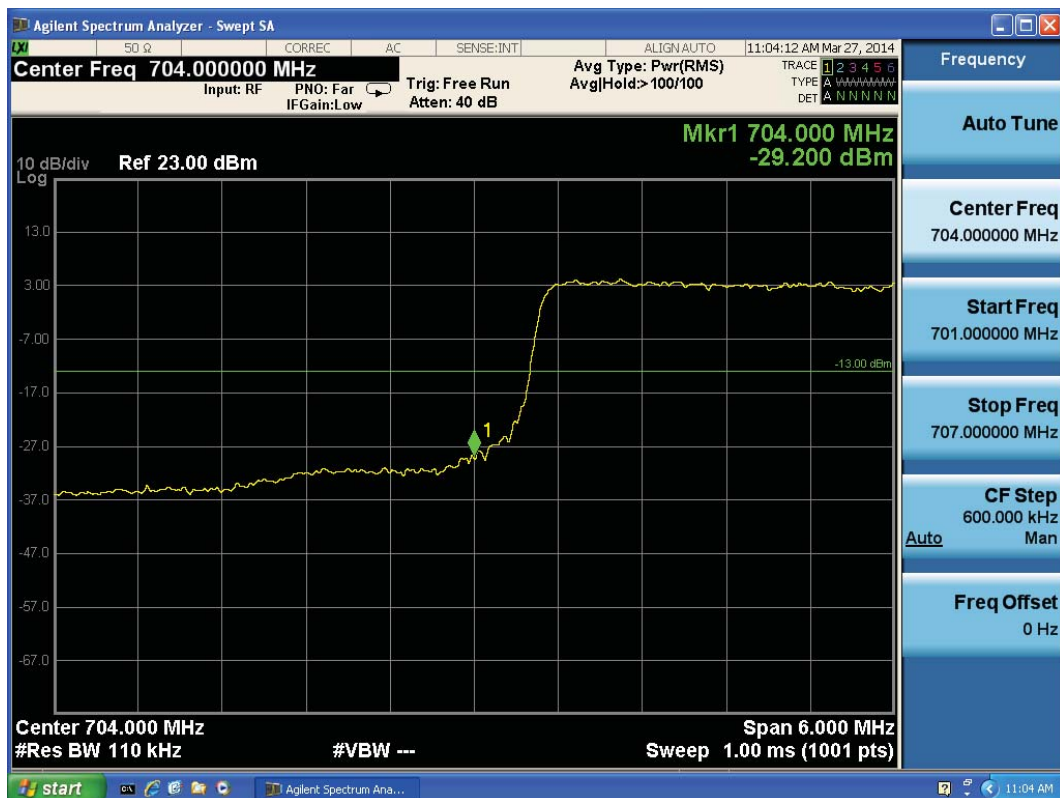

LTE Band 17 QPSK Bandwidth = 10MHz CH23780,RB 50



LTE Band 17 QPSK Bandwidth = 10MHz CH23780,RB 1

TA Technology (Shanghai) Co., Ltd.


Test Report

Report No.: RXC1402-0026RF03

Page 138 of 259



LTE Band 17 QPSK Bandwidth = 10MHz CH23780,RB 25

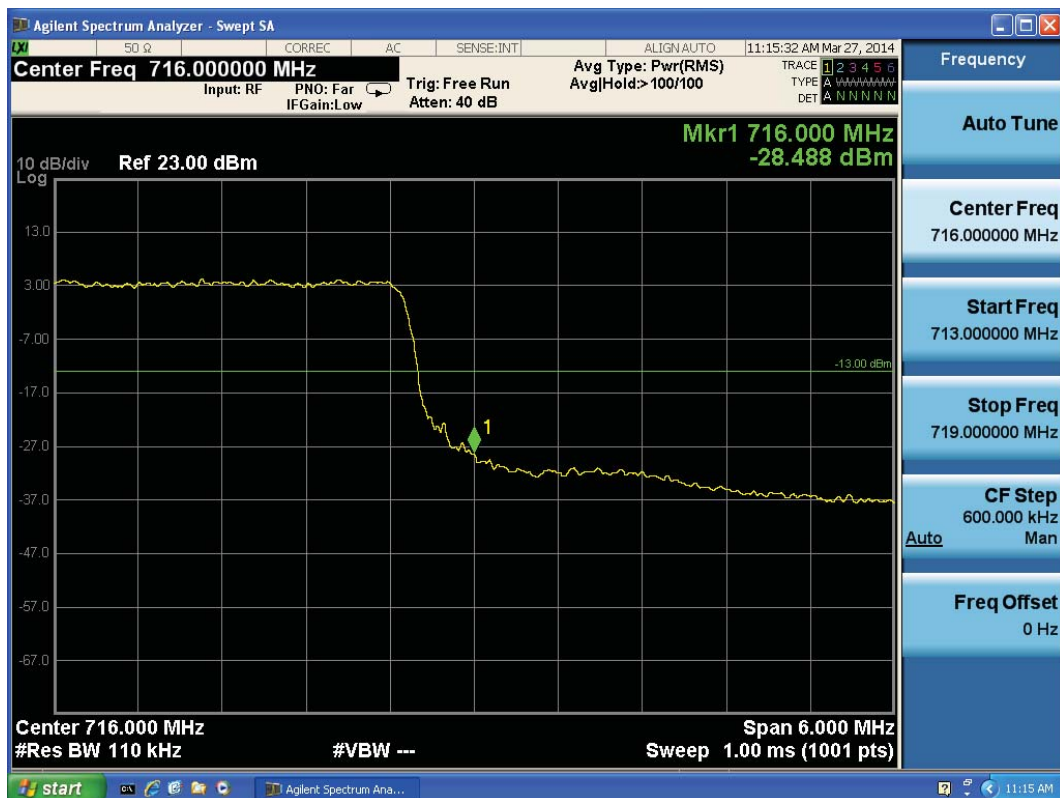


LTE Band 17 QPSK Bandwidth = 10MHz CH23780,RB 50

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXC1402-0026RF03

Page 139 of 259

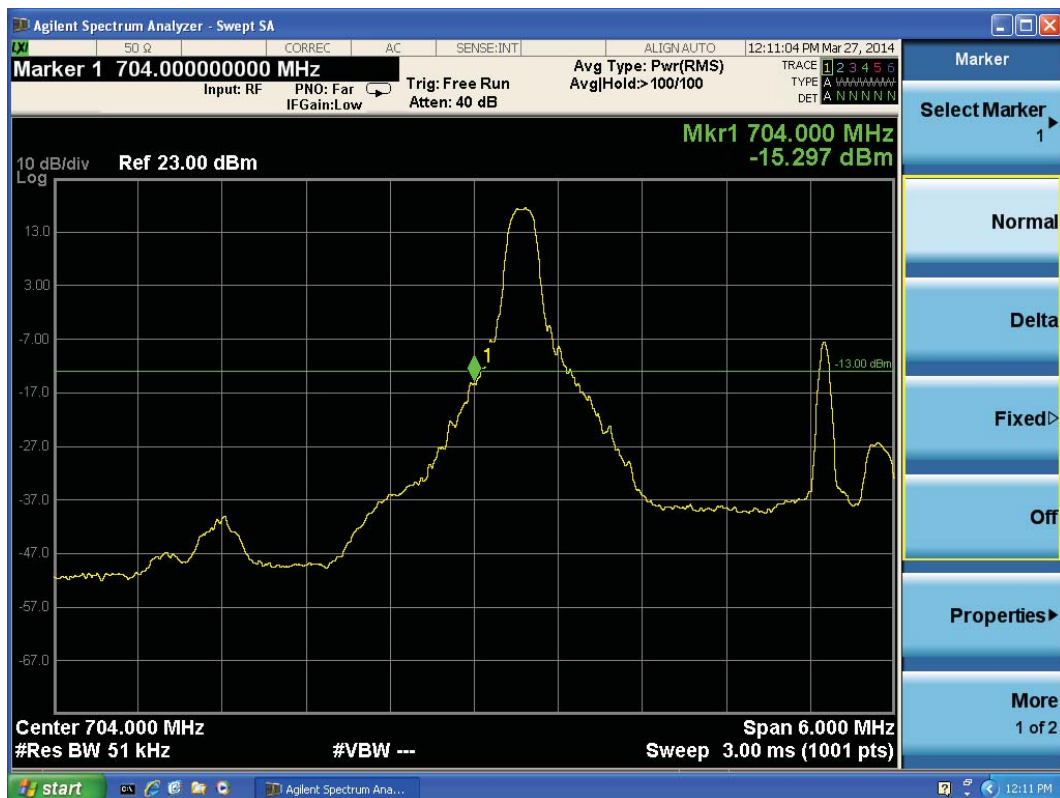

LTE Band 17 16QAM Bandwidth = 5MHz CH19975,RB 1




LTE Band 17 16QAM Bandwidth = 5MHz CH19975,RB 12

TA Technology (Shanghai) Co., Ltd.


Test Report

Report No.: RXC1402-0026RF03

Page 140 of 259

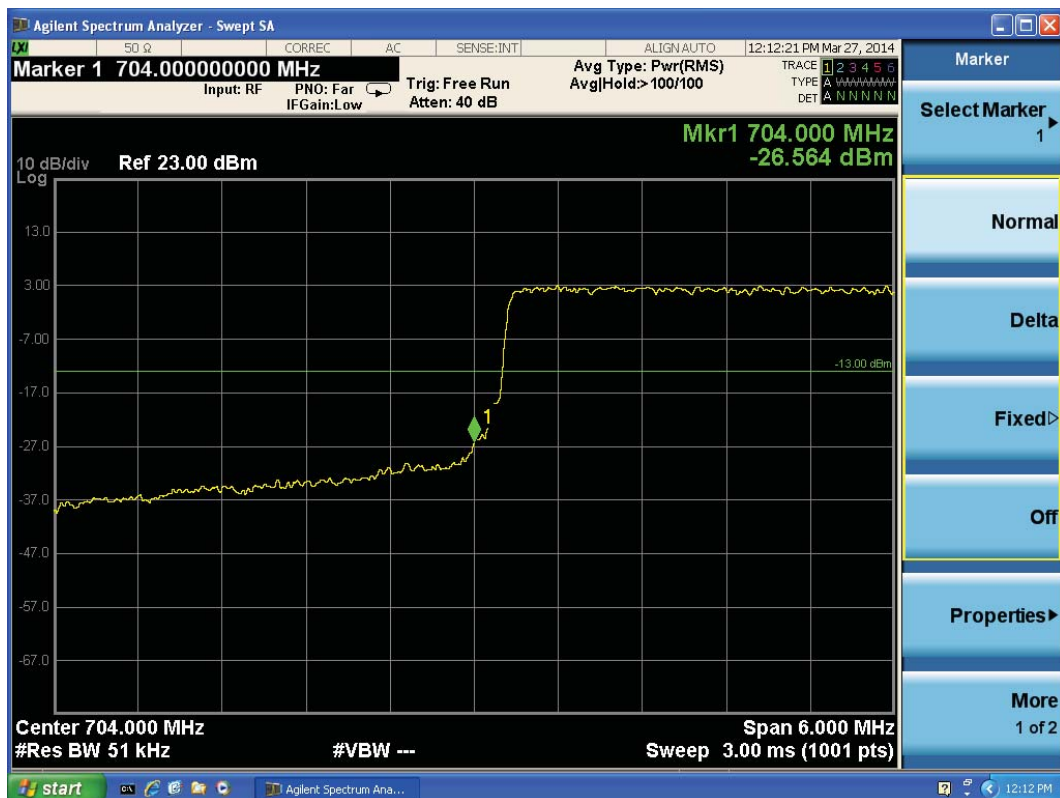

LTE Band 17 16QAM Bandwidth = 5MHz CH19975, RB 25

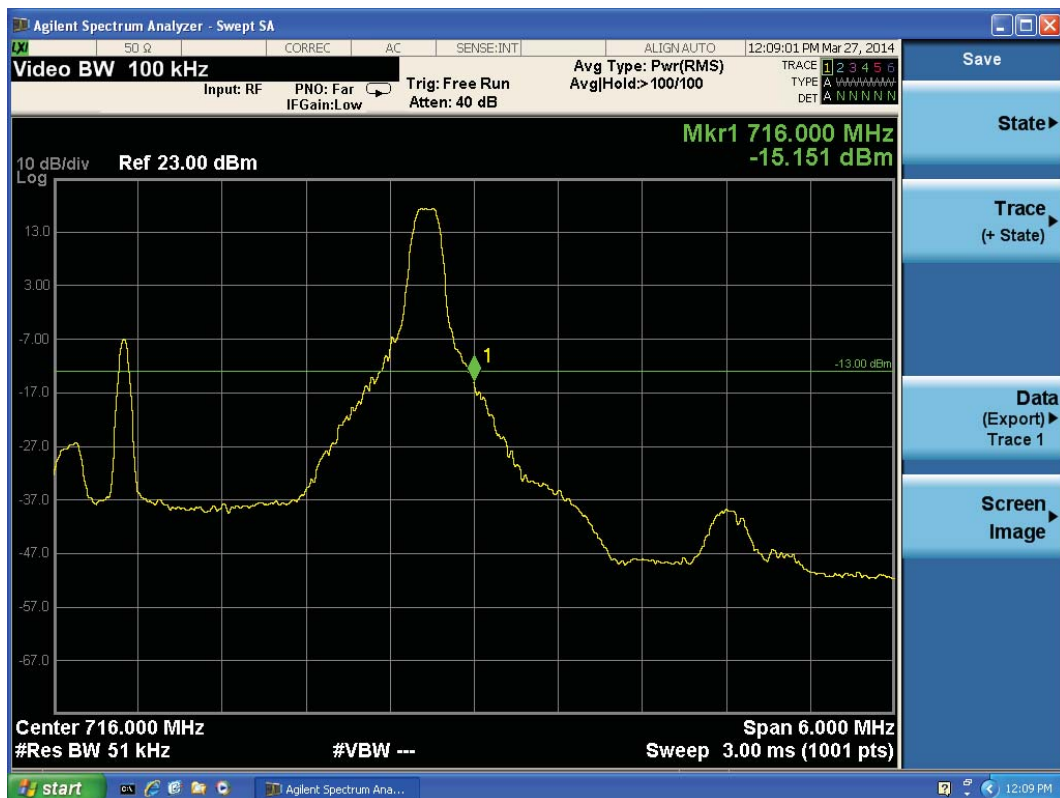

LTE Band 17 16QAM Bandwidth = 5MHz CH20375, RB 1

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXC1402-0026RF03

Page 141 of 259



LTE Band 17 16QAM Bandwidth = 5MHz CH20375, RB 12



LTE Band 17 16QAM Bandwidth = 5MHz CH20375, RB 25

TA Technology (Shanghai) Co., Ltd.


Test Report

Report No.: RXC1402-0026RF03

Page 142 of 259



LTE Band 17 16QAM Bandwidth = 10MHz CH23800,RB 1

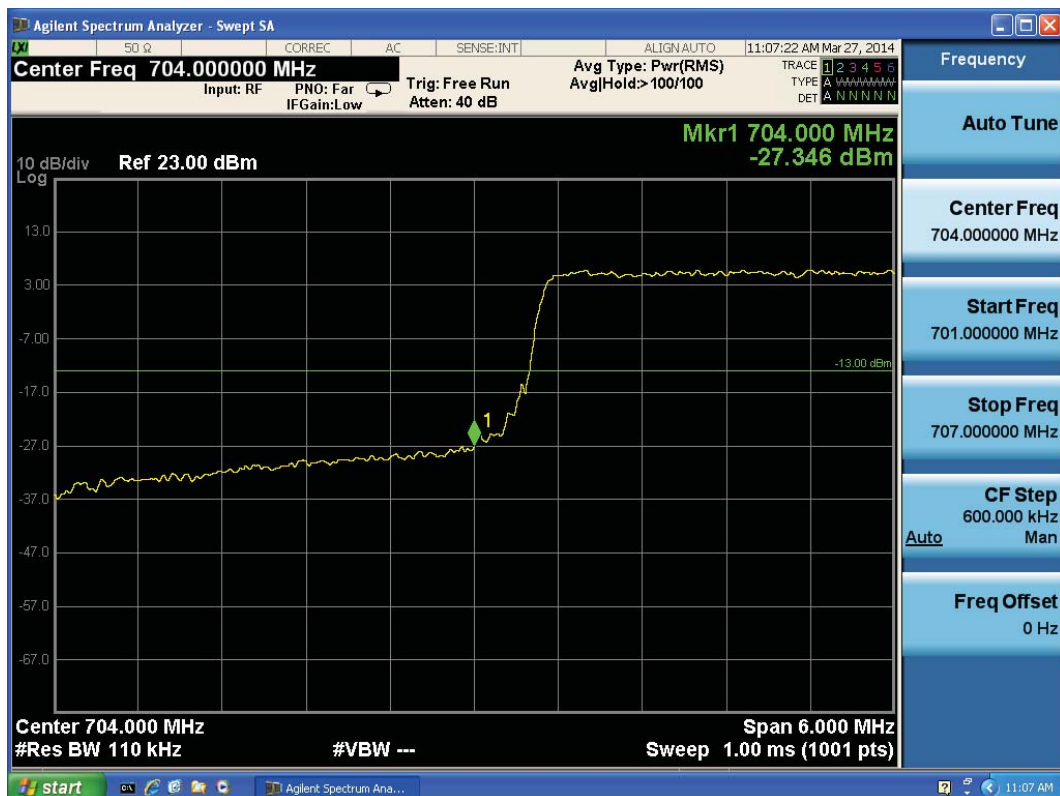


LTE Band 17 16QAM Bandwidth = 10MHz CH23800,RB 25

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXC1402-0026RF03

Page 143 of 259

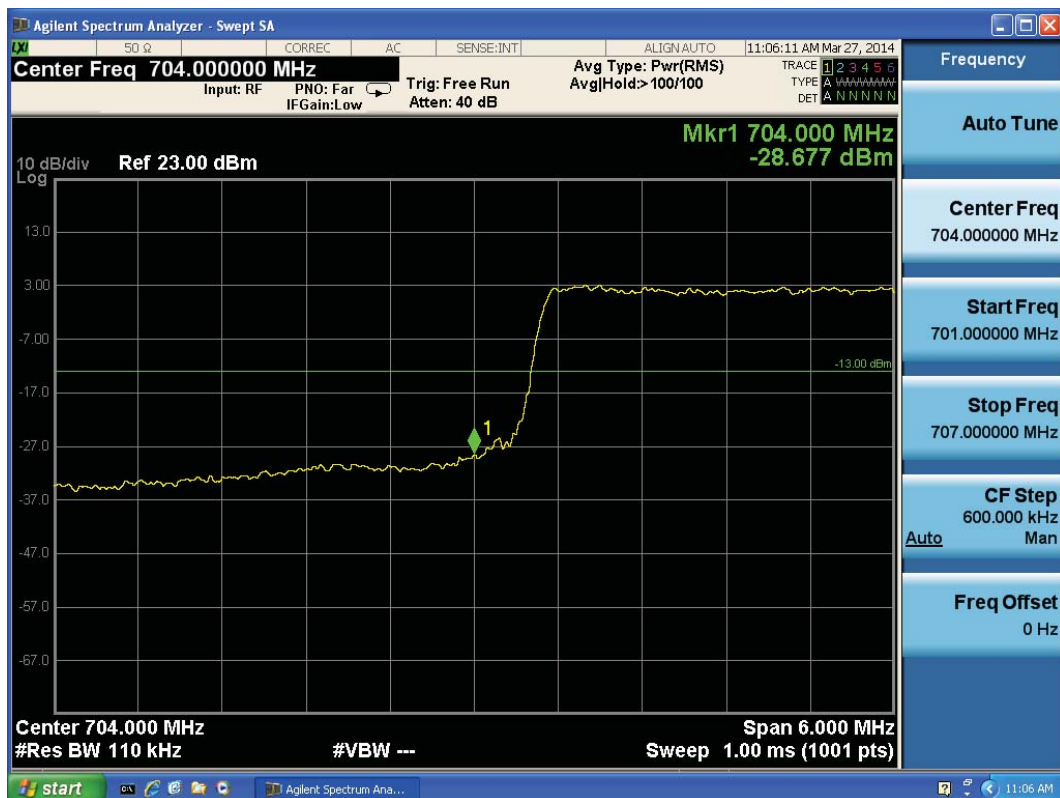

LTE Band 17 16QAM Bandwidth = 10MHz CH23800,RB 50



LTE Band 17 16QAM Bandwidth = 10MHz CH23800,RB 1

TA Technology (Shanghai) Co., Ltd.


Test Report

Report No.: RXC1402-0026RF03

Page 144 of 259



LTE Band 17 16QAM Bandwidth = 10MHz CH23800, RB 25

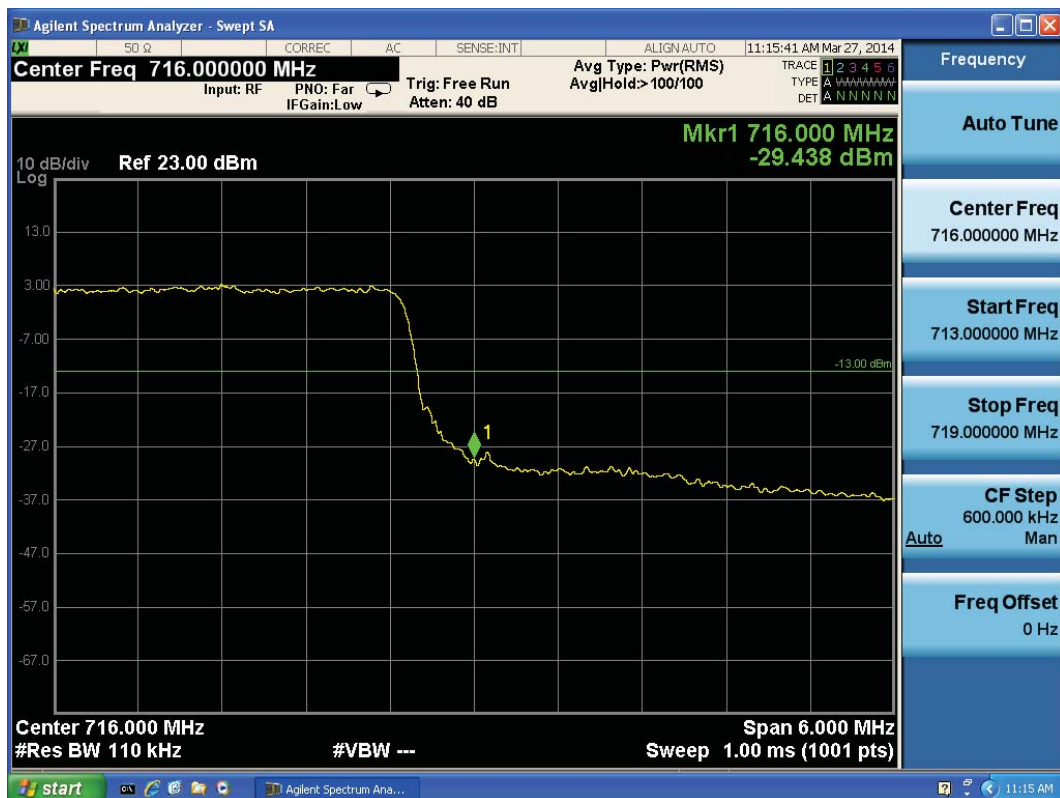

LTE Band 17 16QAM Bandwidth = 10MHz CH23800, RB 50

2.6. Peak-to-Average Power Ratio (PAPR)

Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

Methods of Measurement

The measurement procedures in KDB971168 are used.

The inherent randomness of the power peaks in a noise-like signal makes it difficult to quantify the peak power using traditional measurement techniques for determining the peak power of an analog signal. The peak power of a digitally-modulated signal is predictable only on a statistical basis. Thus, for these types of signals, a statistical measurement of the peak power is necessary.


Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth.

Step 1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.

Step 2. Set the CCDF option in Spectrum analyzer.

Step 3. Record the maximum PAPR level associated with a probability of 0.1%.

Test Setup

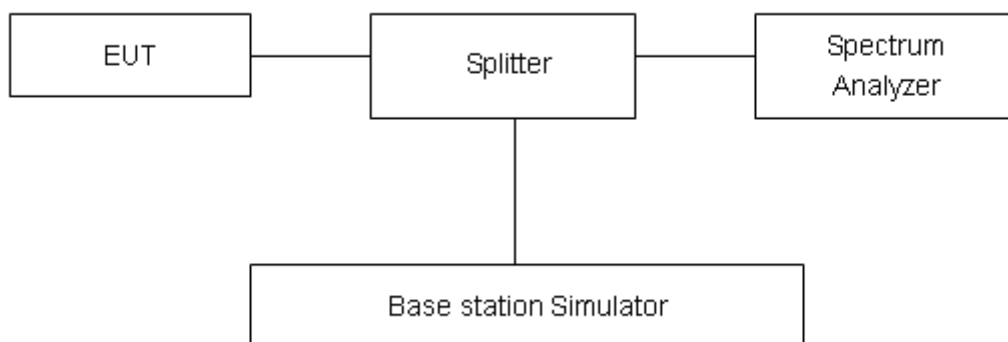

Limits

No specific Peak-to-Average Ratio requirements in KDB 971168.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.