

Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 1 of 166

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 22 SUBPART H, PART 24 SUBPART E AND INDUSTRY CANADA RSS-132 and RSS-133 REQUIREMENT

OF

Product Name: Nyos LGA CDMA

Brand Name: OPTION

Model Name: MO6092

Model Different: N/A

FCC ID: NCMOMO6092

IC: 2734A-MO6092

Report No.: EH/2011/40008

Issue Date: Apr. 26, 2011

FCC Rule Part: 2,22H & 24E

IC Rule Part: RSS 132, Issue 2 and RSS 133, Issue 5

Prepared for: Option NV

Gaston Geenslaan 14, 3001 Leuven Belgium

Prepared by: SGS Taiwan Ltd.

Electronics & Communication Laboratory

No. 134, Wu Kung Rd., Wuku Industrial Zone,

Taipei County, Taiwan.

Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 2 of 166

VERIFICATION OF COMPLIANCE

Option NV

Applicant: Gaston Geenslaan 14, 3001 Leuven Belgium

Product Name: Nyos LGA CDMA

Brand Name: OPTION

FCC ID: NCMOMO6092

IC: 2734A-MO6092

Model Difference: N/A

Model No.:

File Number: EH/2010/30048

Date of Test: Apr. 08, 2011 ~ Apr. 26, 2011

MO6092

Date of EUT Received: Apr. 08, 2011

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in TIA/EIA-603-C-2004, Issue 3 of RSS-Gen and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rule PART 22 subpart H, PART 24 subpart E and IC standards Issue 2 of RSS-132, Issue 5 of RSS-133.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Sky Wang	Date:	Apr. 26, 2011	
	Sky Wang / Asst. Supervisor			
Prepared By:	Tiffany Kao	Date:	Apr. 26, 2011	
Approved By	Tiffany Kao / Clerk Lang Jim Chang / Supervisor	Date:	Apr. 26, 2011	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 3 of 166

Version

Version No.	Date	Description
00	Apr. 26, 2011	Initial creation of document

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 4 of 166

Table of Contents

1.	GEN	NERAL PRODUCT INFORMATION	6
	1.1.	Related Submittal(s) / Grant (s)	9
	1.2.	Test Methodology	9
	1.3.	Test Facility	9
	1.4.	Special Accessories	9
	1.5.	Equipment Modifications	9
2.	SYS	TEM TEST CONFIGURATION	10
	2.1.	EUT Configuration	10
	2.2.	EUT Exercise	10
	2.3.	Test Procedure	10
	2.4.	Measurement Equipment Used:	11
	2.5.	Configuration of Tested System	13
3.	SUN	MMARY OF TEST RESULTS	14
4.	DES	SCRIPTION OF TEST MODES	15
5.	RF I	POWER OUTPUT MEASUREMENT	16
	5.1.	Standard Applicable:	16
	5.2.	Test Set-up:	17
	5.3.	Measurement Procedure:	17
	5.4.	Measurement Equipment Used:	17
	5.5.	Measurement Result:	18
6.	ERP	P, EIRP MEASUREMENT	25
	6.1.	Standard Applicable:	
	6.2.	Test SET-UP (Block Diagram of Configuration):	25
	6.3.	Measurement Procedure:	27
	6.4.	Measurement Equipment Used:	27
	6.5.	Measurement Result:	28
7.	99%	OCCUPIED BANDWIDTH MEASUREMENT	34
	7.1.	Standard Applicable:	
	7.2.	Test Set-up:	34
	7.3.	Measurement Procedure:	34
	7.4.	Measurement Equipment Used:	34
	7.5.	Measurement Result:	35

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. S Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 5 of 166

8.	OUT	OF BAND EMISSION AT ANTENNA TERMINALS	56
	8.1.	Standard Applicable:	56
	8.2.	Test SET-UP:	57
	8.3.	Measurement Procedure:	58
	8.4.	Measurement Equipment Used:	58
	8.5.	Measurement Result:	59
9.	FIEL	D STRENGTH OF SPURIOUS RADIATION MEASUREMENT (TX)	83
	9.1.	Standard Applicable:	
	9.2.	EUT Setup (Block Diagram of Configuration):	84
	9.3.	Measurement Procedure:	84
	9.4.	Measurement Equipment Used:	84
	9.5.	Measurement Result:	84
10.	FRE	QUENCY STABILITY V.S. TEMPERATURE MEASUREMENT	121
	10.1.	Standard Applicable:	
	10.2.	Test Set-up:	121
	10.3.	Measurement Procedure:	121
	10.4.	Measurement Equipment Used:	121
	10.5.	Measurement Result:	122
11.	FRE	QUENCY STABILITY V.S. VOLTAGE MEASUREMENT	125
	11.1.	Standard Applicable:	
	11.2.	Test Set-up:	125
	11.3.	Measurement Procedure:	125
	11.4.	Measurement Equipment Used:	125
	11.5.	Measurement Result:	126
12.	SPUI	RIOUS RADIATED EMISSION TEST (RX)	129
	12.1.	Standard Applicable	
	12.2.	EUT Setup	129
	12.3.	Measurement Procedure	129
	12.4.	Test SET-UP (Block Diagram of Configuration)	130
	12.5.	Measurement Equipment Used:	130
	12.6.	Field Strength Calculation	130
	12.7	Measurement Result	130

S Taiwan Ltd.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 6 of 166

1. GENERAL PRODUCT INFORMATION

General:

Product Name	Nyos LGA CDMA
Brand Name	OPTION
Model Name	MO6092
Model Difference	N/A
Power Supply	3.7 Vdc

GSM / WCDMA

USM / WCDMA	Operating Frequency			
	GSM/GPRS 850, Class 12	824.2 MHz– 848.8 MHz	33 dBm	
	GSM/GPRS 1900, Class 12	1850.2MHz – 1909.8MHz	30 dBm	
Cellular Phone Standards	EDGE 850, Class 12	824.2 MHz– 848.8 MHz	27 dBm	
Frequency Range and Power:	EDGE 1900, Class 12	1850.2MHz – 1909.8MHz	26 dBm	
	WCDMA/HSUPA/HSDPA Band II	1852.4MHz – 1907.6MHz	24 dBm	
	WCDMA/HSUPA/HSDPA Band V	826.4MHz – 846.6MHz	24dBm	
	HSDPA Category: 10 HSUPA Category: 6			
Type of Emission:	GSM850: 245KGXW, GSM1900: 245KGXW EDGE 850: 246KG7W, EDGE 1900: 245KG7W CDMA 850: 1M26F9W CDMA 1900: 1M27F9W WCDMA Band II: 4M16F9W, WCDMA Band V: 4M15F9W			
Hardware Version:	3.1			
Software Version:	1.8.2.0			
IMEI:	IMEI: 004401441440019			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. S Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 7 of 166

CDMA 2000:

	Operating Frequency		Rated Power
Cellular Phone Standards	CDMA 2000 Cellular / EVDO Cellular	824.7MHz – 848.31MHz	24 dBm
Frequency Range and Power	CDMA 2000 PCS / EVDO PCS	1851.25MHz- 1908.75MHz	24 dBm
MEID Manuf. Code	004401441440019		

GPS:

Receiver Frequency	L1 Band, 1575.42MHz
Frequency Conversion os- cillator	19.2MHz
Antenna Designation	PCB Antenna

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 8 of 166

Final Amplifier Voltage and Current Information:

Test mode	DC voltage (V)	DC current (mA)
GPRS 850	3.7Vdc	450
EDGE 850	3.7Vdc	285
GPRS 1900	3.7Vdc	195
EDGE 1900	3.7Vdc	160
WCDMA B5	3.7Vdc	320
HSUPA B5	3.7Vdc	405
WCDMA B2	3.7Vdc	430
HSUPA B2	3.7Vdc	515
CDMA 850	3.7Vdc	265
CDMA 1900	3.7Vdc	235
EVDO 850	3.7Vdc	310
EVDO 1900	3.7Vdc	290

This test report applies for GSM/GPRS/EDGE 850/1900, CDMA 2000 and EVDO and WCDMA/HSDPA/HSUPA Bands II, Band V.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析分月前級サル東西福州建設側弧之様の可具 「四呼吸吸田里本田型人、本来は一木曜平之山宮田町 日、イヤ田中田原東 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

S Taiwan Ltd.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 9 of 166

1.1. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: <u>NCMOMO6092</u> filing to comply with Section Part 22 subpart H, Part 24 subpart E of the FCC CFR 47 Rules and IC: <u>2734A-MO6092</u> filing to comply with Issue 2 of RSS-132, Issue 5 of RSS-133

1.2. Test Methodology

Both conducted and radiated testing were performed according to the procedures document on chapter 13 of TIA/EIA 603C and FCC 47 CFR 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, issue 2 of RSS-132 and issue 3 of RSS-133.

1.3. Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC Registration Number are: 990257 and 236194, Canada Registration Number: 4620A-4

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 29, Pau-Tou-Tsuo Valley Chia-Pau Tsuen, Linkou Hsiang, Taipei county, which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. SGS Site No. 1(3 & 10 meters) and FCC Registration Number: 94644.

All equipment is calibrated externally and traceable to SI (International System of Unit).

1.4. Special Accessories

Not available for this EUT intended for grant.

1.5. Equipment Modifications

Not available for this EUT intended for grant.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2011/40008 **Issue Date: Apr. 26, 2011**

Page 10 of 166

SYSTEM TEST CONFIGURATION

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency which was for the purpose of the measurements.

2.3. Test Procedure

2.3.1 AC Power Line Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in TIA/EIA 603C. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz us- ing CISPR Quasi-Peak and Average detector mode.

2.3.2 Conducted Measurement at Antenna Port:

According to measurement procured TIA/EIA 603C and RSS-Gen Issue 3, the EUT is placed on a turn table which is 0.8 m above ground plane. A low loss of RF cable was used to connect the antenna port of EUT to measurement equipment.

2.3.3 Radiated Emissions (ERP/EIRP):

According to measurement procured TIA/EIA 603C and RSS-Gen Issue 3, The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both Horizontal and Vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna according to the requirements in Section 8 and 13 of ANSI C63.4:2003.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery of falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 11 of 166

2.4. Measurement Equipment Used:

Conducted Emission Test Site						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.		
EMI Test Receiver	R&S	ESCS30	828985/004	09/23/2010	09/22/2011	
LISN	Rolf-Heine	NNB-2/16Z	99012	03/31/2011	03/30/2012	
LISN	FCC	FCC-LISN-50/250-25-2-01	04034	03/31/2011	03/30/2012	
Coaxial Cables	N/A	WK CE Cable	N/A	11/28/2010	11/27/2011	

Conducted Emission Test Site						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.		
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2010	04/18/2012	
Spectrum Analyzer	Agilent	E4440A	US41160416	01/25/2011	01/24/2012	
Radio Communication Analyzer	R&S	CMU200	102189	08/12/2010	08/11/2012	
800 – 1000MHz Filter	Micro-Tronics	BRM13462	001	01/05/2011	01/04/2012	
1800 – 2000MHz Filter	Micro-Tronics	BRM13463	001	01/05/2011	01/04/2012	
Temperature Chamber	TERCHY	MHG-120LF	911009	04/14/2010	04/13/2012	
Temperature Chamber	GIANT FORCE	GTH-150-40- CP-AR	MAA0512-018	02/05/2010	02/04/2012	
DC Block	Agilent	BLK-18	155452	07/05/2010	07/04/2011	
Attenuator	Mini-Circuit	BW-S20W5	N/A	07/05/2010	07/04/2011	
Attenuator	Mini-Circuit	BW-S10W5	N/A	07/05/2010	07/04/2011	
Attenuator	Mini-Circuit	BW-S6W5	N/A	07/05/2010	07/04/2011	
Splitter	Agilent	11636B	N/A	07/05/2010	07/04/2011	
DC Power Supply	Chroma	41901	777188	04/15/2010	04/14/2012	
Power Meter	Anritsu	ML2495A	1005007	02/17/2010	02/16/2012	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. S Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279

台灣檢驗科技股份有限公司

f (886-2) 2298-0488 www.tw.sgs.com



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 12 of 166

ERP, EIRP MEASUREMENT EQUIPMENT List 966 Chamber						
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.	
Spectrum Analyzer	R&S	FSP 40	100034	02/12/2010	02/11/2012	
Bilog Antenna	SCHWAZBECK	VULB9160	9160-3136	11/15/2010	11/14/2011	
Dipole Antenna	SCHWAZBECK	VHAP	908/909	07/10/2010	07/09/2012	
Dipole Antenna	SCHWAZBECK	UHAP	891/892	07/10/2010	07/09/2012	
Hor.n antenna	SCHWAZBECK	BBHA 9120D	309	01/22/2010	01/21/2012	
Horn antenna	SCHWAZBECK	BBHA 9120D	9120D-673	05/09/2010	05/08/2012	
Signal Generator	R&S	SMR40	100210	01/22/2010	01/21/2012	
Signal Generator	Agilent	E4438C	MY45093613	06/11/2010	06/10/2011	
Pre-Amplifier	Agilent	8447D	1937A02834	11/30/2010	11/29/2011	
Pre-Amplifier	Agilent	8449B	3008A01973	01/05/2011	01/04/2012	
Attenuator	Mini-Circuit	BW-S20W5	001	07/05/2010	07/04/2011	
Attenuator	Mini-Circuit	BW-S10W5	001	07/05/2010	07/04/2011	
Attenuator	Mini-Circuit	BW-S6W5	001	07/05/2010	07/04/2011	
Radio Communication Analyzer	R&S	CMU200	102189	05/13/2010	05/12/2012	
Turn Table	HD	DT420	N/A	N.C.R	N.C.R	
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R	
Controller	HD	HD100	N/A	N.C.R	N.C.R	
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	01/05/2010	01/04/2011	
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	01/05/2010	01/04/2011	
3m Site	SGS	966 chamber	N/A	11/09/2010	11/08/2011	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279

S Taiwan Ltd.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 13 of 166

Configuration of Tested System

Fig. 2-1 Configuration of Tested System (Fixed Channel)

EUT

Remote site

CMU200

Table 2-1 Equipment Used in Tested System

Item Equip	Equipment	Mfr/Brand	Model/	Series No.	Dete Cable	
	Equipment	WIII/DI aliu	Type No.	Series No.	Data Cable	Power Cord
1.	Universal Radio Com- munication Tester	R&S	CMU200	102189	shielded	Un-shielded

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 14 of 166

3. SUMMARY OF TEST RESULTS

FCC Rules	IC Rules	Description Of Test	Result
§2.1046(a)	N/A	RF Power Output	Compliant
\$2.1046(a) \$22.913(a)(2) \$24.232(c)	§4.8 (RSS-Gen Issue 3) §4.4 (RSS-132) §6.4 (RSS-133)	ERP/ EIRP measurement	Compliant
§2.1049(h)	§4.6.1 (RSS-Gen Issue 3) §2.3 (RSS-133)	99% Occupied Bandwidth	Compliant
\$2.1051 \$22.917(a) \$24.238(a)	§4.9 (RSS-Gen Issue 3) §4.5 (RSS-132) §6.5 (RSS-133)	Out of Band Emissions at Antenna Terminals and Band Edge	Compliant
\$2.1053 \$22.917(a) \$24.238(a)	§4.9 (RSS-Gen Issue 3) §4.5 (RSS-132) §6.5 (RSS-133)	Field Strength of Spurious Radiation	Compliant
\$2.1055(a)(1) \$22.355 \$24.235	§4.7 (RSS-Gen Issue 3) §4.3 (RSS-132) §6.3 (RSS-133)	Frequency Stability vs. Temperature	Compliant
\$2.1055(d)(2) \$22.355 \$24.235	§4.7 (RSS-Gen Issue 3) §4.3 (RSS-132) §6.3 (RSS-133)	Frequency Stability vs. Voltage	Compliant
N/A	\$4.10 (RSS-Gen Issue 3) \$4.6 (RSS-132) \$6.6 (RSS-133)	Receiver Spurious Emissions	Compliant

Max ERP/EIRP measurement result:

	dBm	dB	W
GSM 850 Band	31.81	ERP	1.517
GSM 1900 Band	28.79	EIRP	0.757
EDGE 850 Band	25.63	ERP	0.366
EDGE 1900 Band	27.99	EIRP	0.630
WCDMA Band II	24.42	EIRP	0.277
WCDMA Band V	24.14	ERP	0.259
HSUPA Band II	20.98	EIRP	0.125
HSUPA Band V	22.88	ERP	0.194
CDMA 2000 Cellular	26.04	EIRP	0.402
CDMA 2000 PCS	27.58	ERP	0.573
CDMA 2000 EVDO	26.05	EIRP	0.403
CDMA 2000 EVDO PCS	25.75	ERP	0.376

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 15 of 166

4. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

EUT was staying in continuous transmitting mode. Channel Low, Mid and High for each band with rated data rate were chosen for full testing.

The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for GSM/GPRS/EDGE, CDMA2000 and

WCDMA/HSDPA/HSUPA Band II, V with power adaptor. The worst-case of E2 position for GSM 850 band, E2 position for GSM 1900, E2 position for WCDMA Band II and E2 position for WCDMA Band V were reported. The worst-case of E2 position for CDMA 2000 Cellular band and E2 position for CDMA 2000 PCS band were reported.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 16 of 166

5. RF POWER OUTPUT MEASUREMENT

5.1. Standard Applicable:

According to FCC §2.1046.

FCC 22.913(a) Mobile station are limited to 7W.

FCC 24.232(C) Peak Power Measurement to 2W.

3GPP Power limitation for HSDPA and HSUPA

Maximum Output Powers for HSDPA

Sub-test in table	Power	Class 3	Power Class 4		
C.10.1.4	Power (dBm)			Tol (dB)	
1	+24	+1.7/-3.7	+21	+2.7/-2.7	
2	+24	+1.7/-3.7	+21	+2.7/-2.7	
3	+23.5	+2.2/-3.7	+20.5	+3.2/-2.7	
4	+23.5	+2.2/-3.7	+20.5	+3.2/-2.7	

Maximum Output Powers for HSUPA

Sub-test in table	Power	Class 3	Power Class 4		
C.11.1.3	Power (dBm)	Tol (dB)	Power (dBm)	Tol (dB)	
1	+24	+1.7/-6.7	+21	+2.7/-5.7	
2	+22	+3.7/-5.2	+19	+4.7/-4.2	
3	+23	+2.7/-5.2	+20	+3.7/-4.2	
4	+22	+3.7/-5.2	+19	+4.7/-4.2	
5	+24	+1.7/-6.7	+21	+2.7/-5.7	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


公司 t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 17 of 166

Test Set-up:

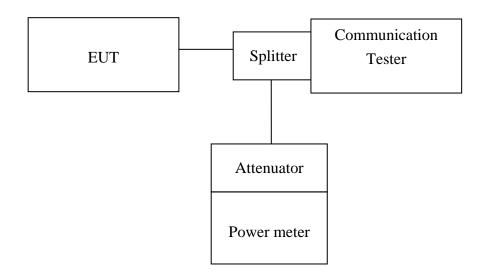

Note: Measurement setup for testing on Antenna connector

5.3. Measurement Procedure:

The transmitter output was connected to a calibrated attenuator, the other end of which was connected to a power meter. Transmitter output was read off the power meter in dBm. The power output at the transmitter antenna port was determined by adding the value of the attenuator to the power meter reading. The Procedure of KDB941225 KDB941125 (SAR Measurement Procedures for 3G devices, WCDMA/HSDPA) was used for EUT and Base station setting. RMC 12.2kps is used for this testing

5.4. Measurement Equipment Used:

Refer to section 2.4 in this report

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. S Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 18 of 166

5.5. Measurement Result:

5.5.1. RF Conducted Output Power

5.5.1.1.: GSM/EDGE (**GMSK**; **8-PSK**)

Result:

		1 Time Slot			2 Time Slot				
Frequency		GMSK	Mode 8-PSK Mode		GMSK Mode		8-PSK Mode		
(MHz)	СН	Peak Power (dBm)	AV Power (dBm)	Peak Power (dBm)	AV Power (dBm)	Peak Power (dBm)	AV Power (dBm)	Peak Power (dBm)	AV Power (dBm)
824.2	128	32.30	32.10	30.80	27.60	32.80	32.60	30.60	27.40
836.6	190	32.60	32.10	30.70	27.40	32.90	32.60	30.50	27.30
848.8	251	31.90	32.10	30.50	27.40	32.40	32.20	30.40	27.20
1850.2	512	29.30	29.20	29.40	26.20	29.30	29.20	29.30	26.00
1880.0	661	29.50	29.40	29.60	26.30	29.40	29.30	29.40	26.60
1909.8	810	29.40	29.30	29.30	26.00	29.30	29.20	29.10	25.90

		3 Time Slot			4 Time Slot				
Frequency		GMSK	Mode	8-PSK	Mode	GMSK	Mode	8-PSK	Mode
(MHz)	СН	Peak Power (dBm)	AV Power (dBm)	Peak Power (dBm)	AV Power (dBm)	Peak Power (dBm)	AV Power (dBm)	Peak Power (dBm)	AV Power (dBm)
824.2	128	32.80	32.50	29.20	29.10	32.10	31.90	30.50	27.20
836.6	190	32.80	32.60	29.30	29.20	32.20	31.90	30.30	27.10
848.8	251	32.30	32.10	29.20	29.00	31.80	31.90	30.30	27.00
1850.2	512	29.20	29.10	29.30	26.00	29.60	29.40	29.20	25.80
1880.0	661	29.30	29.20	29.40	26.00	29.60	29.50	29.30	26.00
1909.8	810	29.20	29.00	29.10	25.70	29.40	29.20	29.00	25.70

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. S Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 19 of 166

5.5.1.2.: WCDMA mode

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 V8.4.0 specification. The EUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7). RMC 12.2kps is used for this testing.

Results:

EUT Mode	Frequency (MHz)	СН	Peak Power (dBm)	Avg. Power (dBm)
WIGDA.	1852.4	9262	25.08	21.67
WCDMA Band II	1880.0	9400	25.43	21.73
	1907.6	9538	24.80	21.35

EUT Mode	Frequency (MHz)	СН	Peak Power (dBm)	Avg. Power (dBm)
W.CD.M.	826.4	4132	25.83	22.25
WCDMA Band V	836.6	4183	25.84	22.12
Band v	846.6	4233	25.63	21.97

Note: The results above reflect max power with all up bits.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. S Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 20 of 166

5.5.1.3.: CDMA 2000 mode

Result:

EUT Mode	Frequency (MHz)	СН	Avg. Power (dBm)	Peak Power (dBm)
CD144 2000	824.70	1013	23.82	23.75
CDMA 2000 Cellular	836.52	384	23.84	23.75
	848.31	777	23.77	23.67

EUT Mode	Frequency (MHz)	СН	Avg. Power (dBm)	Peak Power (dBm)
GD144 2000	1851.25	25	23.25	23.18
CDMA 2000 PCS	1880	600	23.10	22.85
	1908.75	1175	22.98	22.77

EUT Mode	Frequency (MHz)	СН	Avg. Power (dBm)	Peak Power (dBm)
CDMA 2000 EVDO Cellular	824.70	1013	24.15	24.10
	836.52	384	24.07	23.93
	848.31	777	23.97	23.85

EUT Mode	Frequency (MHz)	СН	Avg. Power (dBm)	Peak Power (dBm)
CDMA 2000	1851.25	25	23.24	23.15
EVDO	1880	600	23.31	23.25
PCS	1908.75	1175	23.03	22.97

offset: 0.5dB(for 800MHz) offset: 0.5dB(for 1900MHz)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 t (886-2) 2299-3279



Report No.: EH/2011/40008 **Issue Date: Apr. 26, 2011**

Page 21 of 166

5.5.1.4.:HSDPA Release 6 mode

The following 4 Sub-Tests were completed according to the test requirements outlined in section 5.2A of the 3GPP TS34.121-1 V8.4.0 specification. All TX RMS power requirements for Power Class 3 were met according to table 5.2AA.5 and 5.2B.5 All UE channels and power ratio's are set according to table C10.1.4 & C11.1.3 in the 3GPP TS34.121-1 V8.4.0. RMC 12.2kps is used for this testing

HSDPA SUB-TEST Setting

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH(FOR HSDPA)

Sub-test	$oldsymbol{eta_c}$	$eta_{ m d}$	$eta_{ m d} \ (SF)$	β_c/β_d	β _{HS} (Note1, Note 2)	CM (dB) (<i>Note 3</i>)	MPR (dB) (Note 3)	RMC (Kbps)
1	2/15	15/15	64	2/15	4/15	0.0	0.0	12.2
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0	12.2
3	15/15	8/15	64	15/8	30/15	1.5	0.5	12.2
4	15/15	4/15	64	15/4	30/15	1.5	0.5	12.2

Note: The recommended HSDPA MPRs are implemented as per following sub-tests.

Results:

Mode	Sub-test	Avg.	Power (di	Bm)	Power Class 3 Limita-	Comments	
		9262	9400	9538	tion (dBm)	_	
	1	21.50	21.62	21.21	20.3dBm – 25.7dBm	Pass	
HSDPA	2	21.55	21.59	21.20	20.3dBm – 25.7dBm	Pass	
(B2)	3	21.02	21.17	20.68	19.8dBm – 25.7dBm	Pass	
	4	21.09	21.18	20.80	19.8dBm – 25.7dBm	Pass	

Mode	Sub-test	Avg.	Power (d Channel	Bm)	Power Class 3 Limita-	Comments	
		4132	4183	4233	tion (dBm)		
	1	22.08	22.01	21.83	20.3dBm – 25.7dBm	Pass	
HSDPA	2	22.18	22.01	21.84	20.3dBm – 25.7dBm	Pass	
(B5)	3	21.62	21.53	21.34	19.8dBm – 25.7dBm Pa		
	4	21.67	21.57	21.40	19.8dBm – 25.7dBm	Pass	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 22 of 166

5.5.1.5.: HSPA (HSDPA & HSUPA) Release 6 mode

The following 5 Sub-Tests were completed according to the test requirements outlined in section 5.2A of the 3GPP TS34.121-1 V8.4.0 specification. All TX RMS power requirements for Power Class 3 were met according to table 5.2AA.5 and 5.2B.5 All UE channels and power ratio's are set according to table C11.1.3 in the 3GPP TS34.121-1 V8.4.0. RMC 12.2kps is used for this testing

HSPA SUB-TEST Setting

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH(FOR HSUPA)

Sub- test	βε	$eta_{ m d}$	β _d (SF)	β_c/β_d	$eta_{ m HS}$	$eta_{ m ec}$	$eta_{ m ed}$	β _{ed} (SF)	β _{ed} (Codes)	CM (dB)	MPR (dB)	AG Index	E-TFCI	RMC (Kbps)
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/225	1309/225	4	1	1.0	0.0	20	75	12.2
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67	12.2
3	15/15	9/15	64	15/9	30/15	30/15	β _{ed} 1: 47/15 β _{ed} 2: 47/15	4 4	2	2.0	1.0	15	92	12.2
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71	12.2
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81	12.2

Note: The recommended HSUPA MPRs are implemented as per following sub-tests.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's soel responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 23 of 166

Results:

Mode	Sub-test	Avg.	Power (di	Bm)	Power Class 3 Limita-	Comments	
		9262	9400	9538	tion (dBm)		
	1	21.59	21.71	21.29	18.8dBm – 25.7dBm	Pass	
	2	19.64	19.78	19.33	16.8dBm – 25.7dBm	Pass	
HSUPA(B2)	3	20.65	20.73	20.37	17.8dBm – 25.7dBm	Pass	
	4	19.77	19.83	19.37	16.8dBm – 25.7dBm	Pass	
	5	21.48	21.57	21.20	18.8dBm – 25.7dBm	Pass	

Mode	Sub-test	Avg.	Power (d) Channel	Bm)	Power Class 3 Limita-	Comments
		4132	4183	4233	tion (dBm)	
	1	22.21	22.05	21.89	18.8dBm – 25.7dBm	Pass
	2	20.27	20.13	19.93	16.8dBm – 25.7dBm	Pass
HSUPA(B5)	3	21.25	21.11	20.97	17.8dBm – 25.7dBm	Pass
	4	20.32	20.19	20.01	16.8dBm – 25.7dBm	Pass
	5	22.07	21.88	21.78	18.8dBm – 25.7dBm	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 24 of 166

5.5.2. Minimum Communications Power Measurement

PCS 1900 band

PCL	0	1	2	3	4	5	6	7	8	
Output power (dBm)	29.2	29.2	29.2	29.2	27.7	25.8	23.9	21.9	19.9	
PCL	9	10	11	12	13	14	15	16	17	18
Output power (dBm)	18.1	16.2	13.8	11.8	10	8.1	6.1	4.1	2.2	0.1

Note: The EUT output power was controlled by simulator. Set Communication Tester CMU200 PCL as above, and get the mobile phone output power reading.

WCDMA/HSDPA/HSUPA band II

The EUT output power was controlled by simulator. Set Communication Tester CMU200 function key "UE Power Control" and enter max rated power 24dBm. The EUT is going to be set to max output power to 24dBm. then record the read(see page 15 for measurement data). The min. power was measures by a function key "minimum power" then record the read. It is -52.3dBm. The power variation can be 0.1dB step by setting.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 25 of 166

6. ERP, EIRP MEASUREMENT

6.1. Standard Applicable:

According to FCC §2.1046

FCC 22.913(a) Mobile station are limited to 7W ERP.

FCC 24.232(c) Mobile station are limited to 2W EIRP.


According to IC RSS-133 §6.4

The peak e.i.r.p. for transmitters operating in the band 1850-1910 MHz shall not exceed the limits 2W which given in SRSP-510.

According to issue 2 of RSS 132, section 4.4. The transmitter output power shall not exceed the limits given in SRSP-503.

6.2. Test SET-UP (Block Diagram of Configuration):

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

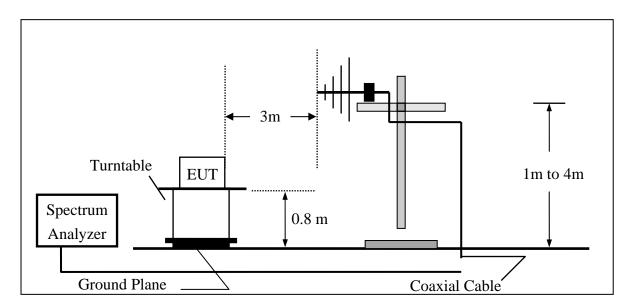

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. S Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


t (886-2) 2299-3279




Report No.: EH/2011/40008 **Issue Date: Apr. 26, 2011**

Page 26 of 166

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

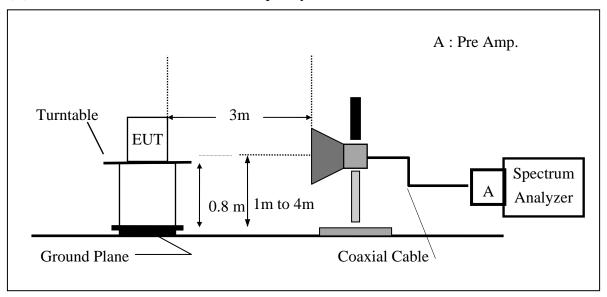

(C) Substituted Method Test Set-UP

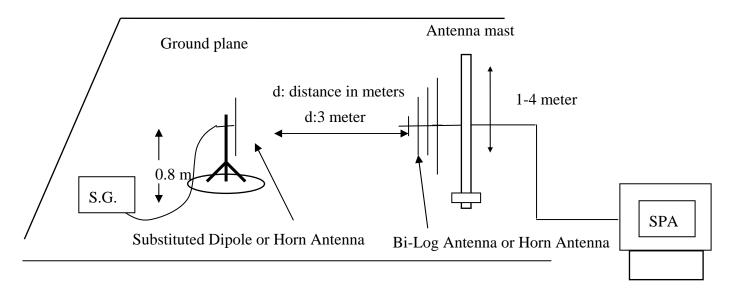

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and Conditions.htm and for electronic Documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and Conditions.htm and for electronic Documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and Conditions.htm and for electronic Documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and which is a subject to Terms and Conditions of the contained hereon reflects the Company's findings at the time of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 27 of 166

6.3. Measurement Procedure:

The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer.

During the measurement, the EUT was communication with the station. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna from 4m to 1m. The reading was recorded and the field strength (E in dBuV/m) was calculated.

ERP in frequency band 824.2 –848.80MHz were measured using a substitution method. The EUT was replaced by dipole antenna connected, the S.G. output was recorded and ERP was calculated as follows:

EIRP in frequency band 1710-1755MHz and 1850.2 –1909.8MHz were measured using a substitution method. The EUT was replaced by a horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows:

ERP = S.G. output (dBm) + Antenna Gain (dBd) - Cable Loss (dB)

EIRP = S.G. output (dBm) + Antenna Gain (dBi) - Cable Loss (dB)

6.4. Measurement Equipment Used:

Refer to section 2.4 in this report

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 28 of 166

6.5. Measurement Result:

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	ERP (dBm)	Limit (dBm)
	924.20	120	E2	V	115.61	29.22	-7.87	3.62	17.72	38.45
	824.20	128	E2	Н	125.29	39.02	-7.87	3.62	27.52	38.45
CCM 950	926 60	190	00 E2	V	107.33	21.08	-7.88	3.65	9.55	38.45
GSM 850	836.60			Н	125.83	39.60	-7.88	3.65	28.07	38.45
848	949 90	251	E2	V	108.09	21.97	-7.88	3.68	10.41	38.45
	848.80	251		Н	129.56	43.37	-7.88	3.68	31.81	38.45

Remark:

(1) The RBW, VBW of SPA for frequency RBW=300 KHz, VBW=1MHz

Measurement Result:

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
	1950 20	512	E2	V	112.12	7.73	9.90	5.56	12.07	33.00
	1850.20	512	E2	Н	127.91	23.73	9.90	5.84	27.79	33.00
PCS 1900	1880.00	661	E2	V	115.06	10.70	9.99	5.61	15.08	33.00
PCS 1900	1000.00			Н	128.05	23.91	9.99	5.61	28.28	33.00
1909.80	810	E2	V	114.81	10.48	10.08	5.66	14.90	33.00	
	810	E2	Н	128.48	24.37	10.08	5.66	28.79	33.00	

Remark:

(1) The RBW, VBW of SPA for frequency RBW=300K, VBW=1MHz

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 29 of 166

Measurement Result:

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	ERP (dBm)	Limit (dBm)
	924.20	128	БЭ	V	110.48	24.09	-7.87	3.62	12.59	38.45
824.20	024.20	128	E2	Н	122.76	36.49	-7.87	3.62	24.99	38.45
	926 60	190	E2	V	106.38	20.13	-7.88	3.65	8.60	38.45
EDGE 850	836.60			Н	122.92	36.69	-7.88	3.65	25.16	38.45
	949 90	251	E2	V	107.13	21.01	-7.88	3.68	9.45	38.45
	848.80			Н	123.38	37.19	-7.88	3.68	25.63	38.45

Remark:

(1) The RBW, VBW of SPA for frequency RBW=300 KHz, VBW=1MHz

Measurement Result:

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
			БЭ	V	112.34	7.95	9.90	5.56	12.29	33.00
	1850.20	512	E2	Н	128.11	23.93	9.90	5.84	27.99	33.00
	1880.00	661	E2	V	112.63	8.27	9.99	5.61	12.65	33.00
EDGE 1900	1000.00			Н	125.05	20.91	9.99	5.61	25.28	33.00
1909.80	910	E2	V	111.68	7.35	10.08	5.66	11.77	33.00	
	810	E2	Н	125.40	21.29	10.08	5.66	25.71	33.00	

Remark:

(1) The RBW, VBW of SPA for frequency RBW=300K, VBW=1MHz

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488

S Taiwan Ltd.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 30 of 166

Measurement Result:

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
	1052.40	00.60	F-2	V	111.43	6.91	9.48	5.33	11.05	33.00
	1852.40	9262	E2	Н	124.51	20.18	9.90	5.84	24.24	33.00
	1880.00	600		V	112.48	7.98	9.54	5.36	12.15	33.00
WCDMA II	1000.00	000	E2	Н	124.56	20.25	9.54	5.36	24.42	33.00
	1008 75	1175	1175 E2	V	112.92	8.44	9.61	5.40	12.64	33.00
	1908.75 117	11/3		Н	124.06	19.77	9.61	5.40	23.98	33.00

Remark:

(1) The RBW, VBW of SPA for frequency

RBW = 5MHz, VBW = 5MHz

Measurement Result:

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	ERP (dBm)	Limit (dBm)
	006.40	4100	F-2	V	106.90	20.54	-7.88	3.63	9.03	38.45
	826.40	4132	E2	Н	121.16	34.90	-7.88	3.63	23.40	38.45
WCDMA	1000.00	600		V	105.73	19.47	-7.88	3.65	7.94	38.45
Band V	1880.00	600	E2	Н	121.90	35.67	-7.88	3.65	24.14	38.45
	1009.75	1175		V	106.48	20.33	-7.88	3.67	8.78	38.45
	1908.75	1175	E2	Н	121.80	35.60	-7.88	3.67	24.05	38.45

Remark:

(1) The RBW, VBW of SPA for frequency

RBW = 5MHz, VBW = 5MHz

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results snown in this test report refer only to the sample(s) lested and such sample(s) are retained for so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 31 of 166

Measurement Result:

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
	1050 10	02.52	F-2	V	106.73	2.21	9.48	5.33	6.35	33.00
	1852.40	9262	E2	Н	119.89	15.56	9.90	5.84	19.62	33.00
HSUPA	1880.00	600	F-2	V	106.50	2.00	9.54	5.36	6.17	33.00
Band II	1000.00	000	E2	Н	120.59	16.28	9.54	5.36	20.45	33.00
	1908.75	1175		V	107.41	2.93	9.61	5.40	7.13	33.00
	1908.73	11/3	E2	Н	121.06	16.77	9.61	5.40	20.98	33.00

Remark:

(1) The RBW, VBW of SPA for frequency

RBW = 5MHz, VBW = 5MHz

Measurement Result:

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	ERP (dBm)	Limit (dBm)
	826.40	4132	F-2	V	106.95	20.59	-7.88	3.63	9.08	38.45
	020.40	4132	E2	Н	120.10	33.84	-7.88	3.63	22.34	38.45
HSUPA	1880.00	600	F-2	V	108.13	21.87	-7.88	3.65	10.34	38.45
Band V	1000.00	000	E2	Н	120.64	34.41	-7.88	3.65	22.88	38.45
	1908.75	1175	F-2	V	107.30	21.15	-7.88	3.67	9.60	38.45
	1900.73	3.75 1175	E2	Н	119.84	33.64	-7.88	3.67	22.09	38.45

Remark:

(1) The RBW, VBW of SPA for frequency

RBW = 5MHz, VBW = 5MHz

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results snown in this test report refer only to the sample(s) lested and such sample(s) are retained for so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. S Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 32 of 166

Measurement Result:

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	ERP (dBm)	Limit (dBm)
	004.70	1012	F2	V	113.39	27.03	-7.88	3.63	15.52	38.45
	824.70	1013	E2	Н	123.44	37.18	-7.88	3.63	25.68	38.45
CDMA	836.52	384	F-2	V	113.79	27.53	-7.88	3.65	16.00	38.45
2000	630.32	364	E2	Н	123.80	37.57	-7.88	3.65	26.04	38.45
Cellular	848.31	777	F-2	V	111.95	25.80	-7.88	3.67	14.25	38.45
	040.31	111	E2	Н	122.67	36.47	-7.88	3.67	24.92	38.45

Remark:

(1) The RBW, VBW of SPA for frequency RBW = 2MHz, VBW = 6MHz

Measurement Result:

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
	1051 25	25	F2	V	112.38	8.00	9.90	5.56	12.33	33.00
	1851.25	25	E2	Н	119.33	15.15	9.90	5.84	19.21	33.00
CDMA	1880.00	600	F-2	V	114.30	9.94	9.99	5.61	14.32	33.00
2000	1880.00	000	E2	Н	127.35	23.21	9.99	5.61	27.58	33.00
PCS	1908.75	1175		V	112.05	7.72	10.07	5.66	12.13	33.00
	1900.73	11/5	E2	Н	125.55	21.44	10.07	5.66	25.85	33.00

Remark:

(1) The RBW, VBW of SPA for frequency RBW = 2MHz, VBW = 6MHz

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488

S Taiwan Ltd.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 33 of 166

Measurement Result:

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	ERP (dBm)	Limit (dBm)
	02150	1012		V	113.52	27.16	-7.88	3.63	15.65	38.45
CDMA	824.70	1013	E2	Н	122.35	36.09	-7.88	3.63	24.59	38.45
2000	926.52	204		V	113.84	27.58	-7.88	3.65	16.05	38.45
EVDO	836.52	384	E2	Н	123.81	37.58	-7.88	3.65	26.05	38.45
Cellular	040 21	777		V	111.95	25.80	-7.88	3.67	14.25	38.45
	848.31	777	E2	Н	122.67	36.47	-7.88	3.67	24.92	38.45

(1) The RBW, VBW of SPA for frequency RBW = 2MHz, VBW = 6MHz

Measurement Result:

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
	1051.05	25	F2	V	116.70	12.32	9.90	5.56	16.65	33.00
CDMA	1851.25	25	E2	Н	117.59	13.41	9.90	5.84	17.47	33.00
2000	1880.00	600	F-2	V	114.24	9.88	9.99	5.61	14.26	33.00
EVDO	1880.00	000	E2	Н	125.52	21.38	9.99	5.61	25.75	33.00
PCS	1908.75	1175	F-2	V	112.21	7.88	10.07	5.66	12.29	33.00
	1700.73	11/3	E2	Н	124.79	20.68	10.07	5.66	25.09	33.00

Remark:

(1) The RBW, VBW of SPA for frequency RBW = 2MHz, VBW = 6MHz

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results snown in this test report refer only to the sample(s) lested and such sample(s) are retained for so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

GS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 34 of 166

7. 99% OCCUPIED BANDWIDTH MEASUREMENT

7.1. Standard Applicable:

According to §FCC 2.1049.

According to IC RSS-Gen Issue 3 §4.6.1

According to IC RSS-133 §2.3

7.2. Test Set-up:

Refer to section 5.2 in this report

7.3. Measurement Procedure:

The EUT's output RF connector was connected with a short cable to the spectrum analyzer, RBW was set to about 1% of emission BW, VBW= 3 times RBW (10/30KHz) for GSM/EDGE; VBW= 3 times RBW (47/150KHz) for WCDMA/HSUPA, -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

7.4. Measurement Equipment Used:

Refer to section 2.4 in this report

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 35 of 166

7.5. Measurement Result:

EUT Mode	Frequency (MHz)	СН	99% Bandwidth (MHz)
	824.20	128	0.2450
GSM 850	836.60	190	0.2433
	848.80	251	0.2398

EUT Mode	Frequency (MHz)	СН	99% Bandwidth (MHz)
	1850.20	512	0.2407
PCS 1900	1880.00	661	0.2400
	1909.80	810	0.2454

EUT Mode	Frequency (MHz)	СН	99% Bandwidth (MHz)
	824.20	128	0.2462
EDGE 850	836.60	190	0.2459
	848.80	251	0.2420

EUT Mode	Frequency (MHz)	СН	99% Bandwidth (MHz)
	1850.20	512	0.2440
EDGE 1900	1880.00	661	0.2456
	1909.80	810	0.2430

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. S Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 36 of 166

EUT Mode	Frequency (MHz)	СН	99% Bandwidth (MHz)
WCDMA II	1852.40	9262	4.1455
	1880.00	9400	4.1675
	1907.60	9538	4.1555

EUT Mode	Frequency (MHz)	СН	99% Bandwidth (MHz)
WCDMA V	826.40	4132	4.1463
	836.00	4180	4.1525
	846.60	4233	4.1561

EUT Mode	Frequency (MHz)	СН	99% Bandwidth (MHz)
HSUPA II	1852.4	9262	4.1590
	1880.0	9400	4.1588
	1907.6	9538	4.1463

EUT Mode	Frequency (MHz)	СН	99% Bandwidth (MHz)
HSUPA V	826.40	4132	4.1542
	836.60	4183	4.1615
	846.60	4233	4.1578

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 37 of 166

EUT Mode	Frequency (MHz)	СН	99% Bandwidth (MHz)
CDMA 2000 Cellular	824.70	1013	1.2669
	836.52	384	1.2659
	848.31	777	1.2676

EUT Mode	Frequency (MHz)	СН	99% Bandwidth (MHz)
CDMA 2000 PCS	1851.25	25	1.2759
	1880.00	600	1.2686
	1908.75	1175	1.2624

EUT Mode	Frequency (MHz)	СН	99% Bandwidth (MHz)
CDMA 2000 EVDO Cellular	824.70	1013	1.2607
	836.52	384	1.2649
	848.31	777	1.2615

EUT Mode	Frequency (MHz)	СН	99% Bandwidth (MHz)
CDMA 2000 EVDO PCS	1851.25	25	1.2711
	1880.00	600	1.2625
	1908.75	1175	1.2690

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SCS Taiwan Ltd

**No 134 Wir Kunn Road Wirklu Indistrial Zone Tainei County Taiwan 台北縣五野工業區五丁縣 134 勝

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號




Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 38 of 166

Figure 7-1: GSM Channel Low





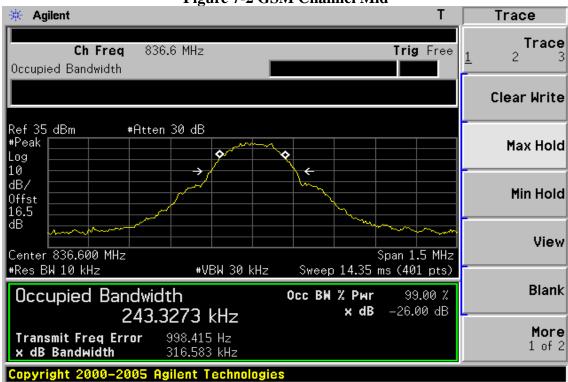

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

| 除計分刊記別・加報音稿米無到側配之係血具具・同時加條血理体量列入・平板音木經平公司音曲計刊・不可能力複製・
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. S Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 39 of 166

Figure 7-3: GSM Channel High


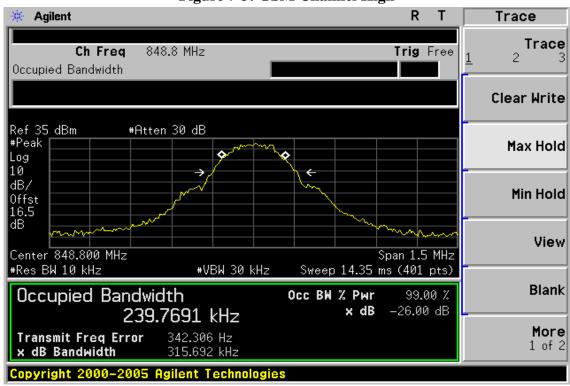


Figure 7-4: PCS Channel Low

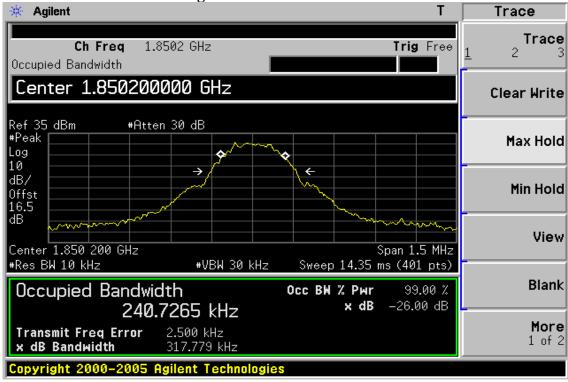

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. S Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


t (886-2) 2299-3279




Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 40 of 166



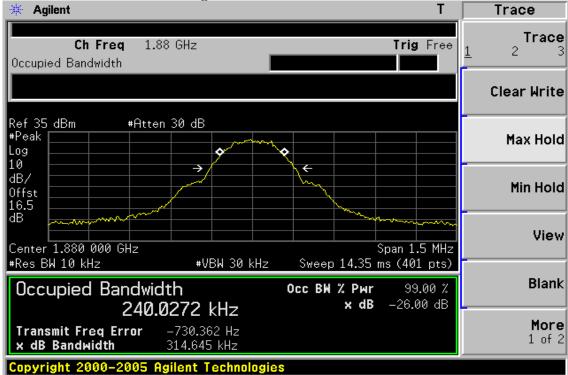



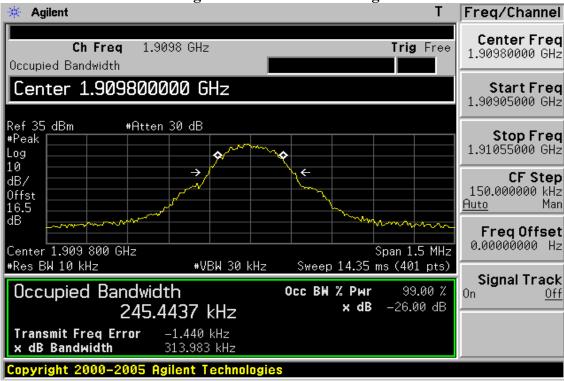

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

Тhis document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic format documents. The format documents are subject to Terms and Conditions for Electronic format documents.

The format documents are subject to Terms and Conditions for Electronic format documents.

The format documents are subject to Terms and Conditions for Electronic format documents.

The format documents are subject to Terms and Conditions for Electronic format documents.

The format documents are subject to Terms and Conditions for Electronic format documents.

The format documents are subject to Terms and Conditions for Electronic format documents.

The format documents are subject for Electronic format within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. S Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 41 of 166




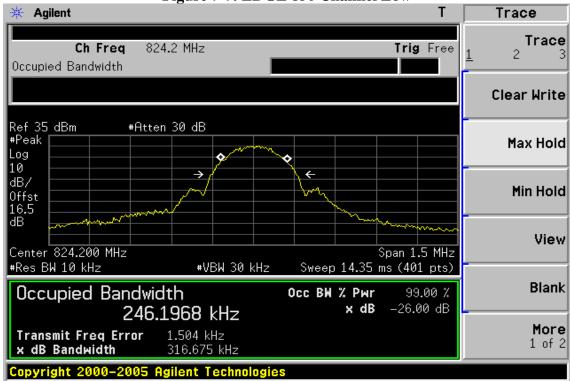


Figure 7-8 EDGE 850 Channel Mid

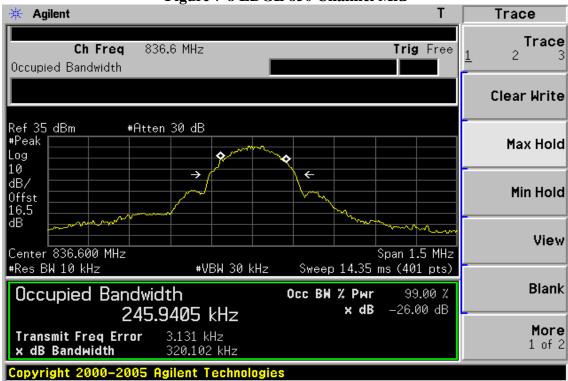

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. S Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 42 of 166




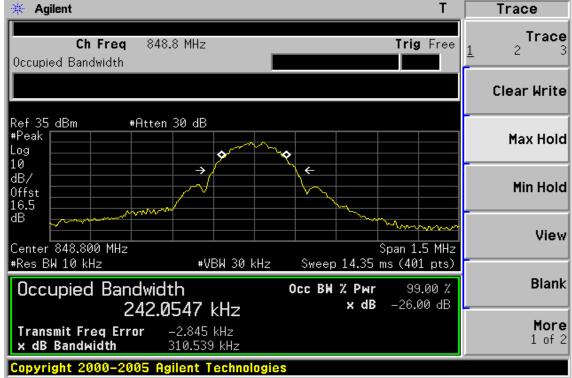


Figure 7-10: EDGE 1900 Channel Low

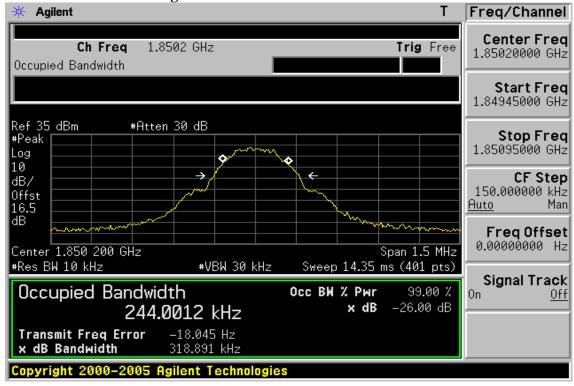

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. S Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 43 of 166



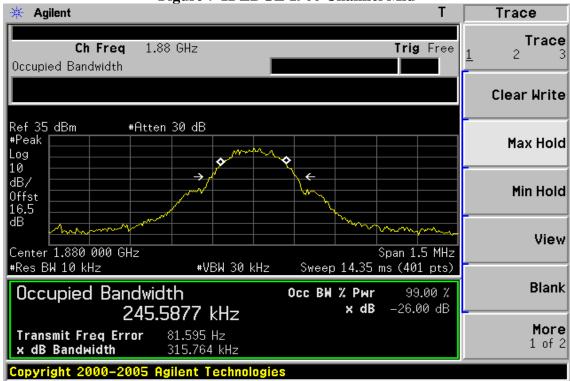


Figure 7-12: EDGE 1900 Channel High



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. S Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 44 of 166




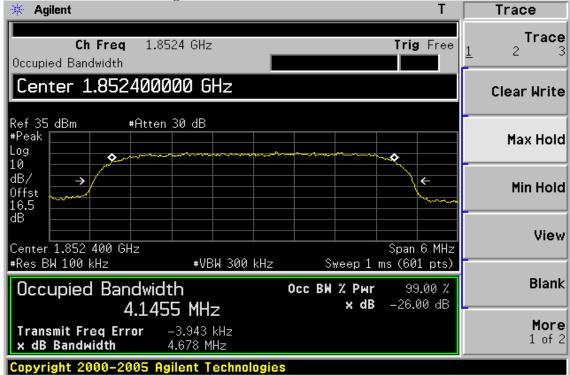


Figure 7-14 WCDMA II Channel Mid

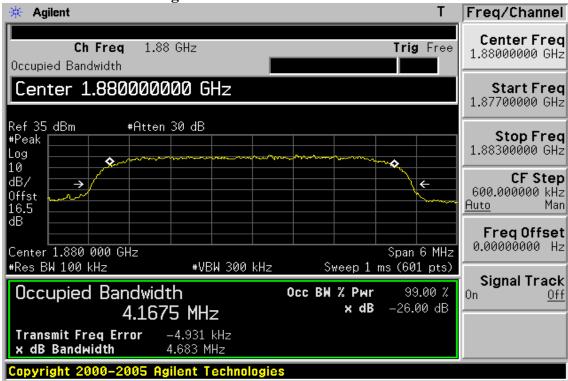

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

Тhis document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic format documents. The format documents are subject to Terms and Conditions for Electronic format documents.

The format documents are subject to Terms and Conditions for Electronic format documents.

The format documents are subject to Terms and Conditions for Electronic format documents.

The format documents are subject to Terms and Conditions for Electronic format documents.

The format documents are subject to Terms and Conditions for Electronic format documents.

The format documents are subject to Terms and Conditions for Electronic format documents.

The format documents are subject for Electronic format within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. S Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 45 of 166




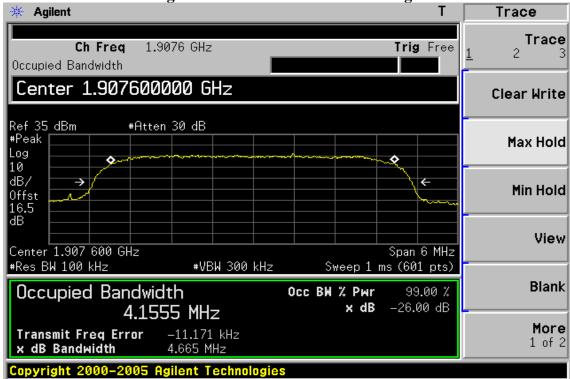


Figure 7-16: WCDMA V Channel Low

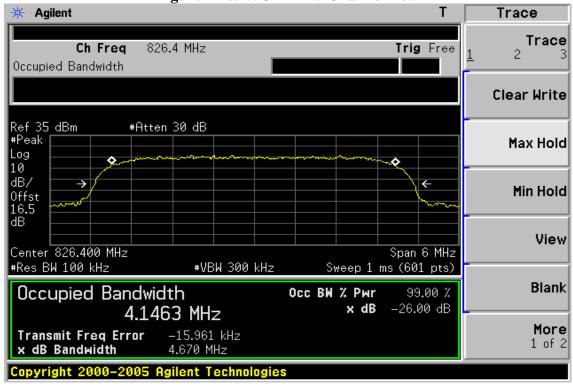

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. S Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 46 of 166




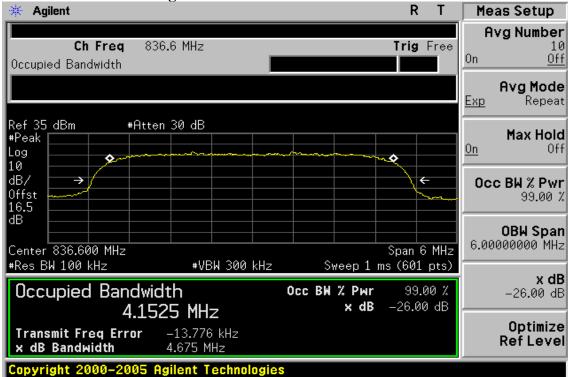


Figure 7-18: WCDMA II Channel High

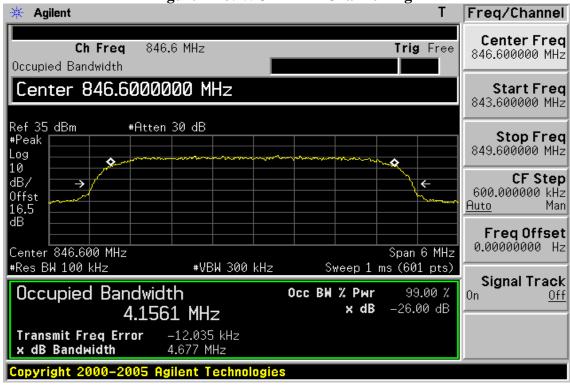

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 47 of 166




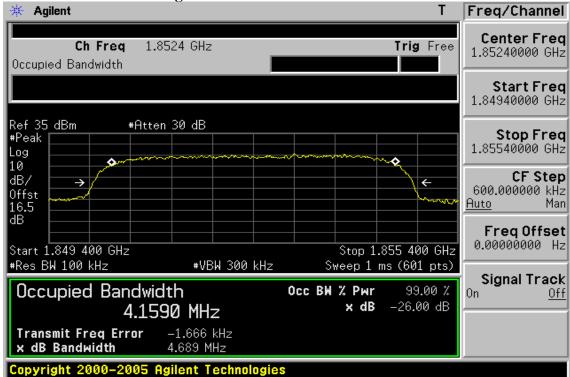


Figure 7-20: HSUPA II Channel Mid

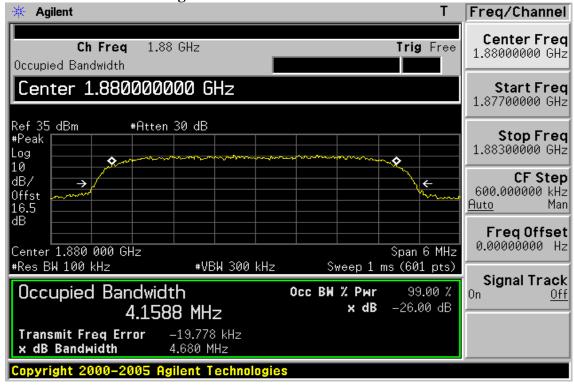

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

brites stated the festules and with this test report reter only to the sample(s) tested and such sample(s) are retained for 30 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號




Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 48 of 166





Figure 7-22: HSUPA V Channel Low

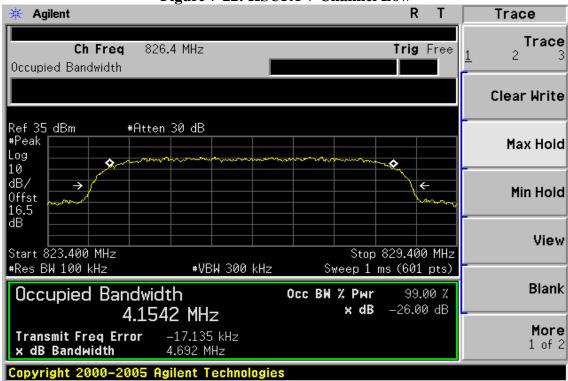

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. S Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 49 of 166




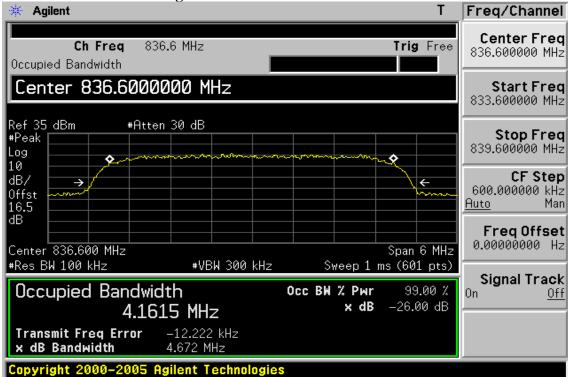


Figure 7-24: HSUPA V Channel High

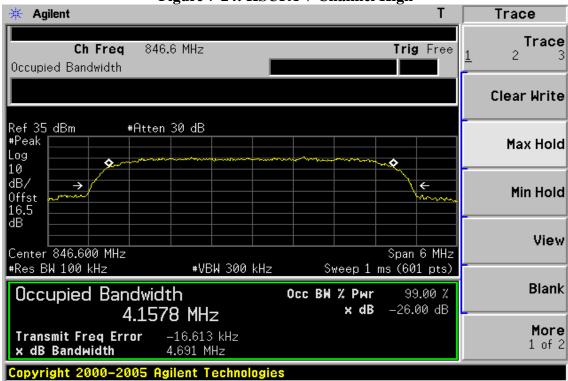

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

Тhis document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic format documents. The format documents are subject to Terms and Conditions for Electronic format documents.

The format documents are subject to Terms and Conditions for Electronic format documents.

The format documents are subject to Terms and Conditions for Electronic format documents.

The format documents are subject to Terms and Conditions for Electronic format documents.

The format documents are subject to Terms and Conditions for Electronic format documents.

The format documents are subject to Terms and Conditions for Electronic format documents.

The format documents are subject for Electronic format within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. S Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 50 of 166

Figure 7-25: CDMA 2000 Cellular Channel Low


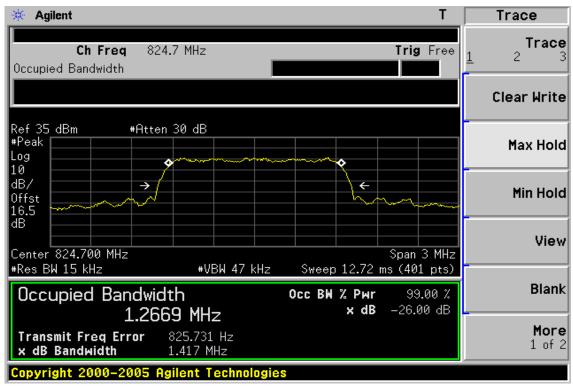


Figure 7-26: CDMA 2000 Cellular Channel Mid

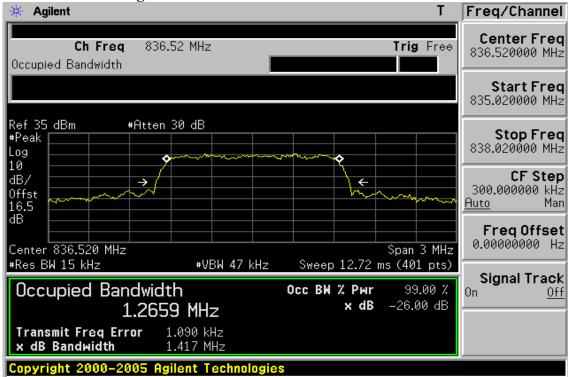

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 51 of 166

Figure 7-27: CDMA 2000 Cellular Channel High


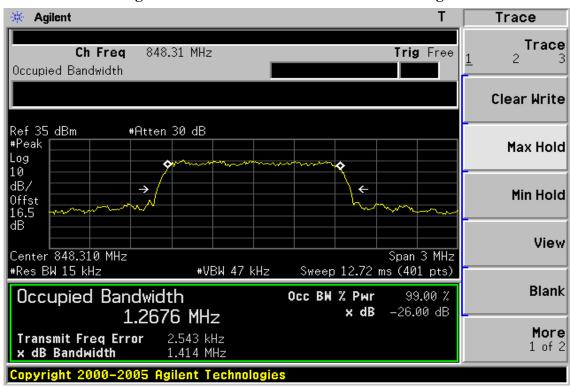


Figure 7-28: CDMA 2000 PCS Channel Low

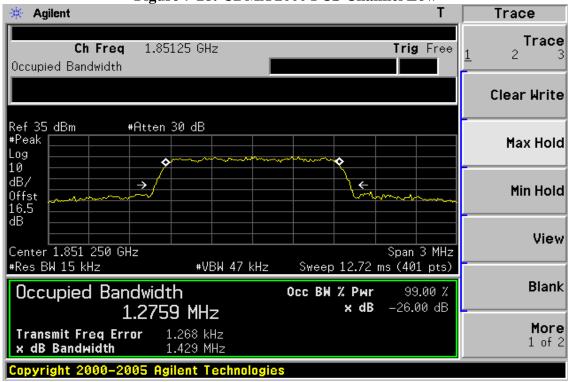

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. S Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 52 of 166

Figure 7-29: CDMA 2000 PCS Channel Mid


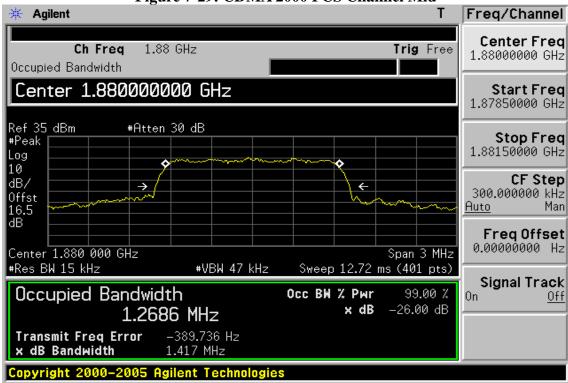


Figure 7-30: CDMA 2000 PCS Channel High

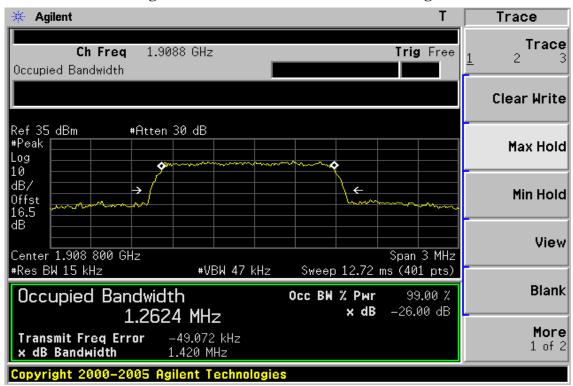

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 53 of 166

Figure 7-31: CDMA 2000 EVDO Cellular Channel Low


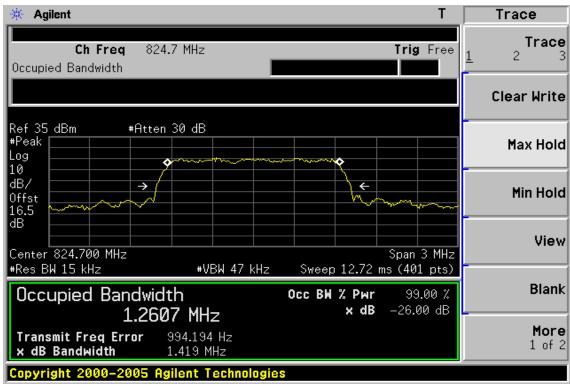


Figure 7-32: CDMA 2000 EVDO Cellular Channel Mid

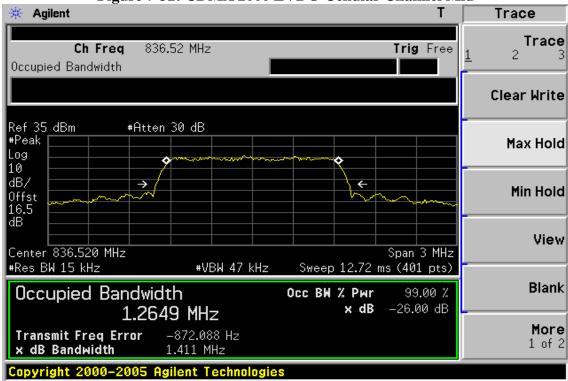

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 54 of 166

Figure 7-33: CDMA 2000 EVDO Cellular Channel High


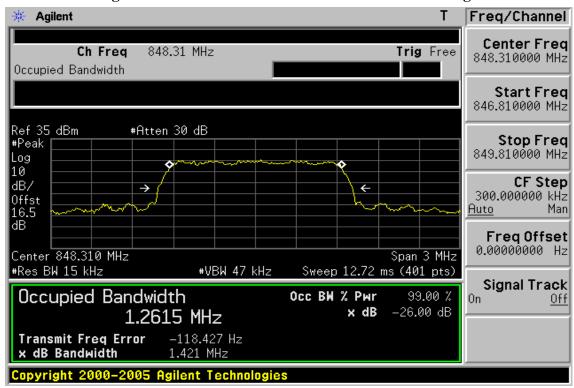


Figure 7-34: CDMA 2000 EVDO PCS Channel Low

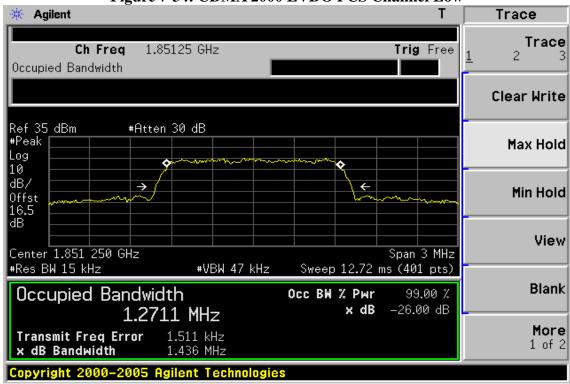

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

brites stated the festules and with this test report reter only to the sample(s) tested and such sample(s) are retained for 30 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 55 of 166

Figure 7-35: CDMA 2000 EVDO PCS Channel Mid


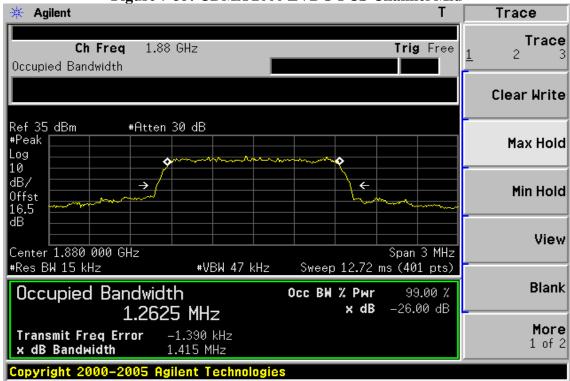


Figure 7-36: CDMA 2000 EVDO PCS Channel High

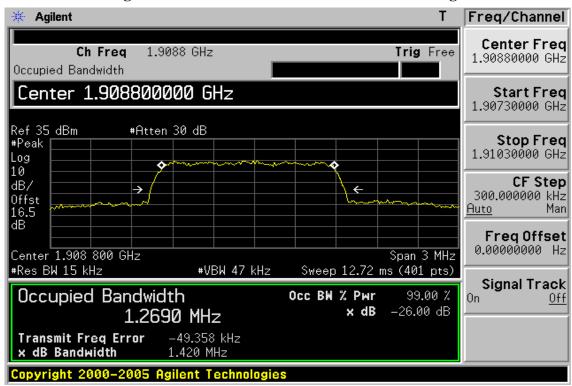

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

brites stated the festules and with this test report reter only to the sample(s) tested and such sample(s) are retained for 30 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. S Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 56 of 166

8. OUT OF BAND EMISSION AT ANTENNA TERMINALS

8.1. Standard Applicable:

According to FCC §2.1051.

FCC §22.917(a), §24.238(a) the magnitude of each spurious and harmonic emission that can be detected when the equipment is operated under the conditions specified in the instruction manual and/or alignment procedure, shall not be less than 43 + 10 log (mean output power in watts) dBc below the mean power output outside a license's frequency block (-13dBm)

According to RSS-132 §4.5

4.5.1 Out-of-block Emissions

Mobile and base station equipment with emission bandwidth less than or equal to 4 MHz shall comply with 4.5.1.1. Mobile station equipment with emission bandwidth greater than 4 MHz shall comply with 4.5.1.2. Base station equipment with emission bandwidth greater than 4 MHz shall comply with either 4.5.1.2 or 4.5.1.3.

- 4.5.1.1 In the first 1.0 MHz band immediately outside and adjacent to the licensee's frequency block, the power of emissions per any 1% of the emission bandwidth shall be attenuated below the transmitter output power P (in watts) by at least $43 + 10 \log (P)$, dB. After the first 1.0 MHz, the power of emissions shall be attenuated below the transmitter output power by at least
- $43 + 10 \log (P)$, dB, in any 100 kHz bandwidth.
- 4.5.1.2 In the first 1.0 MHz band immediately outside and adjacent to the licensee's frequency block, the power of emissions per any 1% of the emission bandwidth shall be attenuated below the transmitter output power P (in watts) by at least $43 + 10 \log (P)$, dB. After the first 1.0 MHz, the power of emissions shall be attenuated below the transmitter output power by at least
- $43 + 10 \log (P)$, dB, in any 1 MHz bandwidth

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 57 of 166

According to RSS-133 §6.5

6.5.1 Out-of-Block Emissions

a. Mobile stations must comply with subsection i. below.

In the first 1.0MHz band immediately outside and adjacent to the licensee's frequency block. the power of emissions per any 1% of the emission bandwidth shall be attenuated below the transmitter output power P (in watts) by at least $43 + 10 \log (P) dB$.


b. After the first 1.0 MHz (for equipment that complies with a.i. of this subsection) or 1.5 MHz (for equipment that complies with all of this subsection), the power of emissions shall be attenuated below the transmitter output power by at least $43 + 10 \log (P)$, dB, per any MHz of bandwidth.

(Note: If the test result using 1% of the emission bandwidth is used, then power integration over 1.0 MHz is required; alternatively, the spectrum analyzer resolution and video bandwidths can be increased to 1.0 MHz for this measurement).

6.5.2 Out-of-Sub-band Emissions

Outside the sub-bands 1850-1910 MHz and 1930-1990 MHz, the attenuation shall be equal to or greater than the out-of-block emission limits in Section 6.5.1.

8.2. Test SET-UP:

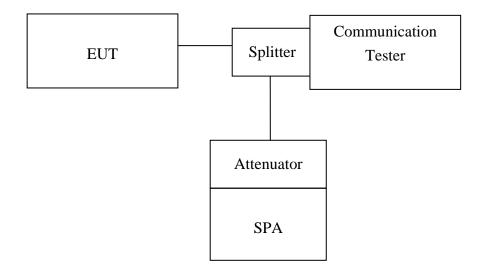

Note: Measurement setup for testing on Antenna connector

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 58 of 166

8.3. Measurement Procedure:

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz, sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.

For the out of band: Set the RBW, VBW = 1MHz, Start=30MHz, Stop=10 th harmonic. Limit = -13dBm

Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions. Limit, -13dBm.

8.4. Measurement Equipment Used:

Refer to section 2.4 in this report

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279





Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 59 of 166

8.5. Measurement Result:

Figure 8-1: Out of Band emission at antenna terminals—GSM 850 Channel Lowest

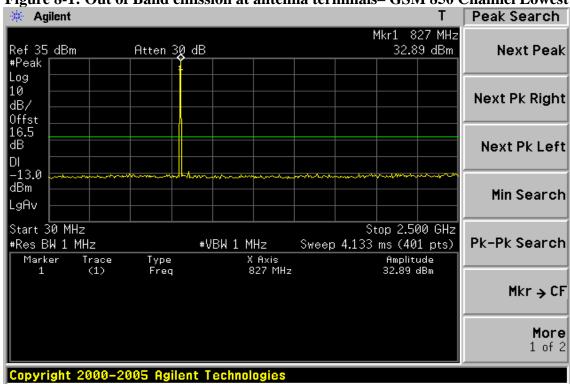

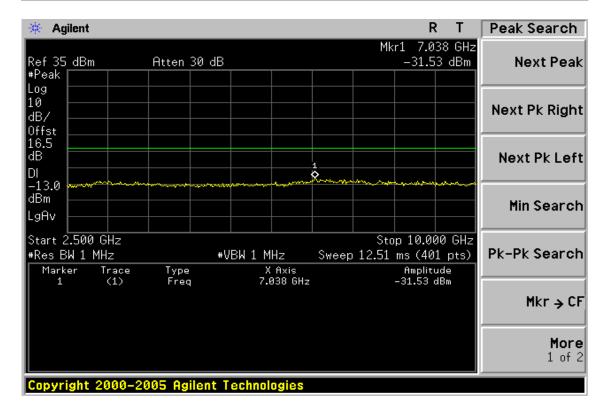

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


t (886-2) 2299-3279




Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 60 of 166

Figure 8-2: Out of Band emission at antenna terminals – GSM 850 Channel Mid

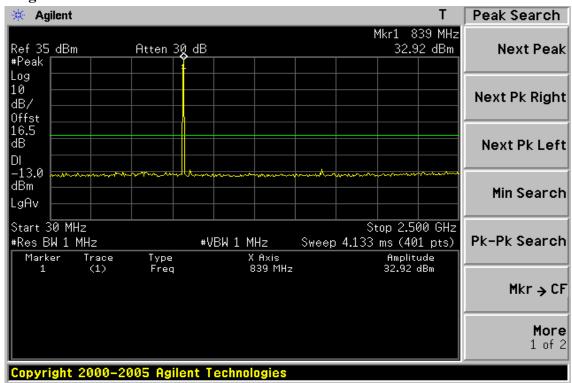

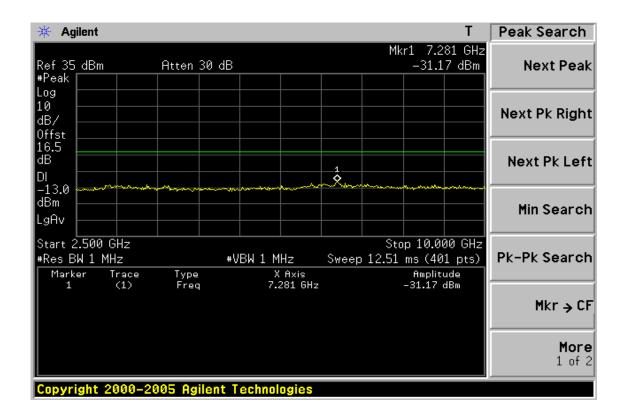

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


t (886-2) 2299-3279




Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 61 of 166

Figure 8-3: Out of Band emission at antenna terminals – GSM 850 Channel Highest

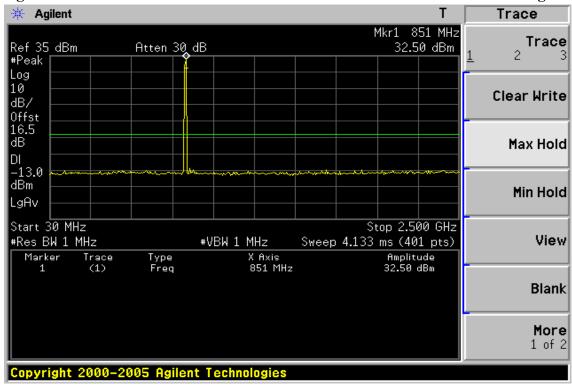

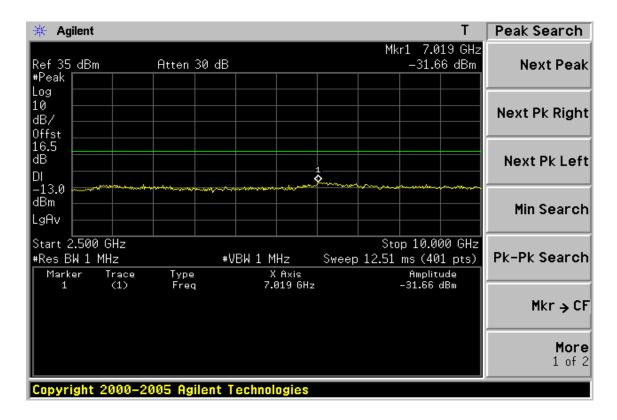

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. S Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279




Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 62 of 166

Figure 8-4: Band edge emission at antenna terminals – GSM 850 Channel Lowest



Figure 8-5: Band edge emission at antenna terminals – GSM 850 Channel Highest

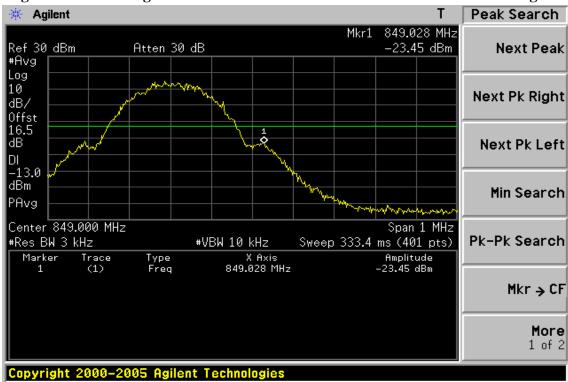

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


t (886-2) 2299-3279




Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 63 of 166

Figure 8-6: Out of Band emission at antenna terminals – PCS 1900 Channel Lowest

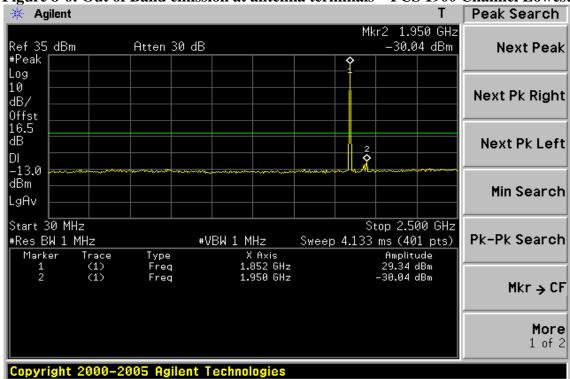

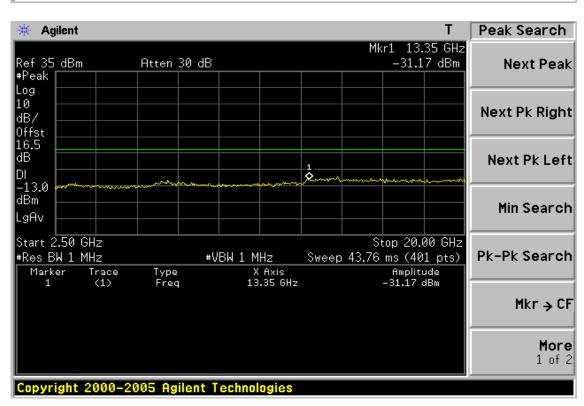

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


t (886-2) 2299-3279




Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 64 of 166

Figure 8-7: Out of Band emission at antenna terminals – PCS 1900 Channel Mid

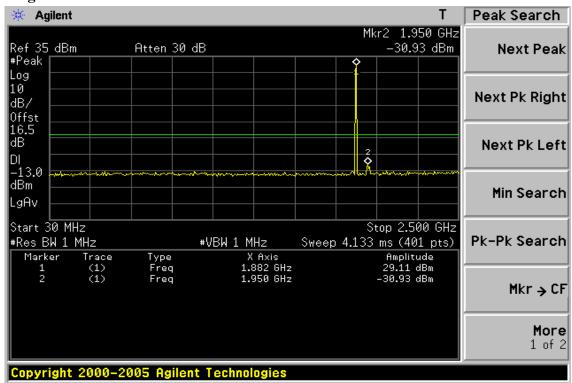

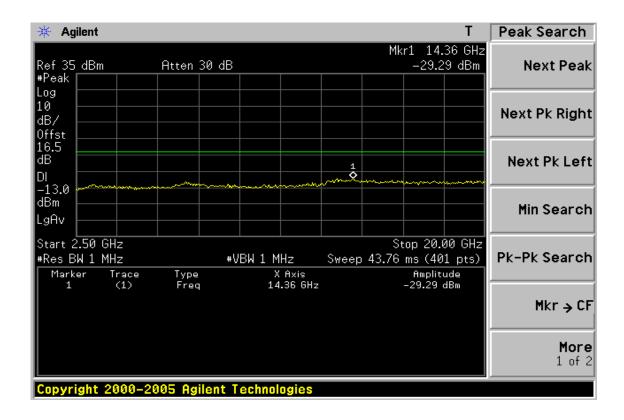

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

台灣檢驗科技股份有限公司

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279


f (886-2) 2298-0488 www.tw.sgs.com




Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 65 of 166

Figure 8-8: Out of Band emission at antenna terminals – PCS 1900Channel Highest

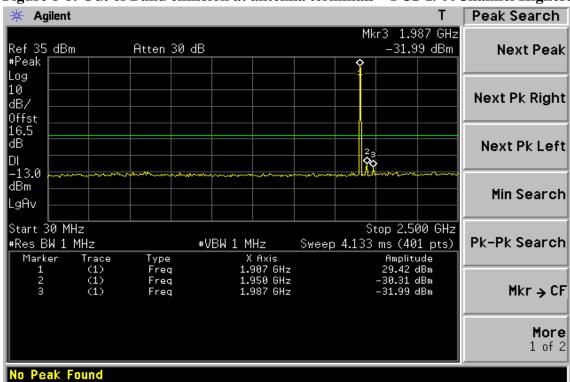

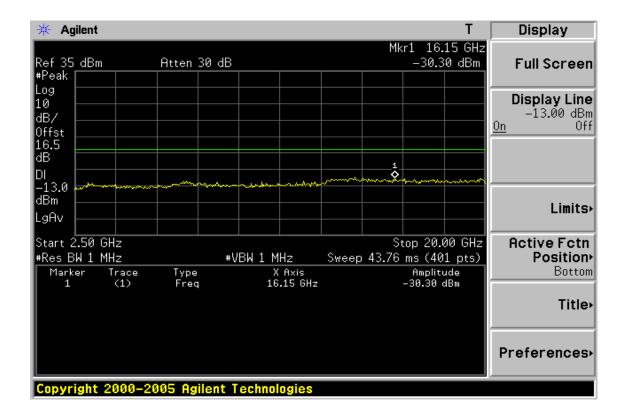

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 66 of 166

Figure 8-9: Band edge emission at antenna terminals – PCS 1900 Channel Lowest


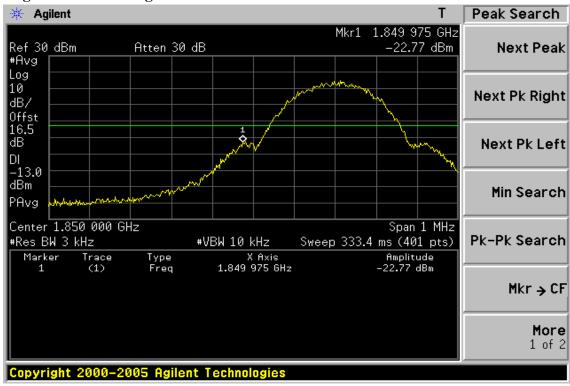


Figure 8-10: Band edge emission at antenna terminals – PCS 1900Channel Highest

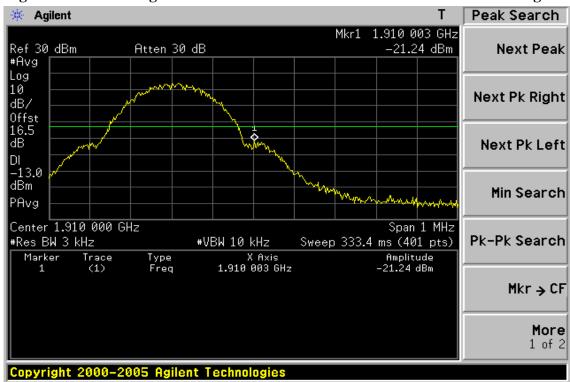

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279


f (886-2) 2298-0488 www.tw.sgs.com




Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 67 of 166

Figure 8-11: Out of Band emission at antenna terminals- WCDMA II Channel Lowest

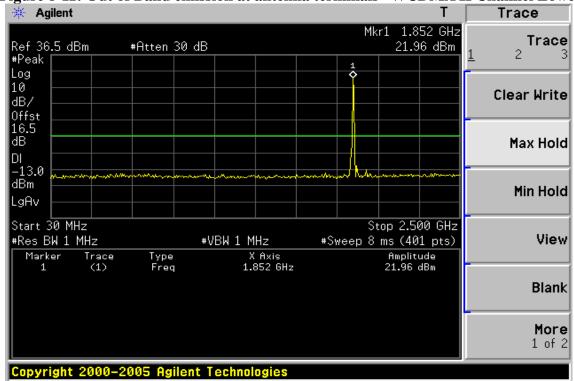

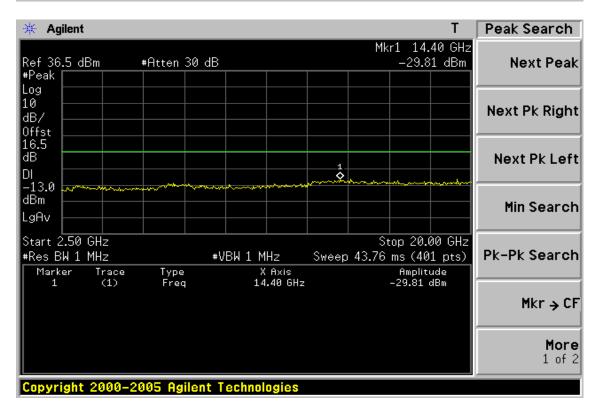

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號




Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 68 of 166

Figure 8-12: Out of Band emission at antenna terminals –WCDMA II Channel Mid

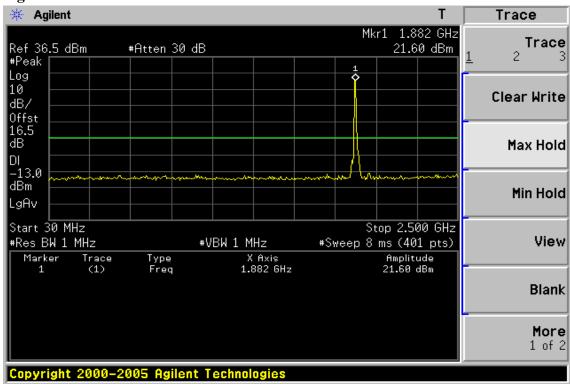

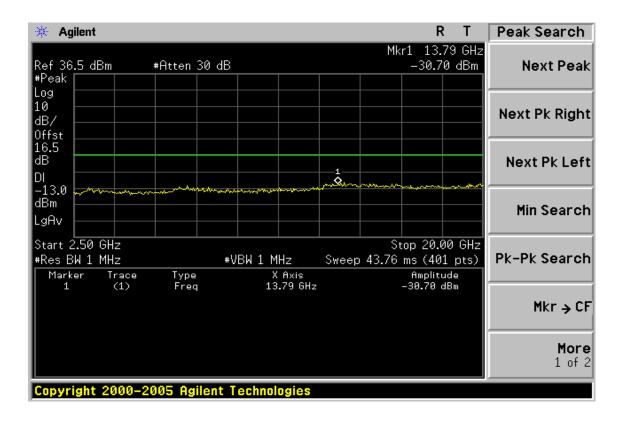

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號




Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 69 of 166

Figure 8-13: Out of Band emission at antenna terminals-WCDMA II Channel Highest

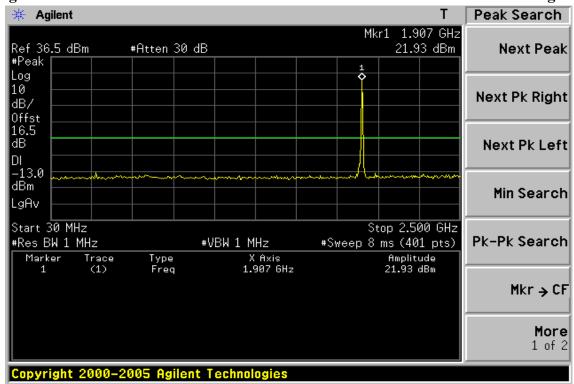

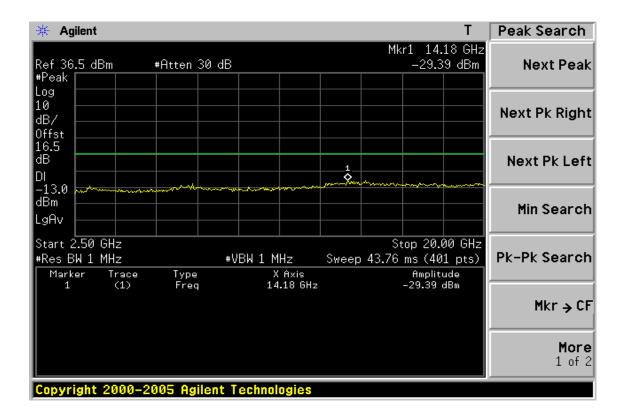

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279




Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 70 of 166

Figure 8-14: Bad edge emission at antenna terminals –WCDMA II Channel Lowest



Figure 8-15: Band edge emission at antenna terminals –WCDMA II Channel Highest

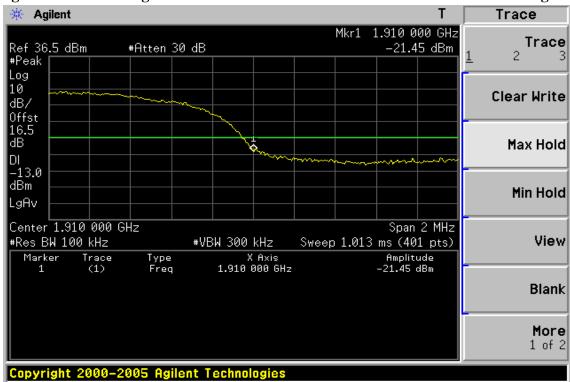

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. S Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


t (886-2) 2299-3279




Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 71 of 166

Figure 8-16: Out of Band emission at antenna terminals-WCDMA V Channel Lowest

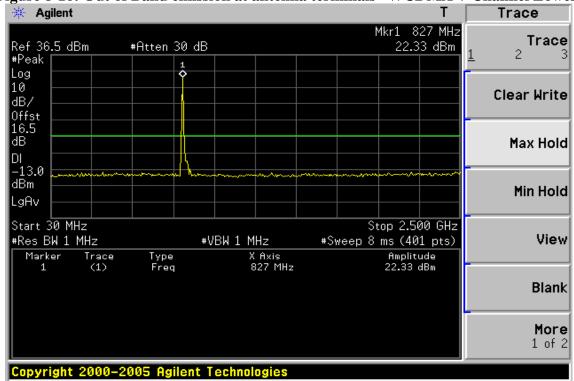

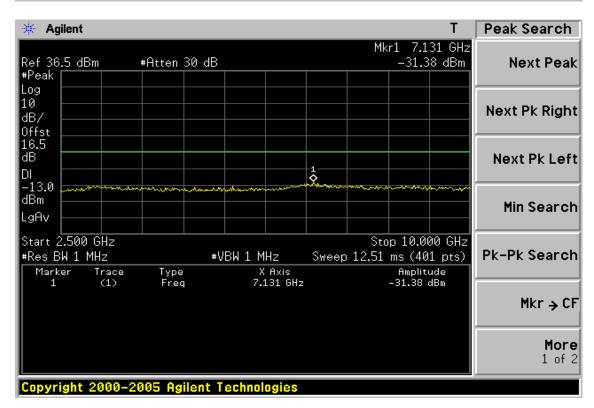

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


t (886-2) 2299-3279




Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 72 of 166

Figure 8-17: Out of Band emission at antenna terminals –WCDMA V Channel Mid

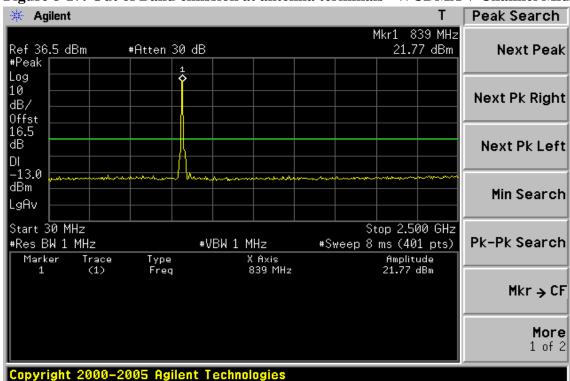

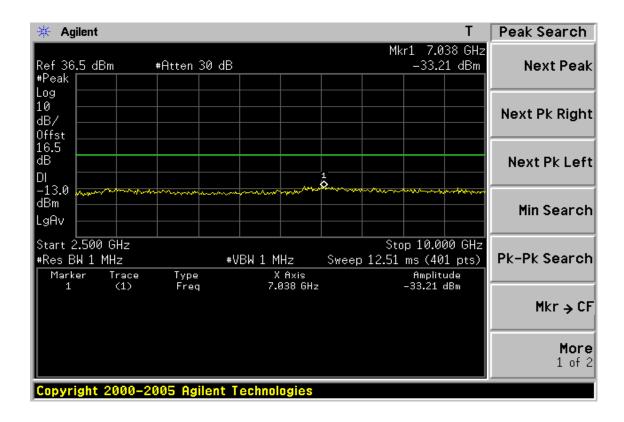

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


t (886-2) 2299-3279




Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 73 of 166

Figure 8-18: Out of Band emission at antenna terminals-WCDMA V Channel Highest

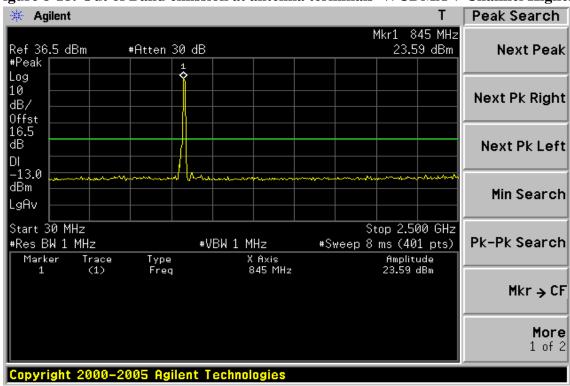

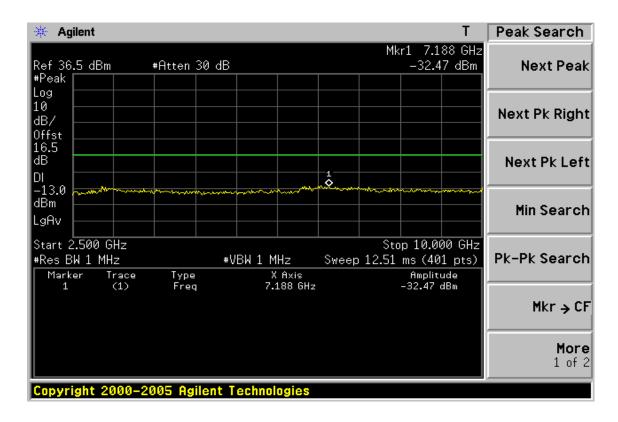

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 74 of 166

Figure 8-19: Bad edge emission at antenna terminals –WCDMA V Channel Lowest


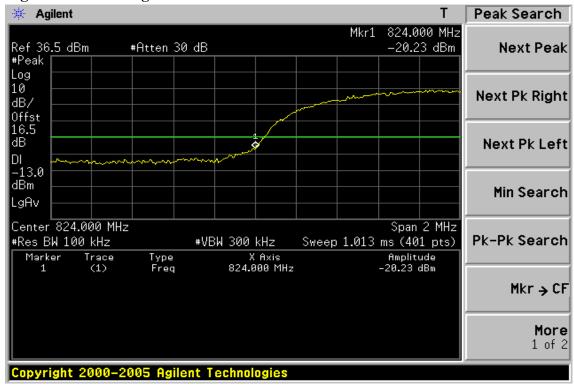


Figure 8-20: Band edge emission at antenna terminals –WCDMA V Channel Highest

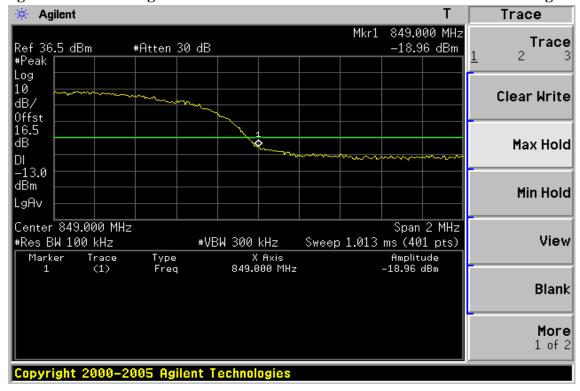

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


t (886-2) 2299-3279




Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 75 of 166

Figure 8-21: Out of Band emission at antenna terminals-CDMA 2000 Cellular Channel Lowest

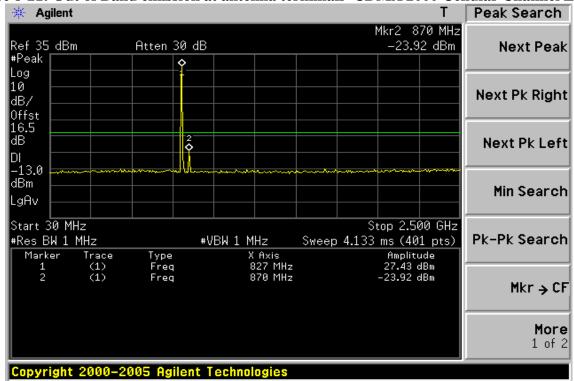

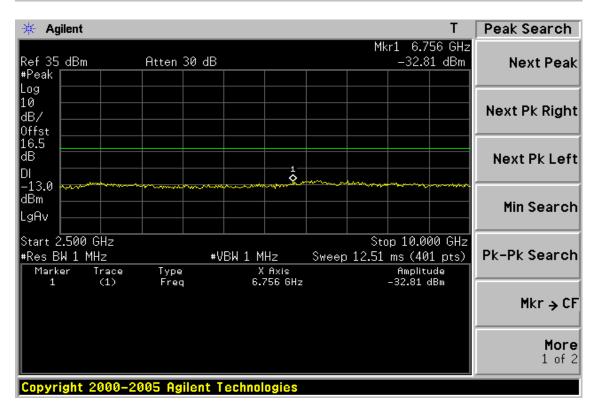

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 76 of 166

Figure 8-22: Out of Band emission at antenna terminals -CDMA 2000 Cellular Channel Mid

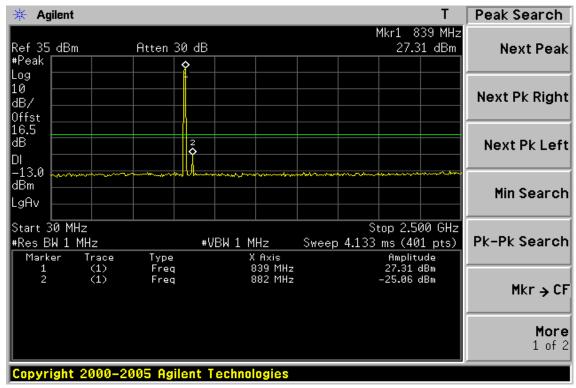

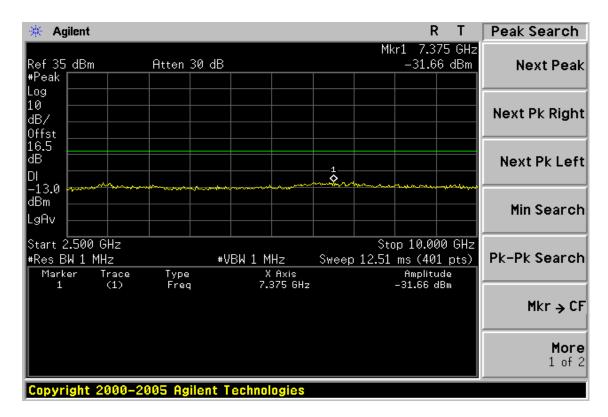

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


t (886-2) 2299-3279




Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 77 of 166

Figure 8-23: Out of Band emission at antenna terminals-CDMA 2000 Cellular Channel Highest

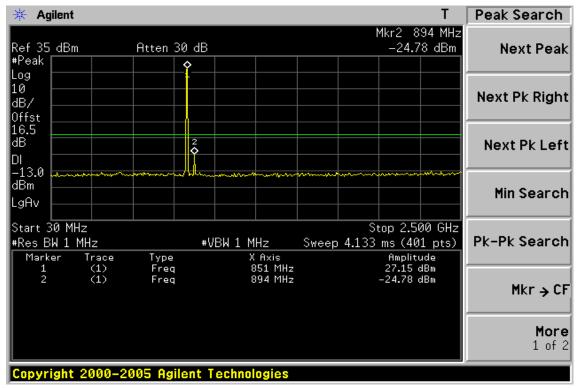

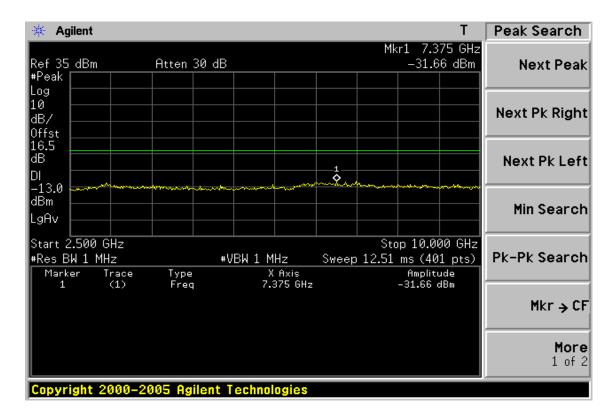

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 78 of 166

Figure 8-24: Band edge emission at antenna terminals -CDMA 2000 Cellular Channel Lowest


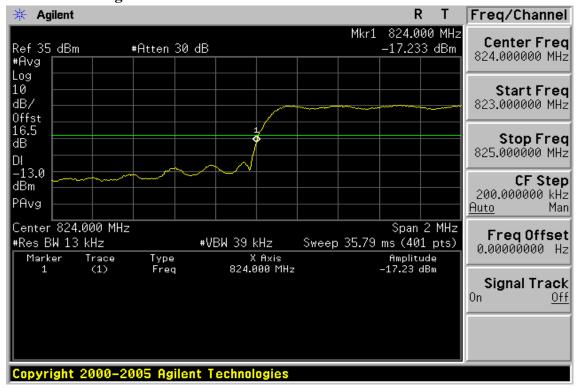


Figure 8-25: Band edge emission at antenna terminals -CDMA 2000 Cellular Channel Highest

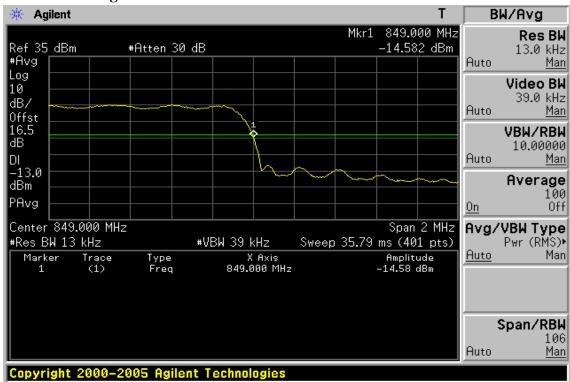

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


t (886-2) 2299-3279




Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 79 of 166

Figure 8-26: Out of Band emission at antenna terminals-CDMA 2000 PCS Channel Lowest

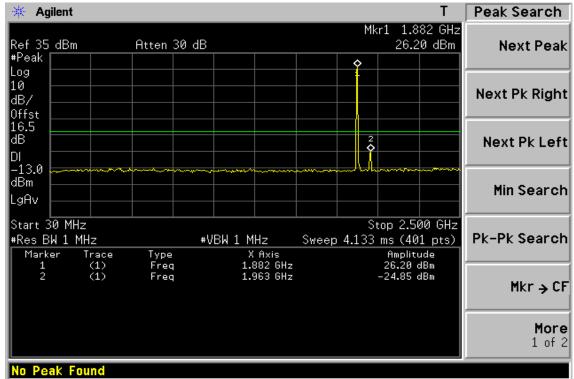

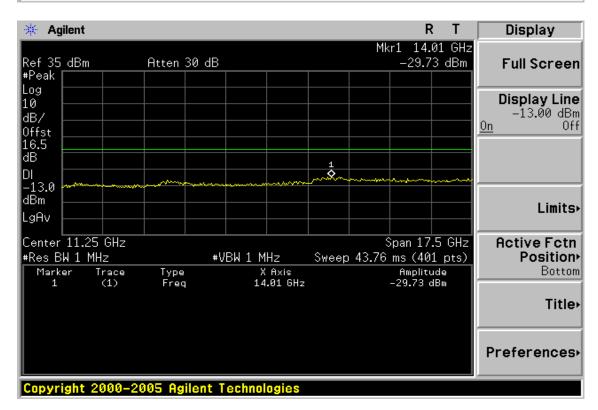

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


t (886-2) 2299-3279




Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 80 of 166

Figure 8-27: Out of Band emission at antenna terminals -CDMA 2000 PCS Channel Mid

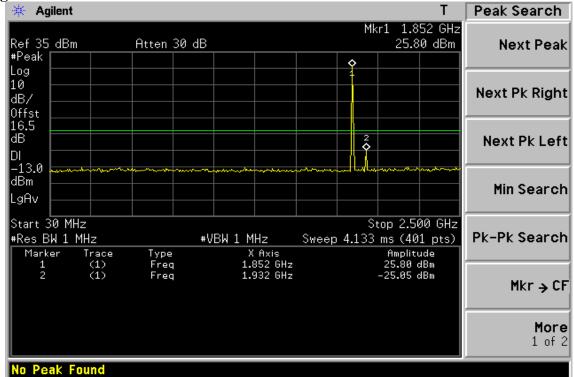

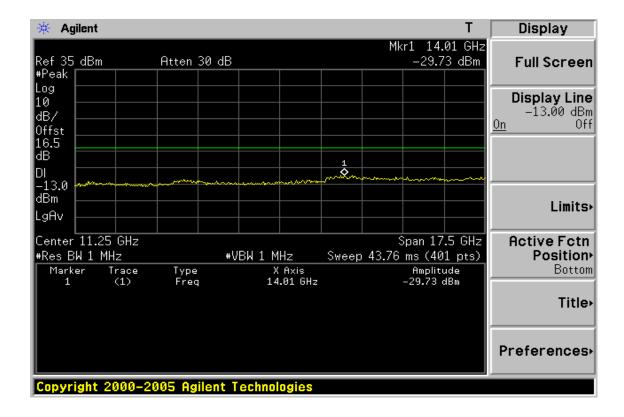

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


t (886-2) 2299-3279




Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 81 of 166

Figure 8-28: Out of Band emission at antenna terminals-CDMA 2000 PCS Channel Highest

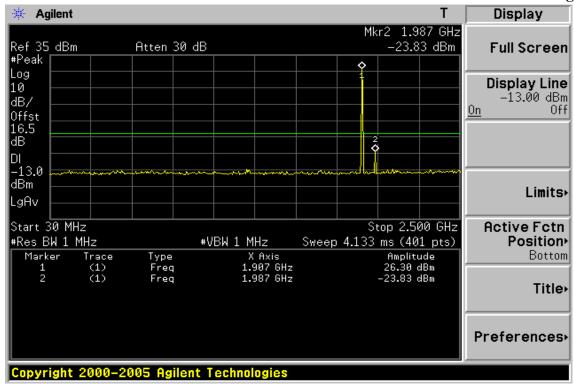

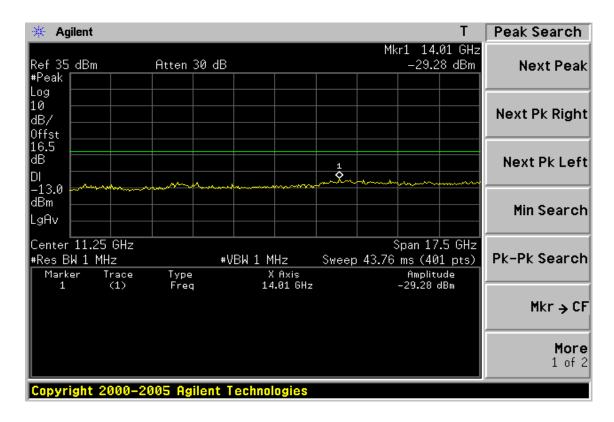

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 82 of 166

Figure 8-29: Band edge emission at antenna terminals -CDMA 2000 PCS Channel Lowest


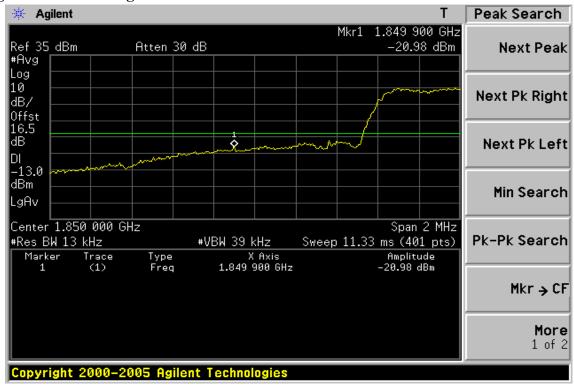


Figure 8-30: Band edge emission at antenna terminals -CDMA 2000 PCS Channel Highest

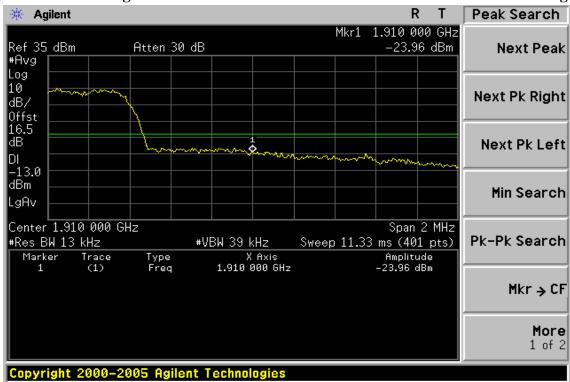

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 83 of 166

9. FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT (TX)

9.1. Standard Applicable:

According to FCC §2.1053,

FCC §22.917(a), §24.238(a) the magnitude of each spurious and harmonic emission that can be detected when the equipment is operated under the conditions specified in the instruction manual and/or alignment procedure, shall not be less than 43 + 10 log (mean output power in watts) dBc below the mean power output outside a license's frequency block (-13dBm)

According to RSS-132 §4.5

4.5.1 Out-of-block Emissions

Mobile and base station equipment with emission bandwidth less than or equal to 4 MHz shall comply with 4.5.1.1. Mobile station equipment with emission bandwidth greater than 4 MHz shall comply with 4.5.1.2. Base station equipment with emission bandwidth greater than 4 MHz shall comply with either 4.5.1.2 or 4.5.1.3.

4.5.1.1 In the first 1.0 MHz band immediately outside and adjacent to the licensee's frequency block, the power of emissions per any 1% of the emission bandwidth shall be attenuated below the transmitter output power P (in watts) by at least $43 + 10 \log (P)$, dB. After the first 1.0 MHz, the power of emissions shall be attenuated below the transmitter output power by at least

 $43 + 10 \log (P)$, dB, in any 100 kHz bandwidth.

4.5.1.2 In the first 1.0 MHz band immediately outside and adjacent to the licensee's frequency block, the power of emissions per any 1% of the emission bandwidth shall be attenuated below the transmitter output power P (in watts) by at least $43 + 10 \log (P)$, dB. After the first 1.0 MHz, the power of emissions shall be attenuated below the transmitter output power by at least

 $43 + 10 \log (P)$, dB, in any 1 MHz bandwidth

According to RSS-133 §6.5

6.5.1 Out-of-Block Emissions

a. Mobile stations must comply with subsection i. below.

In the first 1.0MHz band immediately outside and adjacent to the licensee's frequency block. the power of emissions per any 1% of the emission bandwidth shall be attenuated below the transmitter output power P (in watts) by at least $43 + 10 \log (P) dB$.

b. After the first 1.0 MHz (for equipment that complies with a.i. of this subsection) or 1.5 MHz (for equipment that complies with all of this subsection), the power of emissions shall be attenuated below the transmitter output power by at least $43 + 10 \log (P)$, dB, per any MHz of bandwidth.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. Math ロカジャル (大田本語学) 大田本語学 (大田本語学) 大田本語学 (大田本語学) 大田本語学 (大田本語学) (大田本

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 84 of 166

(Note: If the test result using 1% of the emission bandwidth is used, then power integration over 1.0 MHz is required; alternatively, the spectrum analyzer resolution and video bandwidths can be increased to 1.0 MHz for this measurement).

6.5.2 Out-of-Sub-band Emissions

Outside the sub-bands 1850-1910 MHz and 1930-1990 MHz, the attenuation shall be equal to or greater than the out-of-block emission limits in Section 6.5.1.

9.2. EUT Setup (Block Diagram of Configuration):

Refer to section 6.2 in this report

9.3. Measurement Procedure:

The EUT was placed on a non-conductive, The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method.

The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency.

ERP= S.G. output (dBm) + Antenna Gain (dBd) – Cable Loss (dB)

EIRP = S.G. output (dBm) + Antenna Gain(dBi) - Cable Loss (dB)

9.4. Measurement Equipment Used:

Refer to section 2.4 in this report

9.5. Measurement Result:

Refer to attach tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 85 of 166

Radiated Spurious Emission Measurement Result: GSM 850 Mode

Operation Mode : TX CH Low Mode Test Date: Apr. 25, 2011

Fundamental Frequency : 824.20 MHz Test By: Sky Pol: Temperature Ver : 25°C

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
90.14	49.23	V	-53.95	-7.75	1.27	-62.97	-13.00	-49.97
105.66	47.40	V	-54.00	-7.76	1.39	-63.15	-13.00	-50.15
177.44	36.23	V	-63.52	-7.82	1.66	-73.00	-13.00	-60.00
219.15	35.80	V	-65.26	-7.86	1.82	-74.93	-13.00	-61.93
319.06	36.59	V	-61.42	-7.81	2.24	-71.48	-13.00	-58.48
824.00	66.32	V	-20.07	-7.87	3.62	-31.57	-13.00	-18.57
693.14	33.85	V	-55.52	-7.85	3.27	-66.64	-13.00	-53.64
1648.40	45.74	V	-58.84	9.29	5.23	-54.78	-13.00	-41.78
2472.60	52.57	V	-48.44	10.08	6.53	-44.89	-13.00	-31.89
3296.80		V		12.17	7.71		-13.00	
4121.00		V		12.61	8.86		-13.00	
4945.20		V		12.65	9.74		-13.00	
5769.40		V		13.55	10.54		-13.00	
6593.60		V		12.05	11.30		-13.00	
7417.80		V		11.49	12.10		-13.00	
8242.00		V		11.48	12.71		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark "---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

brites stated the festules and with this test report reter only to the sample(s) tested and such sample(s) are retained for 30 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 86 of 166

Radiated Spurious Emission Measurement Result: GSM 850 Mode

Operation Mode : TX CH Low Mode Test Date: Apr. 25, 2011

Fundamental Frequency : 824.20 MHz Test By: Sky Pol: Temperature Hor : 25°C

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
196.84	38.12	Н	-63.28	-7.84	1.70	-72.82	-13.00	-59.82
250.19	35.34	Н	-63.87	-7.89	1.99	-73.75	-13.00	-60.75
322.94	33.62	Н	-63.83	-7.79	2.26	-73.88	-13.00	-60.88
559.62	33.21	Н	-58.31	-7.77	2.97	-69.05	-13.00	-56.05
697.36	33.60	Н	-54.14	-7.86	3.28	-65.28	-13.00	-52.28
824.00	81.75	Н	-4.52	-7.87	3.62	-16.02	-13.00	-3.02
968.96	33.79	Н	-50.31	-8.00	3.94	-62.24	-13.00	-49.24
1648.40	43.15	Н	-61.25	9.29	5.23	-57.19	-13.00	-44.19
2472.60	53.13	Н	-47.78	10.08	6.53	-44.23	-13.00	-31.23
3296.80		Н		12.17	7.71		-13.00	
4121.00		Н		12.61	8.86		-13.00	
4945.20		Н		12.65	9.74		-13.00	
5769.40		Н		13.55	10.54		-13.00	
6593.60		Н		12.05	11.30		-13.00	
7417.80		Н		11.49	12.10		-13.00	
8242.00		Н		11.48	12.71		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark "---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

brites stated the festules and with this test report reter only to the sample(s) tested and such sample(s) are retained for 30 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 **Issue Date: Apr. 26, 2011**

Page 87 of 166

Radiated Spurious Emission Measurement Result: GSM 850 Mode

Operation Mode : TX CH Mid Mode Test Date: Apr. 25, 2011

Fundamental Frequency: 836.60 MHz Test By: Sky Ver Temperature Pol: : 25°C

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
180.35	37.13	V	-62.89	-7.82	1.66	-72.37	-13.00	-59.37
248.25	34.10	V	-65.86	-7.89	1.98	-75.72	-13.00	-62.72
330.70	34.86	V	-63.01	-7.75	2.29	-73.04	-13.00	-60.04
558.65	33.27	V	-58.71	-7.77	2.97	-69.45	-13.00	-56.45
699.30	33.98	V	-55.45	-7.86	3.29	-66.60	-13.00	-53.60
963.14	33.71	V	-50.61	-8.00	3.92	-62.52	-13.00	-49.52
1673.20	51.68	V	-52.88	9.36	5.27	-48.78	-13.00	-35.78
2509.80	58.96	V	-41.82	10.09	6.58	-38.32	-13.00	-25.32
3346.40	37.74	V	-61.12	12.28	7.79	-56.64	-13.00	-43.64
4183.00		V		12.62	8.93		-13.00	
5019.60		V		12.67	9.81		-13.00	
5856.20		V		13.68	10.62		-13.00	
6692.80		V		11.95	11.39		-13.00	
7529.40		V		11.45	12.20		-13.00	
8366.00		V		11.59	12.81		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belongs to narrowband spurious emission.
- 2 Remark "---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 **Issue Date: Apr. 26, 2011**

Page 88 of 166

Radiated Spurious Emission Measurement Result: GSM 850 Mode

Operation Mode : TX CH Mid Mode Test Date: Apr. 25, 2011

Fundamental Frequency: 836.60 MHz Test By: Sky Temperature Pol: Hor : 25°C

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
196.84	37.82	Н	-63.58	-7.84	1.70	-73.12	-13.00	-60.12
250.19	34.11	Н	-65.10	-7.89	1.99	-74.98	-13.00	-61.98
311.30	33.67	Н	-63.89	-7.86	2.21	-73.96	-13.00	-60.96
551.86	33.13	Н	-58.55	-7.76	2.96	-69.28	-13.00	-56.28
694.45	33.15	Н	-54.71	-7.85	3.28	-65.84	-13.00	-52.84
949.56	33.94	Н	-50.28	-8.00	3.88	-62.15	-13.00	-49.15
1673.20	52.63	Н	-51.75	9.36	5.27	-47.65	-13.00	-34.65
2509.80	57.42	Н	-43.28	10.09	6.58	-39.78	-13.00	-26.78
3346.40		Н		12.28	7.79		-13.00	
4183.00		Н		12.62	8.93		-13.00	
5019.60		Н		12.67	9.81		-13.00	
5856.20		Н		13.68	10.62		-13.00	
6692.80		Н		11.95	11.39		-13.00	
7529.40		Н		11.45	12.20		-13.00	
8366.00		Н		11.59	12.81		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark "---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 **Issue Date: Apr. 26, 2011**

Page 89 of 166

Radiated Spurious Emission Measurement Result: GSM 850 Mode

Apr. 25, 2011 Operation Mode : TX CH High Mode

Fundamental Frequency: 848.80 MHz Test By: Sky Pol: Ver Temperature : 25°C

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
185.20	37.21	V	-63.24	-7.83	1.67	-72.74	-13.00	-59.74
219.15	35.99	V	-65.07	-7.86	1.82	-74.74	-13.00	-61.74
321.00	40.23	V	-57.76	-7.80	2.25	-67.81	-13.00	-54.81
553.80	33.11	V	-59.16	-7.76	2.97	-69.89	-13.00	-56.89
699.30	33.79	V	-55.64	-7.86	3.29	-66.79	-13.00	-53.79
850.00	37.95	V	-48.16	-7.88	3.68	-59.72	-13.00	-46.72
1697.60	54.17	V	-50.37	9.44	5.31	-46.24	-13.00	-33.24
2546.40	58.29	V	-42.35	10.20	6.63	-38.79	-13.00	-25.79
3395.20		V		12.38	7.87		-13.00	
4244.00		V		12.63	9.00		-13.00	
5092.80		V		12.74	9.88		-13.00	
5941.60		V		13.81	10.70		-13.00	
6790.40		V		11.86	11.48		-13.00	
7639.20		V		11.40	12.27		-13.00	
8488.00		V		11.70	12.91		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark "---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 **Issue Date: Apr. 26, 2011**

Page 90 of 166

Radiated Spurious Emission Measurement Result: GSM 850 Mode

Operation Mode : TX CH High Mode Apr. 25, 2011

Fundamental Frequency: 848.80 MHz Test By: Sky Pol: Temperature Hor : 25°C

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
199.75	38.06	Н	-63.57	-7.84	1.71	-73.12	-13.00	-60.12
243.40	36.06	Н	-63.48	-7.88	1.95	-73.32	-13.00	-60.32
319.06	33.95	Н	-63.53	-7.81	2.24	-73.59	-13.00	-60.59
544.10	33.28	Н	-58.64	-7.76	2.94	-69.34	-13.00	-56.34
655.65	33.64	Н	-55.84	-7.82	3.17	-66.83	-13.00	-53.83
850.00	81.84	Н	-4.35	-7.88	3.68	-15.91	-13.00	-2.91
985.45	33.96	Н	-50.04	-7.99	3.99	-62.02	-13.00	-49.02
1697.60	55.63	Н	-48.72	9.44	5.31	-44.59	-13.00	-31.59
2546.40	56.21	Н	-44.39	10.20	6.63	-40.83	-13.00	-27.83
3395.20		Н		12.38	7.87		-13.00	
4244.00		Н		12.63	9.00		-13.00	
5092.80		Н		12.74	9.88		-13.00	
5941.60		Н		13.81	10.70		-13.00	
6790.40		Н		11.86	11.48		-13.00	
7639.20		Н		11.40	12.27		-13.00	
8488.00		Н		11.70	12.91		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark "---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 **Issue Date: Apr. 26, 2011**

Page 91 of 166

Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH Low Mode Test Date: Apr. 25, 2011

Fundamental Frequency: 1850.20MHz Test By: Sky Pol: Ver Temperature : 25°℃

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
170.65	38.47	V	-60.67	-7.82	1.64	-70.13	-13.00	-57.13
231.76	35.94	V	-64.64	-7.87	1.89	-74.40	-13.00	-61.40
309.36	36.11	V	-62.02	-7.87	2.21	-72.10	-13.00	-59.10
546.04	33.31	V	-59.31	-7.76	2.95	-70.01	-13.00	-57.01
645.95	33.35	V	-55.62	-7.81	3.15	-66.58	-13.00	-53.58
972.84	32.42	V	-51.67	-8.00	3.95	-63.62	-13.00	-50.62
1850.00	69.93	V	-34.46	9.90	5.56	-30.12	-13.00	-17.12
3700.40	40.77	V	-57.16	12.61	8.31	-52.86	-13.00	-39.86
5550.60	40.83	V	-50.01	13.23	10.33	-47.11	-13.00	-34.11
7400.80		V		11.50	12.08		-13.00	
9251.00		V		11.92	13.50		-13.00	
11101.20		V		11.66	15.11		-13.00	
12951.40		V		13.63	16.60		-13.00	
14801.60		V		12.76	17.95		-13.00	
16651.80		V		15.92	19.14		-13.00	
18502.00		V		18.75	10.40		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark "---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 **Issue Date: Apr. 26, 2011**

Page 92 of 166

Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH Low Mode Test Date: Apr. 25, 2011

Fundamental Frequency: 1850.20MHz Test By: Sky Pol: Temperature Hor : 25°℃

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
90.14	46.77	Н	-56.96	-7.75	1.27	-65.98	-13.00	-52.98
165.80	38.64	Н	-60.36	-7.81	1.63	-69.80	-13.00	-56.80
338.46	32.18	Н	-65.13	-7.70	2.32	-75.15	-13.00	-62.15
555.74	32.44	Н	-59.16	-7.76	2.97	-69.89	-13.00	-56.89
662.44	32.70	Н	-56.50	-7.82	3.19	-67.51	-13.00	-54.51
917.55	33.14	Н	-51.49	-7.97	3.82	-63.27	-13.00	-50.27
1850.00	83.49	Н	-20.69	9.90	5.56	-16.35	-13.00	-3.35
3700.40	36.79	Н	-61.25	12.61	8.31	-56.95	-13.00	-43.95
5550.60	41.07	Н	-49.98	13.23	10.33	-47.08	-13.00	-34.08
7400.80		Н		11.50	12.08		-13.00	
9251.00		Н		11.92	13.50		-13.00	
11101.20		Н		11.66	15.11		-13.00	
12951.40		Н		13.63	16.60		-13.00	
14801.60		Н		12.76	17.95		-13.00	
16651.80		Н		15.92	19.14		-13.00	
18502.00		Н		18.75	10.40		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark "---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 93 of 166

Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH Mid Mode Test Date: Apr. 25, 2011

Fundamental Frequency: 1880MHz Test By: Sky Temperature Pol: Ver : 25°C

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
105.66	46.76	V	-54.64	-7.76	1.39	-63.79	-13.00	-50.79
175.50	38.58	V	-61.00	-7.82	1.65	-70.47	-13.00	-57.47
316.15	34.74	V	-63.31	-7.83	2.23	-73.37	-13.00	-60.37
551.86	32.65	V	-59.73	-7.76	2.96	-70.46	-13.00	-57.46
665.65	33.30	V	-55.78	-7.83	3.20	-66.81	-13.00	-53.81
970.90	32.25	V	-51.89	-8.00	3.94	-63.83	-13.00	-50.83
3760.00	43.25	V	-54.41	12.60	8.39	-50.19	-13.00	-37.19
5640.00	40.75	V	-49.83	13.36	10.41	-46.88	-13.00	-33.88
7520.00		V		11.45	12.19		-13.00	
9400.00		V		11.93	13.61		-13.00	
11280.00		V		11.92	15.27		-13.00	
13160.00		V		13.33	16.71		-13.00	
15040.00		V		13.76	18.15		-13.00	
16920.00		V		15.27	19.32		-13.00	
18800.00		V		18.68	16.58		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark "---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- $4 \text{ ERP/EIRP } (dBm) = SG \text{ Setting}(dBm) + Antenna Gain } (dB/dBi) Cable loss } (dB)$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 94 of 166

Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH Mid Mode Apr. 25, 2011 Test Date:

Fundamental Frequency: 1880MHz Test By: Sky Pol: Temperature Hor : 25°C

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
90.14	47.57	Н	-56.16	-7.75	1.27	-65.18	-13.00	-52.18
199.75	41.25	Н	-60.38	-7.84	1.71	-69.93	-13.00	-56.93
322.94	34.49	Н	-62.96	-7.79	2.26	-73.01	-13.00	-60.01
533.80	33.35	Н	-58.93	-7.75	2.91	-69.59	-13.00	-56.59
652.74	32.85	Н	-56.76	-7.81	3.17	-67.74	-13.00	-54.74
966.05	32.97	Н	-51.14	-8.00	3.93	-63.07	-13.00	-50.07
3760.00	41.96	Н	-55.81	12.60	8.39	-51.60	-13.00	-38.60
5640.00		Н		13.36	10.41		-13.00	
7520.00		Н		11.45	12.19		-13.00	
9400.00		Н		11.93	13.61		-13.00	
11280.00		Н		11.92	15.27		-13.00	
13160.00		Н		13.33	16.71		-13.00	
15040.00		Н		13.76	18.15		-13.00	
16920.00		Н		15.27	19.32		-13.00	
18800.00		Н		18.68	16.58		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark "---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- $4 \text{ ERP/EIRP } (dBm) = SG \text{ Setting}(dBm) + Antenna Gain } (dB/dBi) Cable loss } (dB)$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 95 of 166

Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH High Mode Apr. 25, 2011 Test Date:

Fundamental Frequency: 1909.8 MHz Test By: Sky Pol: Temperature Ver : 25°C

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
105.66	49.72	V	-51.68	-7.76	1.39	-60.83	-13.00	-47.83
199.75	43.33	V	-58.43	-7.84	1.71	-67.98	-13.00	-54.98
325.85	38.55	V	-59.38	-7.78	2.27	-69.42	-13.00	-56.42
384.05	36.16	V	-60.02	-7.65	2.46	-70.14	-13.00	-57.14
668.26	33.93	V	-55.18	-7.83	3.21	-66.22	-13.00	-53.22
966.05	32.73	V	-51.52	-8.00	3.93	-63.45	-13.00	-50.45
1910.00	66.51	V	-37.82	10.08	5.66	-33.40	-13.00	-20.40
3819.60	45.78	V	-51.61	12.60	8.47	-47.48	-13.00	-34.48
5729.40	35.49	V	-54.83	13.49	10.50	-51.83	-13.00	-38.83
7639.20		V		11.40	12.27		-13.00	
9549.00		V		11.95	13.74		-13.00	
11458.80		V		12.17	15.43		-13.00	
13368.60		V		12.97	16.82		-13.00	
15278.40		V		15.00	18.29		-13.00	
17188.20		V		14.47	19.52		-13.00	
19098.00		V		18.66	20.78		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark "---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

brites stated the festules and with this test report reter only to the sample(s) tested and such sample(s) are retained for 30 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 96 of 166

Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH High Mode Apr. 25, 2011 Test Date:

Fundamental Frequency: 1909.8 MHz Test By: Sky Pol: Temperature Hor : 25°C

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
90.14	46.90	Н	-56.83	-7.75	1.27	-65.85	-13.00	-52.85
199.75	37.28	Н	-64.35	-7.84	1.71	-73.90	-13.00	-60.90
325.85	37.94	Н	-59.48	-7.78	2.27	-69.53	-13.00	-56.53
555.74	32.58	Н	-59.02	-7.76	2.97	-69.75	-13.00	-56.75
662.44	32.74	Н	-56.46	-7.82	3.19	-67.47	-13.00	-54.47
970.90	32.75	Н	-51.33	-8.00	3.94	-63.27	-13.00	-50.27
1910.00	78.20	Н	-25.91	10.08	5.66	-21.49	-13.00	-8.49
3819.60	43.45	Н	-54.06	12.60	8.47	-49.92	-13.00	-36.92
5729.40	36.16	Н	-54.29	13.49	10.50	-51.30	-13.00	-38.30
7639.20		Н		11.40	12.27		-13.00	
9549.00		Н		11.95	13.74		-13.00	
11458.80		Н		12.17	15.43		-13.00	
13368.60		Н		12.97	16.82		-13.00	
15278.40		Н		15.00	18.29		-13.00	
17188.20		Н		14.47	19.52		-13.00	
19098.00		Н		18.66	20.78		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark "---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

brites stated the festules and with this test report reter only to the sample(s) tested and such sample(s) are retained for 30 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 t (886-2) 2299-3279 www.tw.sgs.com

台灣檢驗科技股份有限公司



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 97 of 166

Radiated Spurious Emission Measurement Result: WCDMA II Mode

Operation Mode : TX CH Low Mode Test Date: Apr. 25, 2011

Fundamental Frequency : 1852.4 MHz Test By: Sky Temperature : 25°C Pol: Ver

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
105.66	50.02	V	-51.38	-7.76	1.39	-60.53	-13.00	-47.53
196.84	41.91	V	-59.59	-7.84	1.70	-69.13	-13.00	-56.13
289.96	36.78	V	-61.80	-7.91	2.13	-71.85	-13.00	-58.85
558.65	32.72	V	-59.26	-7.77	2.97	-70.00	-13.00	-57.00
652.74	35.63	V	-53.32	-7.81	3.17	-64.30	-13.00	-51.30
975.75	32.76	V	-51.27	-7.99	3.96	-63.22	-13.00	-50.22
1850.00	70.49	V	-33.90	9.90	5.56	-29.56	-13.00	-16.56
2787.50	36.99	V	-62.74	10.90	6.96	-58.80	-13.00	-45.80
3704.80		V		12.61	8.31		-13.00	
5557.20		V		13.24	10.33		-13.00	
7409.60		V		11.49	12.09		-13.00	
9262.00		V		11.92	13.51		-13.00	
11114.40		V		11.68	15.12		-13.00	
12966.80		V		13.62	16.61		-13.00	
14819.20		V		12.83	17.96		-13.00	
16671.60		V		15.87	19.15		-13.00	
18524.00		V		18.74	10.86		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark "---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 98 of 166

Radiated Spurious Emission Measurement Result: WCDMA II Mode

Operation Mode : TX CH Low Mode Apr. 25, 2011

Fundamental Frequency: 1852.4MHz Test By: Sky Pol: Temperature Hor : 25°C

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
183.26	36.78	Н	-63.57	-7.83	1.67	-73.07	-13.00	-60.07
238.55	32.89	Н	-66.89	-7.88	1.93	-76.69	-13.00	-63.69
332.64	32.72	Н	-64.64	-7.74	2.29	-74.67	-13.00	-61.67
551.86	32.60	Н	-59.08	-7.76	2.96	-69.81	-13.00	-56.81
613.94	33.13	Н	-57.30	-7.80	3.07	-68.16	-13.00	-55.16
972.84	33.24	Н	-50.83	-8.00	3.95	-62.78	-13.00	-49.78
1850.00	69.73	Н	-34.45	9.90	5.56	-30.11	-13.00	-17.11
2787.50	37.44	Н	-62.47	10.90	6.96	-58.54	-13.00	-45.54
3704.80		Н		12.61	8.31		-13.00	
5557.20		Н		13.24	10.33		-13.00	
7409.60		Н		11.49	12.09		-13.00	
9262.00		Н		11.92	13.51		-13.00	
11114.40		Н		11.68	15.12		-13.00	
12966.80		Н		13.62	16.61		-13.00	
14819.20		Н		12.83	17.96		-13.00	
16671.60		Н		15.87	19.15		-13.00	
18524.00		Н		18.74	10.86		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark "---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

brites stated the festules and with this test report reter only to the sample(s) tested and such sample(s) are retained for 30 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 99 of 166

Radiated Spurious Emission Measurement Result: WCDMA II Mode

Operation Mode : TX CH Mid Mode Test Date: Apr. 25, 2011

Fundamental Frequency: 1880MHz Test By: Sky Temperature Pol: Ver : 25°C

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
167.74	35.31	V	-63.57	-7.81	1.63	-73.02	-13.00	-60.02
245.34	33.66	V	-66.41	-7.89	1.96	-76.26	-13.00	-63.26
328.76	34.77	V	-63.12	-7.76	2.28	-73.16	-13.00	-60.16
548.95	32.78	V	-59.74	-7.76	2.96	-70.46	-13.00	-57.46
650.80	33.60	V	-55.33	-7.81	3.16	-66.30	-13.00	-53.30
946.65	32.93	V	-51.70	-8.00	3.87	-63.57	-13.00	-50.57
3418.00	36.10	V	-62.75	12.43	7.90	-58.22	-13.00	-45.22
5640.00		V		13.36	10.41		-13.00	
7520.00		V		11.45	12.19		-13.00	
9400.00		V		11.93	13.61		-13.00	
11280.00		V		11.92	15.27		-13.00	
13160.00		V		13.33	16.71		-13.00	
15040.00		V		13.76	18.15		-13.00	
16920.00		V		15.27	19.32		-13.00	
18800.00		V		18.68	16.58		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark "---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- $4 \text{ ERP/EIRP } (dBm) = SG \text{ Setting}(dBm) + Antenna Gain } (dB/dBi) Cable loss } (dB)$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 100 of 166

Radiated Spurious Emission Measurement Result: WCDMA II Mode

Operation Mode : TX CH Mid Mode Test Date: Apr. 25, 2011

Fundamental Frequency: 1880MHz Test By: Sky Temperature Pol: Hor : 25°C

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
194.90	36.76	Н	-64.49	-7.84	1.70	-74.03	-13.00	-61.03
225.94	33.83	Н	-66.56	-7.87	1.86	-76.28	-13.00	-63.28
328.76	34.68	Н	-62.72	-7.76	2.28	-72.75	-13.00	-59.75
555.74	32.57	Н	-59.03	-7.76	2.97	-69.76	-13.00	-56.76
648.86	32.72	Н	-57.02	-7.81	3.16	-67.99	-13.00	-54.99
968.96	32.47	Н	-51.63	-8.00	3.94	-63.56	-13.00	-50.56
3307.50	36.13	Н	-62.96	12.19	7.73	-58.50	-13.00	-45.50
5640.00		Н		13.36	10.41		-13.00	
7520.00		Н		11.45	12.19		-13.00	
9400.00		Н		11.93	13.61		-13.00	
11280.00		Н		11.92	15.27		-13.00	
13160.00		Н		13.33	16.71		-13.00	
15040.00		Н		13.76	18.15		-13.00	
16920.00		Н		15.27	19.32		-13.00	
18800.00		Н		18.68	16.58		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark "---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- $4 \text{ ERP/EIRP } (dBm) = SG \text{ Setting}(dBm) + Antenna Gain } (dB/dBi) Cable loss } (dB)$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 101 of 166

Radiated Spurious Emission Measurement Result: WCDMA II Mode

Operation Mode : TX CH High Mode Test Date: Apr. 25, 2011

Fundamental Frequency: 1907.6MHz Test By: Sky Pol: Temperature Ver : 25°C

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
173.56	40.31	V	-59.10	-7.82	1.65	-68.56	-13.00	-55.56
233.70	34.08	V	-66.43	-7.87	1.90	-76.20	-13.00	-63.20
319.06	39.47	V	-58.54	-7.81	2.24	-68.60	-13.00	-55.60
558.65	32.61	V	-59.37	-7.77	2.97	-70.11	-13.00	-57.11
658.56	32.89	V	-56.12	-7.82	3.18	-67.12	-13.00	-54.12
970.90	32.56	V	-51.58	-8.00	3.94	-63.52	-13.00	-50.52
1910.00	56.67	V	-47.66	10.08	5.66	-43.24	-13.00	-30.24
3223.00	37.14	V	-61.75	12.01	7.60	-57.34	-13.00	-44.34
5722.80		V		13.48	10.49		-13.00	
7630.40		V		11.41	12.27		-13.00	
9538.00		V		11.95	13.73		-13.00	
11445.60		V		12.15	15.42		-13.00	
13353.20		V		13.00	16.81		-13.00	
15260.80		V		14.91	18.28		-13.00	
17168.40		V		14.53	19.50		-13.00	
19076.00		V		18.65	20.76		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark "---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

brites stated the festules and with this test report reter only to the sample(s) tested and such sample(s) are retained for 30 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 102 of 166

Radiated Spurious Emission Measurement Result: WCDMA II Mode

Operation Mode : TX CH High Mode Test Date: Apr. 25, 2011

Fundamental Frequency: 1907.6MHz Test By: Sky Pol: Temperature Hor : 25°C

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
199.75	35.93	Н	-65.70	-7.84	1.71	-75.25	-13.00	-62.25
243.40	33.18	Н	-66.36	-7.88	1.95	-76.20	-13.00	-63.20
319.06	36.85	Н	-60.63	-7.81	2.24	-70.69	-13.00	-57.69
548.95	33.20	Н	-58.56	-7.76	2.96	-69.27	-13.00	-56.27
655.65	33.20	Н	-56.28	-7.82	3.17	-67.27	-13.00	-54.27
982.54	32.77	Н	-51.24	-7.99	3.98	-63.22	-13.00	-50.22
1910.00	66.78	Н	-37.33	10.08	5.66	-32.91	-13.00	-19.91
3808.00	40.92	Н	-56.64	12.60	8.46	-52.49	-13.00	-39.49
5722.80		Н		13.48	10.49		-13.00	
7630.40		Н		11.41	12.27		-13.00	
9538.00		Н		11.95	13.73		-13.00	
11445.60		Н		12.15	15.42		-13.00	
13353.20		Н		13.00	16.81		-13.00	
15260.80		Н		14.91	18.28		-13.00	
17168.40		Н		14.53	19.50		-13.00	
19076.00		Н		18.65	20.76		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark "---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

brites stated the festules and with this test report reter only to the sample(s) tested and such sample(s) are retained for 30 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 103 of 166

Radiated Spurious Emission Measurement Result: WCDMA V Mode

Operation Mode : TX CH Low Mode Apr. 25, 2011

Fundamental Frequency: 826.4MHz Test By: Sky Pol: Ver Temperature : 25°C

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
173.56	36.99	V	-62.42	-7.82	1.65	-71.88	-13.00	-58.88
231.76	35.11	V	-65.47	-7.87	1.89	-75.23	-13.00	-62.23
325.85	39.93	V	-58.00	-7.78	2.27	-68.04	-13.00	-55.04
555.74	32.45	V	-59.70	-7.76	2.97	-70.44	-13.00	-57.44
700.27	33.55	V	-55.88	-7.86	3.29	-67.03	-13.00	-54.03
823.00	58.53	V	-27.87	-7.87	3.62	-39.37	-13.00	-26.37
936.95	33.53	V	-51.12	-7.99	3.86	-62.97	-13.00	-49.97
1455.00	37.03	V	-67.89	8.58	4.53	-63.84	-13.00	-50.84
1652.80		V		9.30	5.23		-13.00	
2479.20		V		10.07	6.54		-13.00	
3305.60		V		12.19	7.73		-13.00	
4132.00		V		12.62	8.87		-13.00	
4958.40		V		12.65	9.75		-13.00	
5784.80		V		13.58	10.55		-13.00	
6611.20		V		12.03	11.31		-13.00	
7437.60		V		11.48	12.12		-13.00	
8264.00		V		11.50	12.73		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark "---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

brites stated the festules and with this test report reter only to the sample(s) tested and such sample(s) are retained for 30 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or

falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279 f (886-2) 2298-0488



Report No.: EH/2011/40008 **Issue Date: Apr. 26, 2011**

Page 104 of 166

Radiated Spurious Emission Measurement Result: WCDMA V Mode

Operation Mode : TX CH Low Mode Apr. 25, 2011

Fundamental Frequency: 826.4MHz Test By: Sky Pol: Hor Temperature : 25°℃

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
196.84	36.77	Н	-64.63	-7.84	1.70	-74.17	-13.00	-61.17
228.85	35.66	Н	-64.59	-7.87	1.87	-74.33	-13.00	-61.33
322.94	34.03	Н	-63.42	-7.79	2.26	-73.47	-13.00	-60.47
539.25	33.94	Н	-58.15	-7.75	2.93	-68.83	-13.00	-55.83
675.05	33.96	Н	-54.71	-7.84	3.23	-65.77	-13.00	-52.77
823.00	71.26	Н	-15.01	-7.87	3.62	-26.51	-13.00	-13.51
932.10	34.10	Н	-50.34	-7.98	3.85	-62.17	-13.00	-49.17
1652.80	37.81	Н	-66.59	9.30	5.23	-62.52	-13.00	-49.52
2479.20		Н		10.07	6.54		-13.00	
3305.60		Н		12.19	7.73		-13.00	
4132.00		Н		12.62	8.87		-13.00	
4958.40		Н		12.65	9.75		-13.00	
5784.80		Н		13.58	10.55		-13.00	
6611.20		Н		12.03	11.31		-13.00	
7437.60		Н		11.48	12.12		-13.00	
8264.00		Н		11.50	12.73		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark "---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 **Issue Date: Apr. 26, 2011**

Page 105 of 166

Radiated Spurious Emission Measurement Result: WCDMA V Mode

Operation Mode : TX CH Mid Mode Test Date: Apr. 25, 2011

Fundamental Frequency: 836.6MHz Test By: Sky Temperature Pol: Ver : 25°C

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
187.14	35.29	V	-65.34	-7.83	1.68	-74.84	-13.00	-61.84
235.64	34.76	V	-65.67	-7.88	1.91	-75.46	-13.00	-62.46
289.96	34.94	V	-63.64	-7.91	2.13	-73.69	-13.00	-60.69
559.62	32.73	V	-59.20	-7.77	2.97	-69.94	-13.00	-56.94
694.45	33.60	V	-55.78	-7.85	3.28	-66.91	-13.00	-53.91
963.14	33.55	V	-50.77	-8.00	3.92	-62.68	-13.00	-49.68
1673.20		V		9.36	5.27		-13.00	
1858.00	37.35	V	-67.03	9.92	5.57	-62.68	-13.00	-49.68
2509.80		V		10.09	6.58		-13.00	
3346.40		V		12.28	7.79		-13.00	
4183.00		V		12.62	8.93		-13.00	
5019.60		V		12.67	9.81		-13.00	
5856.20		V		13.68	10.62		-13.00	
6692.80		V		11.95	11.39		-13.00	
7529.40		V		11.45	12.20		-13.00	
8366.00		V		11.59	12.81		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark "---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號 t (886-2) 2299-3279

台灣檢驗科技股份有限公司



Report No.: EH/2011/40008 **Issue Date: Apr. 26, 2011**

Page 106 of 166

Radiated Spurious Emission Measurement Result: WCDMA V Mode

Operation Mode : TX CH Mid Mode Test Date: Apr. 25, 2011

Fundamental Frequency: 836.6MHz Test By: Sky Temperature Pol: Hor : 25°C

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
199.75	36.92	Н	-64.71	-7.84	1.71	-74.26	-13.00	-61.26
248.25	35.16	Н	-64.15	-7.89	1.98	-74.01	-13.00	-61.01
340.40	32.50	Н	-64.79	-7.69	2.32	-74.81	-13.00	-61.81
553.80	33.61	Н	-58.03	-7.76	2.97	-68.76	-13.00	-55.76
687.66	33.28	Н	-54.87	-7.85	3.26	-65.97	-13.00	-52.97
992.40	33.60	Н	-50.36	-7.99	4.01	-62.35	-13.00	-49.35
1673.20		Н		9.36	5.27		-13.00	
2118.00	36.48	Н	-66.76	10.28	5.99	-62.46	-13.00	-49.46
2509.80		Н		10.09	6.58		-13.00	
3346.40		Н		12.28	7.79		-13.00	
4183.00		Н		12.62	8.93		-13.00	
5019.60		Н		12.67	9.81		-13.00	
5856.20		Н		13.68	10.62		-13.00	
6692.80		Н		11.95	11.39		-13.00	
7529.40		Н		11.45	12.20		-13.00	
8366.00		Н		11.59	12.81		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark "---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號 台灣檢驗科技股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com

Member of SGS Group



Report No.: EH/2011/40008 **Issue Date: Apr. 26, 2011**

Page 107 of 166

Radiated Spurious Emission Measurement Result: WCDMA V Mode

Operation Mode : TX CH High Mode Test Date: Apr. 25, 2011

Fundamental Frequency: 846.6MHz Test By: Sky Pol: Temperature Ver : 25°C

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
199.75	35.47	V	-66.29	-7.84	1.71	-75.84	-13.00	-62.84
250.19	33.99	V	-65.89	-7.89	1.99	-75.77	-13.00	-62.77
325.85	39.67	V	-58.26	-7.78	2.27	-68.30	-13.00	-55.30
516.94	34.03	V	-59.55	-7.73	2.85	-70.14	-13.00	-57.14
689.60	33.50	V	-55.83	-7.85	3.26	-66.94	-13.00	-53.94
850.00	60.77	V	-25.34	-7.88	3.68	-36.90	-13.00	-23.90
959.26	33.38	V	-51.03	-8.00	3.91	-62.93	-13.00	-49.93
1693.20		V		9.42	5.30		-13.00	
1942.00	36.53	V	-67.77	10.17	5.71	-63.31	-13.00	-50.31
2539.80		V		10.18	6.62		-13.00	
3386.40		V		12.36	7.85		-13.00	
4233.00		V		12.63	8.99		-13.00	
5079.60		V		12.73	9.87		-13.00	
5926.20		V		13.79	10.69		-13.00	
6772.80		V		11.87	11.47		-13.00	
7619.40		V		11.41	12.26		-13.00	
8466.00		V		11.68	12.89		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark "---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 108 of 166

Radiated Spurious Emission Measurement Result: WCDMA V Mode

Operation Mode : TX CH High Mode Test Date: Apr. 25, 2011

Fundamental Frequency: 846.6MHz Test By: Sky Pol: Temperature Hor : 25°C

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
199.75	36.59	Н	-65.04	-7.84	1.71	-74.59	-13.00	-61.59
222.06	35.72	Н	-64.86	-7.86	1.83	-74.55	-13.00	-61.55
322.94	34.87	Н	-62.58	-7.79	2.26	-72.63	-13.00	-59.63
548.95	32.85	Н	-58.91	-7.76	2.96	-69.62	-13.00	-56.62
691.54	34.06	Н	-53.92	-7.85	3.27	-65.04	-13.00	-52.04
850.00	71.33	Н	-14.86	-7.88	3.68	-26.42	-13.00	-13.42
956.35	33.52	Н	-50.65	-8.00	3.90	-62.55	-13.00	-49.55
1693.20	38.19	Н	-66.16	9.42	5.30	-62.04	-13.00	-49.04
2539.80		Н		10.18	6.62		-13.00	
3386.40		Н		12.36	7.85		-13.00	
4233.00		Н		12.63	8.99		-13.00	
5079.60		Н		12.73	9.87		-13.00	
5926.20		Н		13.79	10.69		-13.00	
6772.80		Н		11.87	11.47		-13.00	
7619.40		Н		11.41	12.26		-13.00	
8466.00		Н		11.68	12.89		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark "---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 109 of 166

Radiated Spurious Emission Measurement Result: CDMA 2000 Cellular Mode

Operation Mode : TX CH Low Mode Test Date: Apr. 25, 2011

Fundamental Frequency : 824.70 MHz Test By: Sky Temperature : 25°C Pol: Ver

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
154.16	32.62	V	-65.04	-7.80	1.60	-74.45	-13.00	-61.45
243.40	33.64	V	-66.50	-7.88	1.95	-76.34	-13.00	-63.34
328.76	32.59	V	-65.30	-7.76	2.28	-75.34	-13.00	-62.34
555.74	33.12	V	-59.03	-7.76	2.97	-69.77	-13.00	-56.77
694.45	33.24	V	-56.14	-7.85	3.28	-67.27	-13.00	-54.27
825.00	65.71	V	-20.67	-7.88	3.63	-32.17	-13.00	-19.17
975.75	33.92	V	-50.11	-7.99	3.96	-62.06	-13.00	-49.06
1649.40		V		9.29	5.23		-13.00	
1767.00	43.09	V	-61.38	9.65	5.42	-57.16	-13.00	-44.16
2474.10		V		10.08	6.53		-13.00	
3298.80		V		12.17	7.72		-13.00	
4123.50		V		12.61	8.86		-13.00	
4948.20		V		12.65	9.74		-13.00	
5772.90		V		13.56	10.54		-13.00	
6597.60		V		12.04	11.30		-13.00	
7422.30		V		11.49	12.10		-13.00	
8247.00		V		11.48	12.72		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 110 of 166

Radiated Spurious Emission Measurement Result: CDMA 2000 Cellular Mode

Operation Mode : TX CH Low Mode Test Date: Apr. 25, 2011

Fundamental Frequency : 824.70 MHz Test By: Sky Temperature : 25°C Pol: Hor

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
156.10	32.52	Н	-65.72	-7.80	1.60	-75.13	-13.00	-62.13
241.46	34.00	Н	-65.64	-7.88	1.94	-75.46	-13.00	-62.46
325.85	35.43	Н	-61.99	-7.78	2.27	-72.04	-13.00	-59.04
553.80	33.10	Н	-58.54	-7.76	2.97	-69.27	-13.00	-56.27
691.54	33.21	Н	-54.77	-7.85	3.27	-65.89	-13.00	-52.89
825.00	77.20	Н	-9.07	-7.88	3.63	-20.57	-13.00	-7.57
961.20	33.77	Н	-50.37	-8.00	3.91	-62.28	-13.00	-49.28
1649.40		Н		9.29	5.23		-13.00	
1975.00	49.63	Н	-54.41	10.27	5.77	-49.90	-13.00	-36.90
2474.10		Н		10.08	6.53		-13.00	
3298.80		Н		12.17	7.72		-13.00	
4123.50		Н		12.61	8.86		-13.00	
4948.20		Н		12.65	9.74		-13.00	
5772.90		Н		13.56	10.54		-13.00	
6597.60		Н		12.04	11.30		-13.00	
7422.30		Н		11.49	12.10		-13.00	
8247.00		Н		11.48	12.72		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: EH/2011/40008 **Issue Date: Apr. 26, 2011**

Page 111 of 166

Radiated Spurious Emission Measurement Result: CDMA 2000 Cellular Mode

Operation Mode : TX CH Mid Mode Test Date: Apr. 25, 2011

Fundamental Frequency: 836.52MHz Test By: Sky Temperature Pol: Ver : 25°℃

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
180.35	36.00	V	-64.02	-7.82	1.66	-73.50	-13.00	-60.50
245.34	33.67	V	-66.40	-7.89	1.96	-76.25	-13.00	-63.25
328.76	35.95	V	-61.94	-7.76	2.28	-71.98	-13.00	-58.98
553.80	32.94	V	-59.33	-7.76	2.97	-70.06	-13.00	-57.06
694.45	33.63	V	-55.75	-7.85	3.28	-66.88	-13.00	-53.88
691.20	34.06	V	-55.29	-7.85	3.27	-66.41	-13.00	-53.41
1673.04		V		9.36	5.27		-13.00	
1942.50	39.99	V	-64.31	10.18	5.71	-59.84	-13.00	-46.84
2509.56		V		10.09	6.58		-13.00	
3346.08		V		12.27	7.79		-13.00	
4182.60		V		12.62	8.93		-13.00	
5019.12		V		12.67	9.81		-13.00	
5855.64		V		13.68	10.62		-13.00	
6692.16		V		11.95	11.39		-13.00	
7528.68		V		11.45	12.20		-13.00	
8365.20		V		11.59	12.81		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 t (886-2) 2299-3279



Report No.: EH/2011/40008 **Issue Date: Apr. 26, 2011**

Page 112 of 166

Radiated Spurious Emission Measurement Result: CDMA 2000 Cellular Mode

Operation Mode : TX CH Mid Mode Test Date: Apr. 25, 2011

Fundamental Frequency: 836.52MHz Test By: Sky Temperature Pol: Hor : 25°℃

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
156.10	33.14	Н	-65.10	-7.80	1.60	-74.51	-13.00	-61.51
245.34	33.84	Н	-65.61	-7.89	1.96	-75.46	-13.00	-62.46
321.00	32.71	Н	-64.76	-7.80	2.25	-74.81	-13.00	-61.81
555.74	32.74	Н	-58.86	-7.76	2.97	-69.59	-13.00	-56.59
697.36	33.61	Н	-54.13	-7.86	3.28	-65.27	-13.00	-52.27
966.04	33.72	Н	-50.39	-8.00	3.93	-62.32	-13.00	-49.32
1673.04		Н		9.36	5.27		-13.00	
1942.50	53.06	Н	-51.01	10.18	5.71	-46.55	-13.00	-33.55
2509.56		Н		10.09	6.58		-13.00	
3346.08		Н		12.27	7.79		-13.00	
4182.60		Н		12.62	8.93		-13.00	
5019.12		Н		12.67	9.81		-13.00	
5855.64		Н		13.68	10.62		-13.00	
6692.16		Н		11.95	11.39		-13.00	
7528.68		Н		11.45	12.20		-13.00	
8365.20		Н		11.59	12.81		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司



Report No.: EH/2011/40008 **Issue Date: Apr. 26, 2011**

Page 113 of 166

Radiated Spurious Emission Measurement Result: CDMA 2000 Cellular Mode

Operation Mode : TX CH High Mode Test Date: Apr. 25, 2011

Fundamental Frequency: 848.31MHz Test By: Sky Pol: Temperature Ver : 25°C

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
163.86	34.03	V	-64.50	-7.81	1.62	-73.94	-13.00	-60.94
245.34	35.83	V	-64.24	-7.89	1.96	-74.09	-13.00	-61.09
316.15	35.53	V	-62.52	-7.83	2.23	-72.58	-13.00	-59.58
544.10	33.22	V	-59.46	-7.76	2.94	-70.16	-13.00	-57.16
694.45	33.90	V	-55.48	-7.85	3.28	-66.61	-13.00	-53.61
850.00	70.81	V	-15.30	-7.88	3.68	-26.86	-13.00	-13.86
961.20	33.96	V	-50.40	-8.00	3.91	-62.31	-13.00	-49.31
1696.62		V		9.43	5.31		-13.00	
1975.00	39.49	V	-64.77	10.27	5.77	-60.27	-13.00	-47.27
2544.93		V		10.19	6.63		-13.00	
3393.24		V		12.38	7.86		-13.00	
4241.55		V		12.63	9.00		-13.00	
5089.86		V		12.74	9.88		-13.00	
5938.17		V		13.81	10.70		-13.00	
6786.48		V		11.86	11.48		-13.00	
7634.79		V		11.41	12.27		-13.00	
8483.10		V		11.69	12.91		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 **Issue Date: Apr. 26, 2011**

Page 114 of 166

Radiated Spurious Emission Measurement Result: CDMA 2000 Cellular Mode

Operation Mode : TX CH High Mode Test Date: Apr. 25, 2011

Fundamental Frequency: 848.31MHz Test By: Sky Pol: Temperature Hor : 25°C

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
154.16	33.00	Н	-65.09	-7.80	1.60	-74.50	-13.00	-61.50
283.55	33.32	Н	-64.85	-7.91	2.11	-74.87	-13.00	-61.87
325.85	33.09	Н	-64.33	-7.78	2.27	-74.38	-13.00	-61.38
555.74	32.88	Н	-58.72	-7.76	2.97	-69.45	-13.00	-56.45
699.30	33.49	Н	-54.17	-7.86	3.29	-65.32	-13.00	-52.32
850.00	81.92	Н	-4.27	-7.88	3.68	-15.83	-13.00	-2.83
956.35	33.34	Н	-50.83	-8.00	3.90	-62.73	-13.00	-49.73
1696.62		Н		9.43	5.31		-13.00	
1975.00	49.80	Н	-54.24	10.27	5.77	-49.73	-13.00	-36.73
2544.93		Н		10.19	6.63		-13.00	
3393.24		Н		12.38	7.86		-13.00	
4241.55		Н		12.63	9.00		-13.00	
5089.86		Н		12.74	9.88		-13.00	
5938.17		Н		13.81	10.70		-13.00	
6786.48		Н		11.86	11.48		-13.00	
7634.79		Н		11.41	12.27		-13.00	
8483.10		Н		11.69	12.91		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 115 of 166

Radiated Spurious Emission Measurement Result: CDMA 2000 PCS Mode

Operation Mode : TX CH Low Mode Test Date: Apr. 25, 2011

Fundamental Frequency: 1851.25MHz Test By: Sky Pol: Ver Temperature : 25°C

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
175.50	35.54	V	-64.04	-7.82	1.65	-73.51	-13.00	-60.51
243.40	33.85	V	-66.29	-7.88	1.95	-76.13	-13.00	-63.13
313.24	35.58	V	-62.51	-7.85	2.22	-72.57	-13.00	-59.57
558.65	32.60	V	-59.38	-7.77	2.97	-70.12	-13.00	-57.12
694.45	33.02	V	-56.36	-7.85	3.28	-67.49	-13.00	-54.49
970.90	32.64	V	-51.50	-8.00	3.94	-63.44	-13.00	-50.44
1850.00	56.89	V	-47.50	9.90	5.56	-43.16	-13.00	-30.16
3702.50		V		12.61	8.31		-13.00	
3782.00	35.18	V	-62.38	12.60	8.42	-58.20	-13.00	-45.20
5553.75		V		13.23	10.33		-13.00	
7405.00		V		11.50	12.09		-13.00	
9256.25		V		11.92	13.50		-13.00	
11107.50		V		11.67	15.12		-13.00	
12958.75		V		13.62	16.61		-13.00	
14810.00		V		12.79	17.96		-13.00	
16661.25		V		15.89	19.14		-13.00	
18512.50		V		18.75	10.62		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號 t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 116 of 166

Radiated Spurious Emission Measurement Result: CDMA 2000 PCS Mode

Operation Mode : TX CH Low Mode Test Date: Apr. 25, 2011

Fundamental Frequency : 1851.25 MHz Test By: Sky Temperature : 25°C Pol: Hor

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
196.84	37.09	Н	-64.31	-7.84	1.70	-73.85	-13.00	-60.85
224.00	34.75	Н	-65.73	-7.86	1.84	-75.44	-13.00	-62.44
325.85	33.22	Н	-64.20	-7.78	2.27	-74.25	-13.00	-61.25
558.65	32.62	Н	-58.92	-7.77	2.97	-69.66	-13.00	-56.66
660.50	32.45	Н	-56.83	-7.82	3.19	-67.84	-13.00	-54.84
970.90	32.40	Н	-51.68	-8.00	3.94	-63.62	-13.00	-50.62
1850.00	69.77	Н	-34.41	9.90	5.56	-30.07	-13.00	-17.07
3702.50		Н		12.61	8.31		-13.00	
3957.00	34.36	Н	-62.52	12.60	8.66	-58.58	-13.00	-45.58
5553.75		Н		13.23	10.33		-13.00	
7405.00		Н		11.50	12.09		-13.00	
9256.25		Н		11.92	13.50		-13.00	
11107.50		Н		11.67	15.12		-13.00	
12958.75		Н		13.62	16.61		-13.00	
14810.00		Н		12.79	17.96		-13.00	
16661.25		Н		15.89	19.14		-13.00	
18512.50		Н		18.75	10.62		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

有限公司 t (886-2) 2299-3279



Report No.: EH/2011/40008 **Issue Date: Apr. 26, 2011**

Page 117 of 166

Radiated Spurious Emission Measurement Result: CDMA 2000 PCS Mode

Operation Mode : TX CH Mid Mode Test Date: Apr. 25, 2011

Fundamental Frequency: 1880MHz Test By: Sky Temperature Pol: Ver : 25°C

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
173.56	35.16	V	-64.25	-7.82	1.65	-73.71	-13.00	-60.71
243.40	33.03	V	-67.11	-7.88	1.95	-76.95	-13.00	-63.95
319.06	36.16	V	-61.85	-7.81	2.24	-71.91	-13.00	-58.91
555.74	33.25	V	-58.90	-7.76	2.97	-69.64	-13.00	-56.64
645.95	34.15	V	-54.82	-7.81	3.15	-65.78	-13.00	-52.78
970.90	32.36	V	-51.78	-8.00	3.94	-63.72	-13.00	-50.72
3760.00		V		12.60	8.39		-13.00	
3990.00	34.44	V	-62.19	12.60	8.71	-58.29	-13.00	-45.29
5640.00		V		13.36	10.41		-13.00	
7520.00		V		11.45	12.19		-13.00	
9400.00		V		11.93	13.61		-13.00	
11280.00		V		11.92	15.27		-13.00	
13160.00		V		13.33	16.71		-13.00	
15040.00		V		13.76	18.15		-13.00	
16920.00		V		15.27	19.32		-13.00	
18800.00		V		18.68	16.58		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or

falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com



Report No.: EH/2011/40008 **Issue Date: Apr. 26, 2011**

Page 118 of 166

Radiated Spurious Emission Measurement Result: CDMA 2000 PCS Mode

Operation Mode : TX CH Mid Mode Test Date: Apr. 25, 2011

Fundamental Frequency: 1880MHz Test By: Sky Temperature Pol: Hor : 25°C

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
199.75	40.34	Н	-61.29	-7.84	1.71	-70.84	-13.00	-57.84
235.64	32.99	Н	-66.93	-7.88	1.91	-76.71	-13.00	-63.71
316.15	34.63	Н	-62.88	-7.83	2.23	-72.94	-13.00	-59.94
555.74	32.92	Н	-58.68	-7.76	2.97	-69.41	-13.00	-56.41
665.35	32.48	Н	-56.60	-7.83	3.20	-67.62	-13.00	-54.62
968.96	32.54	Н	-51.56	-8.00	3.94	-63.49	-13.00	-50.49
3760.00		Н		12.60	8.39		-13.00	
4061.00	33.76	Н	-62.71	12.61	8.79	-58.89	-13.00	-45.89
5640.00		Н		13.36	10.41		-13.00	
7520.00		Н		11.45	12.19		-13.00	
9400.00		Н		11.93	13.61		-13.00	
11280.00		Н		11.92	15.27		-13.00	
13160.00		Н		13.33	16.71		-13.00	
15040.00		Н		13.76	18.15		-13.00	
16920.00		Н		15.27	19.32		-13.00	
18800.00		Н		18.68	16.58		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 119 of 166

Radiated Spurious Emission Measurement Result: CDMA 2000 PCS Mode

Operation Mode : TX CH High Mode Test Date: Apr. 25, 2011

Fundamental Frequency : 1908.75 MHz Test By: Sky Temperature : 25°C Pol: Ver

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
173.56	37.16	V	-62.25	-7.82	1.65	-71.71	-13.00	-58.71
235.64	35.91	V	-64.52	-7.88	1.91	-74.31	-13.00	-61.31
299.66	36.09	V	-62.17	-7.92	2.17	-72.26	-13.00	-59.26
536.34	33.69	V	-59.25	-7.75	2.92	-69.92	-13.00	-56.92
662.44	33.42	V	-55.63	-7.82	3.19	-66.64	-13.00	-53.64
966.05	32.44	V	-51.81	-8.00	3.93	-63.74	-13.00	-50.74
1910.00	59.08	V	-45.25	10.08	5.66	-40.83	-13.00	-27.83
3327.00	35.74	V	-63.12	12.23	7.76	-58.65	-13.00	-45.65
3817.50		V		12.60	8.47		-13.00	
5726.25		V		13.49	10.50		-13.00	
7635.00		V		11.41	12.27		-13.00	
9543.75		V		11.95	13.73		-13.00	
11452.50		V		12.16	15.43		-13.00	
13361.25		V		12.99	16.82		-13.00	
15270.00		V		14.95	18.28		-13.00	
17178.75		V		14.50	19.51		-13.00	
19087.50		V		18.65	20.77		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 **Issue Date: Apr. 26, 2011**

Page 120 of 166

Radiated Spurious Emission Measurement Result: CDMA 2000 PCS Mode

Operation Mode : TX CH High Mode Test Date: Apr. 25, 2011

Fundamental Frequency: 1908.75MHz Test By: Sky Pol: Temperature Hor : 25°℃

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
185.20	37.36	Н	-63.14	-7.83	1.67	-72.64	-13.00	-59.64
250.19	32.74	Н	-66.47	-7.89	1.99	-76.35	-13.00	-63.35
330.70	32.73	Н	-64.65	-7.75	2.29	-74.68	-13.00	-61.68
539.25	34.27	Н	-57.82	-7.75	2.93	-68.50	-13.00	-55.50
694.45	33.92	Н	-53.94	-7.85	3.28	-65.07	-13.00	-52.07
990.30	32.48	Н	-51.49	-7.99	4.00	-63.48	-13.00	-50.48
1910.00	67.03	Н	-37.08	10.08	5.66	-32.66	-13.00	-19.66
3817.50		Н		12.60	8.47		-13.00	
5726.25		Н		13.49	10.50		-13.00	
5498.00	35.17	Н	-56.05	13.15	10.28	-53.18	-13.00	-40.18
7635.00		Н		11.41	12.27		-13.00	
9543.75		Н		11.95	13.73		-13.00	
11452.50		Н		12.16	15.43		-13.00	
13361.25		Н		12.99	16.82		-13.00	
15270.00		Н		14.95	18.28		-13.00	
17178.75		Н		14.50	19.51		-13.00	
19087.50		Н		18.65	20.77		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司



Report No.: EH/2011/40008 **Issue Date: Apr. 26, 2011**

Page 121 of 166

10. FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT

10.1. Standard Applicable:

According to FCC §2.1055(a) (1)

Frequency Tolerance: +/-2.5ppm for 850MHz band


+/-2.5ppm for 1900MHz band

According to RSS-133 §6.3, RSS-132 §4.3

The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations

10.2. Test Set-up:

Temperature Chamber

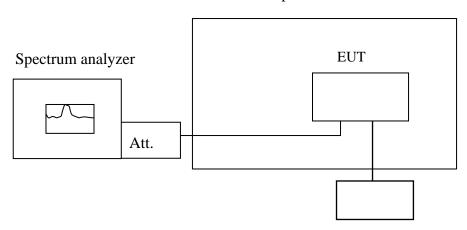

Variable DC Power Supply

Measurement setup for testing on Antenna connector Note:

10.3. Measurement Procedure:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

10.4. Measurement Equipment Used:

Refer to section 2.4 in this report

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnifica-

tion and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 122 of 166

10.5. Measurement Result:

Re	Reference Frequency: GSM Mid Channel 836.6 MHz @ 20°C				
	Limit: +/- 2.5 ppm = 2091 Hz				
Power Supply	Environment	Frequency	Dolto (Hz)	Limit (Hz)	
Vdc	Temperature ($^{\circ}$ C)	(MHz)	Delta (Hz)	Limit (Hz)	
3.70	-30	836.599993	0.00	2091	
3.70	-20	836.599998	-5.00	2091	
3.70	-10	836.600002	-9.00	2091	
3.70	0	836.600022	-29.00	2091	
3.70	10	836.600018	-25.00	2091	
3.70	20	836.599993	0.00	2091	
3.70	30	836.599978	15.00	2091	
3.70	40	836.599974	19.00	2091	
3.70	50	836.599973	20.00	2091	

Reference Frequency: PCS Mid Channel 1880 MHz @ 20°C					
	Limit: +/- 2.5 ppm = 4700 Hz				
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)	
Vdc	Temperature (°C)	(MHz)	Della (HZ)	Lillit (HZ)	
3.70	-30	1880.000003	17.00	4700	
3.70	-20	1880.000009	11.00	4700	
3.70	-10	1880.000053	-33.00	4700	
3.70	0	1880.000047	-27.00	4700	
3.70	10	1880.000038	-18.00	4700	
3.70	20	1880.000020	0.00	4700	
3.70	30	1880.000042	-22.00	4700	
3.70	40	1880.000022	-2.00	4700	
3.70	50	1880.000036	-16.00	4700	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 123 of 166

Reference Frequency: WCDMA II Mid Channel 1880 (ARFCN9400) MHz @ 20°C					
	Limit: +/- 2.5 ppm = 4700 Hz				
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)	
Vdc	Temperature ($^{\circ}$ C)	(MHz)	Della (HZ)	Lillit (HZ)	
3.70	-30	1879.999990	3.00	4700	
3.70	-20	1879.999973	20.00	4700	
3.70	-10	1879.999972	21.00	4700	
3.70	0	1879.999984	9.00	4700	
3.70	10	1879.999985	8.00	4700	
3.70	20	1879.999993	0.00	4700	
3.70	30	1880.000017	-24.00	4700	
3.70	40	1880.000010	-17.00	4700	
3.70	50	1880.000008	-15.00	4700	

Reference Frequency: WCDMA V Mid Channel 836.6 (ARFCN4183) MHz @ 20°C					
Limit: +/- 2.5 ppm = 2090 Hz					
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)	
Vdc	Temperature (°C)	(MHz)	Della (112)	Lillit (112)	
3.7	-30	836.599973	17.00	2091	
3.7	-20	836.599985	5.00	2091	
3.7	-10	836.599983	7.00	2091	
3.7	0	836.599990	0.00	2091	
3.7	10	836.599995	-5.00	2091	
3.7	20	836.599990	0.00	2091	
3.7	30	836.599993	-3.00	2091	
3.7	40	836.600007	-17.00	2091	
3.7	50	836.600010	-20.00	2091	

S Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 124 of 166

Reference Frequency: CDMA 2000 Cellular Mid Channel 836.0 MHz				
Limit: +/- 2.5 ppm = 2091 Hz				
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature (°C)	(MHz)	Della (HZ)	Lilliit (HZ)
3.7	-30	836.519999	-5.00	2091
3.7	-20	836.519997	-3.00	2091
3.7	-10	836.519995	-1.00	2091
3.7	0	836.519999	-5.00	2091
3.7	10	836.519993	1.00	2091
3.7	20	836.519994	0.00	2091
3.7	30	836.519996	-2.00	2091
3.7	40	836.519980	14.00	2091
3.7	50	836.519984	10.00	2091
3.7	-30	836.519999	-5.00	2091

Refe	Reference Frequency: CDMA 2000 PCS Mid Channel 1880 MHz				
Limit: +/- 2.5 ppm = 4700 Hz					
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)	
Vdc	Temperature ($^{\circ}$ C)	(MHz)	Della (112)	Lillit (112)	
3.7	-30	1732.599990	-4.00	4331	
3.7	-20	1732.600001	-15.00	4331	
3.7	-10	1732.599992	-6.00	4331	
3.7	0	1732.599993	-7.00	4331	
3.7	10	1732.599989	-3.00	4331	
3.7	20	1732.599986	0.00	4331	
3.7	30	1732.599980	6.00	4331	
3.7	40	1732.599984	2.00	4331	
3.7	50	1732.599996	-10.00	4331	
3.7	-30	1732.599990	-4.00	4331	

S Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 **Issue Date: Apr. 26, 2011**

Page 125 of 166

11. FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT

11.1. Standard Applicable:

According to FCC §2.1055(a) (1)

Frequency Tolerance: +/-2.5ppm for 850MHz band

+/-2.5ppm for 1900MHz band

According to RSS-133 §6.3, RSS-132 §4.3

The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

11.2. Test Set-up:

Refer to section 10.2 in this report

11.3. Measurement Procedure:

Set chamber temperature to 25°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.

11.4. Measurement Equipment Used:

Refer to section 2.4 in this report

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. S Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 126 of 166

11.5. Measurement Result:

Wicasurement Result.				
Ro	Reference Frequency: GSM Mid Channel 836.6 MHz @ 25°C			
	Limit: +/- 2.5 ppm = 2091 Hz			
Power Supply	y Environment Frequency D. L. (II.)			
Vdc	Temperature (°C)	(MHz)	Delta (Hz)	Limit (Hz)
4.20	25.00	836.600021	-13.00	2091.00
3.70	25.00	836.600008	0.00	2091.00
3.20	25.00	836.600007	1.00	2091.00
2.6	25.00	026 500050	50.00	2001.00
(End Point)	25.00	836.599958	50.00	2091.00

Reference Frequency: PCS Mid Channel 1880 MHz @ 25°C					
	Limit: +/- 2.5 ppm = 4700 Hz				
Power Supply	Environment	Frequency			
Vdc	Temperature ($^{\circ}$ C)	(MHz)	Delta (Hz)	Limit (Hz)	
4.20	25	1879.999989	4.00	4700	
3.70	25	1879.999993	0.00	4700	
3.20	25	1879.999979	14.00	4700	
2.6 (End Point)	25	1879.999943	50.00	4700	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 127 of 166

Reference Frequency: WCDMA II Mid Channel 1880 (ARFCN9400) MHz				
	Limit: +/- 2.5 ppm = 4700 Hz			
Power Supply	Environment	Frequency	Dolto (Uz)	Limit (Uz)
Vdc	Temperature ($^{\circ}$ C)	(MHz)	Delta (Hz)	Limit (Hz)
4.20	25	1879.999996	-3.00	4700
3.70	25	1879.999993	0.00	4700
3.20	25	1879.999991	2.00	4700
2.6	25	1970 000021	65.00	4700
(Endpoint)	25	1879.999931	65.00	4700

Reference Frequency: WCDMA V Mid Channel 836.6 (ARFCN4183) MHz				
	Limit: +/- 2.5 ppm = 2090 Hz			
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature (°C)	(MHz)	Della (112)	Lillit (112)
4.2	25.00	836.599995	0.00	2091.00
3.7	25.00	836.599993	2.00	2091.00
3.2	25.00	836.599990	5.00	2091.00
2.6	25.00	836.599947	48.00	2091.00
(Endpoint)	23.00	830.399947	48.00	2091.00

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 128 of 166

Reference Frequency: CDMA 2000 Cellular Mid Channel 836.0 MHz @ 25°C				
	Limit: +/- 2.5 ppm = 2091 Hz			
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature (°C)	(MHz)	Della (HZ)	Lillit (HZ)
4.2	25.00	836.5200006	-0.40	2091.00
3.7	25.00	836.5200002	0.00	2091.00
3.2	25.00	836.5200003	-0.10	2091.00
2.6	25.00	836.5200037	-3.50	2091.00
(Endpoint)	23.00	630.3200037	-3.30	2091.00

Reference Frequency: CDMA 2000 PCS Mid Channel 1880 MHz @ 25°C					
	Limit: +/- 2.5 ppm = 4700 Hz				
Power Supply	Environment	Frequency			
Vdc	Temperature (°C)	(MHz)	Delta (Hz)	Limit (Hz)	
4.2	25	1880.0000005	0.20	4331	
3.7	25	1880.0000007	0.00	4331	
3.2	25	1880.0000009	-0.20	4331	
2.6 (Endpoint)	25	1880.0000073	-6.60	4331	

S Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 **Issue Date: Apr. 26, 2011**

Page 129 of 166

12. SPURIOUS RADIATED EMISSION TEST (RX)

12.1. Standard Applicable

According to RSS 132 §4.6, all spurious emissions shall comply with the limits of Table 2. The resolution bandwidth of the spectrum analyzer shall be 100 kHz for spurious emissions measurements below 1.0 GHz, and 1.0 MHz for measurements above 1.0 GHz.

	uency (Hz)	Field strength μV/m	Distance (m)	Field strength at 3m dBµV/m	
30)-88	100	3	40	
88-	-216	150	3	43.5	
216	5-960	200	3	46	
Abov	ve 960	500	3	54	

According to RSS 133 §6.6, Receiver spurious emissions shall comply with the limits specified in RSS-Gen Issue 3.

12.2. EUT Setup

- 1. The radiated emission tests were performed in the 3 meter open-test site, using the setup in accordance with the ANSI C63.4-2003.
- 2. The EUT was put in the front of the test table. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
- 3. The spacing between the peripherals was 10 centimeters.
- 4. External I/O cables were draped along the edge of the test table and bundle when necessary.
- 5. The host was connected with 120Vac/60Hz power source.

12.3. Measurement Procedure

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 5. Repeat above procedures until all frequency measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

余非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 130 of 166

12.4. Test SET-UP (Block Diagram of Configuration)

Refer to section 6.2 in this report

12.5. Measurement Equipment Used:

Refer to section 2.4 in this report

12.6. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)		
	RA = Reading Amplitude	AG = Amplifier Gain		
	AF = Antenna Factor			

12.7. Measurement Result

Refer to attach tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

限公司 t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com



Report No.: EH/2011/40008 **Issue Date: Apr. 26, 2011**

Page 131 of 166

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode GSM 850 CH Low Mode Test Date Apr. 25, 2011

Fundamental Frequency 824.2 MHz Test By Sky Temperature Ver./Hor Pol 25 °C

65 % Humidity

Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
V	Peak	34.76	-14.26	20.50	43.50	-23.00
V	Peak	33.49	-13.28	20.21	46.00	-25.79
V	Peak	39.62	-12.57	27.05	46.00	-18.95
V	Peak	33.06	-7.66	25.40	46.00	-20.60
V	Peak	34.68	-5.01	29.67	46.00	-16.33
V	Peak	32.98	-0.77	32.21	54.00	-21.79
Н	Peak	41.09	-15.51	25.58	43.50	-17.92
Н	Peak	35.14	-14.96	20.18	46.00	-25.82
Н	Peak	36.18	-12.47	23.71	46.00	-22.29
Н	Peak	32.99	-7.53	25.46	46.00	-20.54
Н	Peak	32.60	-5.04	27.56	46.00	-18.44
Н	Peak	32.45	-0.80	31.65	54.00	-22.35
	H/V V V V V H H H H	Mode H/V (PK/QP) V Peak V Peak V Peak V Peak V Peak V Peak H Peak	Ant.Pol. Mode Reading H/V (PK/QP) (dBuV) V Peak 34.76 V Peak 33.49 V Peak 39.62 V Peak 33.06 V Peak 34.68 V Peak 32.98 H Peak 41.09 H Peak 35.14 H Peak 36.18 H Peak 32.99 H Peak 32.60	Mode Reading Factor H/V (PK/QP) (dBuV) (dB) V Peak 34.76 -14.26 V Peak 33.49 -13.28 V Peak 39.62 -12.57 V Peak 33.06 -7.66 V Peak 34.68 -5.01 V Peak 32.98 -0.77 H Peak 35.14 -14.96 H Peak 36.18 -12.47 H Peak 32.99 -7.53 H Peak 32.60 -5.04	Ant.Pol. H/VMode (PK/QP)Reading (dBuV)Factor 	Ant.Pol. Mode Reading Factor Actual FS Limitsm H/V (PK/QP) (dBuV) (dB) (dBuV/m) (dBuV/m) V Peak 34.76 -14.26 20.50 43.50 V Peak 33.49 -13.28 20.21 46.00 V Peak 39.62 -12.57 27.05 46.00 V Peak 33.06 -7.66 25.40 46.00 V Peak 34.68 -5.01 29.67 46.00 V Peak 32.98 -0.77 32.21 54.00 H Peak 35.14 -14.96 20.18 46.00 H Peak 36.18 -12.47 23.71 46.00 H Peak 32.99 -7.53 25.46 46.00 H Peak 32.60 -5.04 27.56 46.00

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/AV detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 132 of 166

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode GSM 850 CH Mid Mode Test Date Apr. 25, 2011

Fundamental Frequency 836.6 MHz Test By Sky Temperature 25 $^{\circ}$ C Pol Ver./Hor

Humidity 65 %

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
199.75	V	Peak	41.07	-15.62	25.45	43.50	-18.05
238.55	V	Peak	33.43	-14.18	19.25	46.00	-26.75
319.06	V	Peak	35.71	-12.57	23.14	46.00	-22.86
558.65	V	Peak	32.99	-7.38	25.61	46.00	-20.39
655.65	V	Peak	32.12	-4.97	27.15	46.00	-18.85
959.26	V	Peak	32.36	-0.95	31.41	46.00	-14.59
196.84	Н	Peak	38.04	-15.51	22.53	43.50	-20.97
219.15	Н	Peak	33.63	-14.96	18.67	46.00	-27.33
340.40	Н	Peak	32.78	-12.01	20.77	46.00	-25.23
559.62	Н	Peak	32.44	-7.35	25.09	46.00	-20.91
652.74	Н	Peak	32.98	-4.96	28.02	46.00	-17.98
920.46	Н	Peak	32.73	-1.04	31.69	46.00	-14.31

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz •
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/AV detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 133 of 166

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode GSM 850 CH High Mode Test Date Apr. 25, 2011

Fundamental Frequency 848.8 MHz Test By Sky Temperature 25 $^{\circ}$ C Pol Ver./Hor

Humidity 65 %

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
194.90	V	Peak	38.49	-15.40	23.09	43.50	-20.41
245.34	V	Peak	32.67	-13.98	18.69	46.00	-27.31
322.94	V	Peak	39.49	-12.47	27.02	46.00	-18.98
536.34	V	Peak	32.79	-7.92	24.87	46.00	-21.13
697.36	V	Peak	33.22	-5.05	28.17	46.00	-17.83
968.96	V	Peak	33.07	-0.85	32.22	54.00	-21.78
199.75	Н	Peak	37.92	-15.62	22.30	43.50	-21.20
238.55	Н	Peak	34.27	-14.18	20.09	46.00	-25.91
316.15	Н	Peak	34.23	-12.64	21.59	46.00	-24.41
558.65	Н	Peak	32.30	-7.38	24.92	46.00	-21.08
691.54	Н	Peak	34.20	-5.03	29.17	46.00	-16.83
978.66	Н	Peak	32.71	-0.78	31.93	54.00	-22.07

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz •
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/AV detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 **Issue Date: Apr. 26, 2011**

Page 134 of 166

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode GSM 1900 CH Low Mode Test Date Apr. 25, 2011

Fundamental Frequency 1850.2 MHz Test By Sky Temperature Ver./Hor Pol 25 °C

65 % Humidity

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
170.65	V	Peak	38.61	-13.98	24.63	43.50	-18.87
245.34	V	Peak	32.91	-13.98	18.93	46.00	-27.07
321.00	V	Peak	38.68	-12.53	26.15	46.00	-19.85
558.65	V	Peak	33.05	-7.38	25.67	46.00	-20.33
672.14	V	Peak	33.06	-5.04	28.02	46.00	-17.98
968.96	V	Peak	32.57	-0.85	31.72	54.00	-22.28
196.84	Н	Peak	36.84	-15.51	21.33	43.50	-22.17
222.06	Н	Peak	34.10	-14.85	19.25	46.00	-26.75
322.94	Н	Peak	37.37	-12.47	24.90	46.00	-21.10
558.65	Н	Peak	32.55	-7.38	25.17	46.00	-20.83
652.74	Н	Peak	32.65	-4.96	27.69	46.00	-18.31
963.14	Н	Peak	32.08	-0.92	31.16	54.00	-22.84

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/AV detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 135 of 166

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode GSM 1900 CH Mid Mode Test Date Apr. 25, 2011

Fundamental Frequency $1880 \, \mathrm{MHz}$ Test By Sky Temperature $25 \, ^{\circ}\mathrm{C}$ Pol Ver./Hor

Humidity 65 %

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
154.16	V	Peak	33.21	-13.06	20.15	43.50	-23.35
231.76	V	Peak	33.84	-14.41	19.43	46.00	-26.57
338.46	V	Peak	35.81	-12.05	23.76	46.00	-22.24
559.62	V	Peak	32.59	-7.35	25.24	46.00	-20.76
687.66	V	Peak	35.45	-5.02	30.43	46.00	-15.57
975.75	V	Peak	32.62	-0.80	31.82	54.00	-22.18
163.86	Н	Peak	35.36	-13.63	21.73	43.50	-21.77
243.40	Н	Peak	33.15	-14.04	19.11	46.00	-26.89
325.85	Н	Peak	35.13	-12.41	22.72	46.00	-23.28
559.62	Н	Peak	32.31	-7.35	24.96	46.00	-21.04
652.74	Н	Peak	33.01	-4.96	28.05	46.00	-17.95
966.05	Н	Peak	32.93	-0.86	32.07	54.00	-21.93

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz •
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/AV detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

公司 t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 136 of 166

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode GSM 1900 CH High Mode Test Date Apr. 25, 2011

Fundamental Frequency 1909.8 MHz Test By Sky Temperature Pol Ver./Hor 25 °C

65 % Humidity

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
180.35	V	Peak	38.56	-14.55	24.01	43.50	-19.49
245.34	V	Peak	33.51	-13.98	19.53	46.00	-26.47
322.94	V	Peak	34.75	-12.47	22.28	46.00	-23.72
425.76	V	Peak	37.20	-9.24	27.96	46.00	-18.04
665.35	V	Peak	35.18	-5.02	30.16	46.00	-15.84
975.75	V	Peak	32.32	-0.80	31.52	54.00	-22.48
199.75	Н	Peak	37.04	-15.62	21.42	43.50	-22.08
250.19	Н	Peak	32.88	-13.74	19.14	46.00	-26.86
322.94	Н	Peak	33.11	-12.47	20.64	46.00	-25.36
546.04	Н	Peak	33.03	-7.70	25.33	46.00	-20.67
610.06	Н	Peak	33.00	-5.81	27.19	46.00	-18.81
972.84	Н	Peak	32.34	-0.81	31.53	54.00	-22.47

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz •
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/AV detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 137 of 166

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode WCDMA Band II CH Low Mode Test Date Apr. 25, 2011

Fundamental Frequency 1852.4 MHz Test By Sky Temperature $25 \text{ }^{\circ}\text{C}$ Pol Ver./Hor

Humidity 65 %

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
151.25	V	Peak	33.26	-12.89	20.37	43.50	-23.13
243.30	V	Peak	33.74	-14.04	19.70	46.00	-26.30
311.30	V	Peak	37.43	-12.76	24.67	46.00	-21.33
558.65	V	Peak	33.61	-7.38	26.23	46.00	-19.77
684.75	V	Peak	35.70	-5.00	30.70	46.00	-15.30
924.34	V	Peak	33.72	-1.04	32.68	46.00	-13.32
190.05	Н	Peak	37.86	-15.12	22.74	43.50	-20.76
235.64	Н	Peak	32.94	-14.28	18.66	46.00	-27.34
330.70	Н	Peak	34.46	-12.22	22.24	46.00	-23.76
553.80	Н	Peak	32.47	-7.53	24.94	46.00	-21.06
655.65	Н	Peak	32.84	-4.97	27.87	46.00	-18.13
975.75	Н	Peak	33.02	-0.80	32.22	54.00	-21.78

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/AV detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 138 of 166

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode WCDMA Band II CH Mid Mode Test Date Apr. 25, 2011

Fundamental Frequency 1880 MHz Test By Sky Temperature Pol Ver./Hor 25 °C

65 % Humidity

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
170.65	V	Peak	38.15	-13.98	24.17	43.50	-19.33
250.19	V	Peak	35.76	-13.74	22.02	46.00	-23.98
319.06	V	Peak	37.26	-12.57	24.69	46.00	-21.31
553.80	V	Peak	32.96	-7.53	25.43	46.00	-20.57
699.30	V	Peak	32.44	-5.06	27.38	46.00	-18.62
982.54	V	Peak	32.38	-0.75	31.63	54.00	-22.37
199.75	Н	Peak	39.76	-15.62	24.14	43.50	-19.36
248.25	Н	Peak	32.88	-13.91	18.97	46.00	-27.03
322.94	Н	Peak	34.91	-12.47	22.44	46.00	-23.56
555.74	Н	Peak	32.86	-7.47	25.39	46.00	-20.61
668.26	Н	Peak	32.70	-5.03	27.67	46.00	-18.33
966.05	Н	Peak	32.53	-0.86	31.67	54.00	-22.33

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz •
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/AV detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 139 of 166

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode WCDMA Band II CH High Mode Test Date Apr. 25, 2011

Fundamental Frequency 1907.6 MHz

Test By
Sky
Temperature 25 °C
Pol
Ver./Hor

Humidity 65 %

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
183.26	V	Peak	35.12	-14.72	20.40	43.50	-23.10
238.55	V	Peak	33.00	-14.18	18.82	46.00	-27.18
316.15	V	Peak	40.56	-12.64	27.92	46.00	-18.08
422.85	V	Peak	36.26	-5.17	31.09	46.00	-14.91
641.10	V	Peak	33.74	-5.17	28.57	46.00	-17.43
968.96	V	Peak	32.55	-0.85	31.70	54.00	-22.30
194.90	Н	Peak	35.92	-15.40	20.52	43.50	-22.98
250.19	Н	Peak	32.33	-13.74	18.59	46.00	-27.41
325.85	Н	Peak	35.01	-12.41	22.60	46.00	-23.40
558.65	Н	Peak	32.30	-7.38	24.92	46.00	-21.08
665.35	Н	Peak	32.42	-5.02	27.40	46.00	-18.60
972.84	Н	Peak	32.66	-0.81	31.85	54.00	-22.15

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz •
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/AV detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 140 of 166

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode WCDMA Band V CH Low Mode Test Date Apr. 25, 2011

Fundamental Frequency 826.40 MHz Test By Sky Temperature 25 $^{\circ}$ C Pol Ver./Hor

Humidity 65 %

	Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
_	(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
	173.56	V	Peak	38.99	-14.16	24.83	43.50	-18.67
	219.15	V	Peak	33.52	-14.96	18.56	46.00	-27.44
	328.76	V	Peak	36.99	-12.34	24.65	46.00	-21.35
	548.95	V	Peak	32.57	-7.66	24.91	46.00	-21.09
	655.65	V	Peak	32.58	-4.97	27.61	46.00	-18.39
	972.84	V	Peak	32.52	-0.81	31.71	54.00	-22.29
	167.74	Н	Peak	34.69	-13.85	20.84	43.50	-22.66
	248.25	Н	Peak	33.47	-13.91	19.56	46.00	-26.44
	319.06	Н	Peak	34.74	-12.57	22.17	46.00	-23.83
	555.74	Н	Peak	32.38	-7.47	24.91	46.00	-21.09
	660.50	Н	Peak	32.59	-4.99	27.60	46.00	-18.40
	972.84	Н	Peak	32.71	-0.81	31.90	54.00	-22.10

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/AV detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 141 of 166

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode WCDMA Band V CH Mid Mode Test Date Apr. 25, 2011

Fundamental Frequency 836.60 MHz Test By Sky Temperature 25 $^{\circ}$ C Pol Ver./Hor

Humidity 65 %

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
180.35	V	Peak	39.51	-14.55	24.96	43.50	-18.54
228.85	V	Peak	36.21	-14.51	21.70	46.00	-24.30
316.15	V	Peak	37.14	-12.64	24.50	46.00	-21.50
422.85	V	Peak	35.76	-9.31	26.45	46.00	-19.55
648.86	V	Peak	32.56	-4.97	27.59	46.00	-18.41
975.75	V	Peak	31.96	-0.80	31.16	54.00	-22.84
196.84	Н	Peak	39.34	-15.51	23.83	43.50	-19.67
243.40	Н	Peak	32.76	-14.04	18.72	46.00	-27.28
328.76	Н	Peak	32.47	-12.34	20.13	46.00	-25.87
559.62	Н	Peak	32.27	-7.35	24.92	46.00	-21.08
652.74	Н	Peak	32.61	-4.96	27.65	46.00	-18.35
982.54	Н	Peak	32.45	-0.75	31.70	54.00	-22.30

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz •
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/AV detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 142 of 166

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode WCDMA Band V CH High Mode Test Date Apr. 25, 2011

Fundamental Frequency 846.60 MHz Test By Sky Temperature 25 $^{\circ}$ C Pol Ver./Hor

Humidity 65 %

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
170.65	V	Peak	37.24	-13.98	23.26	43.50	-20.24
250.19	V	Peak	32.28	-13.74	18.54	46.00	-27.46
303.54	V	Peak	35.30	-12.93	22.37	46.00	-23.63
553.80	V	Peak	32.35	-7.53	24.82	46.00	-21.18
677.96	V	Peak	32.38	-4.98	27.40	46.00	-18.60
951.50	V	Peak	32.42	-1.00	31.42	46.00	-14.58
167.74	Н	Peak	36.89	-13.85	23.04	43.50	-20.46
238.55	Н	Peak	32.94	-14.18	18.76	46.00	-27.24
328.76	Н	Peak	33.96	-12.34	21.62	46.00	-24.38
555.74	Н	Peak	33.15	-7.47	25.68	46.00	-20.32
636.25	Н	Peak	33.39	-5.26	28.13	46.00	-17.87
968.96	Н	Peak	32.71	-0.85	31.86	54.00	-22.14

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz •
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/AV detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 143 of 166

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode CDMA 2000 Cellular CH Low Mode Test Date Apr. 25, 2011

Fundamental Frequency 824.70MHz Test By Sky Temperature 25 $^{\circ}$ C Pol Ver./Hor

Humidity 65 %

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
183.26	V	Peak	37.24	-14.72	22.52	43.50	-20.98
233.70	V	Peak	34.49	-14.34	20.15	46.00	-25.85
316.15	V	Peak	40.16	-12.64	27.52	46.00	-18.48
553.80	V	Peak	32.47	-7.53	24.94	46.00	-21.06
645.95	V	Peak	33.48	-5.08	28.40	46.00	-17.60
959.26	V	Peak	32.75	-0.95	31.80	46.00	-14.20
167.74	Н	Peak	34.59	-13.85	20.74	43.50	-22.76
245.34	Н	Peak	32.95	-13.98	18.97	46.00	-27.03
328.76	Н	Peak	34.45	-12.34	22.11	46.00	-23.89
555.74	Н	Peak	31.94	-7.47	24.47	46.00	-21.53
652.74	Н	Peak	32.84	-4.96	27.88	46.00	-18.12
982.54	Н	Peak	31.82	-0.75	31.07	54.00	-22.93

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/AV detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 144 of 166

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode CDMA 2000 Cellular CH Mid Mode Test Date Apr. 25, 2011

Fundamental Frequency 836.52MHz Test By Sky Temperature 25 $^{\circ}$ C Pol Ver./Hor

Humidity 65 %

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
177.44	V	Peak	40.63	-14.38	26.25	43.50	-17.25
248.25	V	Peak	33.44	-13.91	19.53	46.00	-26.47
321.00	V	Peak	36.27	-12.53	23.74	46.00	-22.26
555.74	V	Peak	32.59	-7.47	25.12	46.00	-20.88
658.56	V	Peak	33.00	-4.98	28.02	46.00	-17.98
941.80	V	Peak	32.41	-1.01	31.40	46.00	-14.60
194.90	Н	Peak	39.31	-15.40	23.91	43.50	-19.59
250.19	Н	Peak	32.51	-13.74	18.77	46.00	-27.23
328.76	Н	Peak	34.73	-12.34	22.39	46.00	-23.61
555.74	Н	Peak	32.64	-7.47	25.17	46.00	-20.83
652.74	Н	Peak	32.45	-4.96	27.49	46.00	-18.51
961.20	Н	Peak	32.11	-0.93	31.18	54.00	-22.82

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz •
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/AV detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 145 of 166

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode CDMA 2000 Cellular CH High Mode Test Date Apr. 25, 2011

Test By Fundamental Frequency 848.31MHz Sky Temperature Pol Ver./Hor 25 °C

65 % Humidity

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
199.75	V	Peak	40.63	-15.62	25.01	43.50	-18.49
219.15	V	Peak	34.33	-14.96	19.37	46.00	-26.63
321.00	V	Peak	36.65	-12.53	24.12	46.00	-21.88
559.62	V	Peak	32.30	-7.35	24.95	46.00	-21.05
675.05	V	Peak	32.92	-4.97	27.95	46.00	-18.05
978.66	V	Peak	32.77	-0.78	31.99	54.00	-22.01
196.84	Н	Peak	37.49	-15.51	21.98	43.50	-21.52
248.25	Н	Peak	32.60	-13.91	18.69	46.00	-27.31
322.94	Н	Peak	36.42	-12.47	23.95	46.00	-22.05
555.74	Н	Peak	33.32	-7.47	25.85	46.00	-20.15
665.35	Н	Peak	32.55	-5.02	27.53	46.00	-18.47
939.86	Н	Peak	32.45	-1.01	31.44	46.00	-14.56

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz •
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/AV detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 t (886-2) 2299-3279

f (886-2) 2298-0488



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 146 of 166

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode CDMA 2000 PCS CH Low Mode Test Date Apr. 25, 2011

Fundamental Frequency 1851.25MHz Test By Sky
Temperature 25 °C Pol Ver./Hor

Temperature $25 \,^{\circ}\text{C}$ Humidity $65 \,^{\circ}\text{M}$

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
180.35	V	Peak	39.02	-14.55	24.47	43.50	-19.03
241.46	V	Peak	32.77	-14.09	18.68	46.00	-27.32
291.90	V	Peak	37.10	-13.20	23.90	46.00	-22.10
553.80	V	Peak	33.01	-7.53	25.48	46.00	-20.52
658.56	V	Peak	37.18	-4.98	32.20	46.00	-13.80
963.14	V	Peak	32.56	-0.92	31.64	54.00	-22.36
196.84	Н	Peak	37.02	-15.51	21.51	43.50	-21.99
238.55	Н	Peak	33.30	-14.18	19.12	46.00	-26.88
335.55	Н	Peak	33.51	-12.10	21.41	46.00	-24.59
516.94	Н	Peak	33.03	-8.17	24.86	46.00	-21.14
662.44	Н	Peak	32.67	-5.01	27.66	46.00	-18.34
978.66	Н	Peak	32.59	-0.78	31.81	54.00	-22.19

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/AV detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 147 of 166

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode CDMA 2000 PCS CH Mid Mode Test Date Apr. 25, 2011

Fundamental Frequency $1880 \mathrm{MHz}$ Test By Sky Temperature $25~^{\circ}\mathrm{C}$ Pol Ver./Hor

Humidity 65 %

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
199.75	V	Peak	43.44	-15.62	27.82	43.50	-15.68
245.34	V	Peak	33.22	-13.98	19.24	46.00	-26.76
335.55	V	Peak	36.77	-12.10	24.67	46.00	-21.33
553.80	V	Peak	33.16	-7.53	25.63	46.00	-20.37
677.96	V	Peak	36.36	-4.98	31.38	46.00	-14.62
963.14	V	Peak	32.41	-0.92	31.49	54.00	-22.51
196.84	Н	Peak	37.86	-15.51	22.35	43.50	-21.15
253.64	Н	Peak	33.12	-14.28	18.84	46.00	-27.16
313.24	Н	Peak	34.09	-12.70	21.39	46.00	-24.61
544.10	Н	Peak	32.85	-7.73	25.12	46.00	-20.88
645.95	Н	Peak	32.65	-5.08	27.57	46.00	-18.43
975.75	Н	Peak	32.43	-0.80	31.63	54.00	-22.37

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz •
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/AV detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

及司 t (886-2) 2299-3279

f (886-2) 2298-0488



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 148 of 166

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode CDMA 2000 PCS CH High Mode Test Date Apr. 25, 2011

Fundamental Frequency 1908.75MHz Test By Sky
Temperature 25 °C Pol Ver./Hor

Temperature 25 °C Pol Humidity 65 %

Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
V	Peak	38.99	-14.72	24.27	43.50	-19.23
V	Peak	35.43	-14.68	20.75	46.00	-25.25
V	Peak	35.00	-12.57	22.43	46.00	-23.57
V	Peak	35.98	-10.92	25.06	46.00	-20.94
V	Peak	34.01	-5.04	28.97	46.00	-17.03
V	Peak	32.33	-0.72	31.61	54.00	-22.39
Н	Peak	32.97	-12.89	20.08	43.50	-23.42
Н	Peak	32.46	-14.09	18.37	46.00	-27.63
Н	Peak	35.99	-12.47	23.52	46.00	-22.48
Н	Peak	32.66	-7.38	25.28	46.00	-20.72
Н	Peak	32.53	-5.08	27.45	46.00	-18.55
Н	Peak	32.59	-0.81	31.78	54.00	-22.22
	H/V V V V V H H H H	Mode H/V (PK/QP) V Peak V Peak V Peak V Peak V Peak V Peak H Peak	Ant.Pol. Mode Reading H/V (PK/QP) (dBuV) V Peak 38.99 V Peak 35.43 V Peak 35.00 V Peak 35.98 V Peak 34.01 V Peak 32.33 H Peak 32.97 H Peak 35.99 H Peak 35.99 H Peak 32.66 H Peak 32.53	Mode Reading Factor H/V (PK/QP) (dBuV) (dB) V Peak 38.99 -14.72 V Peak 35.43 -14.68 V Peak 35.00 -12.57 V Peak 35.98 -10.92 V Peak 34.01 -5.04 V Peak 32.33 -0.72 H Peak 32.97 -12.89 H Peak 32.46 -14.09 H Peak 35.99 -12.47 H Peak 32.66 -7.38 H Peak 32.53 -5.08	Ant.Pol. H/VMode (PK/QP)Reading (dBuV)Factor 	Ant.Pol. Mode Reading Factor Actual FS Limit3m H/V (PK/QP) (dBuV) (dB) (dBuV/m) (dBuV/m) V Peak 38.99 -14.72 24.27 43.50 V Peak 35.43 -14.68 20.75 46.00 V Peak 35.90 -12.57 22.43 46.00 V Peak 35.98 -10.92 25.06 46.00 V Peak 34.01 -5.04 28.97 46.00 V Peak 32.33 -0.72 31.61 54.00 H Peak 32.97 -12.89 20.08 43.50 H Peak 32.46 -14.09 18.37 46.00 H Peak 35.99 -12.47 23.52 46.00 H Peak 32.66 -7.38 25.28 46.00 H Peak 32.53 -5.08 27.45 46.00

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz \circ
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/AV detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 149 of 166

Radiated Spurious Emission Measurement Result (above 1GHz)

Apr. 25, 2011 Operation Mode GSM 850 CH Low Mode Test Date

Fundamental Frequency Test By 824.2 MHz Sky

Temperature Pol Ver. / Hor. 25 °C

Humidity 65 %

		Peak	\mathbf{AV}		Actual	Actual	Peak Limit	AV Limit	
Freq. (MHz)	Ant.Pol. H/V	Reading (dBuV)	Reading (dBuV)	Factor (dB)	Peak FS (dBuV/m)	AV FS (dBuV/m)	at 3m (dBuV/m)	at 3m (dBuV/m)	Margin (dB)
1648.4	V						74.00	54.00	
1572.0	V	36.33		-5.60	30.73		74.00	54.00	-23.27
2472.6	V						74.00	54.00	
3296.8	V						74.00	54.00	
4121.0	V						74.00	54.00	
4945.2	V						74.00	54.00	
1648.4	Н						74.00	54.00	
2472.6	Н						74.00	54.00	
2807.0	Н	37.62		-0.07	37.55		74.00	54.00	-16.45
3296.8	H						74.00	54.00	
4121.0	Н						74.00	54.00	
4945.2	Н						74.00	54.00	

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-13GHz, RBW=1MHz, VBW=1MHz, Sweep time=200 ms.
- (5) Spectrum AV Setting: 1GHz-13GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 150 of 166

Radiated Spurious Emission Measurement Result (above 1GHz)

Apr. 25, 2011 Operation Mode GSM 850 CH Mid Mode Test Date

Fundamental Frequency Test By 836.6 MHz Sky

Temperature Pol Ver. / Hor. 25 °C

Humidity 65 %

Freq. (MHz)	Ant.Pol. H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Factor (dB)	Actual Peak FS (dBuV/m)	Actual AV FS (dBuV/m)	Peak Limit at 3m (dBuV/m)	AV Limit at 3m (dBuV/m)	Margin (dB)
1673.2	V						74.00	54.00	
2509.8	V						74.00	54.00	
2950.0	V	36.64		0.26	36.90		74.00	54.00	-17.10
3346.4	V						74.00	54.00	
4183.0	V						74.00	54.00	
5019.6	V						74.00	54.00	
1673.2	Н						74.00	54.00	
2509.8	Н						74.00	54.00	
2950.0	Н	36.72		0.26	36.98		74.00	54.00	-17.02
3346.4	Н						74.00	54.00	
4183.0	Н						74.00	54.00	
5019.6	Н						74.00	54.00	

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-13GHz, RBW=1MHz, VBW=1MHz, Sweep time=200 ms.
- (5) Spectrum AV Setting: 1GHz-13GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 151 of 166

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode GSM 850 CH High Mode Test Date Apr. 25, 2011

Fundamental Frequency 848.8 MHz Test By Sky

Temperature Pol Ver. / Hor. 25 °C

Humidity 65 %

Freq.	Ant.Pol. H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Factor (dB)	Actual Peak FS (dBuV/m)	Actual AV FS (dBuV/m)	Peak Limit at 3m (dBuV/m)	AV Limit at 3m (dBuV/m)	Margin (dB)
1697.6	V						74.00	54.00	
2202.5	V	37.32		-2.38	34.94		74.00	54.00	-19.06
2546.4	V						74.00	54.00	
3395.2	V						74.00	54.00	
4244.0	V						74.00	54.00	
5092.8	V						74.00	54.00	
1697.6	Н						74.00	54.00	
1897.0	Н	37.57		-3.96	33.61		74.00	54.00	-20.39
2546.4	Н						74.00	54.00	
3395.2	Н						74.00	54.00	
4244.0	Н						74.00	54.00	
5092.8	Н						74.00	54.00	

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-13GHz, RBW=1MHz, VBW=1MHz, Sweep time=200 ms.
- (5) Spectrum AV Setting: 1GHz-13GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 152 of 166

Radiated Spurious Emission Measurement Result (above 1GHz)

Test Date Apr. 25, 2011 Operation Mode GSM 1900 CH Low Mode

Fundamental Frequency 1850.2 MHz Test By Sky

Temperature Pol Ver. / Hor. 25 °C

Humidity 65 %

Freq.	Ant.Pol. H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Factor (dB)	Actual Peak FS (dBuV/m)	Actual AV FS (dBuV/m)	Peak Limit at 3m (dBuV/m)	AV Limit at 3m (dBuV/m)	Margin (dB)
3700.4	V						74.00	54.00	
4380.0	V	35.66		4.93	40.59		74.00	54.00	-13.41
5550.6	V						74.00	54.00	
7400.8	V						74.00	54.00	
9251.0	V						74.00	54.00	
11101.2	V						74.00	54.00	
2963.0	Н	36.79		0.29	37.08		74.00	54.00	-16.92
3700.4	Н						74.00	54.00	
5550.6	Н						74.00	54.00	
7400.8	Н						74.00	54.00	
9251.0	Н						74.00	54.00	
11101.2	Н						74.00	54.00	

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-13GHz, RBW=1MHz, VBW=1MHz, Sweep time=200 ms.
- (5) Spectrum AV Setting: 1GHz-13GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 **Issue Date: Apr. 26, 2011**

Page 153 of 166

Radiated Spurious Emission Measurement Result (above 1GHz)

Test Date Operation Mode GSM 1900 CH Mid Mode Apr. 25, 2011

Fundamental Frequency 1880 MHz Test By Sky

Temperature Pol Ver. / Hor. 25 °C

65 % Humidity

		Peak	\mathbf{AV}		Actual	Actual	Peak Limit	AV Limit	
Freq.	Ant.Pol.		A v Reading	Factor	Actual Peak FS	Actual AV FS	at 3m	at 3m	Margin
(MHz)	H/V	(dBuV)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
3760.0	V						74.00	54.00	
5640.0	V						74.00	54.00	
7520.0	V						74.00	54.00	
9400.0	V						74.00	54.00	
11280.0	V						74.00	54.00	
2963.0	Н	36.55		0.29	36.84		74.00	54.00	-17.16
3760.0	Н						74.00	54.00	
5640.0	Н						74.00	54.00	
7520.0	Н						74.00	54.00	
9400.0	Н						74.00	54.00	
11280.0	Н						74.00	54.00	

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-13GHz, RBW=1MHz, VBW=1MHz, Sweep time=200 ms.
- (5) Spectrum AV Setting: 1GHz-13GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. S Taiwan Ltd.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 154 of 166

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode GSM 1900 CH High Mode Test Date Apr. 25, 2011

Fundamental Frequency 1909.8 MHz Test By Sky

Temperature Pol Ver. / Hor. 25 °C Humidity 65 %

(dB)
-13.70
13.70
-16.84

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-13GHz, RBW=1MHz, VBW=1MHz, Sweep time=200 ms.
- (5) Spectrum AV Setting: 1GHz-13GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 155 of 166

Radiated Spurious Emission Measurement Result (above 1GHz)

Test Date Apr. 25, 2011 Operation Mode WCDMA Band II CH Low Mode

Fundamental Frequency Test By 1852.4 MHz Sky

Temperature Pol Ver. / Hor. 25 °C

65 % Humidity

Freq. (MHz)	Ant.Pol. H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Factor (dB)	Actual Peak FS (dBuV/m)	Actual AV FS (dBuV/m)	Peak Limit at 3m (dBuV/m)	AV Limit at 3m (dBuV/m)	Margin (dB)
2982.5	V	36.91		0.38	37.29		74.00	54.00	-16.71
3704.8	V						74.00	54.00	
5557.2	V						74.00	54.00	
7409.6	V						74.00	54.00	
9262.0	V						74.00	54.00	
11114.4	V						74.00	54.00	
2807.0	H	36.32		-0.07	36.25		74.00	54.00	-17.75
3704.8	Н						74.00	54.00	
5557.2	Н						74.00	54.00	
7409.6	Н						74.00	54.00	
9262.0	Н						74.00	54.00	
11114.4	Н						74.00	54.00	

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-13GHz, RBW=1MHz, VBW=1MHz, Sweep time=200 ms.
- (5) Spectrum AV Setting: 1GHz-13GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 156 of 166

Radiated Spurious Emission Measurement Result (above 1GHz)

Test Date Apr. 25, 2011 Operation Mode WCDMA Band II CH Mid Mode

Fundamental Frequency Test By 1880 MHz Sky

Temperature Pol Ver. / Hor. 25 °C

Humidity 65 %

Freq. (MHz)	Ant.Pol. H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Factor (dB)	Actual Peak FS (dBuV/m)	Actual AV FS (dBuV/m)	Peak Limit at 3m (dBuV/m)	AV Limit at 3m (dBuV/m)	Margin (dB)
1942.5	V	37.68		-3.73	33.95		74.00	54.00	-20.05
3760.0	V						74.00	54.00	
5640.0	V						74.00	54.00	
7520.0	V						74.00	54.00	
9400.0	V						74.00	54.00	
11280.0	V						74.00	54.00	
2137.5	Н	36.91		-2.70	34.21		74.00	54.00	-19.79
3760.0	Н						74.00	54.00	
5640.0	Н						74.00	54.00	
7520.0	Н						74.00	54.00	
9400.0	Н						74.00	54.00	
11280.0	Н						74.00	54.00	

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-13GHz, RBW=1MHz, VBW=1MHz, Sweep time=200 ms.
- (5) Spectrum AV Setting: 1GHz-13GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 157 of 166

Radiated Spurious Emission Measurement Result (above 1GHz)

Apr. 25, 2011 Operation Mode WCDMA Band II CH High Mode Test Date

Fundamental Frequency Test By 1907.6 MHz Sky

Temperature Pol Ver. / Hor. 25 °C

Humidity 65 %

Freq.	Ant.Pol. H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Factor (dB)	Actual Peak FS (dBuV/m)	Actual AV FS (dBuV/m)	Peak Limit at 3m (dBuV/m)	AV Limit at 3m (dBuV/m)	Margin (dB)
	V	36.50	•	0.38	36.88	,			-17.12
2982.5		30.30		0.38	30.00		74.00	54.00	-17.12
3815.2	V						74.00	54.00	
5722.8	V						74.00	54.00	
7630.4	V						74.00	54.00	
9538.0	V						74.00	54.00	
11445.6	V						74.00	54.00	
2592.5	Н	36.93		-0.60	36.33		74.00	54.00	-17.67
3815.2	Н						74.00	54.00	
5722.8	Н						74.00	54.00	
7630.4	Н						74.00	54.00	
9538.0	Н						74.00	54.00	
11445.6	Н						74.00	54.00	

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-13GHz, RBW=1MHz, VBW=1MHz, Sweep time=200 ms.
- (5) Spectrum AV Setting: 1GHz-13GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 158 of 166

Radiated Spurious Emission Measurement Result (above 1GHz)

Test Date Apr. 25, 2011 Operation Mode WCDMA Band V CH Low Mode

Fundamental Frequency Test By 826.40 MHz Sky

Temperature Pol Ver. / Hor. 25 °C

Humidity 65 %

Freq. (MHz)	Ant.Pol. H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Factor (dB)	Actual Peak FS (dBuV/m)	Actual AV FS (dBuV/m)	Peak Limit at 3m (dBuV/m)	AV Limit at 3m (dBuV/m)	Margin (dB)
1652.8	V						74.00	54.00	_
2963.0	V	36.36		0.29	36.65		74.00	54.00	-17.35
2479.2	V						74.00	54.00	
3305.6	V						74.00	54.00	
4132.0	V						74.00	54.00	
4958.4	V						74.00	54.00	
1652.8	Н						74.00	54.00	
1988.0	Н	36.66		-3.47	33.19		74.00	54.00	-20.81
2479.2	Н						74.00	54.00	
3305.6	Н						74.00	54.00	
4132.0	Н						74.00	54.00	
4958.4	Н						74.00	54.00	

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-13GHz, RBW=1MHz, VBW=1MHz, Sweep time=200 ms.
- (5) Spectrum AV Setting: 1GHz-13GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 159 of 166

Radiated Spurious Emission Measurement Result (above 1GHz)

Test Date Apr. 25, 2011 Operation Mode WCDMA Band V CH Mid Mode

Fundamental Frequency Test By 836.60 MHz Sky

Temperature Pol Ver. / Hor. 25 °C

Humidity 65 %

Freq. (MHz)	Ant.Pol. H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Factor (dB)	Actual Peak FS (dBuV/m)	Actual AV FS (dBuV/m)	Peak Limit at 3m (dBuV/m)	AV Limit at 3m (dBuV/m)	Margin (dB)
1897.0	V	37.17		-3.96	33.21		74.00	54.00	-20.79
1673.2	V						74.00	54.00	
2509.8	V						74.00	54.00	
3346.4	V						74.00	54.00	
4183.0	V						74.00	54.00	
5019.6	V						74.00	54.00	
1673.2	Н						74.00	54.00	
2509.8	Н						74.00	54.00	
2885.0	Н	36.46		0.13	36.59		74.00	54.00	-17.41
3346.4	Н						74.00	54.00	
4183.0	Н						74.00	54.00	
5019.6	Н						74.00	54.00	

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-13GHz, RBW=1MHz, VBW=1MHz, Sweep time=200 ms.
- (5) Spectrum AV Setting: 1GHz-13GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 160 of 166

Radiated Spurious Emission Measurement Result (above 1GHz)

Apr. 25, 2011 Operation Mode WCDMA Band V CH High Mode Test Date

Fundamental Frequency Test By 846.60 MHz Sky

Temperature Pol Ver. / Hor. 25 °C

Humidity 65 %

_	Freq. (MHz)	Ant.Pol. H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Factor (dB)	Actual Peak FS (dBuV/m)	Actual AV FS (dBuV/m)	Peak Limit at 3m (dBuV/m)	AV Limit at 3m (dBuV/m)	Margin (dB)
	1693.2	V						74.00	54.00	
	2539.8	V						74.00	54.00	
	2963.0	V	36.66		0.29	36.95		74.00	54.00	-17.05
	3386.4	V						74.00	54.00	
	4233.0	V						74.00	54.00	
	5079.6	V						74.00	54.00	
	1693.2	Н						74.00	54.00	
	2539.8	Н						74.00	54.00	
	3223.0	Н	35.47		1.15	36.62		74.00	54.00	-17.38
	3386.4	Н						74.00	54.00	
	4233.0	Н						74.00	54.00	
	5079.6	Н						74.00	54.00	

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-13GHz, RBW=1MHz, VBW=1MHz, Sweep time=200 ms.
- (5) Spectrum AV Setting: 1GHz-13GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 161 of 166

Radiated Spurious Emission Measurement Result (above 1GHz)

Test Date Apr. 25, 2011 Operation Mode CDMA 2000 Cellular CH Low Mode

Fundamental Frequency Test By 824.70MHz Sky

Temperature Pol Ver. / Hor. 25 °C

Humidity 65 %

Freq. (MHz)	Ant.Pol. H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Factor (dB)	Actual Peak FS (dBuV/m)	Actual AV FS (dBuV/m)	Peak Limit at 3m (dBuV/m)	AV Limit at 3m (dBuV/m)	Margin (dB)
1649.4	V						74.00	54.00	
2417.0	V	36.78		-1.28	35.50		74.00	54.00	-18.50
2474.1	V						74.00	54.00	
3298.8	V						74.00	54.00	
4123.5	V						74.00	54.00	
4948.2	V						74.00	54.00	
1649.4	Н						74.00	54.00	
2474.1	Н						74.00	54.00	
3298.8	Н						74.00	54.00	
1649.4	Н	35.82		1.76	37.58		74.00	54.00	-16.42
4123.5	Н						74.00	54.00	
4948.2	Н						74.00	54.00	

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-13GHz, RBW=1MHz, VBW=1MHz, Sweep time=200 ms.
- (5) Spectrum AV Setting: 1GHz-13GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 162 of 166

Radiated Spurious Emission Measurement Result (above 1GHz)

Test Date Apr. 25, 2011 Operation Mode CDMA 2000 Cellular CH Mid Mode

Fundamental Frequency Test By 836.52MHz Sky

Temperature Pol Ver. / Hor. 25 °C Humidity 65 %

Freq. (MHz)	Ant.Pol. H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Factor (dB)	Actual Peak FS (dBuV/m)	Actual AV FS (dBuV/m)	Peak Limit at 3m (dBuV/m)	AV Limit at 3m (dBuV/m)	Margin (dB)
1673.0	V						74.00	54.00	
2509.6	V						74.00	54.00	
2963.0	V	36.54		0.29	36.83		74.00	54.00	-17.17
3346.1	V						74.00	54.00	
4182.6	V						74.00	54.00	
5019.1	V						74.00	54.00	
1673.0	Н						74.00	54.00	
2509.6	Н						74.00	54.00	
2963.0	Н	36.37		0.29	36.66		74.00	54.00	-17.34
3346.1	Н						74.00	54.00	
4182.6	Н						74.00	54.00	
5019.1	Н						74.00	54.00	

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-13GHz, RBW=1MHz, VBW=1MHz, Sweep time=200 ms.
- (5) Spectrum AV Setting: 1GHz-13GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 163 of 166

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode CDMA 2000 Cellular CH High Mode Test Date Apr. 25, 2011

Fundamental Frequency Test By 848.31MHz Sky

Temperature Pol Ver. / Hor. 25 °C Humidity 65 %

Freq.	Ant.Pol. H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Factor (dB)	Actual Peak FS (dBuV/m)	Actual AV FS (dBuV/m)	Peak Limit at 3m (dBuV/m)	AV Limit at 3m (dBuV/m)	Margin (dB)
1696.6	V						74.00	54.00	
2544.9	V						74.00	54.00	
3393.2	V						74.00	54.00	
3502.5	V	35.55		2.06	37.61		74.00	54.00	-16.39
4241.6	V						74.00	54.00	
5089.9	V						74.00	54.00	
1696.6	Н						74.00	54.00	
2544.9	Н						74.00	54.00	
2560.0	Н	36.84		-0.67	36.17		74.00	54.00	-17.83
3393.2	Н						74.00	54.00	
4241.6	Н						74.00	54.00	
5089.9	Н						74.00	54.00	

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-13GHz, RBW=1MHz, VBW=1MHz, Sweep time=200 ms.
- (5) Spectrum AV Setting: 1GHz-13GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 164 of 166

Radiated Spurious Emission Measurement Result (above 1GHz)

Test Date Apr. 25, 2011 Operation Mode CDMA 2000 PCS CH Low Mode

Fundamental Frequency Test By 1851.25MHz Sky

Temperature Pol Ver. / Hor. 25 °C Humidity 65 %

Freq. (MHz)	Ant.Pol. H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Factor (dB)	Actual Peak FS (dBuV/m)	Actual AV FS (dBuV/m)	Peak Limit at 3m (dBuV/m)	AV Limit at 3m (dBuV/m)	Margin (dB)
2963.0	V	36.79		0.29	37.08		74.00	54.00	-16.92
3702.5	V						74.00	54.00	
5553.8	V						74.00	54.00	
7405.0	V						74.00	54.00	
9256.3	V						74.00	54.00	
11107.5	V						74.00	54.00	
2963.0	Н	36.52		0.29	36.81		74.00	54.00	-17.19
3702.5	Н						74.00	54.00	
5553.8	Н						74.00	54.00	
7405.0	Н						74.00	54.00	
9256.3	Н						74.00	54.00	
11107.5	Н						74.00	54.00	

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-13GHz, RBW=1MHz, VBW=1MHz, Sweep time=200 ms.
- (5) Spectrum AV Setting: 1GHz-13GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 165 of 166

Radiated Spurious Emission Measurement Result (above 1GHz)

Test Date Apr. 25, 2011 Operation Mode CDMA 2000 PCS CH Mid Mode

Fundamental Frequency Test By 1880MHz Sky

Temperature Pol Ver. / Hor. 25 °C

Humidity 65 %

Freq. (MHz)	Ant.Pol. H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Factor (dB)	Actual Peak FS (dBuV/m)	Actual AV FS (dBuV/m)	Peak Limit at 3m (dBuV/m)	AV Limit at 3m (dBuV/m)	Margin (dB)
2443.0	V	36.74		-1.12	35.62		74.00	54.00	-18.38
3760.0	V						74.00	54.00	
5640.0	V						74.00	54.00	
7520.0	V						74.00	54.00	
9400.0	V						74.00	54.00	
11280.0	V						74.00	54.00	
1702.0	Н	36.77		-4.92	31.85		74.00	54.00	-22.15
3760.0	Н						74.00	54.00	
5640.0	Н						74.00	54.00	
7520.0	Н						74.00	54.00	
9400.0	Н						74.00	54.00	
11280.0	Н						74.00	54.00	

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-13GHz, RBW=1MHz, VBW=1MHz, Sweep time=200 ms.
- (5) Spectrum AV Setting: 1GHz-13GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2011/40008 Issue Date: Apr. 26, 2011

Page 166 of 166

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode CDMA 2000 PCS CH High Mode Test Date Apr. 25, 2011

Fundamental Frequency Test By 1908.75MHz Sky

Temperature Pol Ver. / Hor. 25 °C

Humidity 65 %

Freq. (MHz)	Ant.Pol. H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Factor (dB)	Actual Peak FS (dBuV/m)	Actual AV FS (dBuV/m)	Peak Limit at 3m (dBuV/m)	AV Limit at 3m (dBuV/m)	Margin (dB)
1942.5	V	35.92		-3.73	32.19		74.00	54.00	-21.81
3817.5	V						74.00	54.00	
5726.3	V						74.00	54.00	
7635.0	V						74.00	54.00	
9543.8	V						74.00	54.00	
11452.5	V						74.00	54.00	
3535.0	V	35.83		2.19	38.02		74.00	54.00	-15.98
3817.5	Н						74.00	54.00	
5726.3	Н						74.00	54.00	
7635.0	Н						74.00	54.00	
9543.8	Н						74.00	54.00	
11452.5	Н						74.00	54.00	

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-13GHz, RBW=1MHz, VBW=1MHz, Sweep time=200 ms.
- (5) Spectrum AV Setting: 1GHz-13GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Sharp faith in the sample of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.