

FCC CERTIFICATION
On Behalf of
Jinghong Industrial (Hong Kong) Co., Limited

Wireless Silicone Keyboard
Model No.: FK-126MW

FCC ID: VOZFK126MW

Prepared for : Jinghong Industrial (Hong Kong) Co., Limited
Address : La 2, Block B, Hengmingzhu, Bao Tian Industry, Qianjin 2
Rd., Baoan District, Shenzhen, China
Prepared by : ACCURATE TECHNOLOGY CO. LTD
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China
Tel: (0755) 26503290
Fax: (0755) 26503396

Report Number : ATE20072280
Date of Test : September 18, 2007
Date of Report : September 21, 2007

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT).....	4
1.2. Description of Test Facility	4
1.3. Measurement Uncertainty	4
2. MEASURING DEVICE AND TEST EQUIPMENT	5
3. FUNDAMENTAL AND HARMONICS RADIATED EMISSION MEASUREMENT	6
3.1. Block Diagram of Test Setup.....	6
3.2. The Emission Limit	6
3.3. Configuration of EUT on Measurement	7
3.4. Operating Condition of EUT	7
3.5. Test Procedure	7
3.6. The Field Strength of Radiation Emission Measurement Results	8
4. RADIATED EMISSION FOR FCC PART 15 SECTION 15.249(D).....	11
4.1. Block Diagram of Test Setup.....	11
4.2. The Emission Limit For Section 15.249(d)	11
4.3. EUT Configuration on Measurement	13
4.4. Operating Condition of EUT	13
4.5. Test Procedure	13
4.6. The Emission Measurement Result	14
5. BAND EDGES	17
5.1. The Requirement	17
5.2. EUT Configuration on Measurement	17
5.3. Operating Condition of EUT	17
5.4. Test Procedure	17
5.5. The Measurement Result	18
6. ANTENNA REQUIREMENT.....	19
6.1. The Requirement	19
6.2. Antenna Construction	19
APPENDIX I (TEST CURVES) (20pages)	

Test Report Certification

Applicant : Jinghong Industrial (Hong Kong) Co., Limited
 Manufacturer : Jinghong Industrial (Hong Kong) Co., Limited
 EUT Description : Wireless Silicone Keyboard
 (A) MODEL NO.: FK-126MW
 (B) SERIAL NO.: N/A
 (C) POWER SUPPLY: DC 3.0V (AAA battery × 2)

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.249: 2006 & ANSI C63.4: 2003

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.249 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : September 18, 2007

Prepared by : 
 (Engineer)

Reviewer : 
 (Quality Manager)

Approved & Authorized Signer : 
 (Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	:	Wireless Silicone Keyboard
Model Number	:	FK-126MW
Power Supply	:	DC 3.0V (AAA battery ×2)
Operate Frequency	:	2405M-2477MHz
Applicant	:	Jinghong Industrial (Hong Kong) Co., Limited
Address	:	La 2, Block B, Hengmingzhu, Bao Tian Industry, Qianjin 2 Rd., Baoan District, Shenzhen, China
Manufacturer	:	Jinghong Industrial (Hong Kong) Co., Limited
Address	:	La 2, Block B, Hengmingzhu, Bao Tian Industry, Qianjin 2 Rd., Baoan District, Shenzhen, China
Date of sample received	:	September 10, 2007
Date of Test	:	September 18, 2007

1.2. Description of Test Facility

EMC Lab	:	Accredited by TUV Rheinland Shenzhen, May 10, 2004 Accredited by FCC, May 10, 2004 The Certificate Registration Number is 253065 Accredited by Industry Canada, May 18, 2004 The Certificate Registration Number is IC 5077
Name of Firm	:	ACCURATE TECHNOLOGY CO. LTD
Site Location	:	F1, Bldg. A, Changyuan New Material Port, Keyuan Rd. Science & Industry Park, Nanshan, Shenzhen, Guangdong P.R. China

1.3. Measurement Uncertainty

Conducted emission expanded uncertainty	=	2.23dB, k=2
Radiated emission expanded uncertainty	=	4.12dB, k=2

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	03.31.2008
EMI Test Receiver	Rohde&Schwarz	ESI26	838786/013	01.24.2008
Bilog Antenna	Schwarzbeck	VULB9163	9163-194	03.31.2008
Bilog Antenna	Chase	CBL6112B	2591	01.24.2008
Horn Antenna	Rohde&Schwarz	HF906	100013	01.24.2008
Spectrum Analyzer	Anritsu	MS2651B	6200238856	03.31.2008
Pre-Amplifier	Agilent	8447D	2944A10619	03.31.2008
L.I.S.N.	Rohde&Schwarz	ESH3-Z5	100305	03.31.2008
L.I.S.N.	Rohde&Schwarz	ESH3-Z5	100310	03.31.2008

3. FUNDAMENTAL AND HARMONICS RADIATED EMISSION MEASUREMENT


3.1. Block Diagram of Test Setup

3.1.1. Block diagram of connection between the EUT and simulators



(EUT: Wireless Silicone Keyboard)

3.1.2. Anechoic Chamber Test Setup Diagram

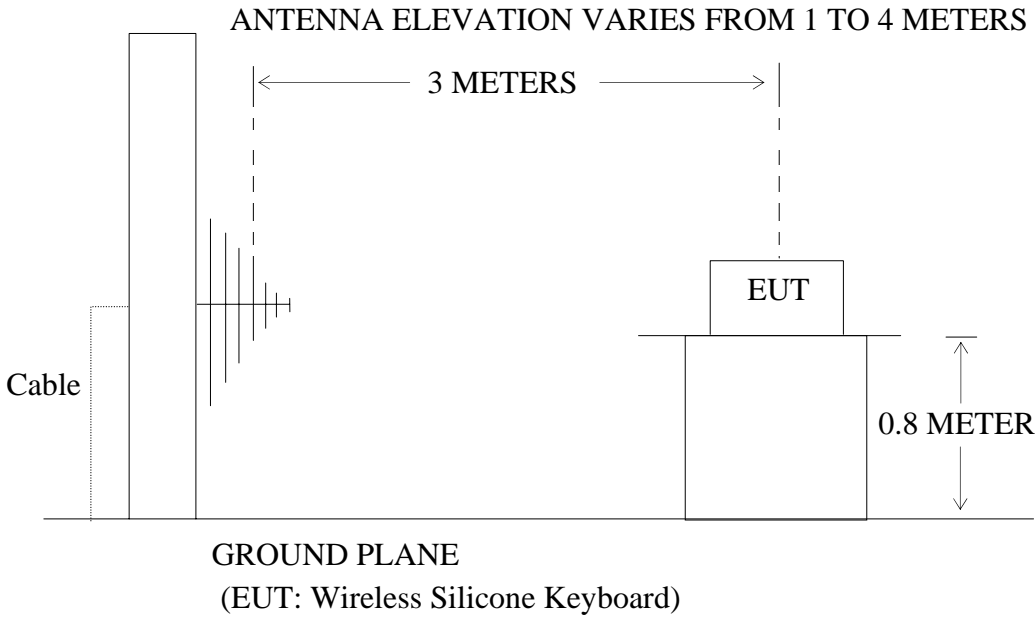

3.2. The Emission Limit

3.2.1 For intentional radiators, According to section 15.249(a), Operation within the frequency band of 2.4 to 2.4835GHz, The fundamental field strength shall not exceed 94 dBμV/m and the harmonics shall not exceed 54 dBμV/m.

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of harmonics (microvolts/meter)
902-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

3.2.2 According to section 15.249(e), as shown in section 15.35(b), The peak field strength

of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

3.3. Configuration of EUT on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

3.3.1. Wireless Silicone Keyboard (EUT)

Model Number : FK-126MW
Serial Number : N/A
Manufacturer : Jinghong Industrial (Hong Kong) Co., Limited

3.4. Operating Condition of EUT

3.4.1. Setup the EUT and simulator as shown as Section 3.1.

3.4.2. Turn on the power of all equipment.

3.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2405M-2477MHz. We are select 2405M, 2441M, 2477MHz TX frequency to transmitted.

3.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement.

The bandwidth of test receiver (R&S ESI26) is set at 1MHz.

3.6. The Field Strength of Radiation Emission Measurement Results

PASS.

Date of Test:	September 18, 2007	Temperature:	26°C
EUT:	Wireless Silicone Keyboard	Humidity:	49%
Model No.:	FK-126MW	Power Supply:	DC 3.0V (AAA battery ×2)
Test Mode:	TX 2405MHz	Test Engineer:	Andy

Fundamental Radiated Emissions

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2405.046	72.1	86.4	-3.6	68.5	82.8	94	114	25.5	31.2	Vertical
2405.046	72.8	87.2	-3.6	69.2	83.6	94	114	24.8	30.4	Horizontal

Harmonics Radiated Emissions

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
*4810.104	44.5	59.1	2.1	46.6	61.2	54	74	7.4	12.8	Vertical
*4810.104	45.3	60.0	2.1	47.4	62.1	54	74	6.6	11.9	Horizontal

Note:

1. The emission emitted by the EUT is too low to be measured except the emission listed above.
2. *: Denotes restricted band of operation.
3. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

$$\text{Where Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

Date of Test:	September 18, 2007	Temperature:	26°C
EUT:	Wireless Silicone Keyboard	Humidity:	49%
Model No.:	FK-126MW	Power Supply:	DC 3.0V (AAA battery ×2)
Test Mode:	TX 2441MHz	Test Engineer:	Andy

Fundamental Radiated Emissions

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2440.897	69.2	85.3	-3.5	65.7	81.8	94	114	28.3	32.2	Vertical
2440.897	70.9	86.8	-3.5	67.4	83.3	94	114	26.6	30.7	Horizontal

Harmonics Radiated Emissions

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
*4881.784	45.0	59.7	2.2	47.2	61.9	54	74	6.8	12.1	Vertical
*4881.784	46.5	61.2	2.2	48.7	63.4	54	74	5.3	10.6	Horizontal

Note:

- 1.The emission emitted by the EUT is too low to be measured except the emission listed above.
2. *: Denotes restricted band of operation.
3. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

$$\text{Where Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

Date of Test:	September 18, 2007	Temperature:	26°C
EUT:	Wireless Silicone Keyboard	Humidity:	49%
Model No.:	FK-126MW	Power Supply:	DC 3.0V (AAA battery ×2)
Test Mode:	TX 2477MHz	Test Engineer:	Andy

Fundamental Radiated Emissions

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2477.031	71.7	86.1	-3.4	68.3	82.7	94	114	25.7	31.3	Vertical
2477.031	71.5	85.8	-3.4	68.1	82.4	94	114	25.9	31.6	Horizontal

Harmonics Radiated Emissions

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
*4954.069	42.3	56.8	2.3	44.6	59.1	54	74	9.4	14.9	Vertical
*4954.069	40.7	55.3	2.3	43.0	57.6	54	74	11.0	16.4	Horizontal

Note:

1. The emission emitted by the EUT is too low to be measured except the emission listed above.
2. *: Denotes restricted band of operation.
3. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

$$\text{Where Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

4. RADIATED EMISSION FOR FCC PART 15 SECTION 15.249(D)


4.1. Block Diagram of Test Setup

4.1.1. Block diagram of connection between the EUT and simulators



(EUT: Wireless Silicone Keyboard)

4.1.2. Anechoic Chamber Test Setup Diagram

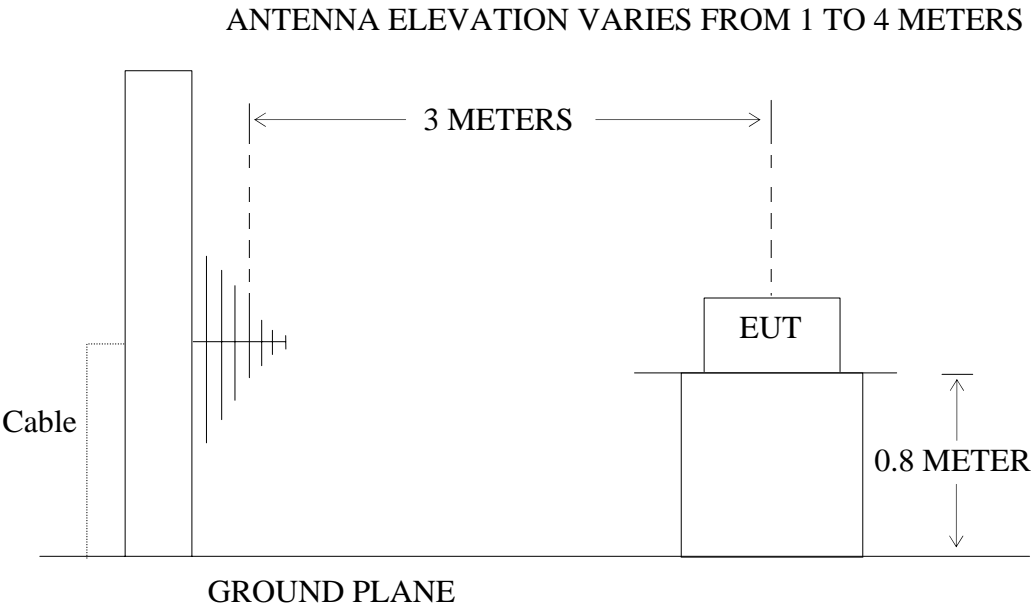

(EUT: Wireless Silicone Keyboard)

4.2. The Emission Limit For Section 15.249(d)

4.2.1 Emission radiated outside of the specified frequency bands, except for harmonics, shall be comply with the general radiated emission limits in Section 15.209.

Radiation Emission Measurement Limits According to Section 15.209

Frequency (MHz)	Limit,		
	Field Strength of Quasi-peak Value (microvolts/m)	Field Strength of Quasi-peak Value (dBμV/m)	The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector.
30 - 88	100	40	

88 - 216	150	43.5	Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.
216 - 960	200	46	
Above 960	500	54	

4.3. EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.3.1. Wireless Silicone Keyboard (EUT)

Model Number : FK-126MW
Serial Number : N/A
Manufacturer : Jinghong Industrial (Hong Kong) Co., Limited

4.4. Operating Condition of EUT

4.4.1. Setup the EUT and simulator as shown as Section 4.1.

4.4.2. Turn on the power of all equipment.

4.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2405M-2477MHz. We are select 2405M, 2441M, 2477MHz TX frequency to transmitted.

4.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement.

The bandwidth of test receiver (R&S ESI26) is set at 120KHz in 30-1000MHz. and set at 1MHz in above 1000MHz.

The frequency range from 30MHz to 25000MHz is checked.

The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

4.6. The Emission Measurement Result

PASS.

Date of Test:	September 18, 2007	Temperature:	26°C
EUT:	Wireless Silicone Keyboard	Humidity:	49%
Model No.:	FK-126MW	Power Supply:	DC 3.0V (AAA battery ×2)
Test Mode:	TX 2405MHz	Test Engineer:	Andy

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dBμV/m)	Polarization
-	-	-	-	-	-	Vertical
*274.929	56.9	-20.0	36.9	46.0	9.1	Horizontal
294.368	57.7	-19.6	38.1	46.0	7.9	Horizontal

Note:

1. -: Denotes the emission emitted by the EUT is too low to be measured .
2. *: Denotes restricted band of operation.
3. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain

Date of Test:	September 18, 2007	Temperature:	26°C
EUT:	Wireless Silicone Keyboard	Humidity:	49%
Model No.:	FK-126MW	Power Supply:	DC 3.0V (AAA battery ×2)
Test Mode:	TX 2441MHz	Test Engineer:	Andy

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dBμV/m)	Polarization
-	-	-	-	-	-	Vertical
*274.929	56.3	-20.0	36.3	46.0	9.7	Horizontal
288.537	56.4	-19.7	36.7	46.0	9.3	Horizontal
294.368	58.1	-19.6	38.5	46.0	7.5	Horizontal

Note:

1. -: Denotes the emission emitted by the EUT is too low to be measured .
2. *: Denotes restricted band of operation.
3. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

$$\text{Where Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

Date of Test:	<u>September 18, 2007</u>	Temperature:	<u>26°C</u>
EUT:	<u>Wireless Silicone Keyboard</u>	Humidity:	<u>49%</u>
Model No.:	<u>FK-126MW</u>	Power Supply:	<u>DC 3.0V (AAA battery ×2)</u>
Test Mode:	<u>TX 2477MHz</u>	Test Engineer:	<u>Andy</u>

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dBμV/m)	Polarization
-	-	-	-	-	-	Vertical
*274.929	56.4	-20.0	36.4	46.0	9.6	Horizontal
288.537	57.3	-19.7	37.6	46.0	8.4	Horizontal
294.368	57.1	-19.6	37.5	46.0	8.5	Horizontal

Note:

1. -: Denotes the emission emitted by the EUT is too low to be measured .
2. *: Denotes restricted band of operation.
3. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

$$\text{Where Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

5. BAND EDGES

5.1. The Requirement

- 5.1.1. Band Edge from 2400MHz to 2483.5MHz. Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

5.2. EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.2.1. Wireless Silicone Keyboard (EUT)

Model Number : FK-126MW
 Serial Number : N/A
 Manufacturer : Jinghong Industrial (Hong Kong) Co., Limited

5.3. Operating Condition of EUT

- 5.3.1. Setup the EUT and simulator as shown as Section 4.1.

- 5.3.2. Turn on the power of all equipment.

- 5.3.3. Let the EUT work in TX modes measure it. The transmit frequency are 2405M-2477MHz. We are select 2405M, 2477MHz TX frequency to transmitted.

5.4. Test Procedure

- 5.4.1. Measure the fundamental amplitude appearing on spectral display and set it as a reference level. measure the lower band edge amplitude. Get the delta amplitude and edge frequency.
- 5.4.2. Repeat above procedures , Measure the fundamental amplitude appearing on spectral display and set it as a reference level. measure the upper band edge amplitude. Get the delta amplitude and edge frequency.

5.5. The Measurement Result

Test result in lower band (2405MHz): Pass

Test result in higher band (2477MHz): Pass

5.5.1. The lower band edge emission plot as below, shows 38.2dB delta between carrier maximum field strength and local maximum emission in the restricted band(2400MHz)

Low Band	The emission of carrier field strength (dBμV/m)	The maximum field strength in restrict band (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
2405MHz	83.6	45.4	74	28.6	Peak
2405MHz	69.2	31.0	54	23.0	Average

5.5.2. The higher band edge emission plot as below, shows 38.9dB delta between carrier maximum power and local maximum emission in the restricted band(2483.5MHz)

High Band	The emission of carrier power strength (dBμV/m)	The maximum field strength in restrict band (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
2477MHz	82.7	43.8	74	30.2	Peak
2477MHz	68.3	29.4	54	24.6	Average

* The maximum field strength in restricted band is the emission of carrier field strength subtract to the delta between carrier maximum field and local maximum emission in the restricted band.


6. ANTENNA REQUIREMENT

6.1. The Requirement

7.1.1. According to Section 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

6.2. Antenna Construction

The transmitter utilizes a wire as dipole antenna. It is not considered to be user replaceable.

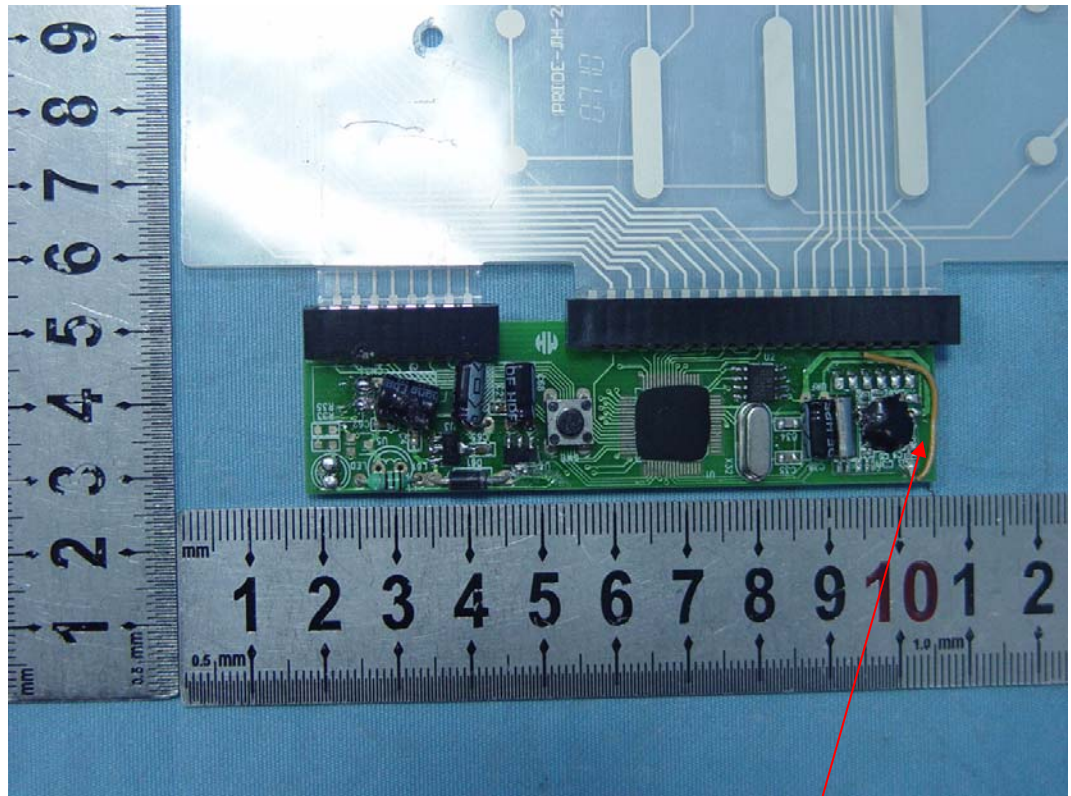

Antenna


APPENDIX I

(Test Curves)

Radiated Disturbance

FCC Part 15


EUT: Wireless Silicone Keyboard M/N: FK-126MW
Manufacturer: Jinghong Industrial (Hong Kong) Co., Limited
Operating Condition: TX 2405MHz
Test Site: ATC EMC Lab.SAC
Operator: Andy
Test Specification: Horizontal
Comment : DC 3.0V

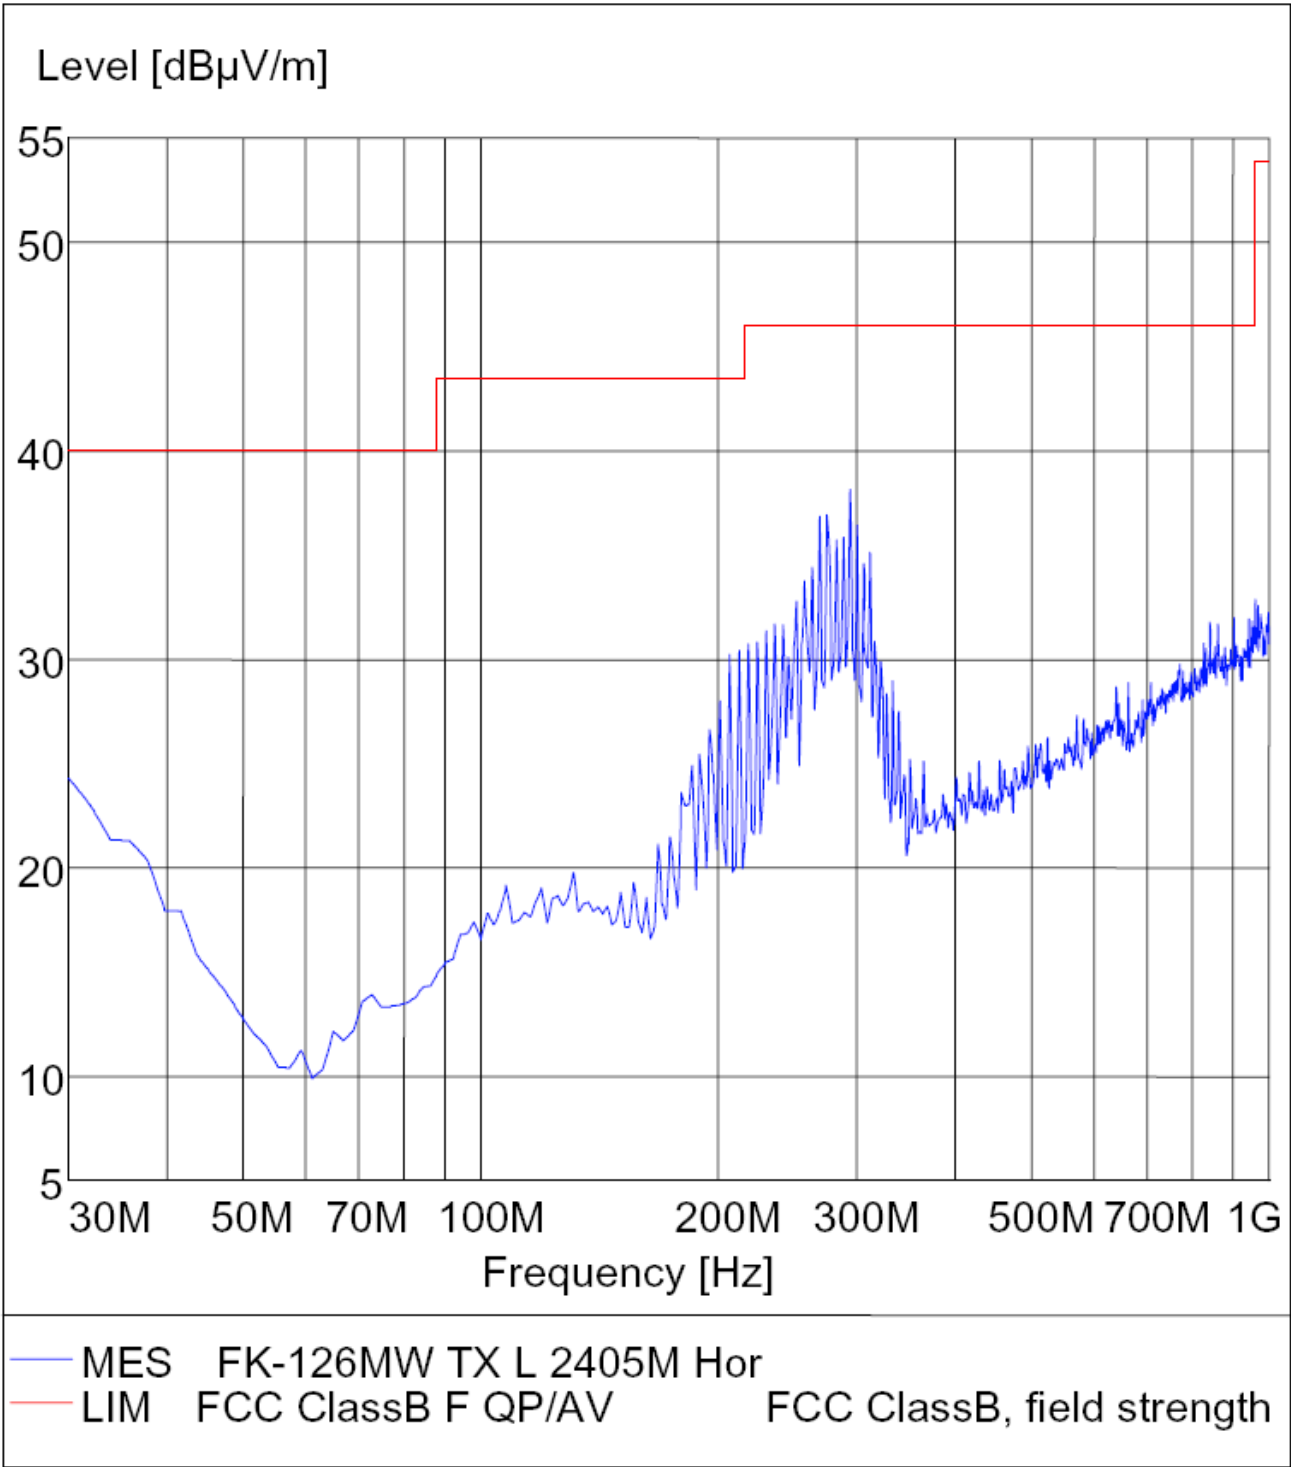

Radiated Disturbance

FCC Part 15


EUT: Wireless Silicone Keyboard M/N: FK-126MW
Manufacturer: Jinghong Industrial (Hong Kong) Co., Limited
Operating Condition: TX 2405MHz
Test Site: ATC EMC Lab.SAC
Operator: Andy
Test Specification: Vertical
Comment : DC 3.0V

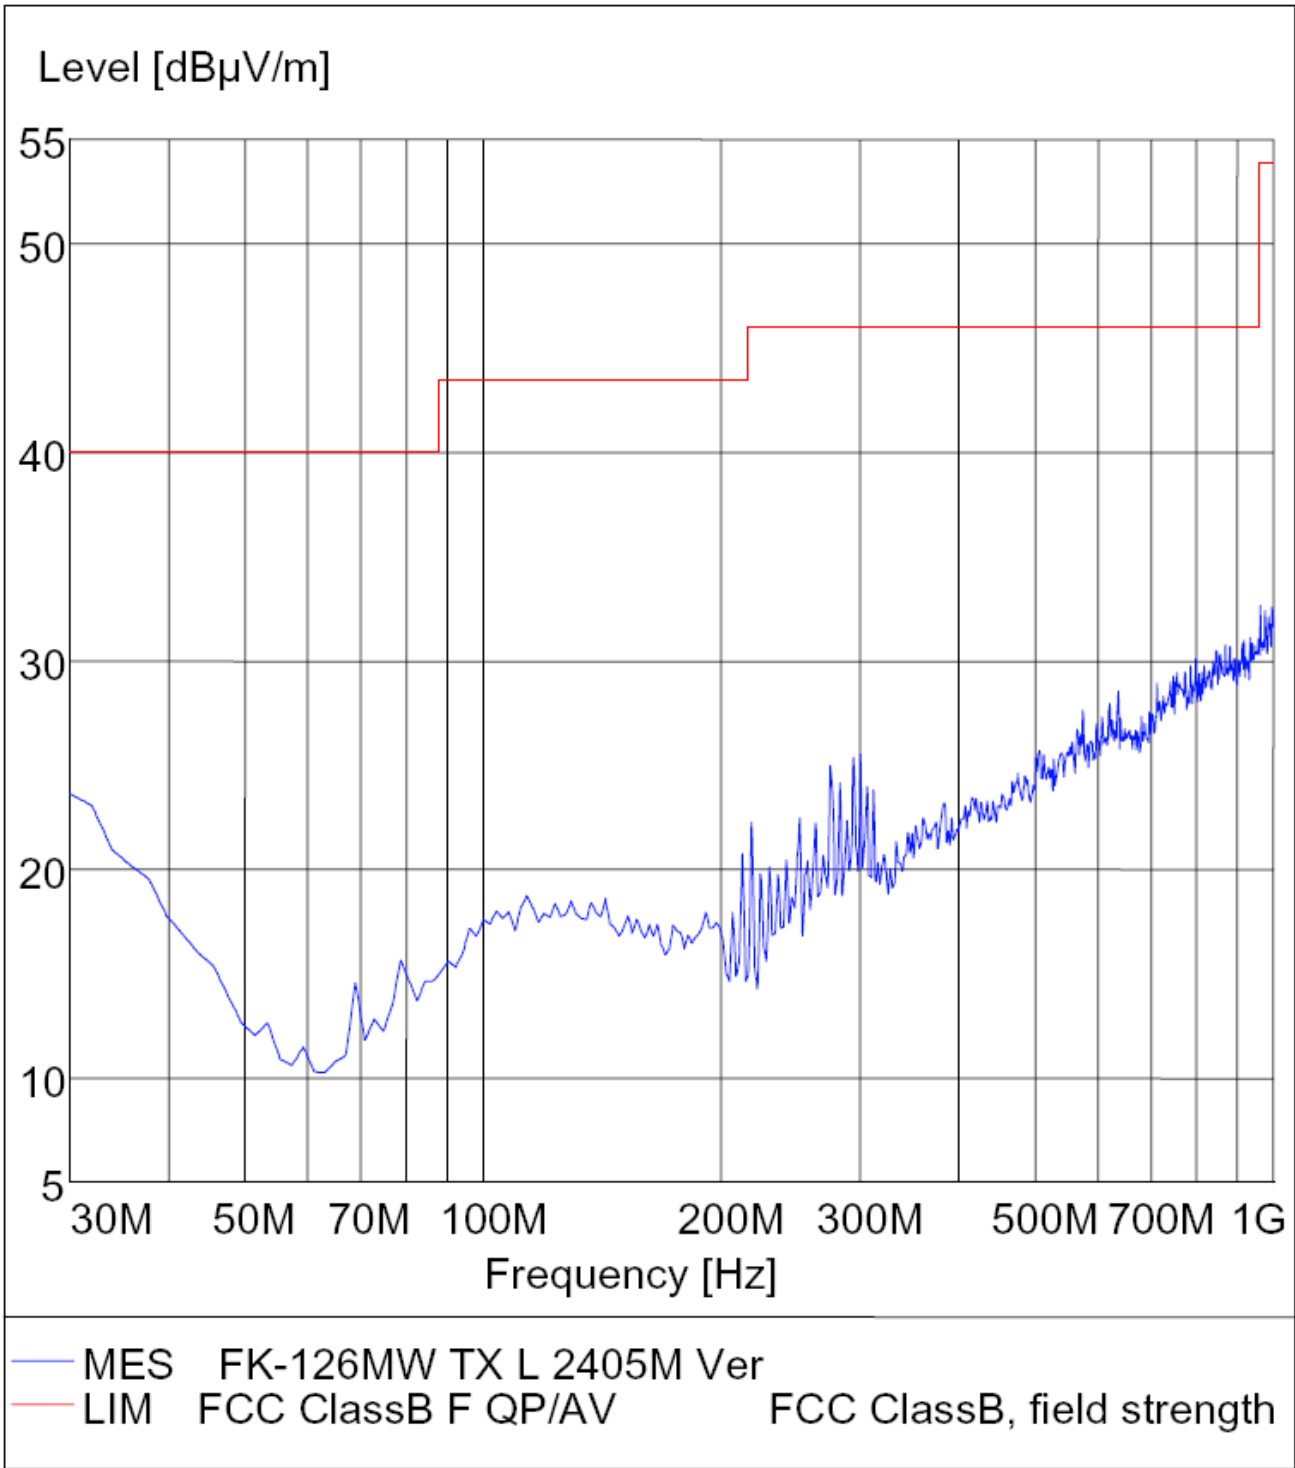

Radiated Disturbance

FCC Part 15


EUT: Wireless Silicone Keyboard M/N: FK-126MW
Manufacturer: Jinghong Industrial (Hong Kong) Co., Limited
Operating Condition: TX 2405MHz
Test Site: ATC EMC Lab.SAC
Operator: Andy
Test Specification: Horizontal
Comment: DC 3.0V

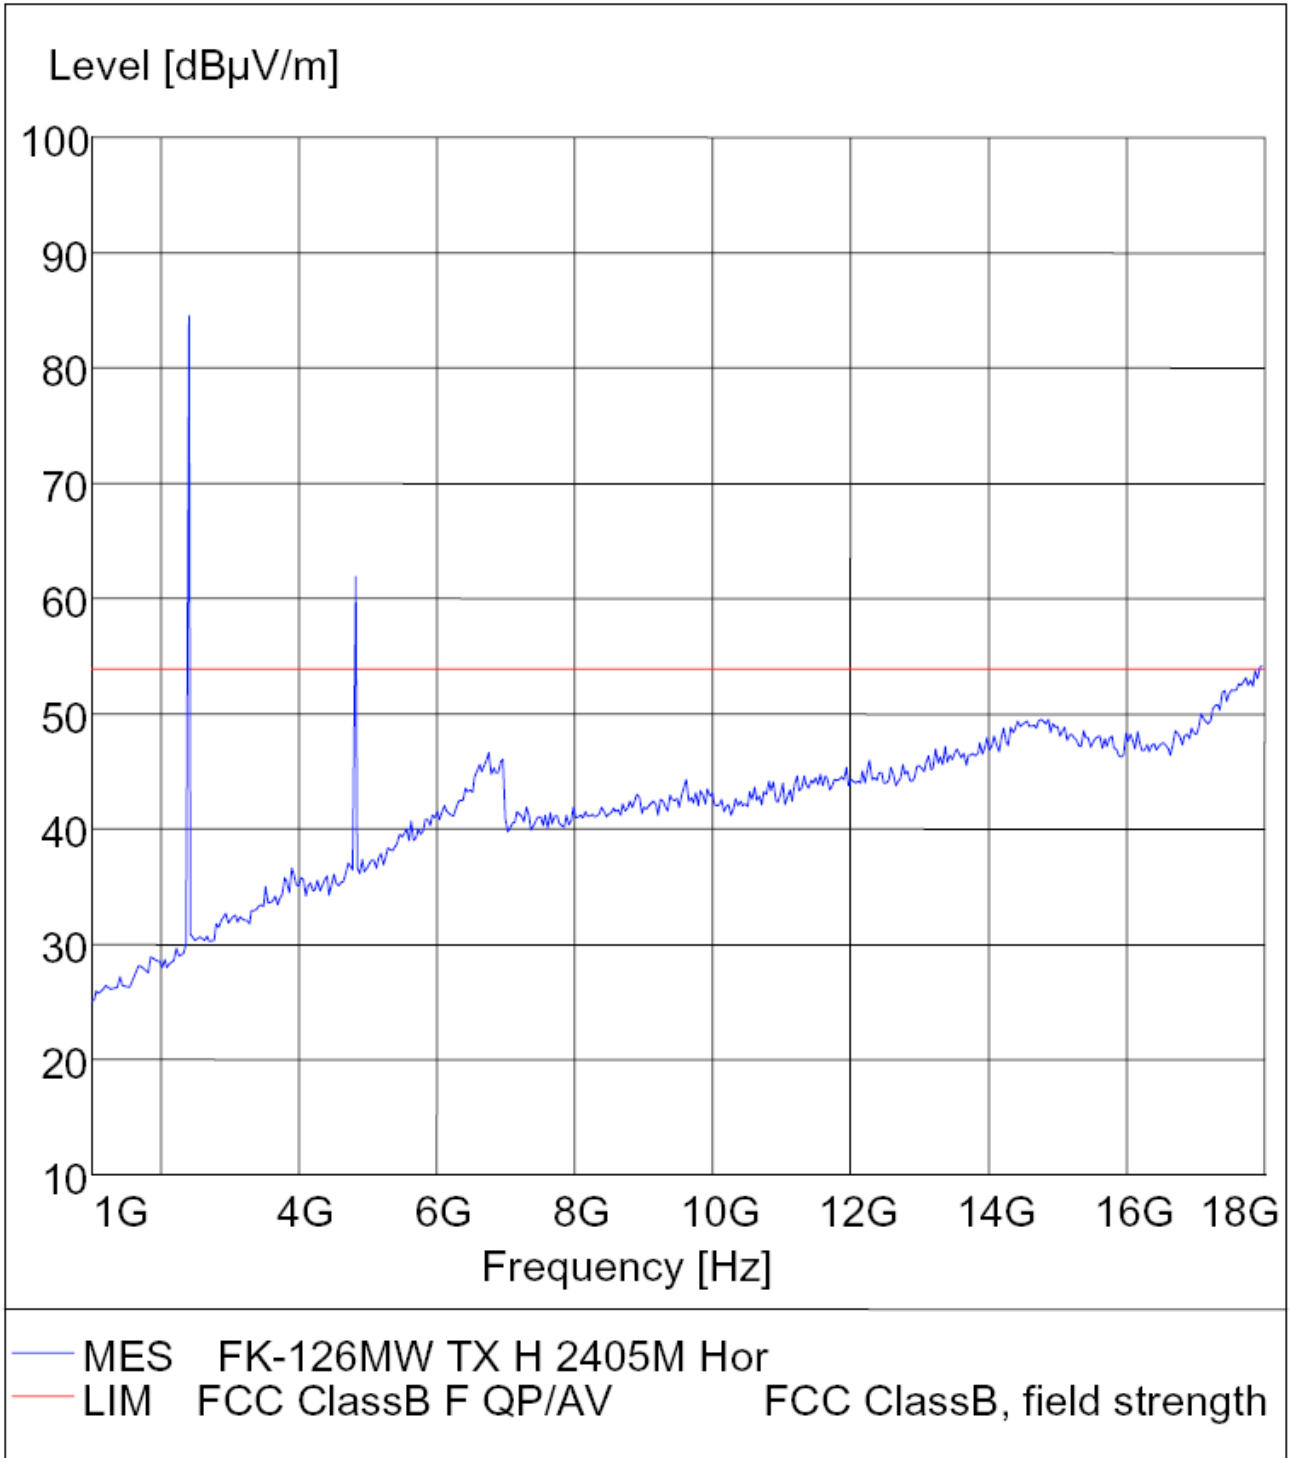

Radiated Disturbance

FCC Part 15


EUT: Wireless Silicone Keyboard M/N: FK-126MW
Manufacturer: Jinghong Industrial (Hong Kong) Co., Limited
Operating Condition: TX 2405MHz
Test Site: ATC EMC Lab.SAC
Operator: Andy
Test Specification: Vertical
Comment: DC 3.0V

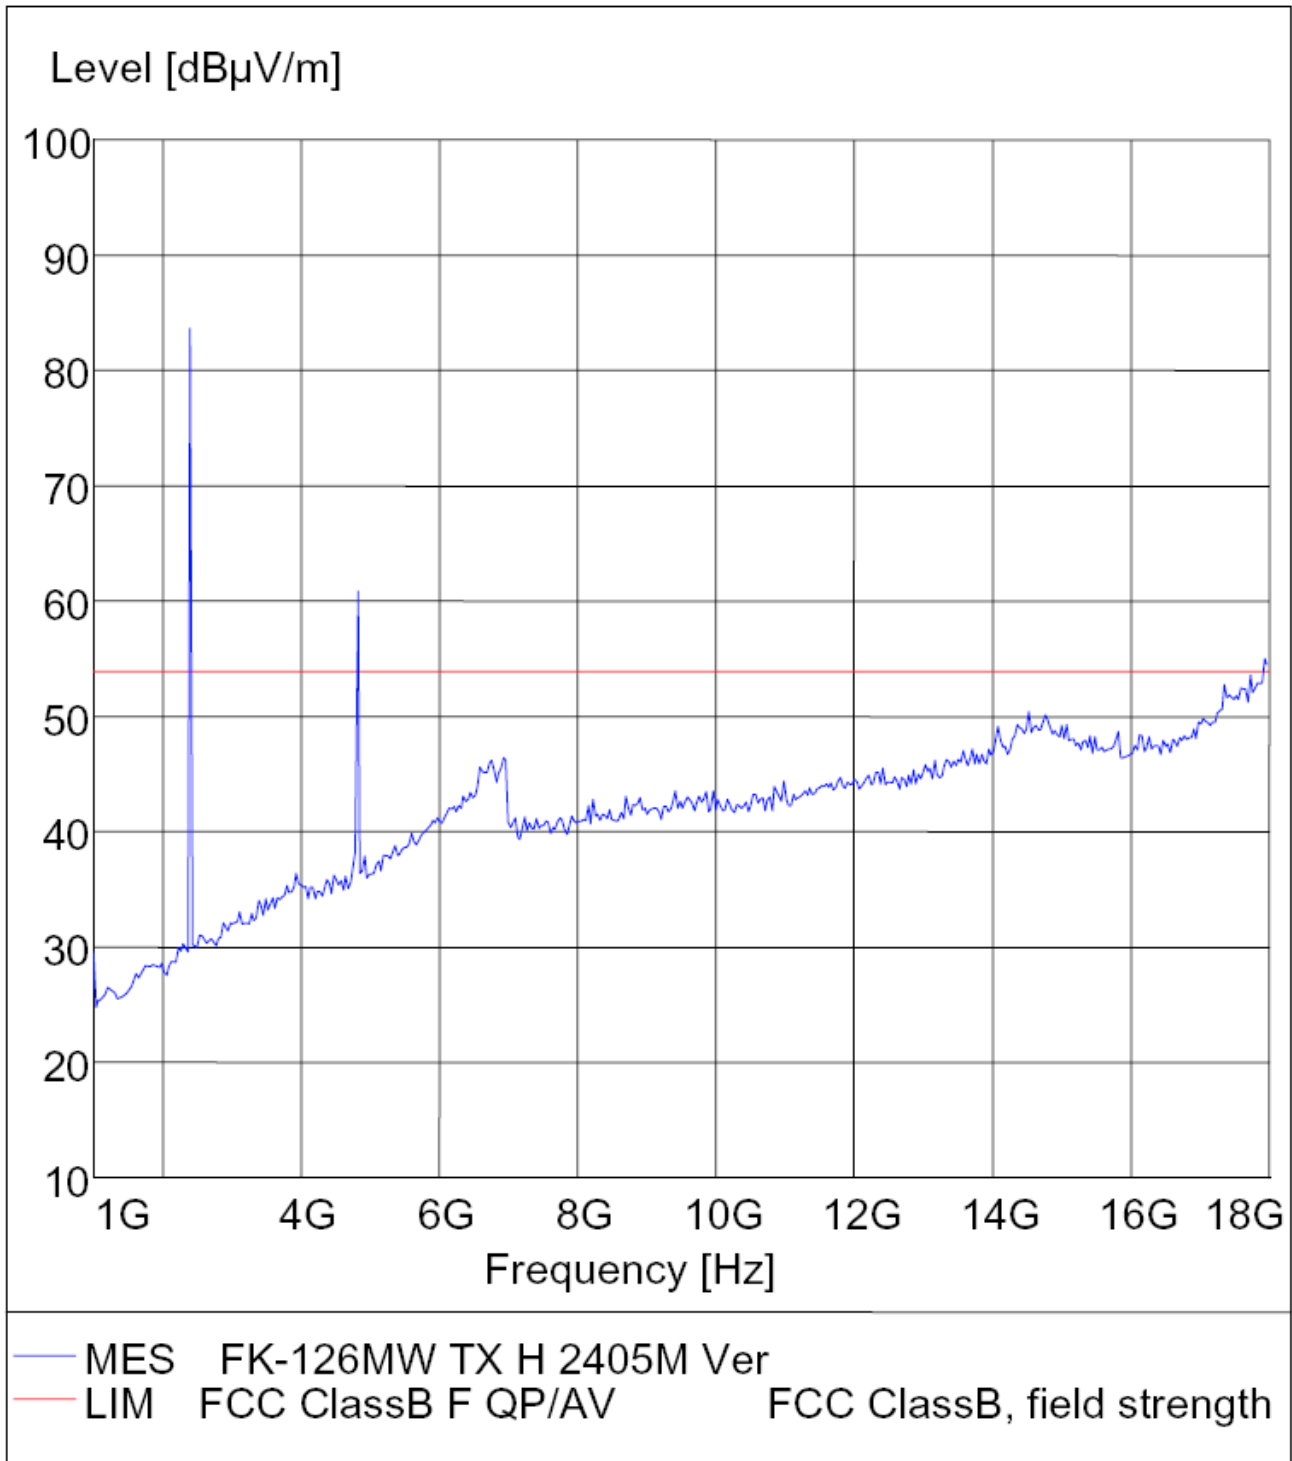

Radiated Disturbance

FCC Part 15


EUT: Wireless Silicone Keyboard M/N: FK-126MW
Manufacturer: Jinghong Industrial (Hong Kong) Co., Limited
Operating Condition: TX 2405MHz
Test Site: ATC EMC Lab.SAC
Operator: Andy
Test Specification: Horizontal
Comment: DC 3.0V

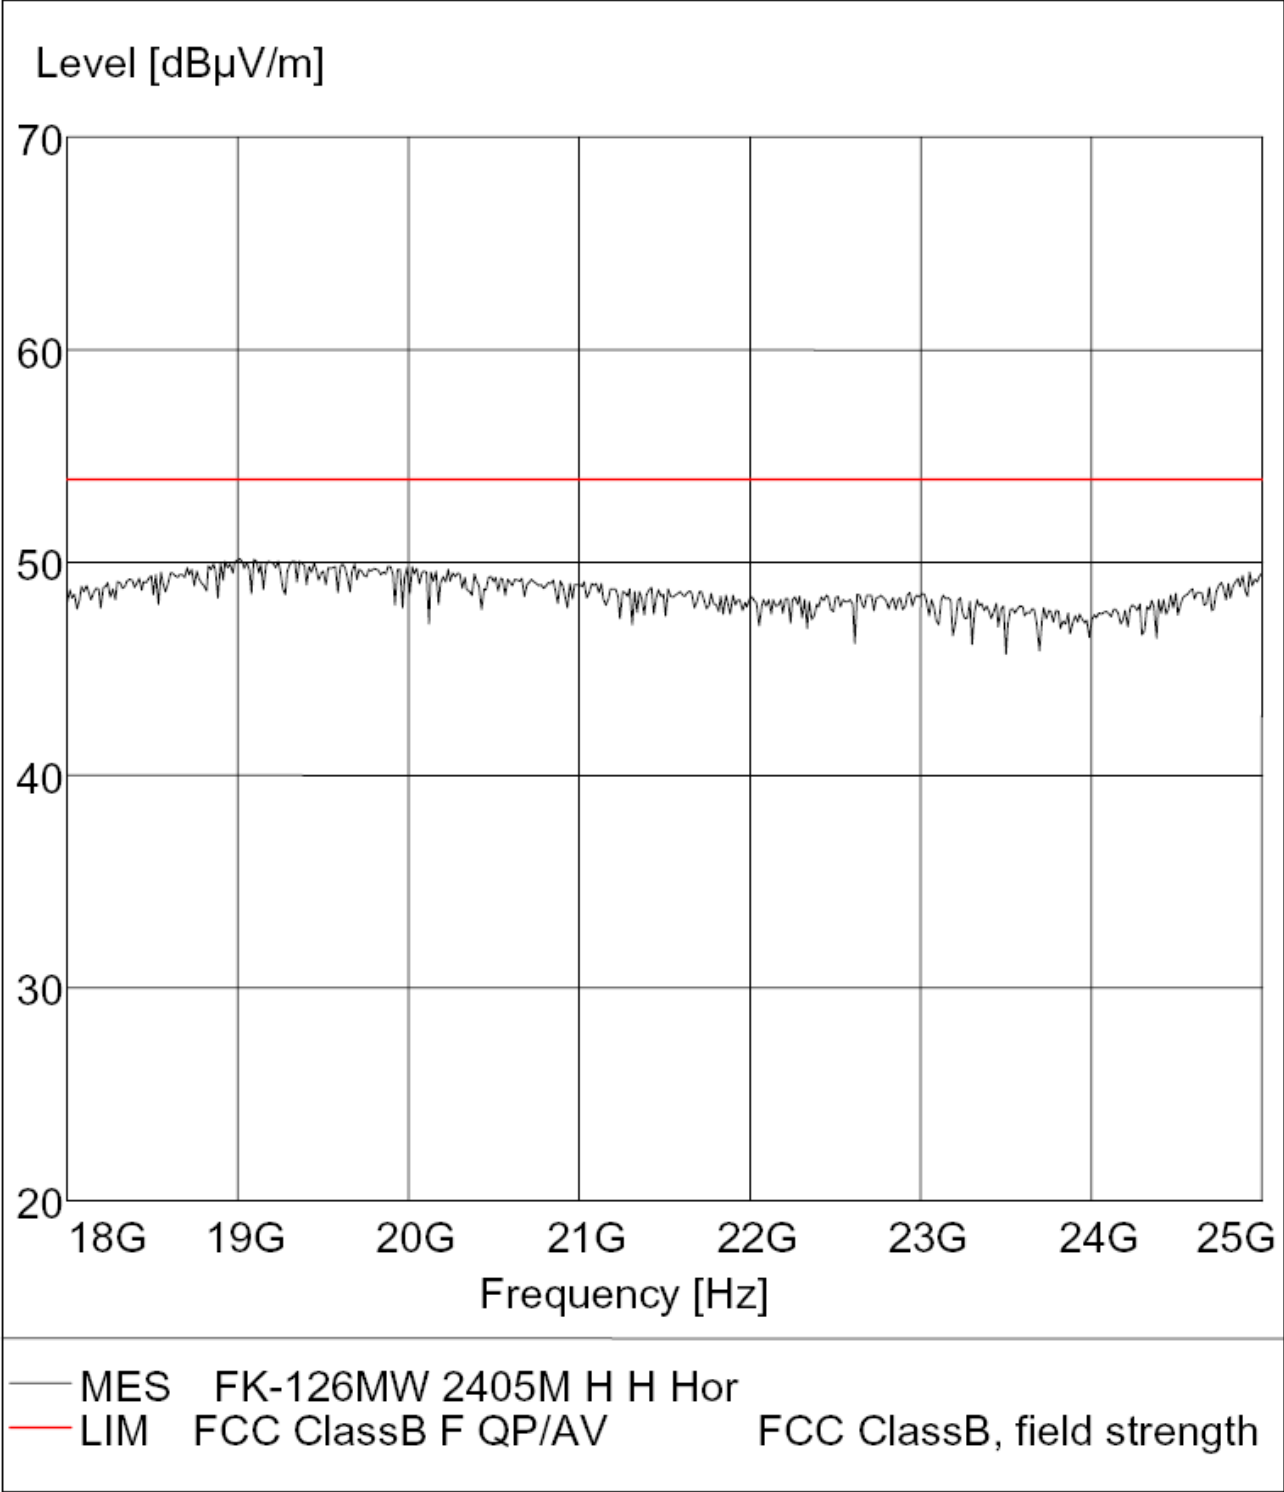

Radiated Disturbance

FCC Part 15


EUT: Wireless Silicone Keyboard M/N: FK-126MW
Manufacturer: Jinghong Industrial (Hong Kong) Co., Limited
Operating Condition: TX 2405MHz
Test Site: ATC EMC Lab.SAC
Operator: Andy
Test Specification: Vertical
Comment: DC 3.0V

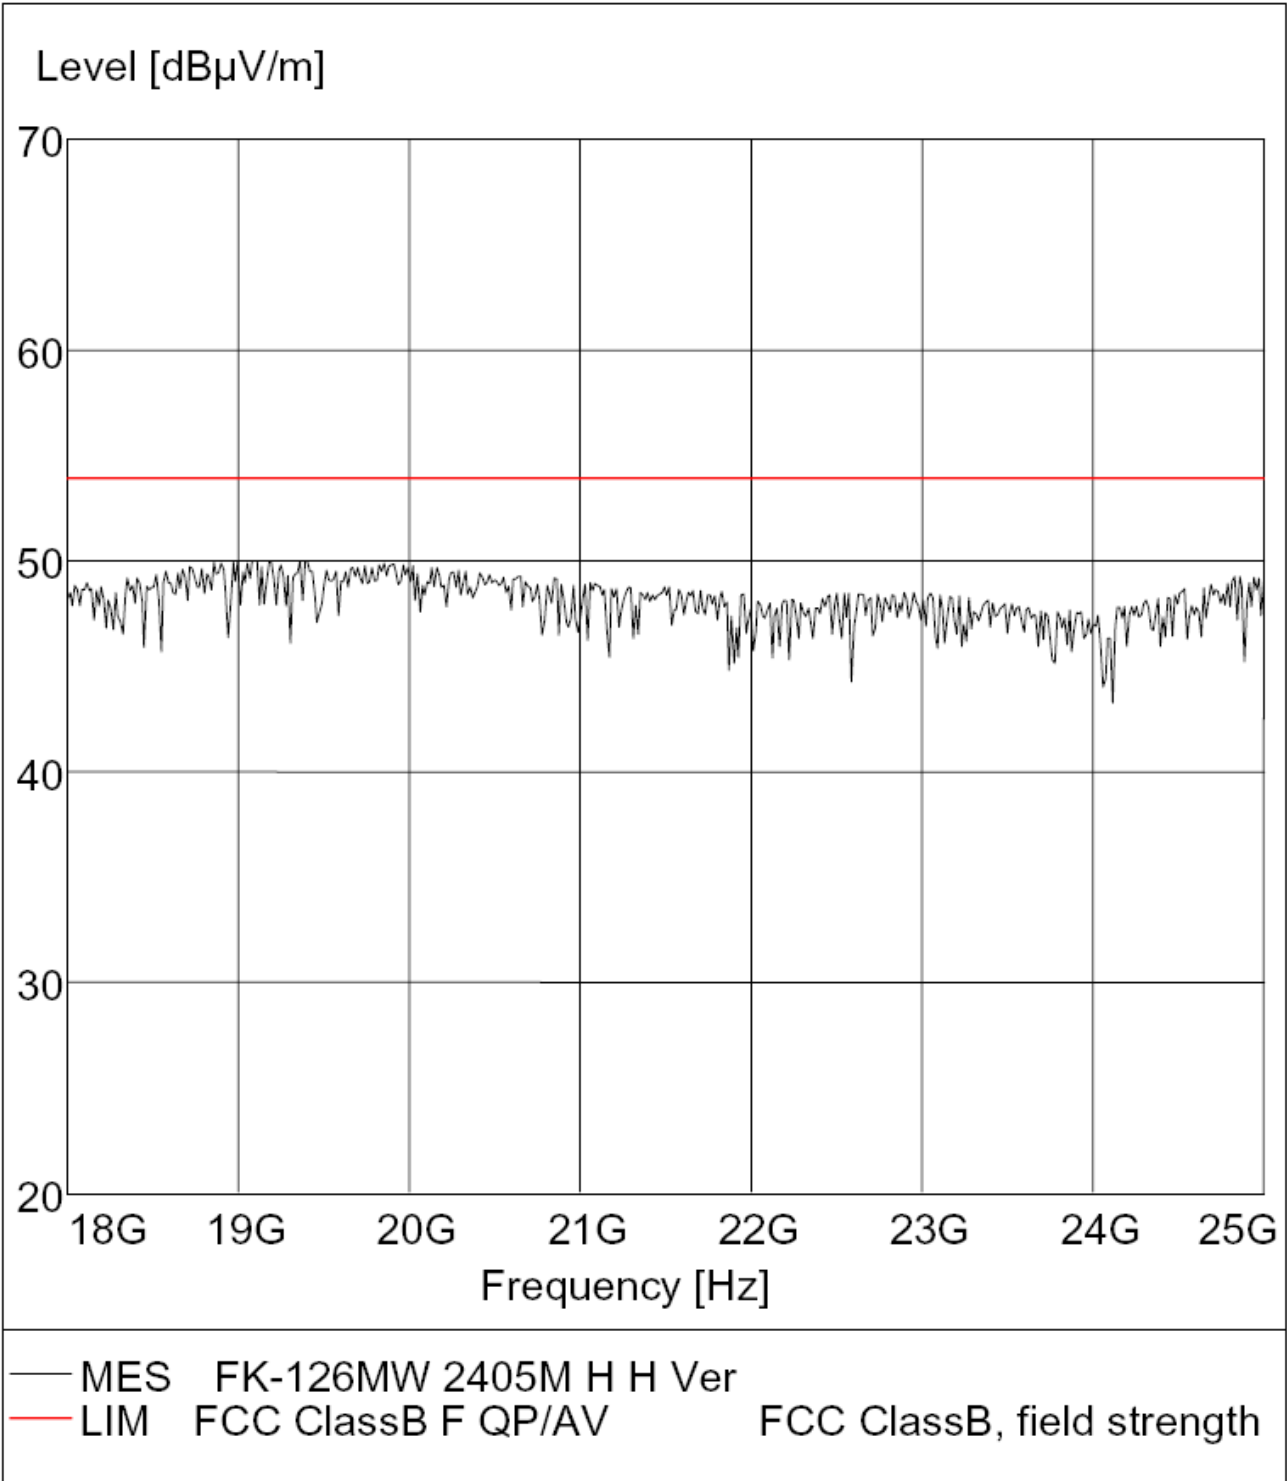

Radiated Disturbance

FCC Part 15


EUT: Wireless Silicone Keyboard M/N: FK-126MW
 Manufacturer: Jinghong Industrial (Hong Kong) Co., Limited
 Operating Condition: TX 2441MHz
 Test Site: ATC EMC Lab.SAC
 Operator: Andy
 Test Specification: Horizontal
 Comment : DC 3.0V

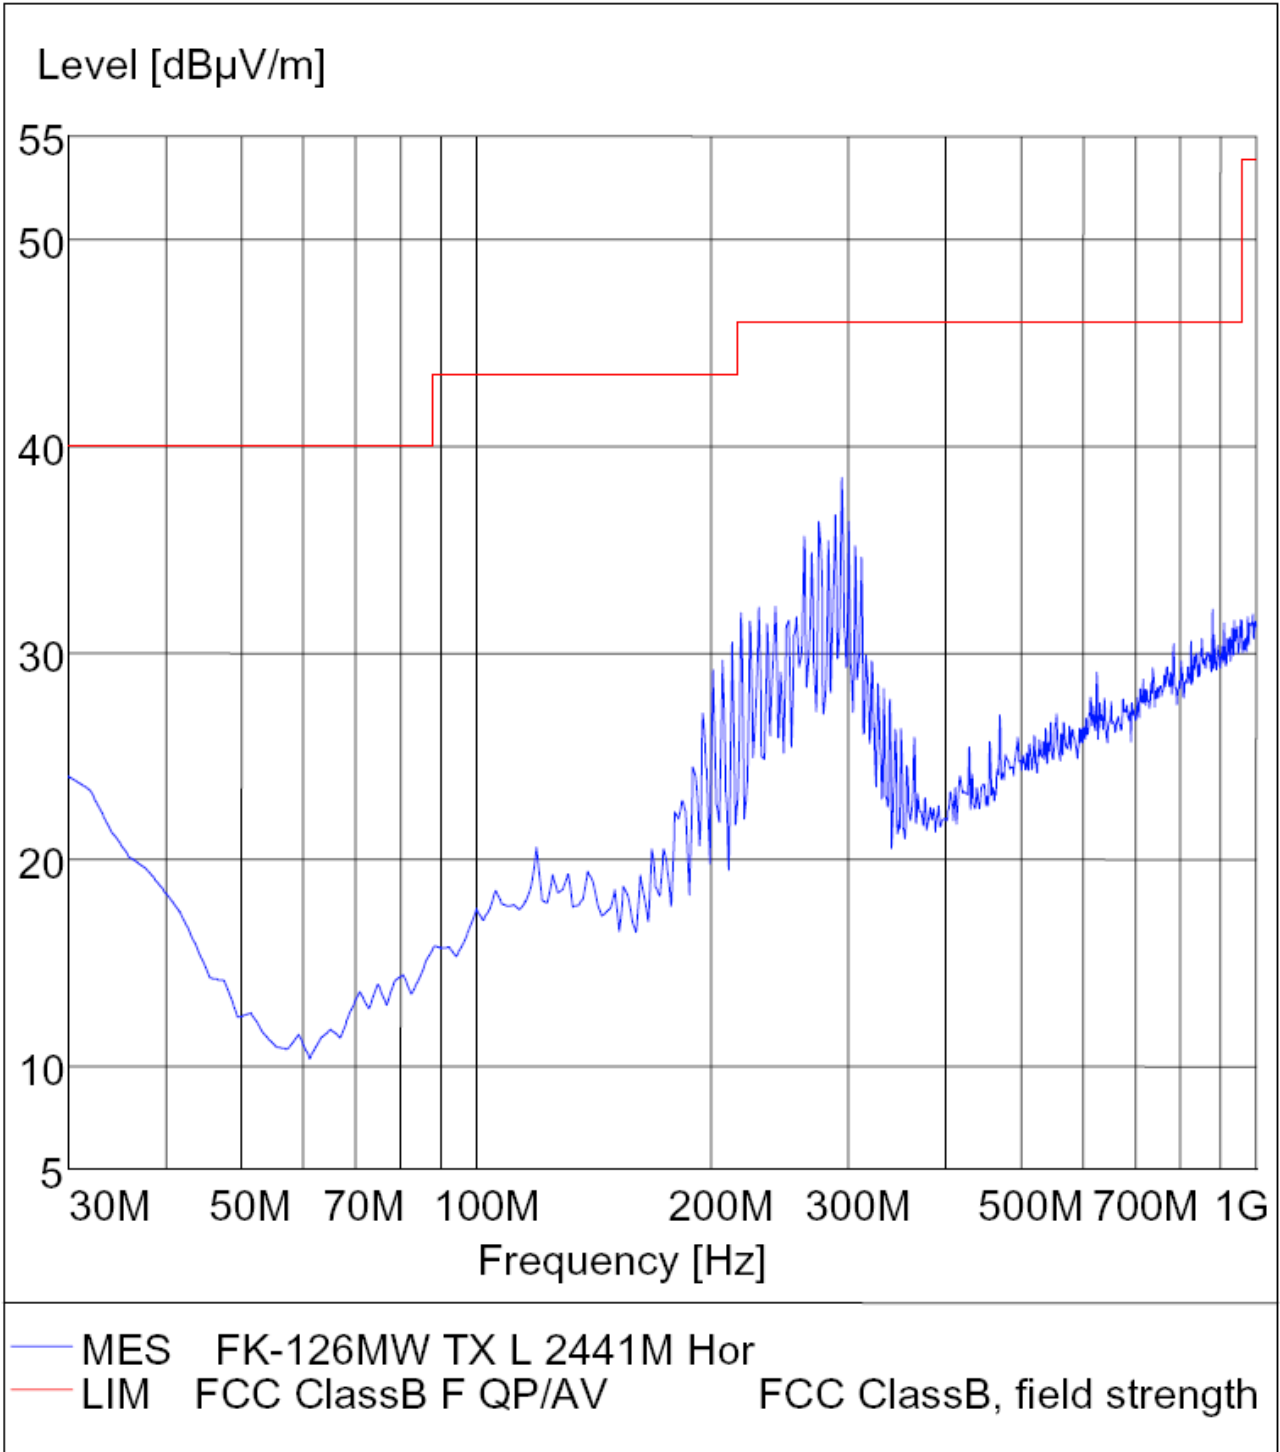

Radiated Disturbance

FCC Part 15


EUT: Wireless Silicone Keyboard M/N: FK-126MW
 Manufacturer: Jinghong Industrial (Hong Kong) Co., Limited
 Operating Condition: TX 2441MHz
 Test Site: ATC EMC Lab.SAC
 Operator: Andy
 Test Specification: Vertical
 Comment : DC 3.0V

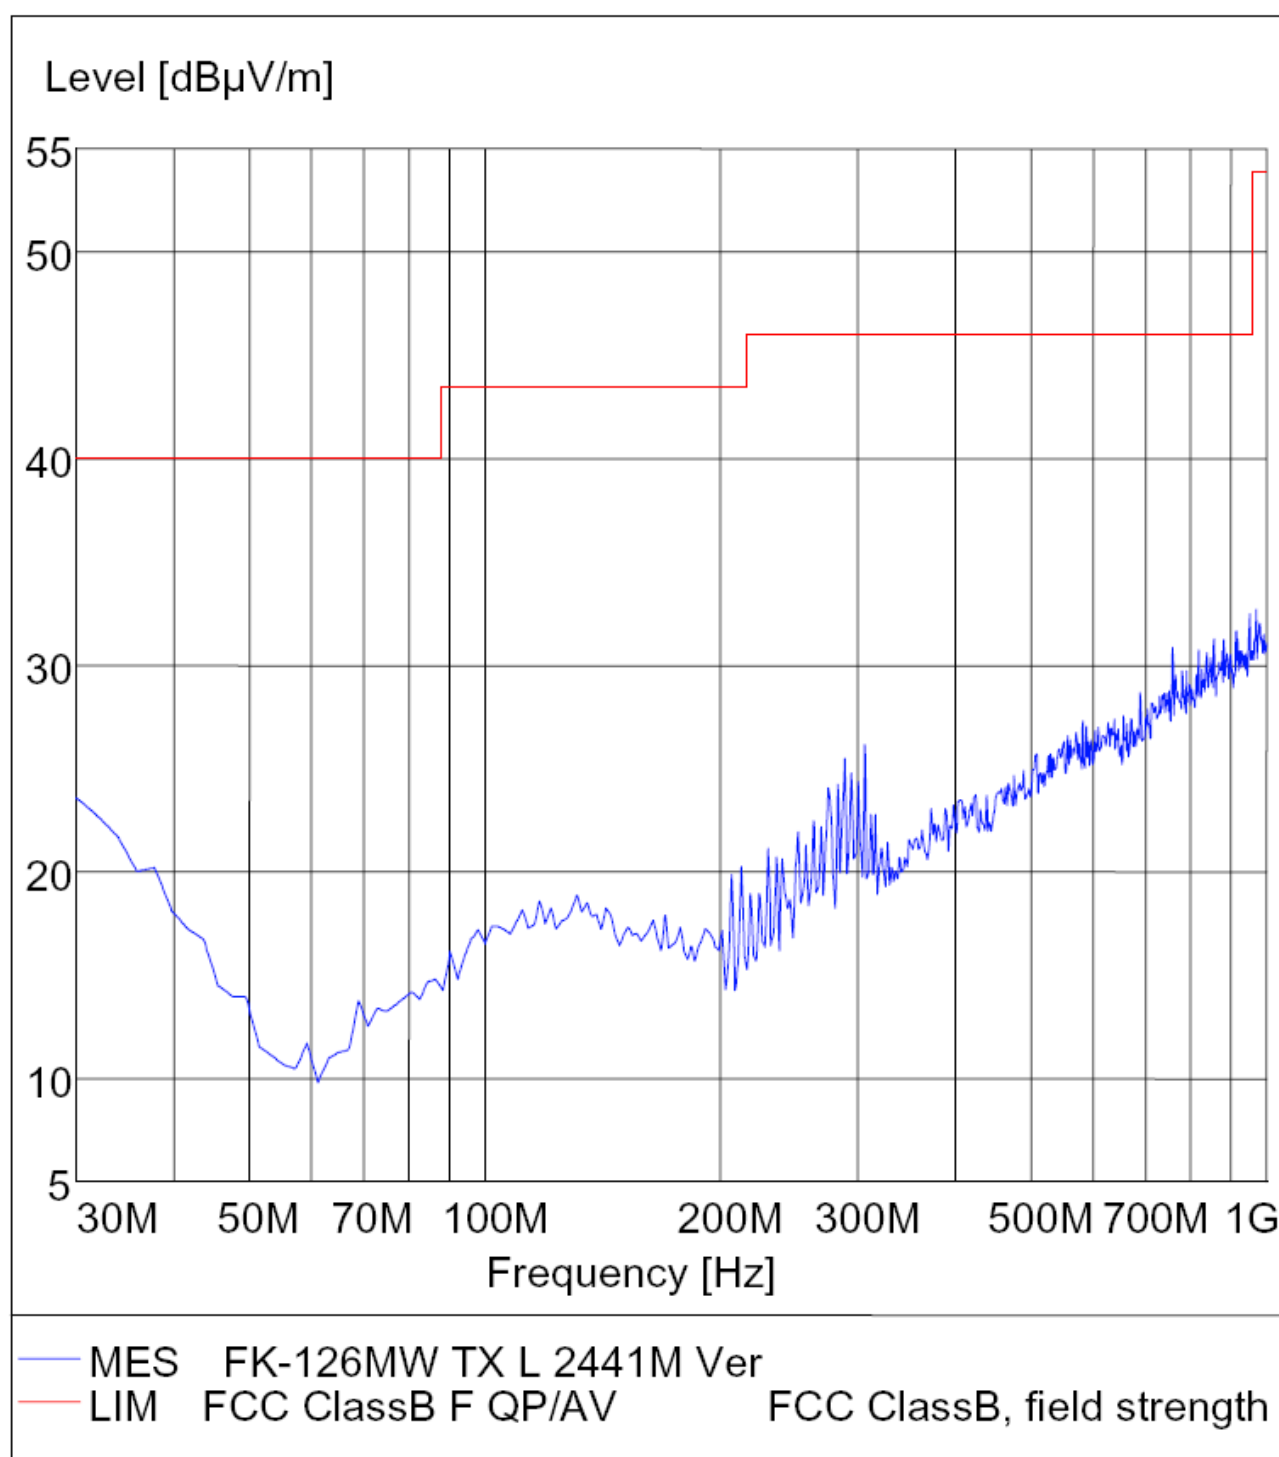

Radiated Disturbance

FCC Part 15


EUT: Wireless Silicone Keyboard M/N: FK-126MW
 Manufacturer: Jinghong Industrial (Hong Kong) Co., Limited
 Operating Condition: TX 2441MHz
 Test Site: ATC EMC Lab.SAC
 Operator: Andy
 Test Specification: Horizontal
 Comment: DC 3.0V

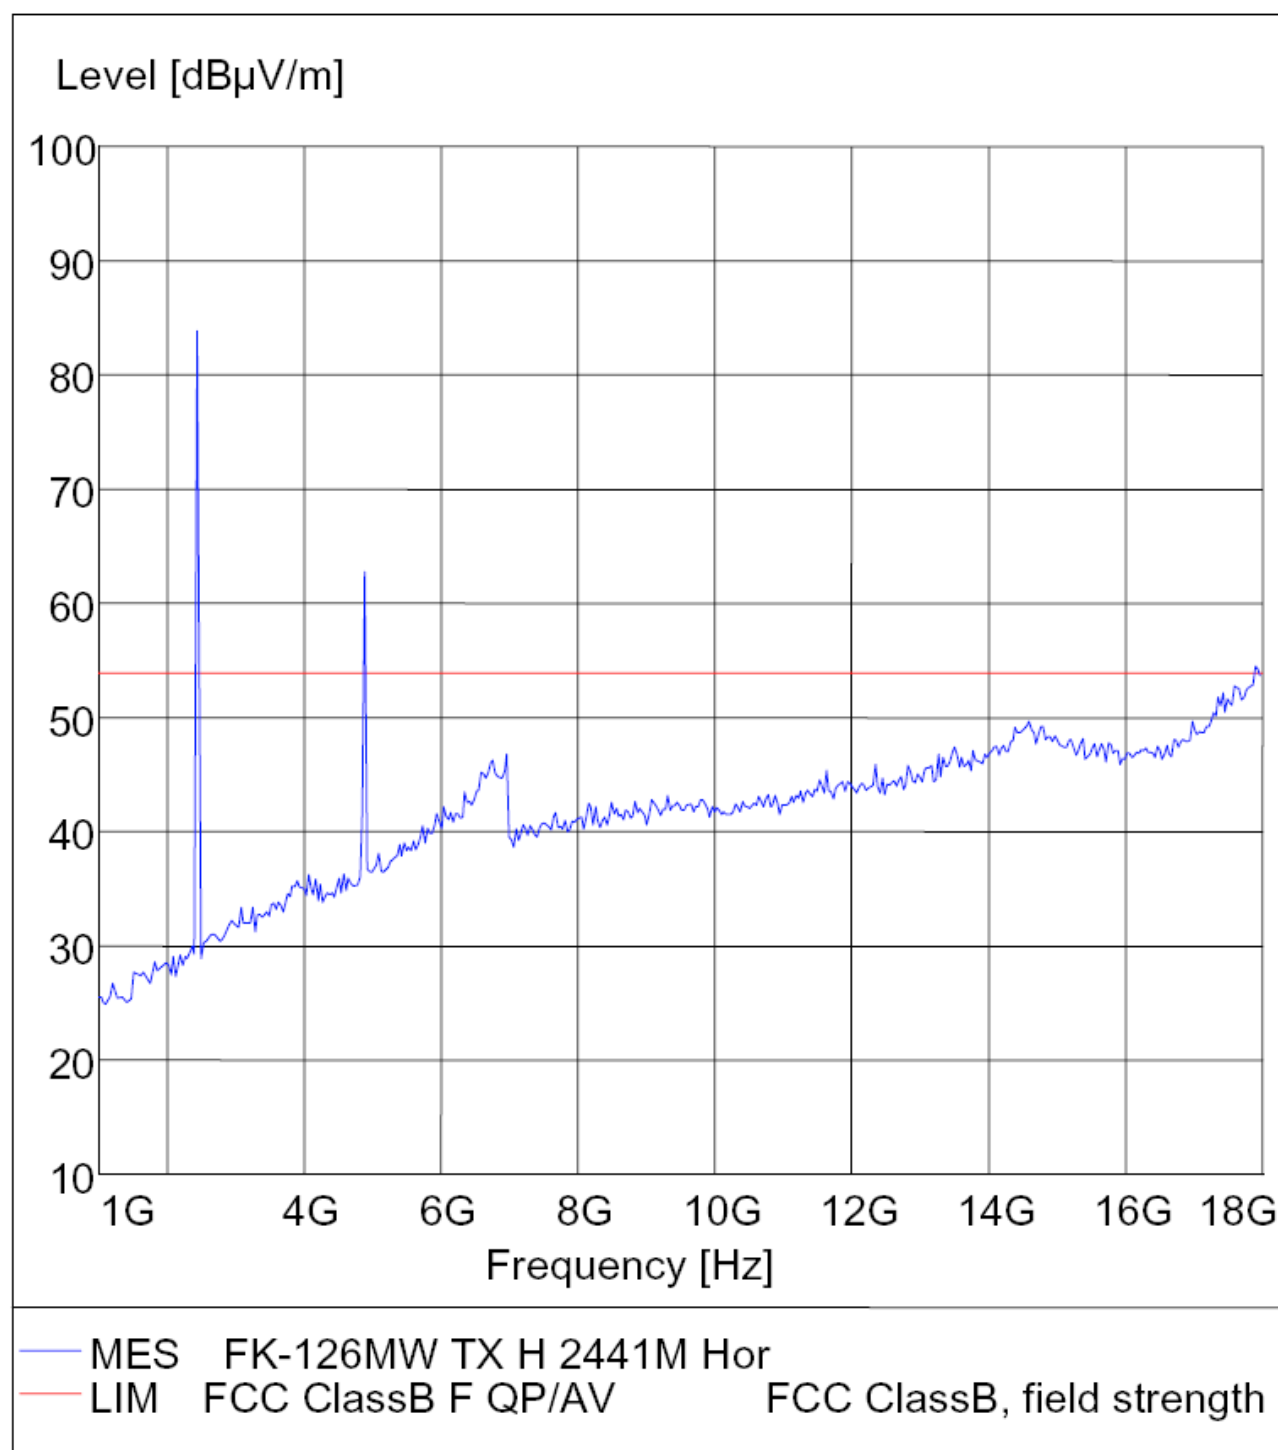

Radiated Disturbance

FCC Part 15


EUT: Wireless Silicone Keyboard M/N: FK-126MW
 Manufacturer: Jinghong Industrial (Hong Kong) Co., Limited
 Operating Condition: TX 2441MHz
 Test Site: ATC EMC Lab.SAC
 Operator: Andy
 Test Specification: Vertical
 Comment: DC 3.0V

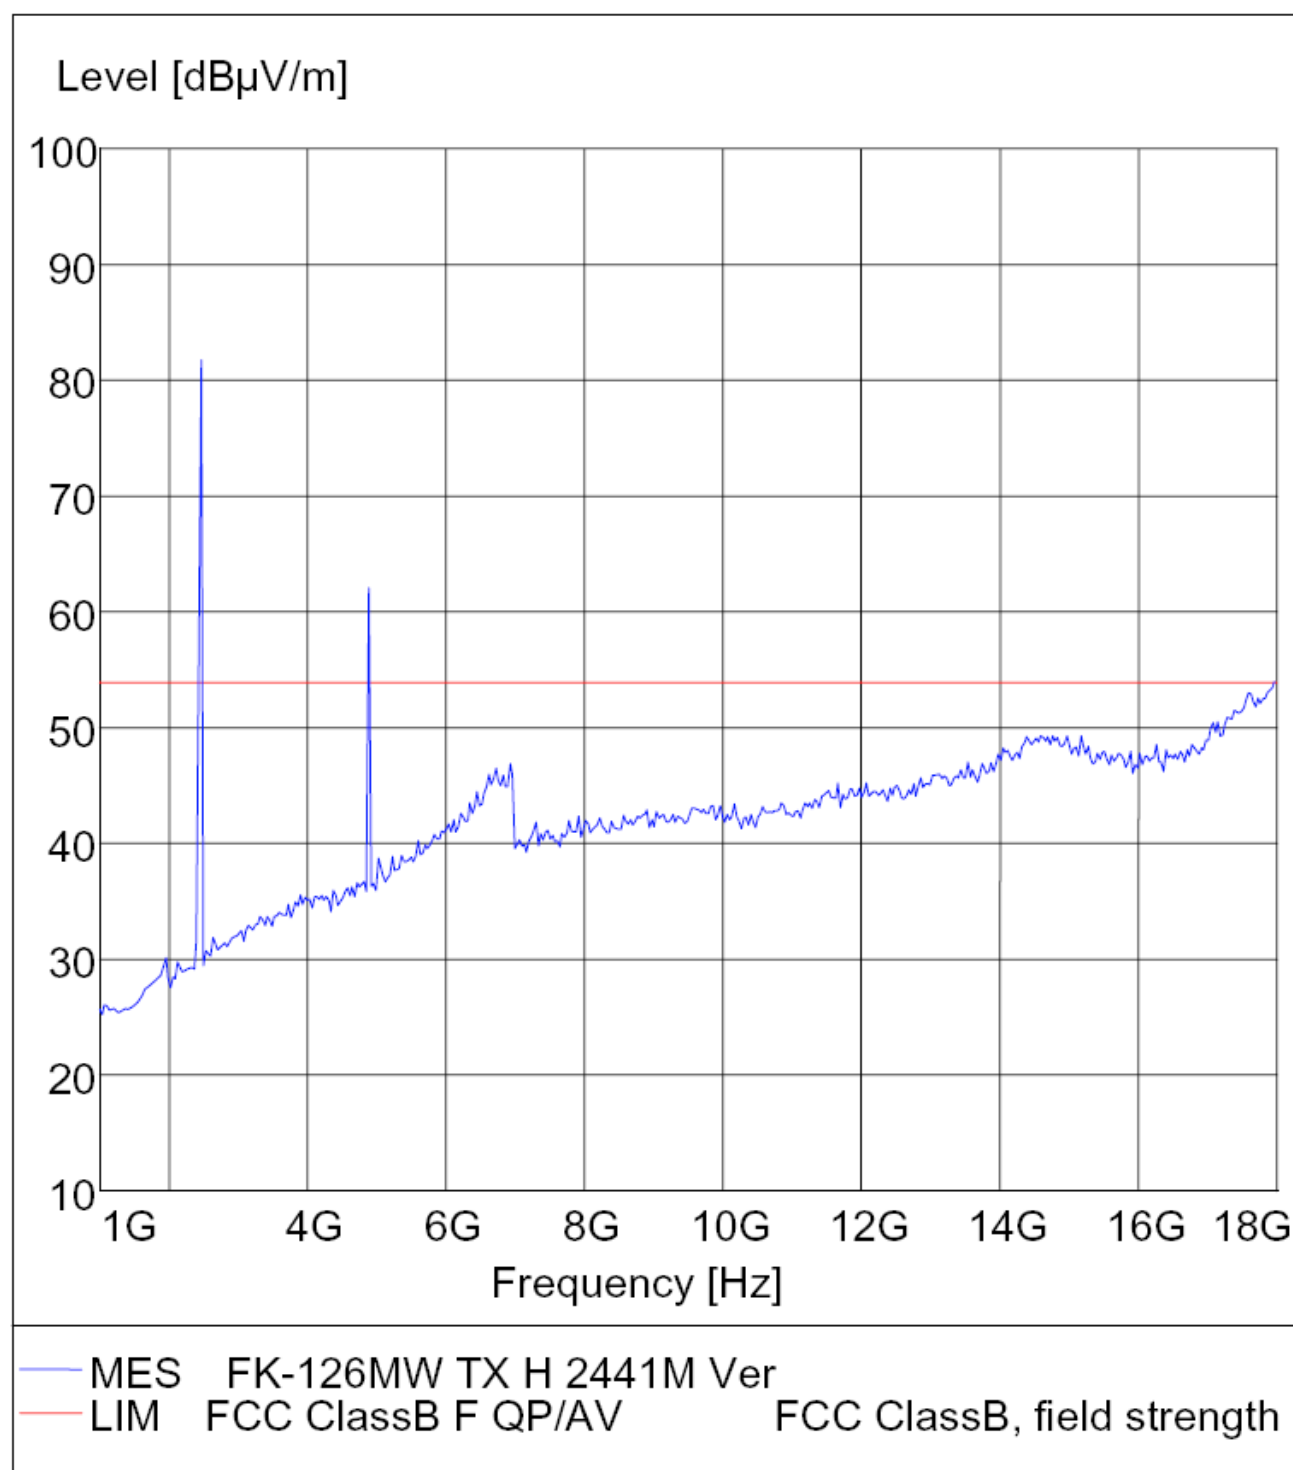

Radiated Disturbance

FCC Part 15


EUT: Wireless Silicone Keyboard M/N: FK-126MW
Manufacturer: Jinghong Industrial (Hong Kong) Co., Limited
Operating Condition: TX 2441MHz
Test Site: ATC EMC Lab.SAC
Operator: Andy
Test Specification: Horizontal
Comment: DC 3.0V

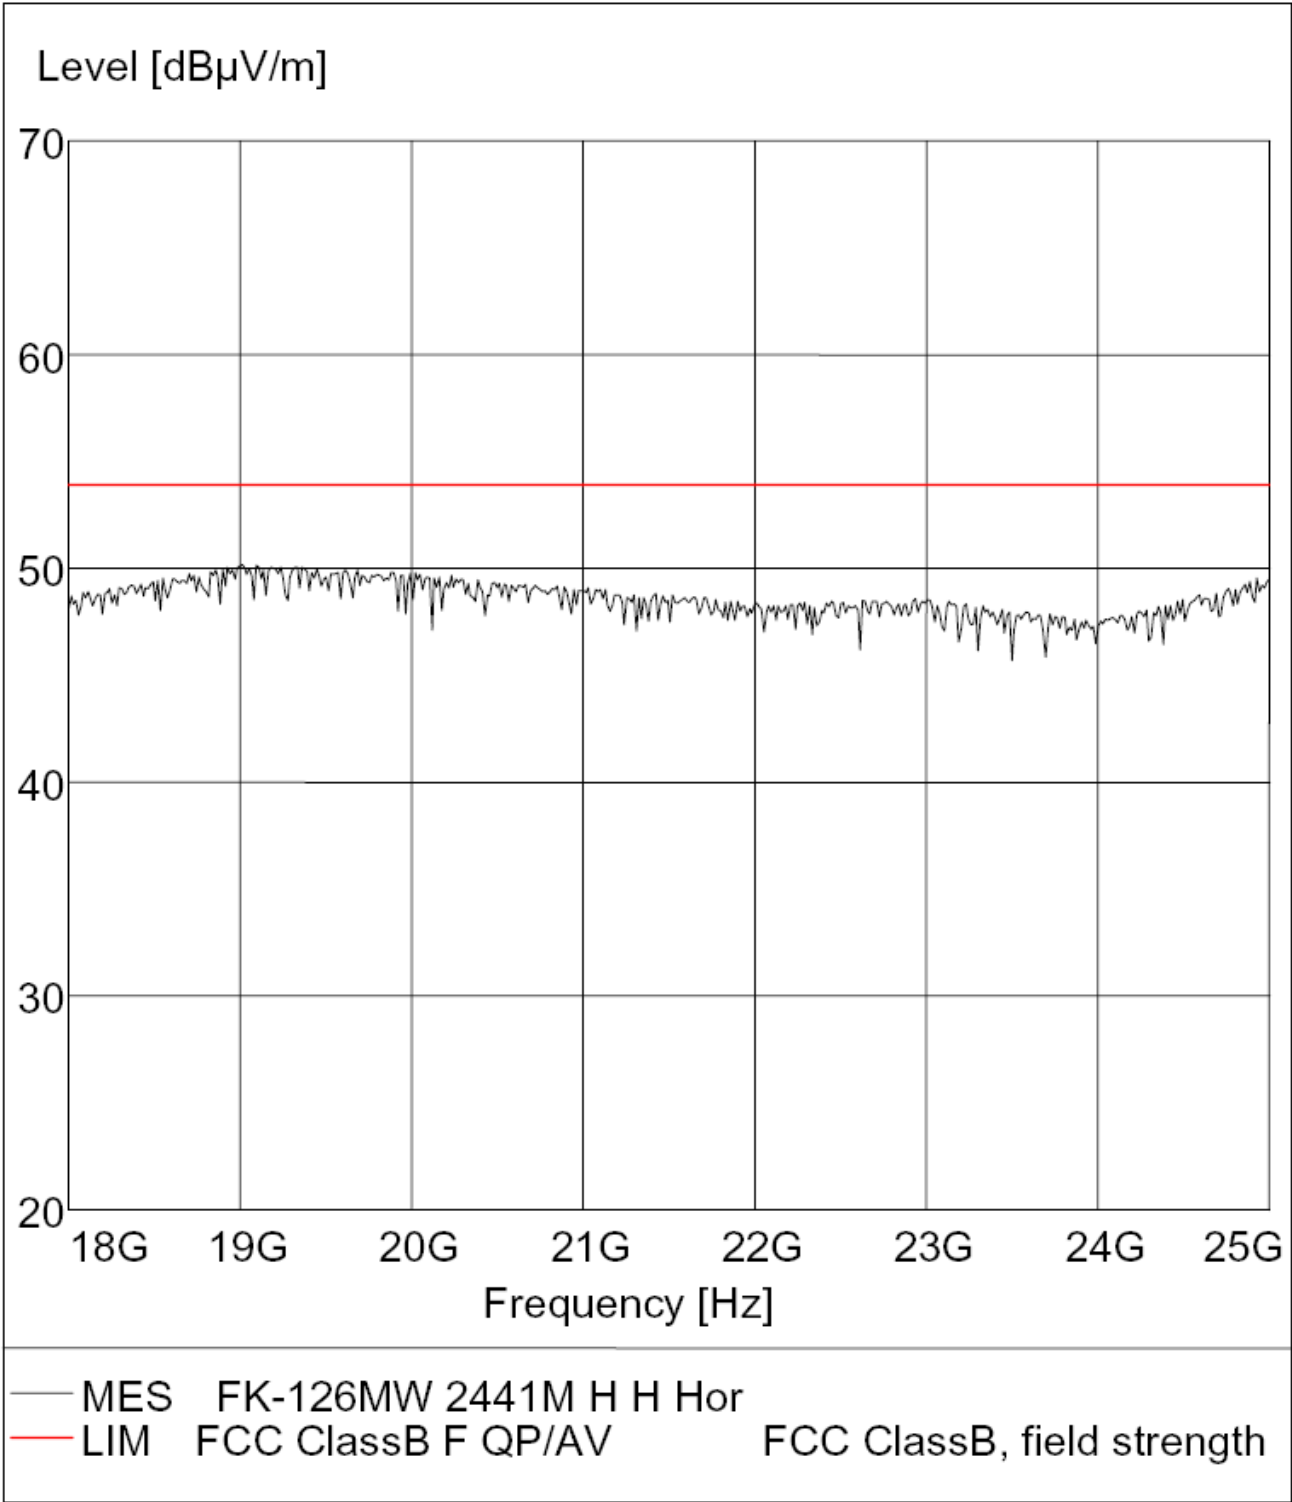

Radiated Disturbance

FCC Part 15


EUT: Wireless Silicone Keyboard M/N: FK-126MW
Manufacturer: Jinghong Industrial (Hong Kong) Co., Limited
Operating Condition: TX 2441MHz
Test Site: ATC EMC Lab.SAC
Operator: Andy
Test Specification: Vertical
Comment: DC 3.0V

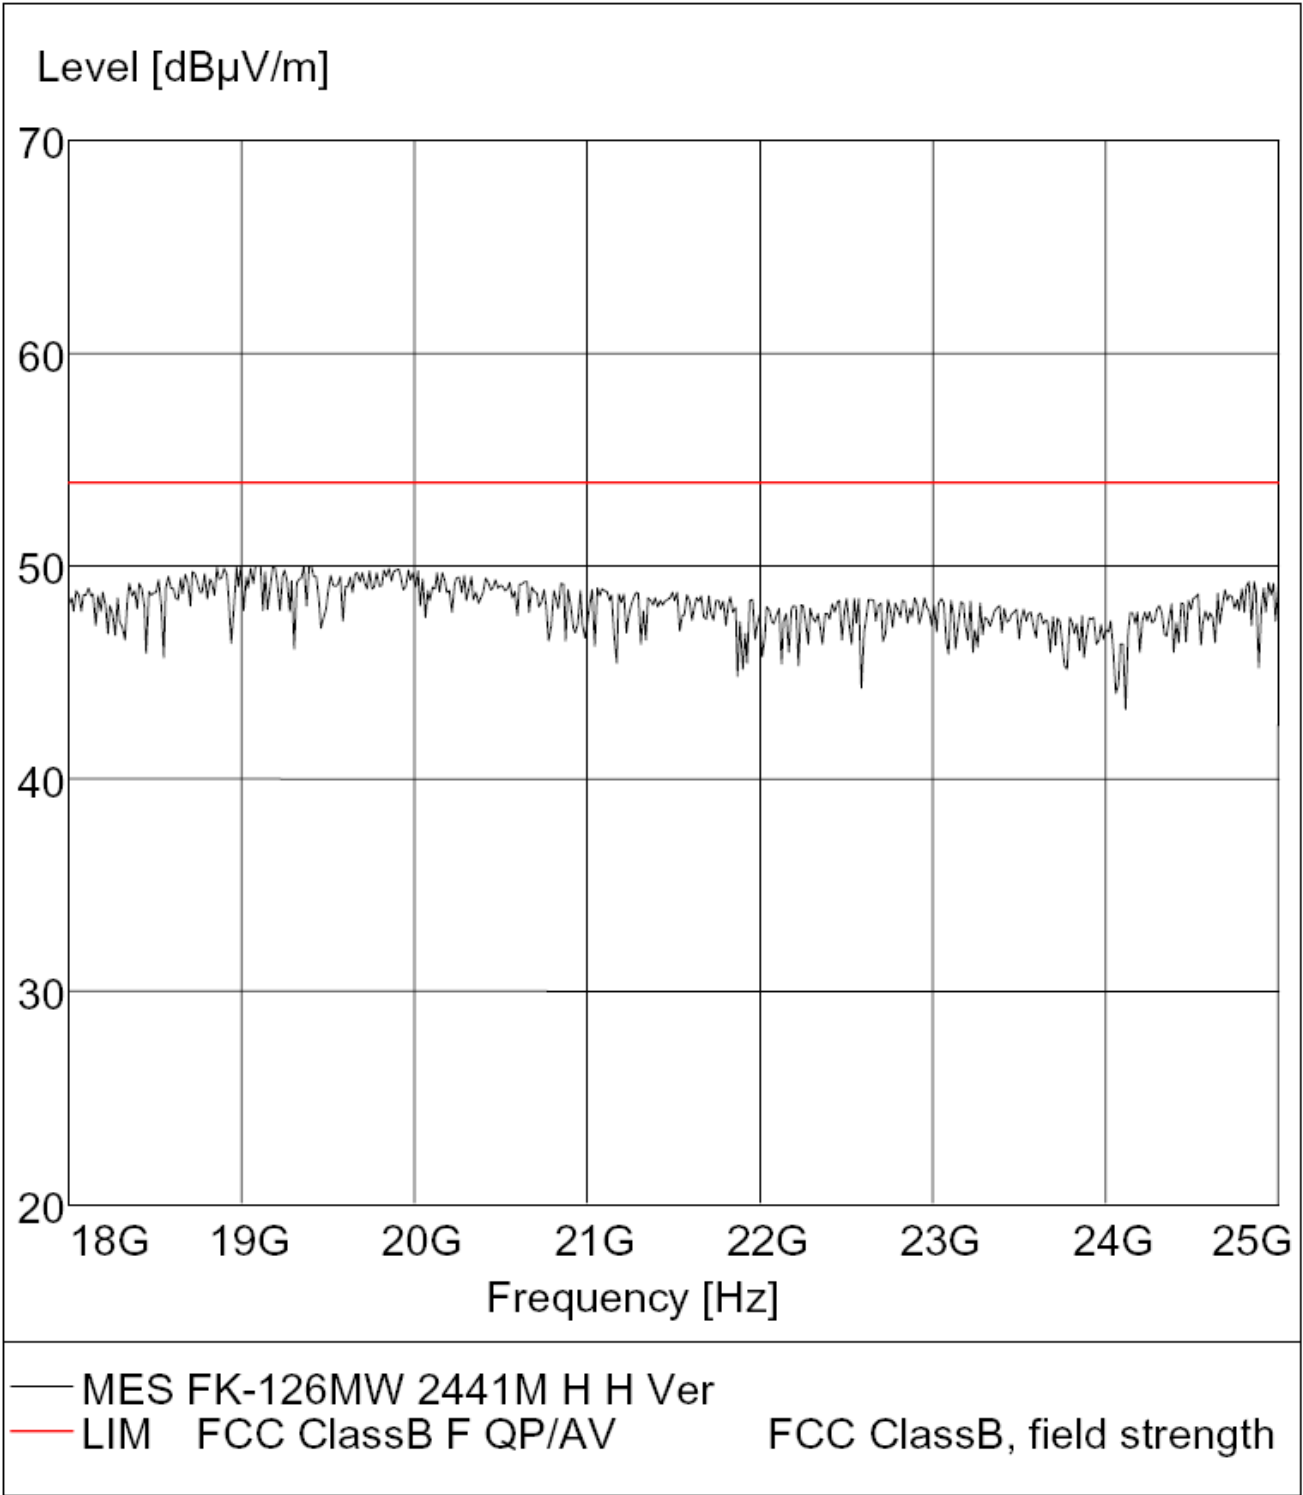

Radiated Disturbance

FCC Part 15


EUT: Wireless Silicone Keyboard M/N: FK-126MW
 Manufacturer: Jinghong Industrial (Hong Kong) Co., Limited
 Operating Condition: TX 2477MHz
 Test Site: ATC EMC Lab.SAC
 Operator: Andy
 Test Specification: Horizontal
 Comment : DC 3.0V

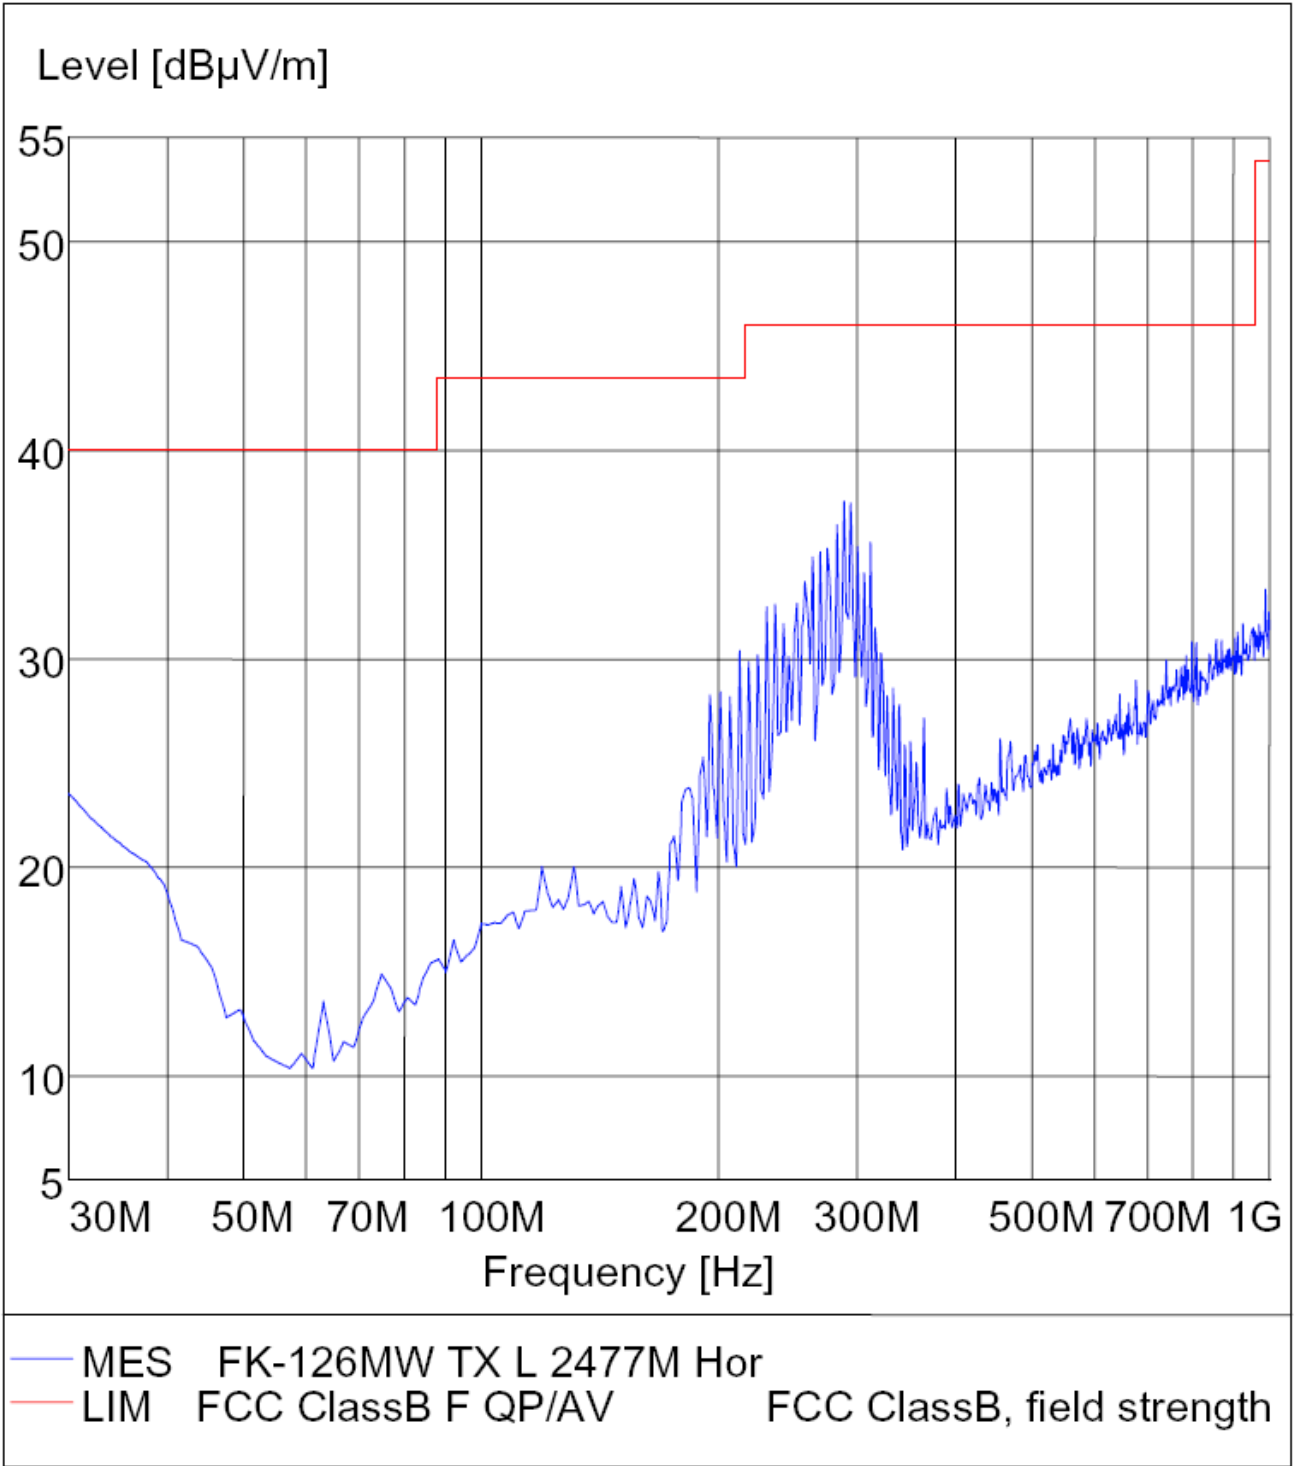

Radiated Disturbance

FCC Part 15


EUT: Wireless Silicone Keyboard M/N: FK-126MW
Manufacturer: Jinghong Industrial (Hong Kong) Co., Limited
Operating Condition: TX 2477MHz
Test Site: ATC EMC Lab.SAC
Operator: Andy
Test Specification: Vertical
Comment : DC 3.0V

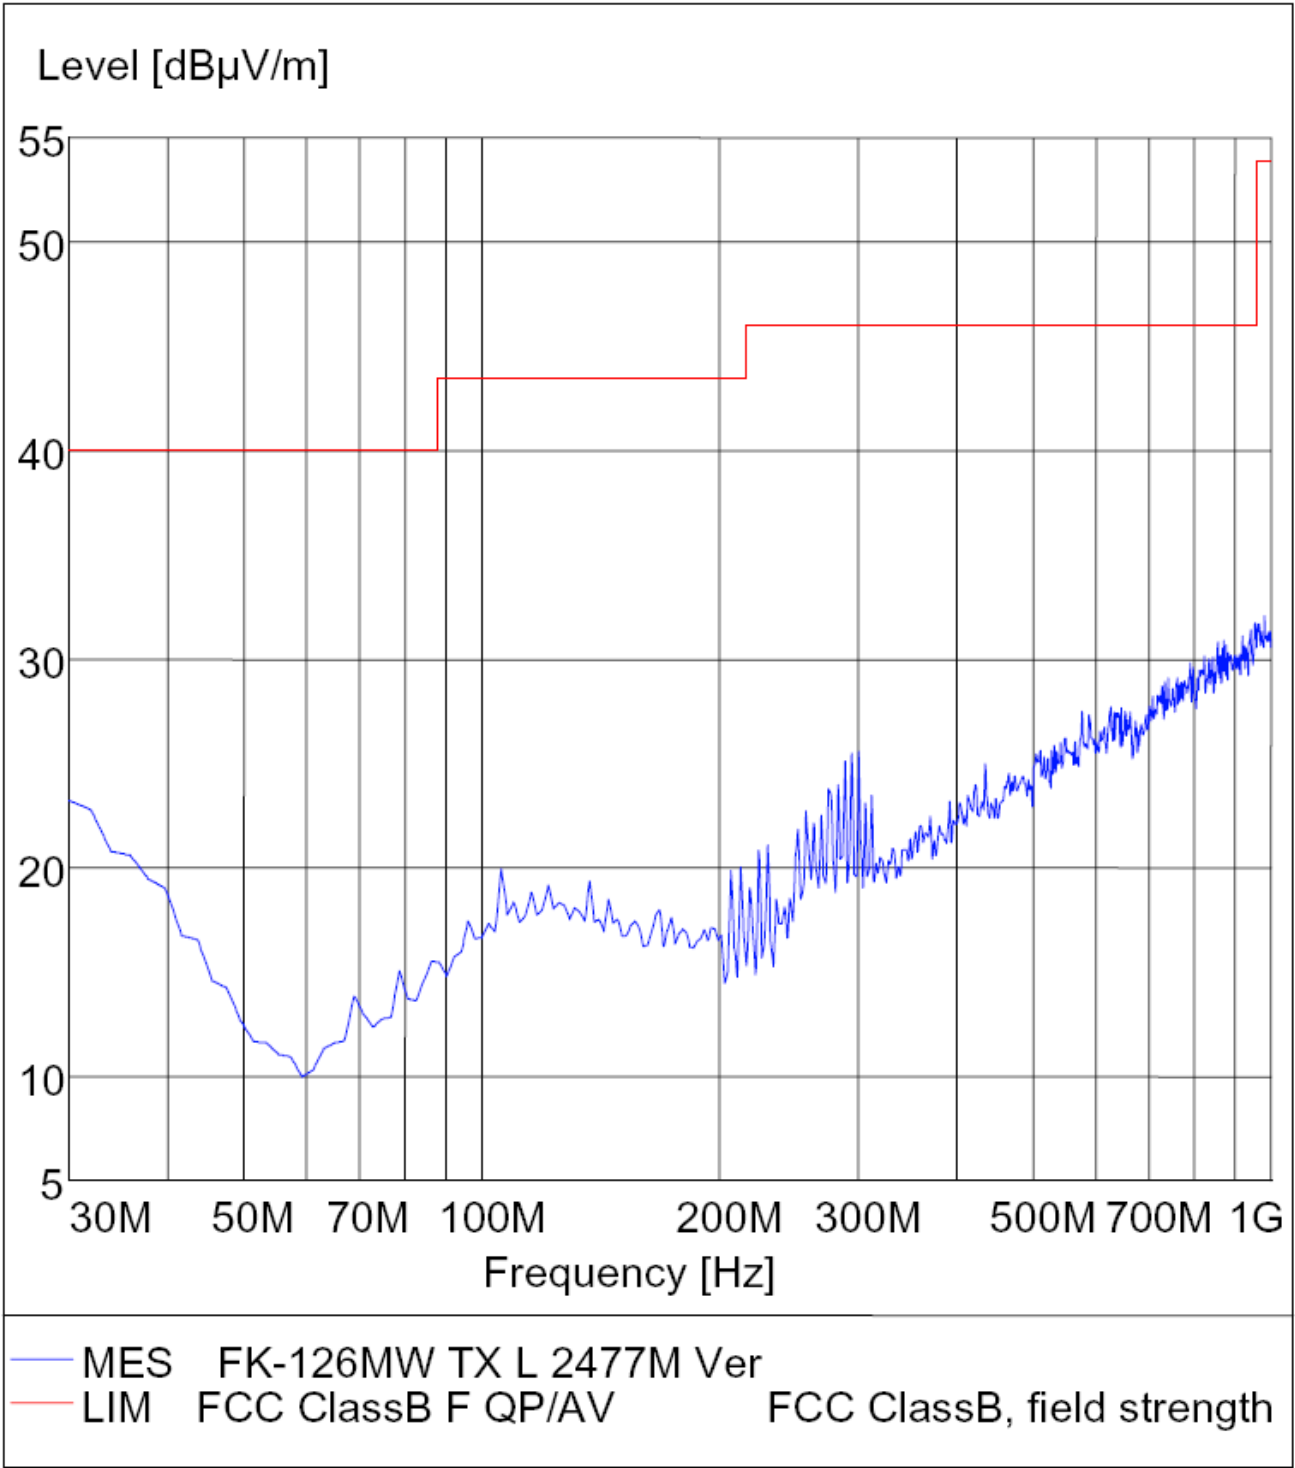

Radiated Disturbance

FCC Part 15


EUT: Wireless Silicone Keyboard M/N: FK-126MW
 Manufacturer: Jinghong Industrial (Hong Kong) Co., Limited
 Operating Condition: TX 2477MHz
 Test Site: ATC EMC Lab.SAC
 Operator: Andy
 Test Specification: Horizontal
 Comment: DC 3.0V

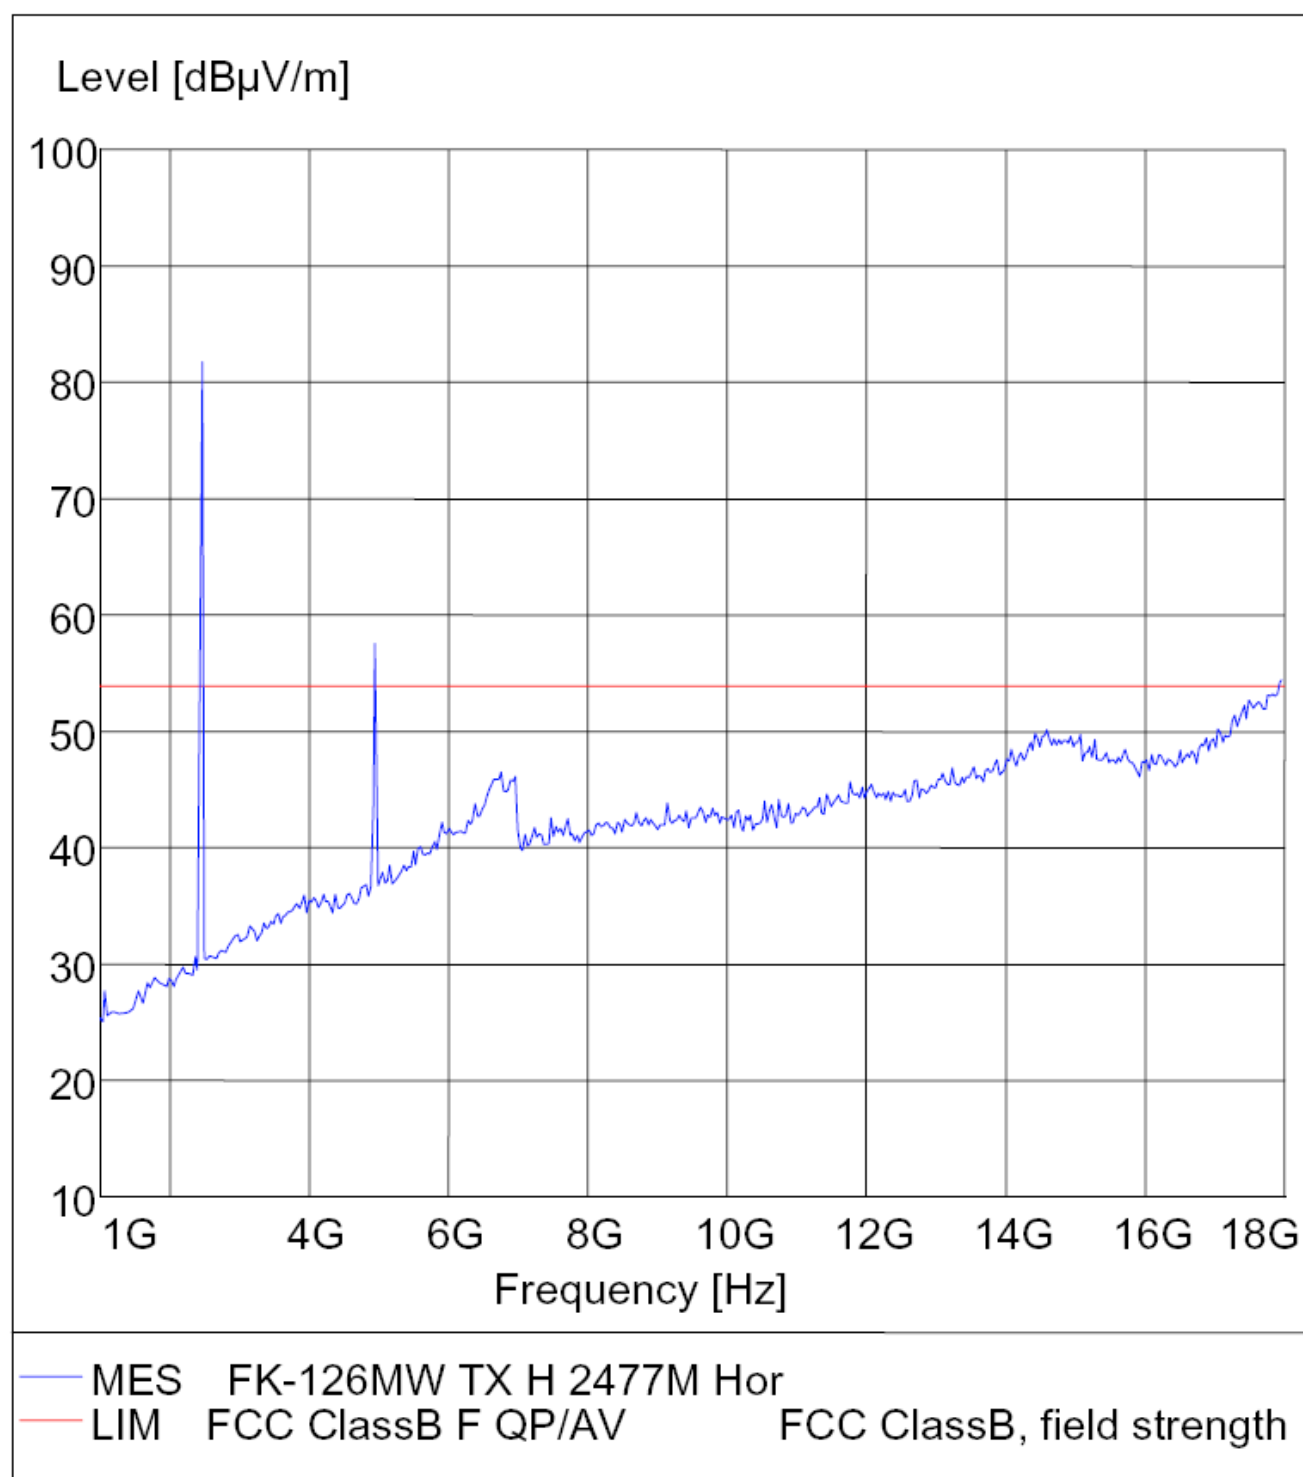

Radiated Disturbance

FCC Part 15


EUT: Wireless Silicone Keyboard M/N: FK-126MW
 Manufacturer: Jinghong Industrial (Hong Kong) Co., Limited
 Operating Condition: TX 2477MHz
 Test Site: ATC EMC Lab.SAC
 Operator: Andy
 Test Specification: Vertical
 Comment: DC 3.0V

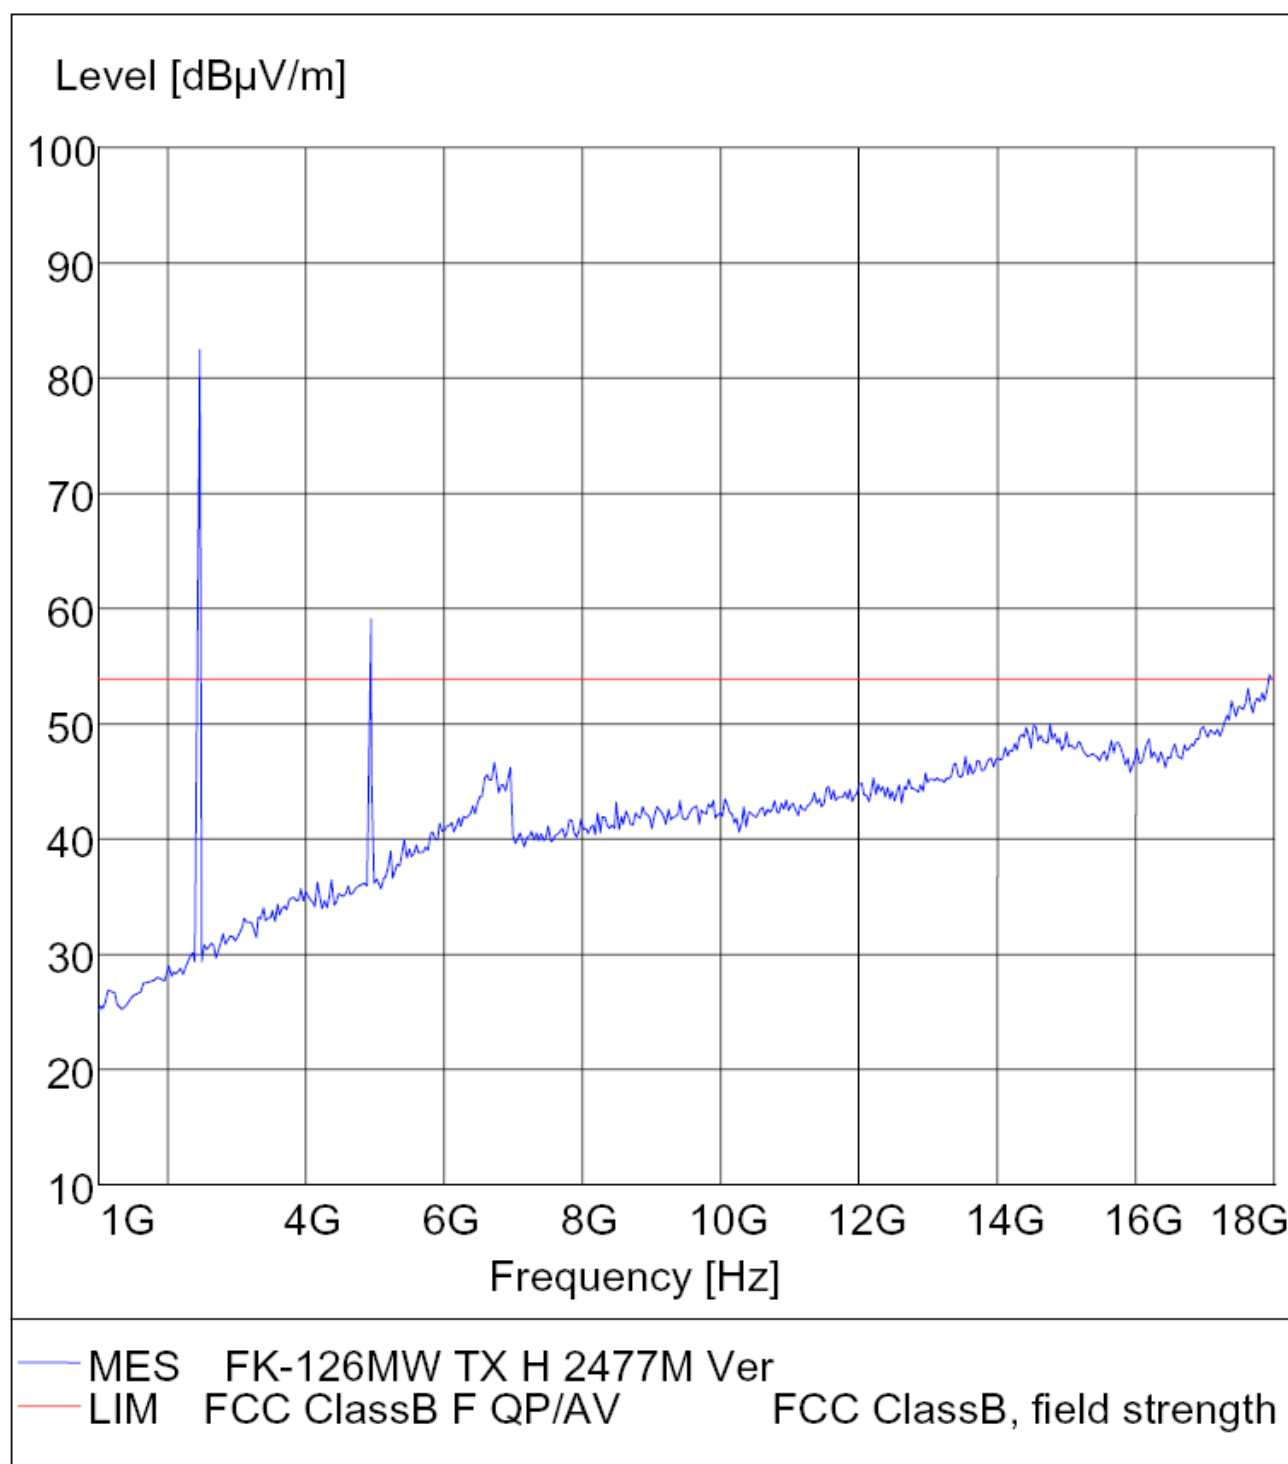

Radiated Disturbance

FCC Part 15

EUT: Wireless Silicone Keyboard M/N: FK-126MW
Manufacturer: Jinghong Industrial (Hong Kong) Co., Limited
Operating Condition: TX 2477MHz
Test Site: ATC EMC Lab.SAC
Operator: Andy
Test Specification: Horizontal
Comment: DC 3.0V

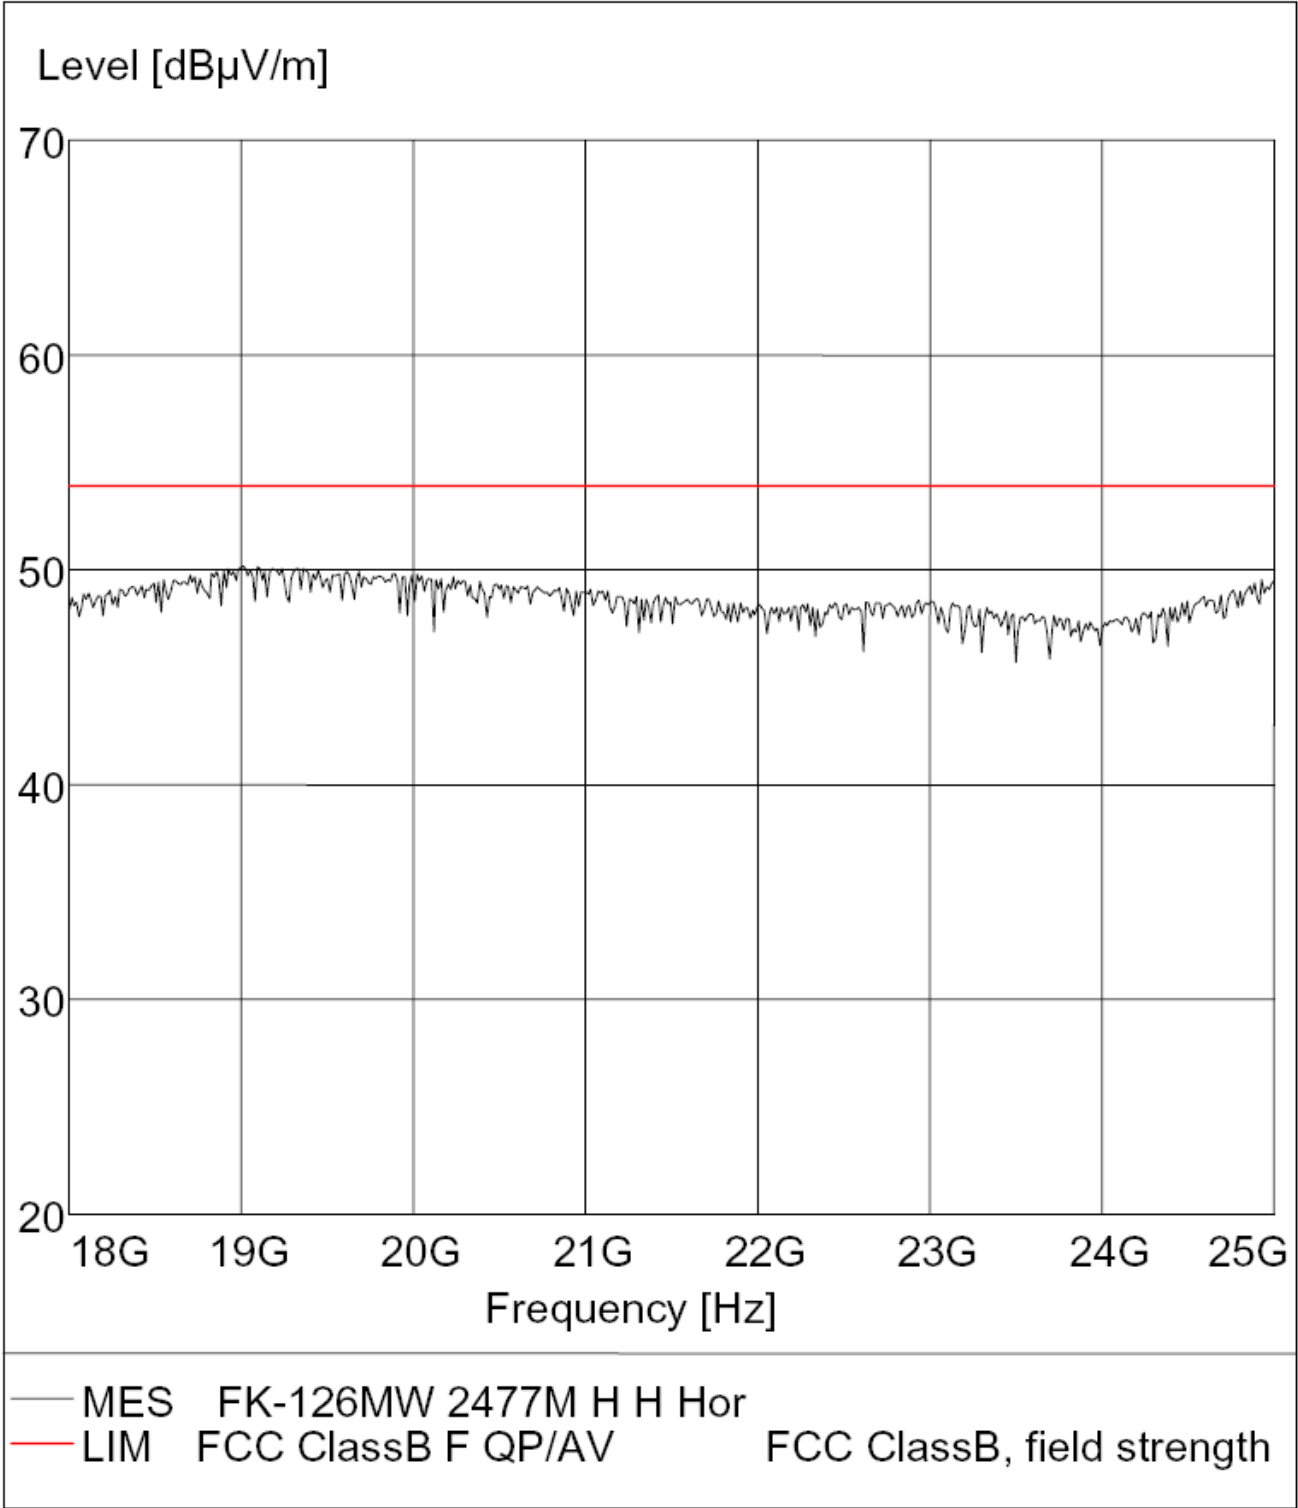

Radiated Disturbance**FCC Part 15**

EUT: Wireless Silicone Keyboard M/N: FK-126MW
 Manufacturer: Jinghong Industrial (Hong Kong) Co., Limited
 Operating Condition: TX 2477MHz
 Test Site: ATC EMC Lab.SAC
 Operator: Andy
 Test Specification: Vertical
 Comment: DC 3.0V

