

FCC TEST REPORT

FCC ID : VPOFLYSKYGT3

Applicant : DONG GUAN CITY FLYSKY REMOTE MODEL CO., LTD

Address of Applicant : Unit 2504, 25/F, Nanyang Plaza ,No. 57, Hung To Road
Kwun Tong, Kowloon Hongkong

Equipment Under Test (EUT) :

Product description : 3 Channel Gun Radio


Modulation :GFSK

Model No. : FS-GT3

Standards : FCC 15 Paragraph 15.247

Date of Test : July 29,2009

Test Engineer : zero zhou

Reviewed By : 

PERPARED BY:

Waltek Services (Shenzhen) Co., Ltd.

1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District, Shenzhen
518105, China

Tel :+86-755-27553488

Fax:+86-755-27553868

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS.....	2
3 TEST SUMMARY.....	4
4 GENERAL INFORMATION.....	5
4.1 CLIENT INFORMATION	5
4.2 GENERAL DESCRIPTION OF E.U.T.....	5
4.3 DETAILS OF E.U.T.	5
4.4 DESCRIPTION OF SUPPORT UNITS	5
4.5 STANDARDS APPLICABLE FOR TESTING.....	5
4.6 TEST FACILITY.....	6
4.7 TEST LOCATION.....	6
5 EQUIPMENT USED DURING TEST	7
6 CONDUCTED EMISSION TEST	9
7 RADIATION EMISSION TEST.....	10
7.1 EUT OPERATING CONDITION	10
7.2 MEASUREMENT UNCERTAINTY.....	10
7.3 TEST PROCEDURE	11
7.4 RADIATED TEST SETUP	11
7.5 SPECTRUM ANALYZER SETUP.....	12
7.6 CORRECTED AMPLITUDE & MARGIN CALCULATION	13
7.7 RADIATED EMISSIONS LIMIT ON PARAGRAPH 15.209.....	13
7.8 RADIATED EMISSIONS TEST RESULT	14
7.9 RADIATED EMISSION DATA	14
8 MAXIMUM PEAK OUTPUT POWER.....	19
9 HOPPING CHANNEL NUMBER.....	20
10 FREQUENCY SEPARATED.....	21
11 DWELL TIME.....	24
12 20-DB BANDWIDTH.....	28
13 RADIATED SPURIOUS EMISSIONS INTO ADJACENT RESTRICTED BAND	30
14 RF EXPOSURE TEST.....	32
15 ANTENNA REQUIREMENT.....	33

16 PHOTOGRAPHS OF TESTING34

17 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS35

17.1 EUT -FRONT VIEW35

17.2 EUT - BACK VIEW35

17.3 EUT - OPEN VIEW36

17.4 EUT-PCB1 - FRONT VIEW.....36

17.5 EUT-PCB1 - BACK VIEW37

17.6 EUT-PCB2 - FRONT VIEW.....37

17.7 EUT-PCB2 - BACK VIEW38

17.8 EUT-PCB3 - FRONT VIEW.....38

17.9 EUT-PCB3 - BACK VIEW39

18 FCC ID LABEL.....40

3 Test Summary

Test Items	Test Requirement	Test Method	Limit / Severity	Result
Maximum peak output power	FCC Part 15:2007	ANSI C63.4: 2003	30dBm	PASS
Restricted Band	FCC Part 15:2007	ANSI C63.4: 2003	Note	PASS
Dwell time	FCC Part 15:2007	ANSI C63.4: 2003	Maximum:0.4 s	PASS
Channel separation	FCC Part 15:2007	ANSI C63.4: 2003	Channel separation at least 1MHz	PASS
Hopping channel No.	FCC Part 15:2007	ANSI C63.4: 2003	At least 15 channels	PASS
20-dB Bandwidth	FCC Part 15:2007	ANSI C63.4: 2003	Note	PASS
RF Exposure Test	FCC Part 15:2007	ANSI C63.4: 2003	Note	PASS
Mains Terminal Disturbance Voltage, 150kHz to 30MHz	FCC Part 15:2007	ANSI C63.4: 2003	N/A	PASS
Radiation Emission, 30MHz to 25GHz	FCC Part 15:2007	ANSI C63.4: 2003	N/A	PASS

Note : Denote that for more details of the EUT , please refer to the relating test items as below .

Remark : the methods of measurement in all the test items were according to the FCC Public Notice DA 00-705 .

4 General Information

4.1 Client Information

Applicant: DONG GUAN CITY FLYSKY REMOTE MODEL CO., LTD
Address of Applicant: No 41 Road west, BanHu village Huangjiang Town ,Dongguan city, Guangdong province, China

Manufacturer: DONG GUAN CITY FLYSKY REMOTE MODEL CO., LTD
Address of Manufacturer: No 41 Road west, BanHu village Huangjiang Town ,Dongguan city, Guangdong province, China

4.2 General Description of E.U.T.

Product description: 3 Channel Gun Radio
Model No.: FS-GT3

4.3 Details of E.U.T.

Power Supply: Batteries 1.5VDC*8(AA size)

4.4 Description of Support Units

The EUT has been tested as an independent unit.

4.5 Standards Applicable for Testing

The customer requested FCC tests for a 3 Channel Gun Radio. The standards used were FCC 15 Paragraph 15.247, Paragraph 15.205, Paragraph 15.207, Paragraph 15.209, Paragraph 15.31, Paragraph 15.33, Paragraph 15.35.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC – Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:880581,June 24, 2008.

- **IC – Registration No.: 7760A**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration No.:7760A,July 24, 2008.

4.7 Test Location

All Emission tests were performed at:-

1/F, Fukangtai Building,West Baima Rd.,Songgang Street, Baoan District, Shenzhen
518105, Guangdong,China.

Remark : All the test results of the peripherals were conformed to the FCC Verification requirements.

5 Equipment Used during Test

Equipment Name	Manufacturer Model	Equipment No	Internal No	Specification	Cal. Date	Due Date	Cert. No	Uncertainty
EMC Analyzer	Agilent/ E7405A	MY45114 943	W2008001	9k-26.5GHz	Aug-08	Aug-09	Wws200 81596	±1dB
Trilog Broadband Antenne 30-3000 MHz	SCHWARZ BECK MESS-ELEKTROM / VULB9163	336	W2008002	30-3000 MHz	Aug-08	Aug-09		±1dB
Broad-band Horn Antenna 1-18 GHz	SCHWARZ BECK MESS-ELEKTROM / VULB9163	667	W2008003	1-18GHz	Aug-08	Aug-09		f<10 GHz: ±1dB 10GHz<f<18 GHz: ±1.5dB
Broadband Preamplifier 0.5-18 GHz	SCHWARZ BECK MESS-ELEKTROM / BBV 9718	9718-148	W2008004	0.5-18GHz	Aug-08	Aug-09		±1.2dB
10m Coaxial Cable with N-male Connectors usable up to 18GHz,	SCHWARZ BECK MESS-ELEKTROM / AK 9515 H	-	-	-	Aug-08	Aug-09		-
10m 50 Ohm Coaxial Cable with N-plug, individual length, usable up to 3(5)GHz, Connector	SCHWARZ BECK MESS-ELEKTROM / AK 9513				Aug-08	Aug-09		
Positioning Controller	C&C LAB/ CC-C-IF				N/A	N/A		
Color Monitor	SUNPO/ SP-14C				N/A	N/A		
Test Receiver	ROHDE&SCHWARZ/ ESPI	101155	W2005001	9k-3GHz	Aug-08	Aug-09	Wws200 80942	±1dB
EMI Receiver	Beijingkehua n	KH3931		9k-1GHz	Aug-08	Aug-09		
Two-Line V-	ROHDE&SCHWARZ/	100115	W2005002	50Ω/50μH	Aug-08	Aug-09	Wws200 80941	±10%

Equipment Name	Manufacturer Model	Equipment No	Internal No	Specification	Cal. Date	Due Date	Cert. No	Uncertainty
Network	ENV216							
V—LISN	SCHWARZ BECK MESS — ELEKTRON IK	NSLK 8128	8128-259	9k-30MHz	Aug-08	Aug-09		
Absorbing Clamp	ROHDE&SC HWAHZ/ MDS-21	100205	W2005003	impandance50 Ω loss : 17 dB	Aug-08	Aug-09	Wws200 80943	± 1 dB
10m 50 Ohm Coaxial Cable with N- plug,indivi dual length,usa ble up to 3(5)GHz, Connector s	SCHWARZ BECK MESS- ELEKTROM / AK 9514				Aug-08	Aug-09		

6 Conducted Emission Test

Test Requirement:	FCC Part15 Paragraph 15.207
Test Method:	Based on FCC Part15 Paragraph 15.207
Test Date:	N/A
Frequency Range:	150kHz to 30MHz
Class:	Class B
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

Remark:Due to the EUT operating power from batteries,this test was not performed.


7 Radiation Emission Test

Test Requirement:	FCC Part15 Paragraph 15.247
Test Method:	Based on ANSI 63.4:2003
Frequency Range:	30MHz to 25GHz
Measurement Distance:	3m
Detector:	Peak for pre-scan (120kHz resolution bandwidth) Quasi-Peak if maximised peak within 6dB of limit

7.1 EUT Operating Condition

Operating condition is according to ANSI C63.4:2003.

- A. Setup the EUT and simulators as shown on follow.
- B. Enable RF signal and confirm EUT active.
- C. Modulate output capacity of EUT up to specification.

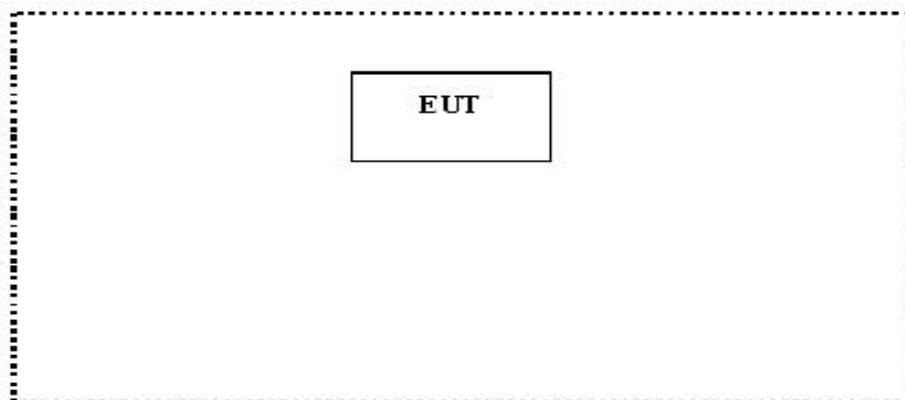

7.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at WALTEK SERVICES EMC Lab is ± 5.03 dB.

7.3 Test Procedure

1. New battery were installed in the equipment under test for radiated emissions test.
2. This is a handheld device, The radiation emission should be tested under 3-axes position (lying, side and stand), After pre-test, It was found that the worse radiation emission was get at the lying position.
3. Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combinations.
4. All data was recorded in the peak and average detection mode.
5. The EUT was under normal mode during the final qualification test and the configuration was used to represent the worst case results.
6. For below 30MHz, a loop antenna with its vertical plane is placed 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
7. The device was rotated through three orthogonal axes to determine which attitude and configuration produce the highest emission during measurement.

7.4 Radiated Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part 15 Paragraph 15.209 limits and Paragraph 15.247 limits.

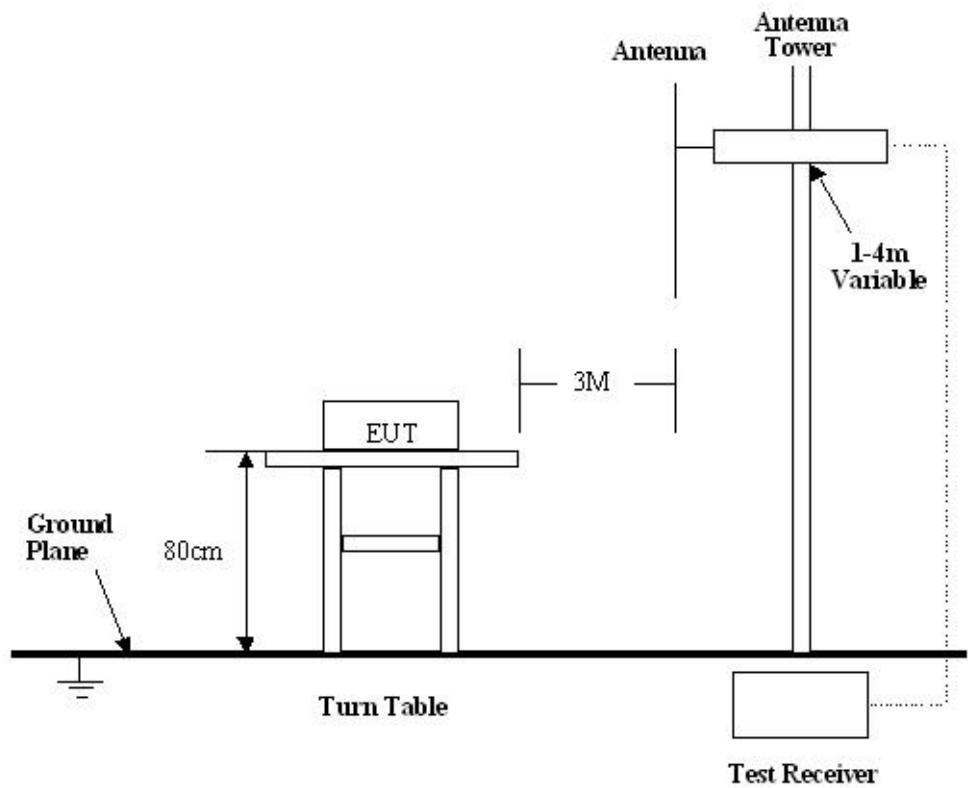

7.5Spectrum Analyzer Setup

According to FCC Part15 Paragraph 15.247 Rules, the system was tested to 25000 MHz.
Below 1GHz

Start Frequency30 MHz
Stop Frequency1000 MHz
Sweep Speed Auto
IF Bandwidth.....120 KHz
Video Bandwidth.....100KHz
Quasi-Peak Adapter Bandwidth120 KHz
Quasi-Peak Adapter Mode.....Normal
Resolution Bandwidth100KHz

Above 1GHz

Start Frequency1000 MHz
Stop Frequency25000MHz
Sweep Speed Auto
IF Bandwidth.....120 KHz

Video Bandwidth 1MHz
 Quasi-Peak Adapter Bandwidth 120 KHz
 Quasi-Peak Adapter Mode Normal
 Resolution Bandwidth 1MHz

7.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB μ V means the emission is 7dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$

7.7 Radiated Emissions Limit on Paragraph 15.209

Frequency(MHZ)	Distance(m)	Field strength(dBuV/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

- Note:**
- (1) RF Voltage(dBuV)=20 log RF Voltage(uV)
 - (2) In the Above Table,the tighter limit applies at the band edges.
 - (3) Distance refers to the distance in meters between the measuring instrument antenna.
 - (4)The emission limit in this paragraph is based on measurement instrumentaion employing an average detector.Measurement using instrumentation with a peak detector function,corresponding to 20dB above the maximum permitted average limit.
 - (5)Above 1GHz, mark a Peak and average measurements for all emissions,Limit for peak is 74dBuv/m,According to Part15.35(b) and average is 54Buv/m.

7.8 Radiated Emissions Test Result

Formula of conversion factors: the field strength at 3m was established by adding
The meter reading of the spectrum analyzer (which is set to read in units of dBuV/m)
To the antenna correction factor supplied by the antenna manufacturer. The antenna
Correction factors are stated in terms of dB. The gain of the pressletor was accounted
For in the spectrum analyser meter reading.

Example:

Freq(MHz) Meter Reading +ACF=FS

33 20dBuV+10.36dB=30.36dBuV/m @3m

7.9 Radiated Emission Data

A. Test Item: Radiated Emission Data

Test Voltage: Adapter input 5.0V

Test Mode: TX On

Temperature: 25 °C

Humidity: 52%RH

Test Result: PASS

Remarks: 30-1000MHz radiation test no significant emissions above the equipment noise floor
were detected. And the below is the Fundamental and Harmonic .

Frequency (MHz)	Detector	Antenna Polarization	Emission Level (dBuV/m)	FCC 15 Subpart C Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Turntable Angle (°)
Low frequency							
2400.00	AV	Vertical	76.52		(Fund.)	1.1	120
4800.00	AV	Vertical	41.02	54.00	13.98	1.2	0
7200.00	AV	Vertical	35.23	54.00	19.73	1.8	60
9600.00	AV	Vertical	32.52	54.00	21.48	1.5	110
12000.00	AV	Vertical	31.25	54.00	22.75	1.2	120
14400.00	AV	Vertical	31.01	54.00	22.99	1.2	90
16800.00	AV	Vertical	30.02	54.00	23.98	1.8	0
19200.00	AV	Vertical	30.67	54.00	23.33	1.2	120
21600.00	AV	Vertical	29.63	54.00	24.34	1.5	100
24000.00	AV	Vertical	29.01	54.00	24.99	1.2	130
2400.00	AV	Horizontal	72.23		(Fund.)	1.4	0

4800.00	AV	Horizontal	41.12	54.00	12.88	1.6	0
7200.00	AV	Horizontal	36.21	54.00	17.79	1.8	60
9600.00	AV	Horizontal	34.25	54.00	19.75	1.0	40
12000.00	AV	Horizontal	33.21	54.00	20.79	1.8	45
14400.00	AV	Horizontal	31.25	54.00	22.75	1.0	60
16800.00	AV	Horizontal	30.74	54.00	23.26	1.8	20
19200.00	AV	Horizontal	32.01	54.00	21.99	1.1	90
21600.00	AV	Horizontal	31.53	54.00	22.47	1.5	60
24000.00	AV	Horizontal	30.01	54.00	23.99	1.0	20
2400.00	PK	Vertical	92.09		(Fund.)	1.2	0
4800.00	PK	Vertical	45.21	74.00	29.64	1.1	10
7200.00	PK	Vertical	40.01	74.00	33.99	1.4	120
9600.00	PK	Vertical	37.42	74.00	36.58	1.7	120
12000.00	PK	Vertical	36.21	74.00	37.79	1.0	180
14400.00	PK	Vertical	32.01	74.00	41.99	1.5	0
16800.00	PK	Vertical	33.21	74.00	40.79	1.0	120
19200.00	PK	Vertical	30.10	74.00	43.90	1.8	0
21600.00	PK	Vertical	29.01	74.00	44.99	1.5	0
24000.00	PK	Vertical	29.01	74.00	44.99	1.2	50
2400.00	PK	Horizontal	107.32		(Fund.)	1.3	0
4800.00	PK	Horizontal	41.24	74.00	32.76	1.2	40
7200.00	PK	Horizontal	38.25	74.00	35.75	1.5	100
9600.00	PK	Horizontal	36.98	74.00	37.02	1.0	90
12000.00	PK	Horizontal	35.69	74.00	38.31	1.0	60
14400.00	PK	Horizontal	35.62	74.00	38.38	1.5	60
16800.00	PK	Horizontal	33.35	74.00	40.65	1.8	110
19200.00	PK	Horizontal	33.01	74.00	40.99	1.8	180
21600.00	PK	Horizontal	30.21	74.00	43.79	1.8	0
24000.00	PK	Horizontal	30.01	74.00	43.99	1.0	20
Middle frequency							
2441.00	AV	Vertical	72.21		(Fund.)	1.5	0
4882.00	AV	Vertical	39.02	54.00	14.98	1.2	90
7323.00	AV	Vertical	35.21	54.00	18.71	1.0	45
9764.00	AV	Vertical	33.33	54.00	20.67	1.0	100

12205.00	AV	Vertical	32.02	54.00	21.98	1.8	180
14646.00	AV	Vertical	32.01	54.00	21.99	1.0	0
17087.00	AV	Vertical	30.26	54.00	23.74	1.6	100
19528.00	AV	Vertical	30.01	54.00	23.99	1.2	0
21969.00	AV	Vertical	29.02	54.00	24.98	1.5	90
24410.00	AV	Vertical	28.23	54.00	25.77	1.5	20
2441.00	AV	Horizontal	72.96		(Fund.)	1.1	0
4882.00	AV	Horizontal	35.69	54.00	18.31	1.3	80
7323.00	AV	Horizontal	34.25	54.00	19.75	1.8	90
9764.00	AV	Horizontal	33.52	54.00	20.48	1.0	100
12205.00	AV	Horizontal	31.21	54.00	22.79	1.8	120
14646.00	AV	Horizontal	30.25	54.00	23.75	1.6	90
17087.00	AV	Horizontal	29.25	54.00	24.75	1.5	45
19528.00	AV	Horizontal	28.36	54.00	25.64	1.8	180
21969.00	AV	Horizontal	28.02	54.00	25.98	1.6	120
24410.00	AV	Horizontal	28.02	54.00	25.98	1.2	150
2441.00	PK	Vertical	89.53		(Fund.)	1.0	0
4882.00	PK	Vertical	44.21	74.00	29.79	1.3	10
7323.00	PK	Vertical	38.25	74.00	35.75	1.2	180
9764.00	PK	Vertical	37.94	74.00	36.06	1.6	100
12205.00	PK	Vertical	37.87	74.00	36.13	1.5	120
14646.00	PK	Vertical	36.10	74.00	38.90	1.8	90
17087.00	PK	Vertical	32.03	74.00	41.97	1.0	180
19528.00	PK	Vertical	30.21	74.00	43.79	1.0	150
21969.00	PK	Vertical	28.30	74.00	45.70	1.6	45
24410.00	PK	Vertical	28.30	74.00	45.70	1.2	45
2441.00	PK	Horizontal	106.45		(Fund.)	1.0	120
4882.00	PK	Horizontal	43.56	74.00	30.44	1.1	25
7323.00	PK	Horizontal	41.51	74.00	32.49	1.5	60
9764.00	PK	Horizontal	40.14	74.00	33.86	1.5	90
12205.00	PK	Horizontal	39.36	74.00	34.64	1.6	100
14646.00	PK	Horizontal	37.44	74.00	36.56	1.0	120
17087.00	PK	Horizontal	34.21	74.00	39.79	1.4	10
19528.00	PK	Horizontal	38.86	74.00	35.14	1.5	120

21969.00	PK	Horizontal	34.21	74.00	39.79	1.5	100
24410.00	PK	Horizontal	33.33	74.00	40.67	1.8	60
High frequency							
2480.00	AV	Vertical	73.42		(Fund.)	1.0	0
4960.00	AV	Vertical	36.25	54.00	17.75	1.2	100
7440.00	AV	Vertical	32.25	54.00	21.75	1.5	100
9920.00	AV	Vertical	30.26	54.00	23.74	1.6	90
12400.00	AV	Vertical	30.55	54.00	23.45	1.8	45
14880.00	AV	Vertical	30.34	54.00	23.66	1.5	100
17360.00	AV	Vertical	30.62	54.00	23.38	1.6	120
19840.00	AV	Vertical	30.13	54.00	23.87	1.8	90
22320.00	AV	Vertical	30.27	54.00	23.73	1.5	90
24800.00	AV	Vertical	28.25	54.00	25.75	1.5	90
2480.00	AV	Horizontal	72.51		(Fund.)	1.0	0
4960.00	AV	Horizontal	34.56	54.00	19.44	1.2	20
7440.00	AV	Horizontal	30.35	54.00	23.65	1.5	90
9920.00	AV	Horizontal	31.47	54.00	22.53	1.0	60
12400.00	AV	Horizontal	31.89	54.00	22.11	1.6	90
14880.00	AV	Horizontal	32.42	54.00	21.58	1.0	100
17360.00	AV	Horizontal	31.17	54.00	22.83	1.8	120
19840.00	AV	Horizontal	32.55	54.00	21.45	1.5	120
22320.00	AV	Horizontal	32.86	54.00	21.14	1.0	100
24800.00	AV	Horizontal	30.25	54.00	22.75	1.6	60
2480.00	PK	Vertical	91.53		(Fund.)	1.0	0
4960.00	PK	Vertical	44.21	74.00	29.79	1.2	0
7440.00	PK	Vertical	35.62	74.00	38.38	1.5	10
9920.00	PK	Vertical	35.35	74.00	38.65	1.8	20
12400.00	PK	Vertical	35.56	74.00	38.44	1.0	58
14880.00	PK	Vertical	34.21	74.00	39.79	1.5	90
17360.00	PK	Vertical	33.54	74.00	40.46	1.8	45
19840.00	PK	Vertical	36.26	74.00	37.74	1.5	100
22320.00	PK	Vertical	36.73	74.00	37.27	1.5	0
24800.00	PK	Vertical	30.21	74.00	43.99	15	50
2480.00	PK	Horizontal	107.62		(Fund.)	1.0	90

4960.00	PK	Horizontal	42.58	74.00	31.42	1.1	0
7440.00	PK	Horizontal	38.64	74.00	35.36	1.5	90
9920.00	PK	Horizontal	35.37	74.00	38.63	1.6	50
12400.00	PK	Horizontal	35.52	74.00	38.48	1.6	45
14880.00	PK	Horizontal	35.26	74.00	38.74	1.5	60
17360.00	PK	Horizontal	36.41	74.00	37.59	1.8	10
19840.00	PK	Horizontal	32.41	74.00	41.59	1.8	150
22320.00	PK	Horizontal	31.11	74.00	42.89	1.0	0
24800.00	PK	Horizontal	28.21	74.00	45.79	1.0	0

8 Maximum Peak Output Power

Test Requirement:	FCC Part15 Paragraph 15.247
Test Method:	Based on ANSI 63.4:2003
Test mode:	Compliance test in the worse case: Tx Lower/Tx Middle/Tx Upper
Requirements:	Regulation 15.247(b) The limit of Maximum Peak Output Power Measurement is 1W(30dBm)

Test procedure:

The following test procedure as below:

The transmitter output (antenna port) was connected to the spectrum analyzer.EUT and its simulators are placed on a table, let EUT working in test mode,then test it.

The bandwidth of the fundamental frequency was measured with the spectrum analyser using 1MHz RBW and 1MHz VBW.

Test Result: The unit does meet the FCC requirements.

Test Channel	Fundamental Frequency(MHz)	Output Power (mW)	Limit (W)	Power output level
Lower	2400	0.93	1	conducted
Middle	2441	0.88	1	conducted
Upper	2480	0.87	1	conducted

9 Hopping Channel Number

Test Requirement: FCC Part15 C


Test Method: Based on FCC Part15 Paragraph 15.247

Test mode: The EUT work in test mode(Tx) and test it

Requirements: Regulation 15.247(b) For frequency hopping systems operating In the 2400-2483.5MHz band employing at least 15 hopping channels.

Test result: The total number of channels would be 41 channels.
The unit does meet the FCC requirements.

Please refer the graph as below:

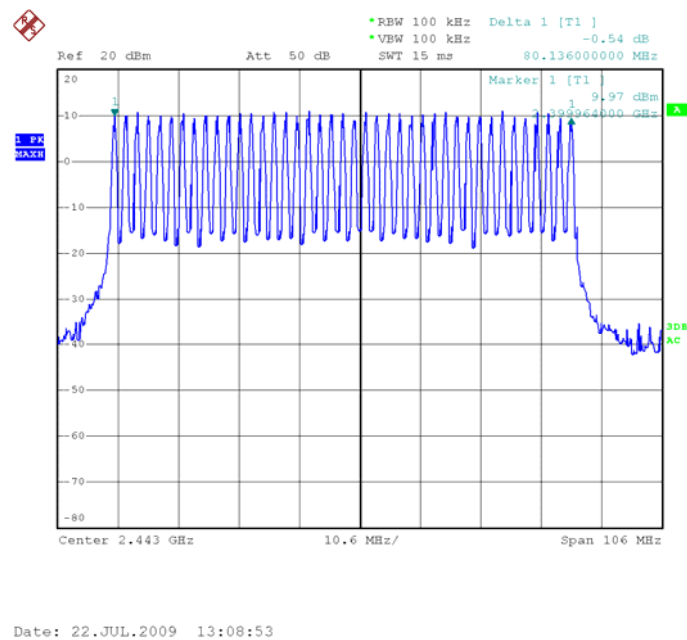

10 Frequency Separated

The requirements in this clause are only applicable to equipment using frequency hopping spread spectrum (FHSS) modulation.

Channel Separated

Definition: A hopping channel is any of the centre frequencies defined within the hopping sequence of a FHSS system.

Limit: Non-adaptive frequency hopping system shall make use of non-overlapping channels separated by the channel bandwidth as measured at 20dB below peak power.

The hopping channels defined within a hopping sequence shall be at least 1MHz apart(channel separation)

Operating Environment:

Temperature: 25.5 °C

Humidity: 51 % RH

Barometric Pressure: 1012 mbar

EUT Operation Condition:


The EUT was programmed to be in continuously transmitting mode.

Test Result: PASS

Please refer to the below photos for more details


Test Channel	Channel Separation	PASS/FAIL
Lower Channels	2MHz	Pass
Middle Channels	2MHz	Pass
Upper Channels	2MHz	Pass

Lower Channel

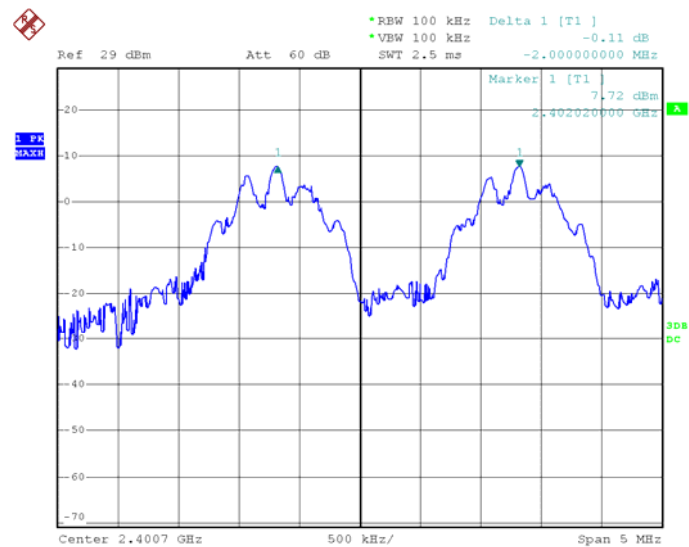


Date: 22.JUL.2009 13:47:53

Middle Channel

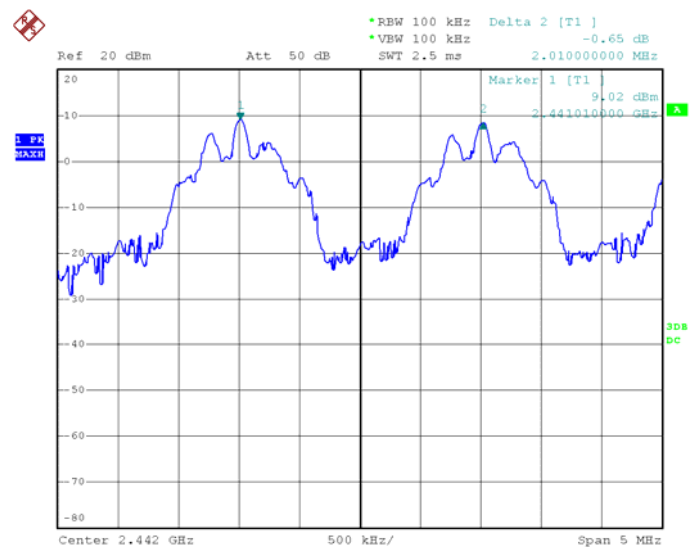

Date: 22.JUL.2009 13:33:28

Upper Channel

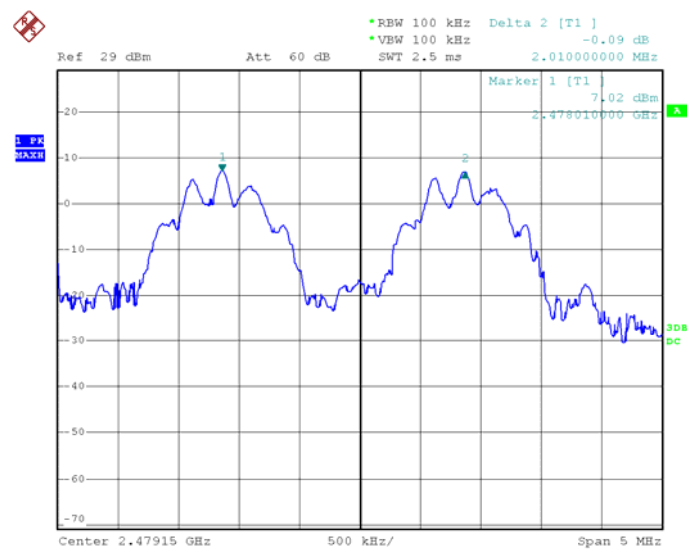

Date: 22.JUL.2009 13:49:53

11 Dwell time

Definition:

The dwell time is the time spent at a particular frequency during any single hop.

Limit: the maximum dwell time shall be less than 0.4s.

Operating Environment:

Temperature: 25.5 °C

Humidity: 51 % RH

Barometric Pressure: 1012 mbar

EUT Operation Condition:

The EUT was programmed to be in continuously transmitting mode.

Test Procedure

The EUT output antenna port was connected to the spectrum analyzer. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz, and the frequency span to zero span, measure the maximum time duration of one single pulse. So, the Dwell Time can be calculated as follows:

$$T = \text{Ton-time} * \text{Ntimes} / 1\text{S} * 0.4 * 41 \leq 0.4\text{S}.$$

Ton-time: one pulse of the hopping time.

Ntimes: the number of hopping in one second

Test Result: PASS


Please refer to the below photos for more details.

Lower Channel

Dwell time of each occupation in this channel as follows:
 $0.00059 \times 20 / 1S \times 0.4 \times 41 = 0.194 < 0.4S$

Test Result: PASS

The Results are not be greater than 0.4 seconds.

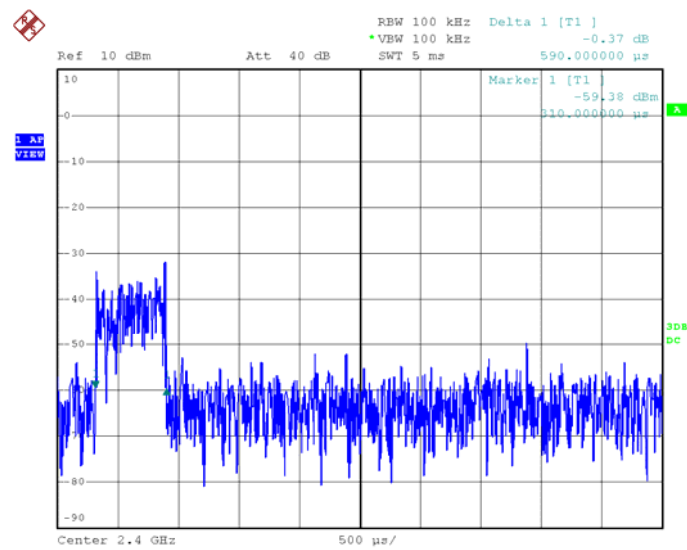


Date: 22.JUL.2009 15:36:08

Middle Channel

Dwell time of each occupation in this channel as follows:
 $0.00062 \times 20 / 1S \times 0.4 \times 41 = 0.203 < 0.4S$

Test Result: PASS

The Results are not be greater than 0.4 seconds.

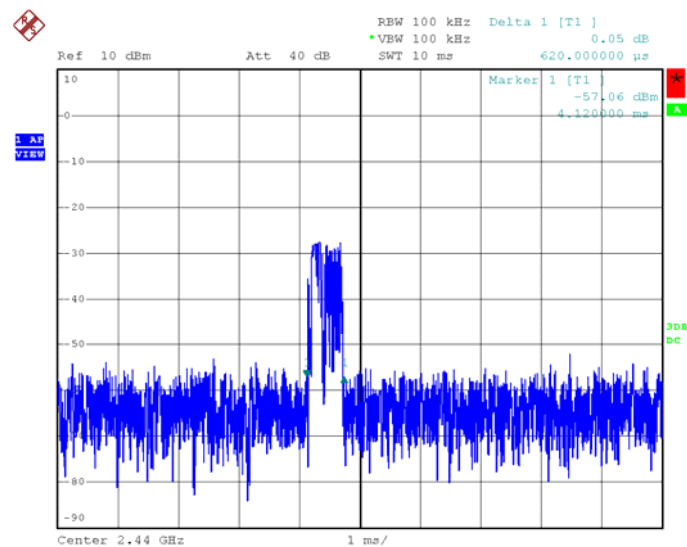

Date: 22.JUL.2009 15:38:54


Upper Channel

Dwell time of each occupation in this channel as follows:

$$0.00062 * 20 / 1S * 0.4 * 41 = 0.203 < 0.4S$$

Test Result: PASS

The Results are not be greater than 0.4 seconds.

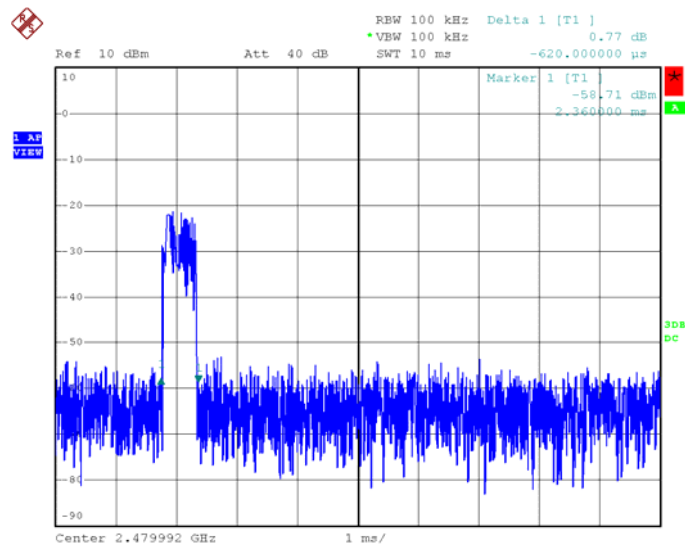

Date: 22.JUL.2009 15:25:55

12 20-dB Bandwidth

Test Requirement: FCC Part15 C
Test Method: Based on FCC Part15 Paragraph 15.247
Test mode: The EUT work in test mode(Tx) and test it


Test Procedure

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer.
- 2. The bandwidth of the fundamental frequency was measure by spectrum analyser with 100KHz RBW and 100KHz VBW.The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power 20dB.


Test Result

Please refer the graph as below:


Lower Channel

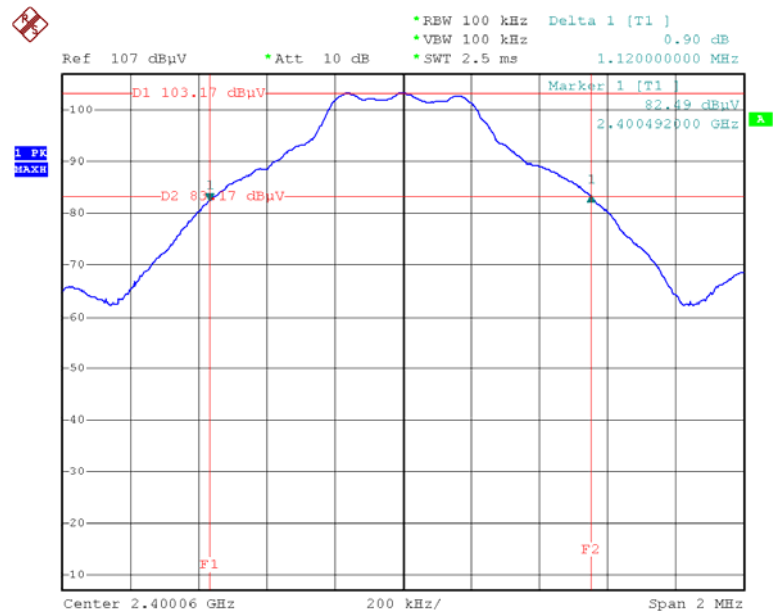

Middle Channel

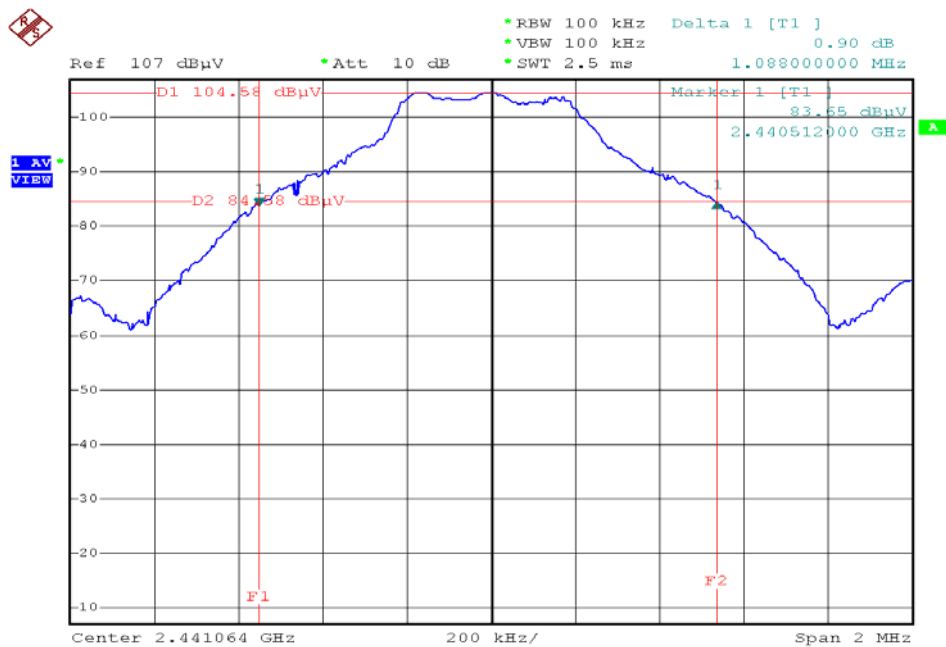

Upper Channel

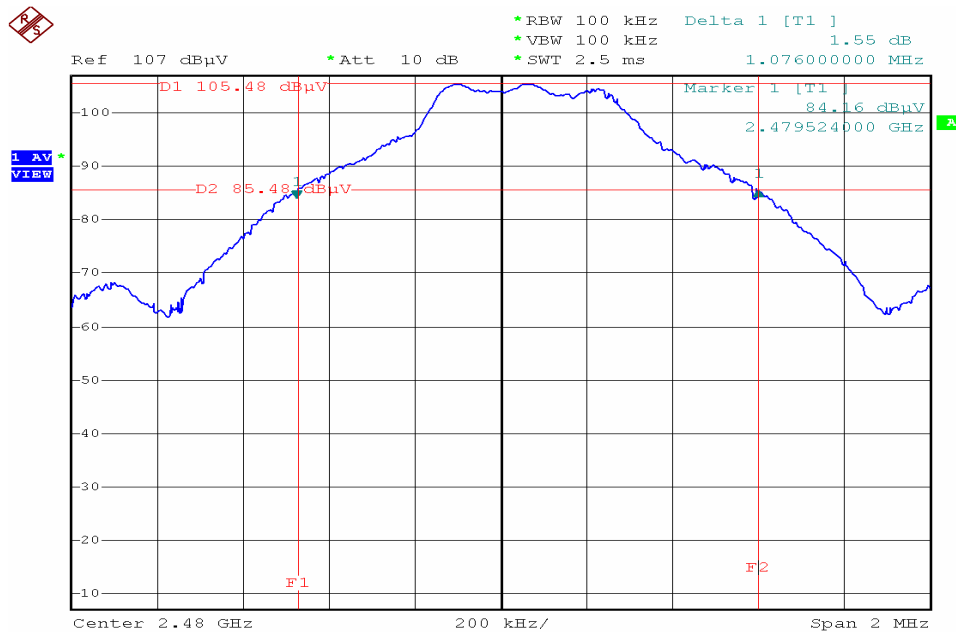

13 Radiated spurious emissions into adjacent restricted band

Test Requirement: FCC Part15 Paragraph 15.205
Test Method: Based on FCC Part 15 Paragraph 15.247
Requirements: The EUT work in test mode(Tx) and test it


Requiments:

emissions that fall in the restricted bands(15.205).Above 1000MHz, compliance with the emissions limits in section 15.209 shall be demonstrated based on the average value of the measured emissions,The provisions in section 15.35apply to these measurements.


Test procedure:

An in band field strength measurement of the fundamental emission using the RBW and detector function required by C63.4-2003 and FCC Rules.The procedure was repeated with an average detector and a plot made.The calculated field strength in the adjacent restricted band is presented below.

Lower bandedge/ restricted band (AV value)

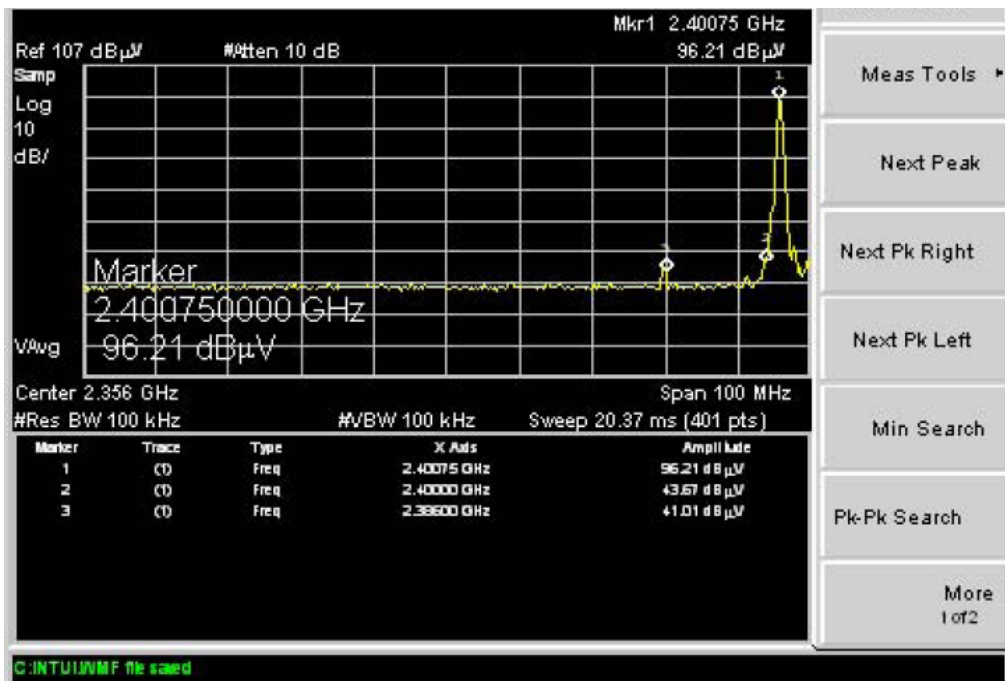

Upper bandedge/ restricted band (AV value)

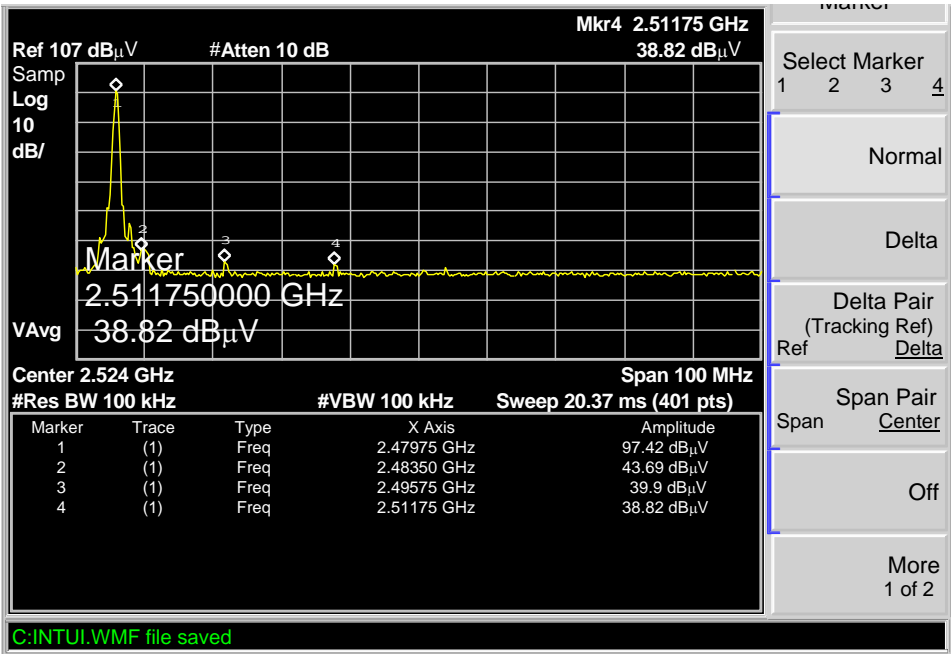

14 RF Exposure Test

Test Requirement:	FCC Part 2 Subpart J
Test Method:	Based on FCC Part 15 Paragraph 15.247
Requirements:	The EUT work in test mode(Tx) and test it

Requiments:

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

The procedures / limit

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained


Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
-2.31	0.587	-0.32	0.93	0.00336	1	Complies
-2.31	0.587	-0.56	0.88	0.00343	1	Complies
-2.31	0.587	-0.60	0.87	0.00356	1	Complies

15 Antenna Requirement.


According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna to the intentional radiator shall be considered sufficient to comply with the provisions of this section. This product has a permanent antenna, fulfill the requirement of this section.

16 Photographs of Testing

Radiation Emission Test View For Below 1GHz

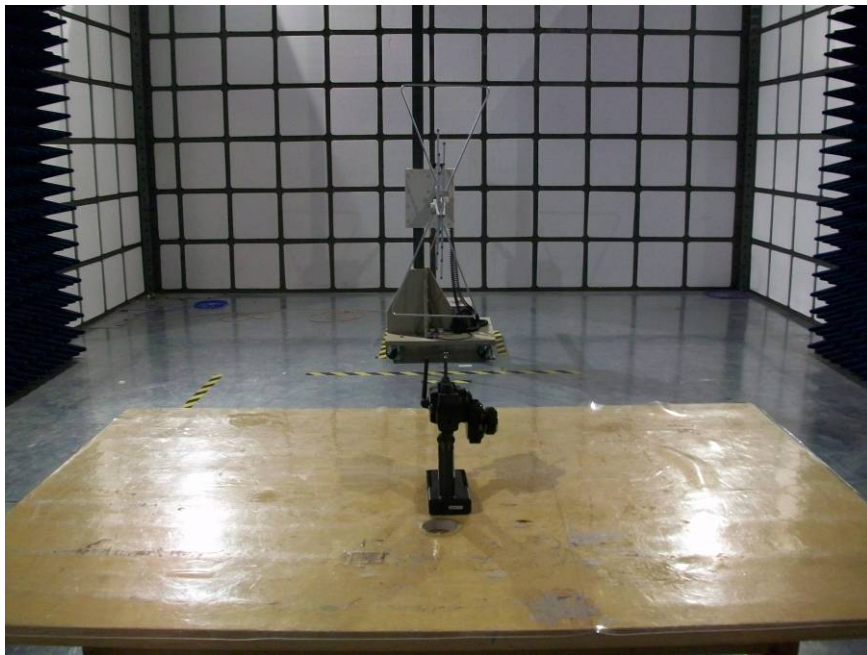


Radiation Emission Test View For Above 1GHz

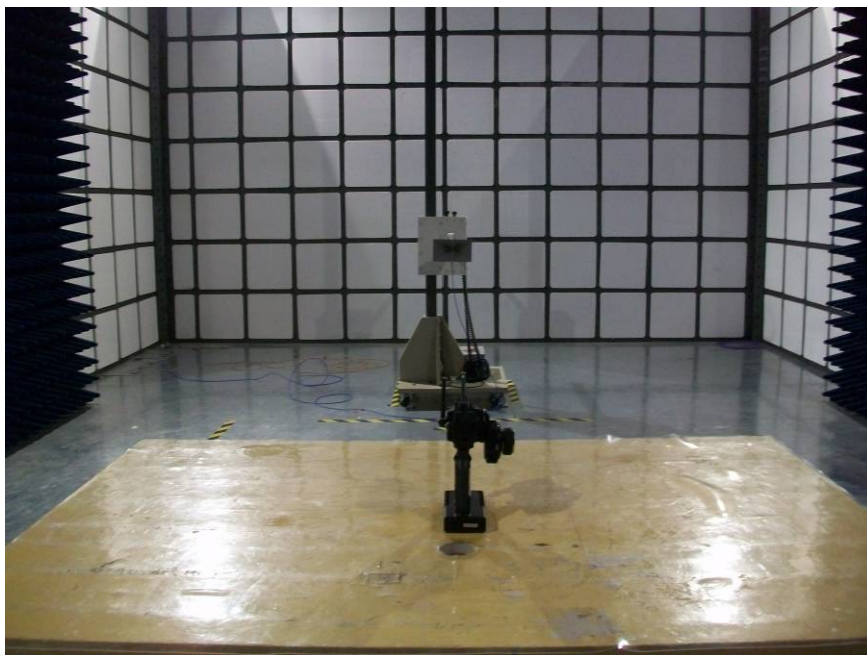

17 Photographs - Constructional Details

17.1 EUT -Front View

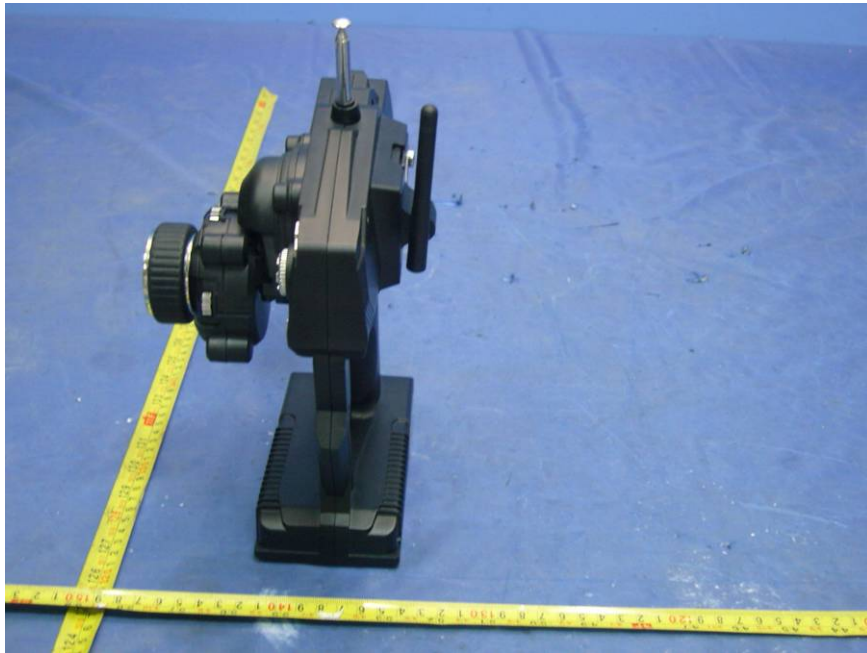


17.2 EUT - Back View




17.3 EUT - Open View




17.4 EUT-PCB1 - Front View

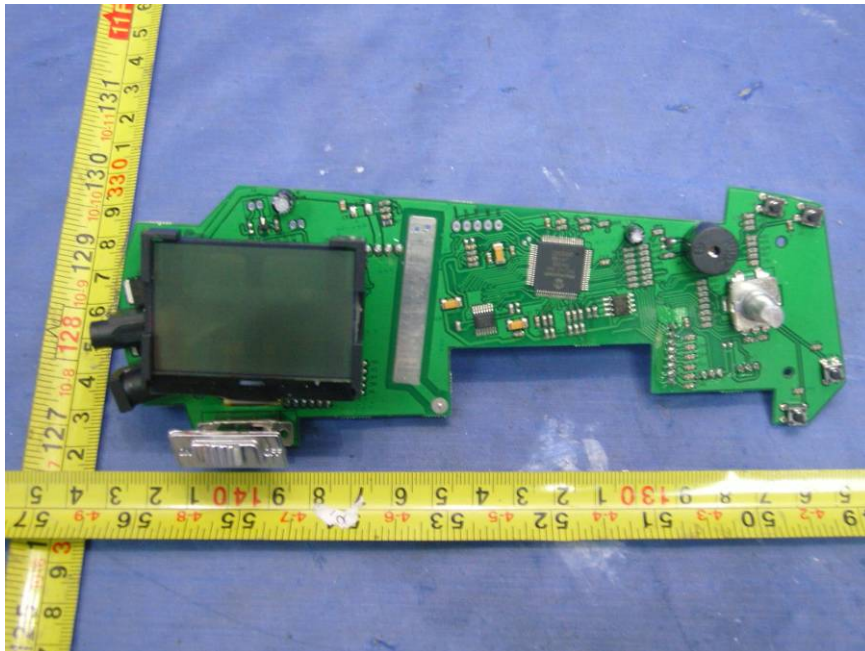


17.5 EUT-PCB1 - Back View

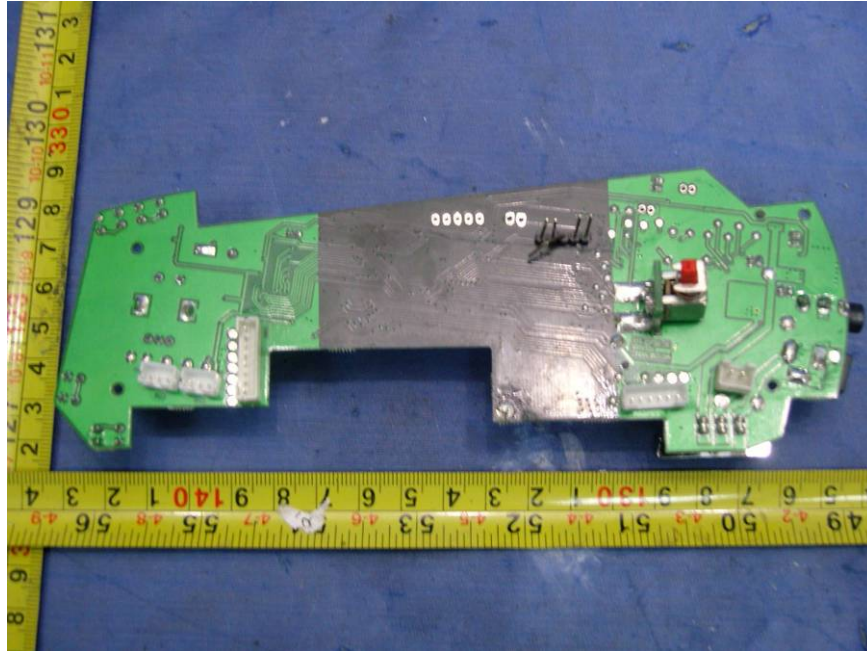


17.6 EUT-PCB2 - Front View

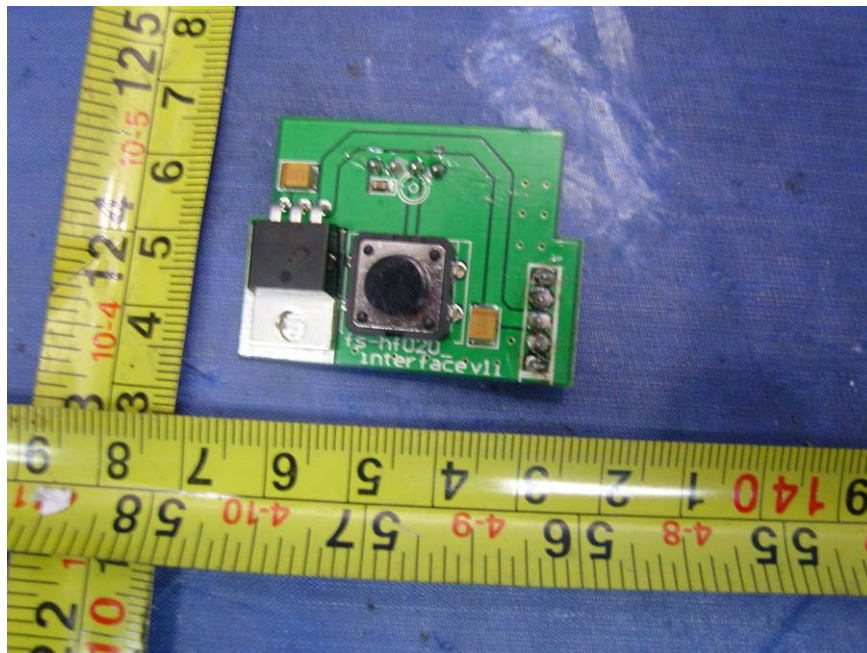


17.7 EUT-PCB2 - Back View

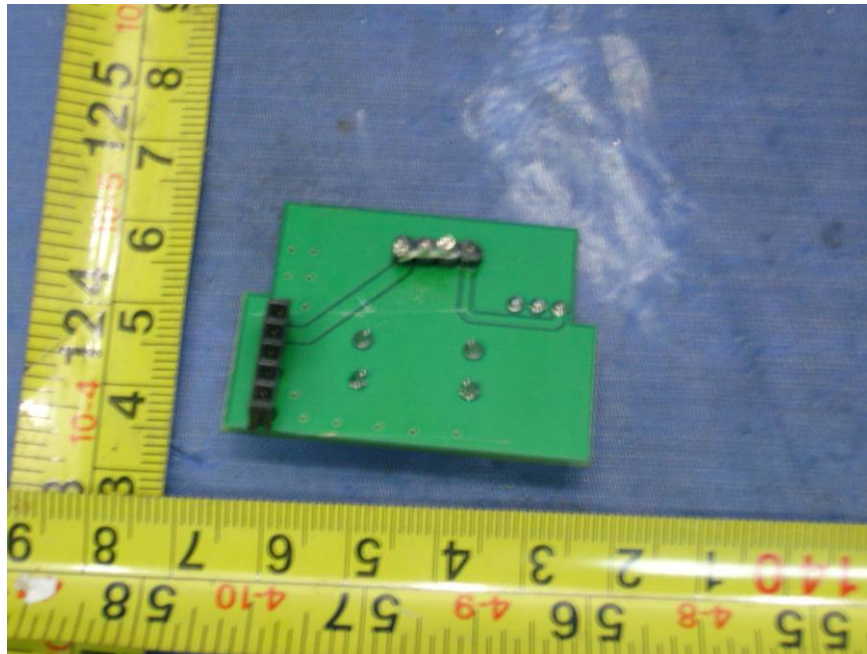

17.8 EUT-PCB3 - Front View

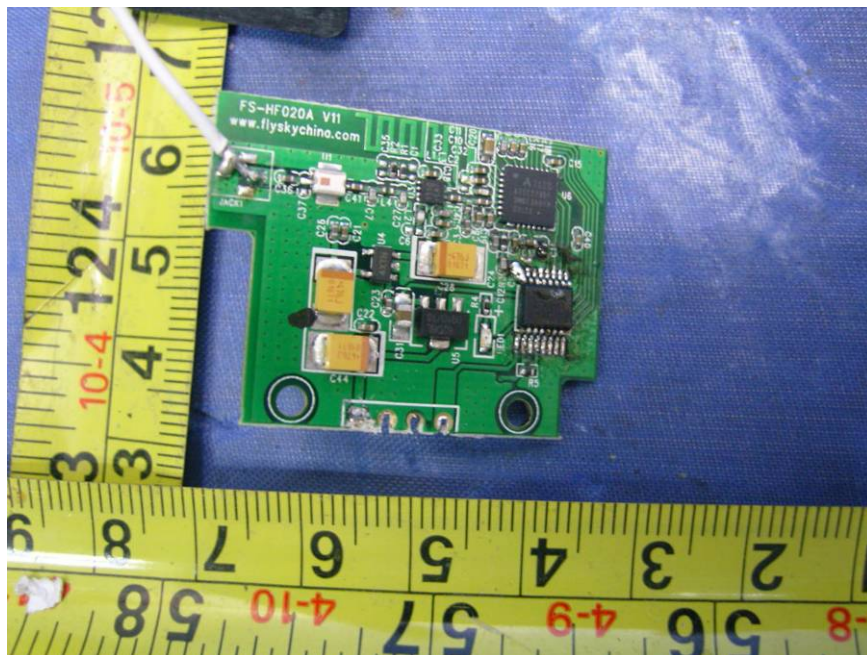

17.9 EUT-PCB3 - Back View

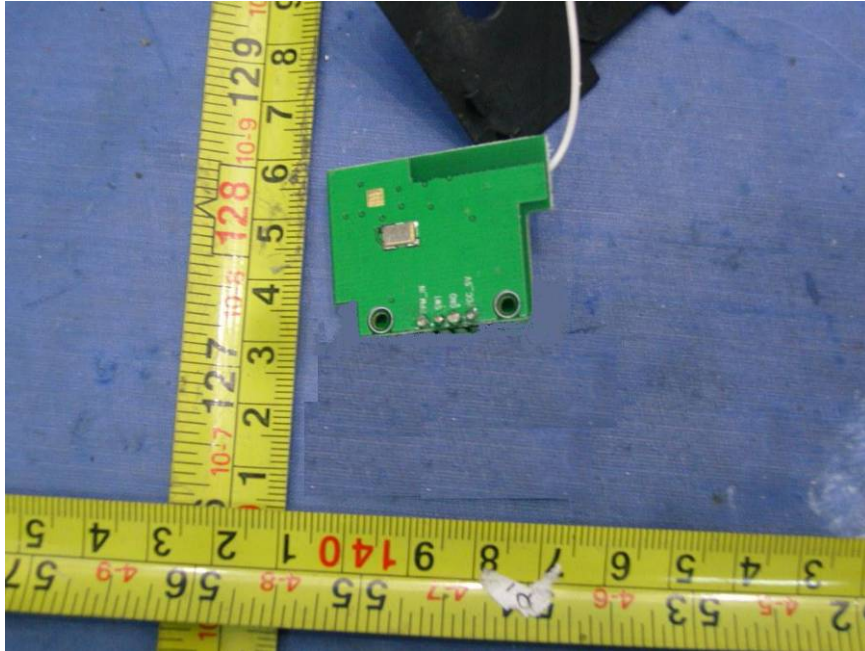

18 FCC ID Label

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1)this device may not cause harmful interference,and (2) this device must accept any interference received, including interference that may cause undesired operation.

The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT
EUT Bottom View/proposed FCC Mark Location

