



NOTES:

1. PLUG TRANSMITTER CABLE FROM THE TOP COVER ASSEMBLY INTO THE CONNECTOR ON BOTTOM PCB.
2. MOUNT TOP COVER ASM AND SCREW IT INTO THE BASE.
3. INSTALL THE THREE LABELS AS SHOWN ON RIGHT VIEW.

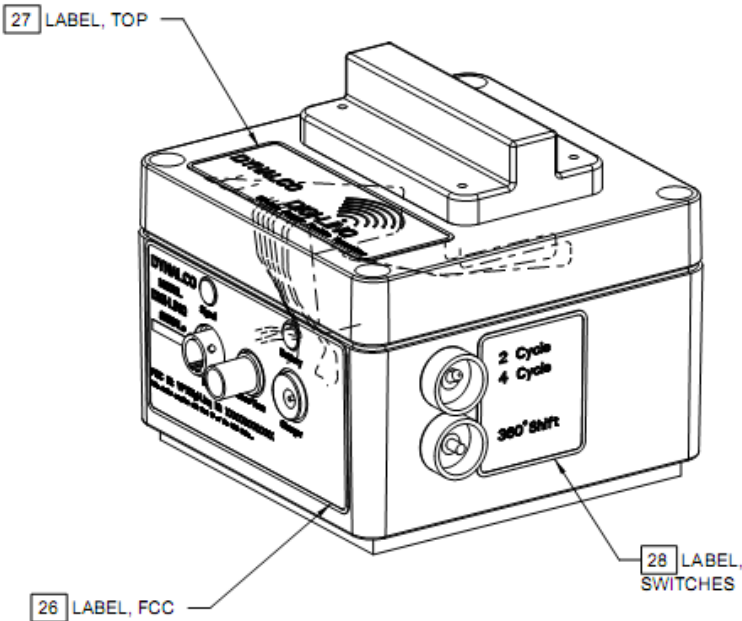

DO NOT SCALE

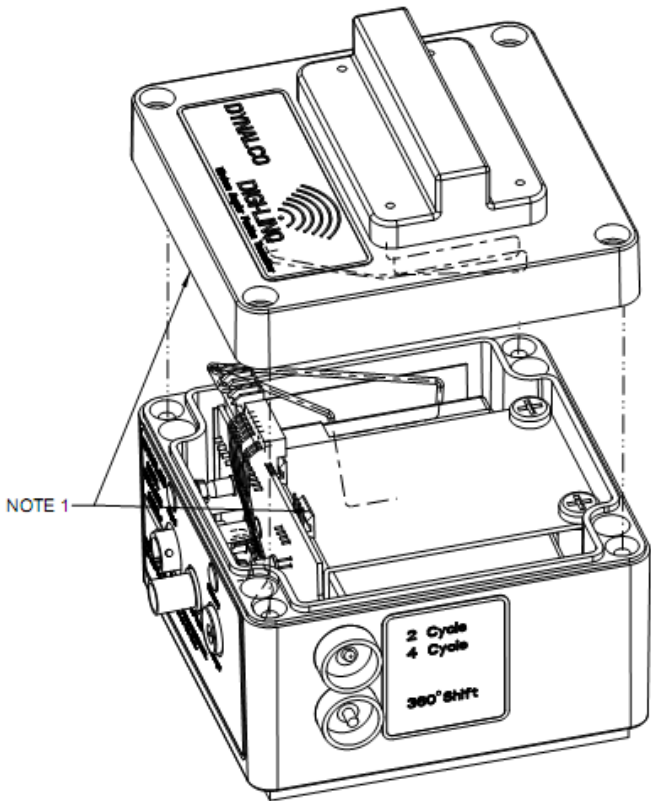

THIRD ANGLE  
PROJECTION

Sheet 3 of 3

MATERIAL:

FINISH:

This document, all information contained herein and all information related thereto, is the property of Dynalco Controls a unit of Crane Company, is confidential to it and no part thereof nor any such information may be copied, disseminated or used in any manner whatsoever without the prior written consent of Dynalco and is to be returned to Dynalco upon request.

TOLERANCES  
(EXCEPT AS NOTED)

DECIMAL

$\pm .01$  .XX

$\pm .005$  .XXX

FRACTIONAL

$\pm 1/64$

ANGULAR

$\pm 1/2^\circ$

**DYNALCO**

MODEL NO. 9260

SCALE

PATH

GDIAG 9260 XMT2

TITLE

FINAL ASM, TRANSMITTER 2

DATE

06/20/07

DRAWN BY

PF

APPROVED BY

DW

DRAWING NUMBER

C 800-12705

REV