



RADIO TEST REPORT

Test Report No. : 12176728H-A-R1

Applicant : Murata Manufacturing Co., Ltd.
Type of Equipment : Wireless vibration sensor node
Model No. : LBAC0ZZ1LZ
FCC ID : VPYLB1LZ
Test regulation : FCC Part 15 Subpart C: 2018
Test Result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.
6. This test report covers Radio technical requirements. It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
7. This report is a revised version of 12176728H-A. 12176728H-A is replaced with this report.

Date of test: February 15 and 16, 2018

Representative test engineer:

T. Noguchi

Takafumi Noguchi
Engineer
Consumer Technology Division

Approved by:

Takayuki Shimada

Takayuki Shimada
Leader
Consumer Technology Division



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.
*As for the range of Accreditation in NVLAP, you may refer to the WEB address,
http://japan.ul.com/resources/emc_accredited/

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

13-EM-F0429

REVISION HISTORY

Original Test Report No.: 12176728H-A

[illegible]

CONTENTS	PAGE
SECTION 1: Customer information.....	4
SECTION 2: Equipment under test (E.U.T.).....	4
SECTION 3: Test specification, procedures & results.....	5
SECTION 4: Operation of E.U.T. during testing.....	8
SECTION 5: Radiated Spurious Emission	10
SECTION 6: Antenna Terminal Conducted Tests.....	12
APPENDIX 1: Test data	13
6 dB Bandwidth and 99 % Occupied Bandwidth.....	13
Maximum Peak Output Power	16
Average Output Power	17
Radiated Spurious Emission	19
Conducted Spurious Emission	28
Power Density	31
APPENDIX 2: Test instruments	33
APPENDIX 3: Photographs of test setup	34
Radiated Spurious Emission	34
Worst Case Position	35

SECTION 1: Customer information

Company Name	:	Murata Manufacturing Co., Ltd.
Address	:	1-10-1 Higashikotari, Nagaokakyo-shi, Kyoto 617-8555 Japan
Telephone Number	:	+81-75-955-6736
Facsimile Number	:	+81-75-955-6634
Contact Person	:	Motoo Hayashi

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment	:	Wireless vibration sensor node
Model No.	:	LBAC0ZZ1LZ
Serial No.	:	Refer to Section 4, Clause 4.2
Rating	:	Min. 2.2 V / Typ. 3.3 V / Max. 3.6 V (Battery: SB-AA02)
Receipt Date of Sample	:	February 8, 2018
Country of Mass-production	:	Japan, China
Condition of EUT	:	Engineering prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT	:	No Modification by the test lab

2.2 Product Description

Model: LBAC0ZZ1LZ (referred to as the EUT in this report) is a Wireless vibration sensor node.

General Specification

Clock frequency(ies) in the system	:	24 MHz, 32.768 kHz
------------------------------------	---	--------------------

Radio Specification

Radio Type	:	Transceiver
Frequency of Operation	:	902.5 MHz to 927.5 MHz
Modulation	:	GFSK
Antenna type	:	Monopole wire antenna
Antenna Gain	:	-9.0 dBi

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart C
FCC Part 15 final revised on February 2, 2018 and effective March 5, 2018

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.247 Operation within the bands 902-928MHz,
2400-2483.5MHz, and 5725-5850MHz

* The revision on February 2, 2018, does not affect the test specification applied to the EUT.

3.2 Procedures and results

Item	Test Procedure	Specification	Worst margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.10-2013 6. Standard test methods	FCC: Section 15.207	N/A *1)	Complied	-
	IC: RSS-Gen 8.8	IC: RSS-Gen 8.8			
6dB Bandwidth	FCC: KDB 558074 D01 DTS Meas Guidance v04	FCC: Section 15.247(a)(2)	See data.	Complied	Conducted
	IC: -	IC: RSS-247 5.2(a)			
Maximum Peak Output Power	FCC: KDB 558074 D01 DTS Meas Guidance v04	FCC: Section 15.247(b)(3)		Complied	Conducted
	IC: RSS-Gen 6.12	IC: RSS-247 5.4(d)			
Power Density	FCC: KDB 558074 D01 DTS Meas Guidance v04	FCC: Section 15.247(e)		Complied	Conducted
	IC: -	IC: RSS-247 5.2(b)			
Spurious Emission Restricted Band Edges	FCC: KDB 558074 D01 DTS Meas Guidance v04	FCC: Section 15.247(d)	2.2 dB 902.000 MHz, PK, Vert.	Complied#	Conducted (below 30 MHz)/ Radiated (above 30 MHz) *2)
	IC: RSS-Gen 6.13	IC: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10			

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

*1) The test was not performed since the EUT is battery-powered equipment.

*2) Radiated test was selected over 30 MHz based on section 15.247(d) and KDB 558074 D01 DTS Meas Guidance v04 12.2.7.

Symbols:

Complied The data of this test item has enough margin, more than the measurement uncertainty.

Complied# The data of this test item meets the limits unless the measurement uncertainty is taken into consideration.

* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

FCC Part 15.31 (e)

The test was performed with the New Battery and the stable voltage was supplied to the EUT during the tests.
Therefore, the EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

3.3 Addition to standard

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99% Occupied Bandwidth	IC: RSS-Gen 6.7	IC: -	N/A	-	Conducted

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

EMI

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k=2$.

Ise EMC Lab.

Antenna Terminal test

Test Item	Uncertainty (+/-)
6 dB Bandwidth / 99 % Occupied Bandwidth	0.96 %
Maximum Peak Output Power / Average Output Power	1.3 dB
Burst Rate	0.10 %
Power Density	2.7 dB
Conducted Spurious Emission	2.7 dB

Conducted emission

using Item	Frequency range	Uncertainty (+/-)
AMN (LISN)	0.009 MHz to 0.15 MHz	3.8 dB
	0.15 MHz to 30 MHz	3.4 dB

Radiated emission

Measurement distance	Frequency range	Uncertainty (+/-)
3 m	9 kHz to 30 MHz	3.3 dB
10 m		3.2 dB
3 m	30 MHz to 200 MHz (Horizontal) (Vertical)	4.8 dB
		5.0 dB
	200 MHz to 1000 MHz (Horizontal) (Vertical)	5.2 dB
		6.3 dB
10 m	30 MHz to 200 MHz (Horizontal) (Vertical)	4.8 dB
		4.9 dB
	200 MHz to 1000 MHz (Horizontal) (Vertical)	5.0 dB
		5.0 dB
3 m	1 GHz to 6 GHz	5.0 dB
	6 GHz to 18 GHz	5.3 dB
1 m	10 GHz to 26.5 GHz	5.8 dB
	26.5 GHz to 40 GHz	5.8 dB
10 m	1 GHz to 18 GHz	5.2 dB

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

3.5 Test Location

UL Japan, Inc. Ise EMC Lab.
 4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
 Telephone: +81 596 24 8999, Facsimile: +81 596 24 8124
 NVLAP Lab. code: 200572-0 / FCC Test Firm Registration Number: 199967

Test site	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	2973C-1	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	2973C-2	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	2973C-3	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	-	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	2973C-4	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	-	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	-	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.6 shielded room	-	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	-	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	-	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	-	3.1 x 5.0 x 2.7	3.1 x 5.0	-	-
No.9 measurement room	-	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.11 measurement room	-	6.2 x 4.7 x 3.0	4.8 x 4.6	-	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 m x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Mode(s)

Mode	Remarks*
Transmitting (Tx)	-
*Power of the EUT was set by the software as follows; Power setting value: B Software: Murata SubGHz Tool 1.0.3 *This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.	

*The details of Operating mode(s)

Test Item	Operating Mode	Tested frequency
6 dB Bandwidth Power Density 99 % Occupied Bandwidth Spurious Emission (Radiated /Conducted) Maximum Peak Output Power	Transmitting (Tx)	902.5 MHz 915.0 MHz 927.5 MHz

UL Japan, Inc.


Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

4.2 Configuration and peripherals

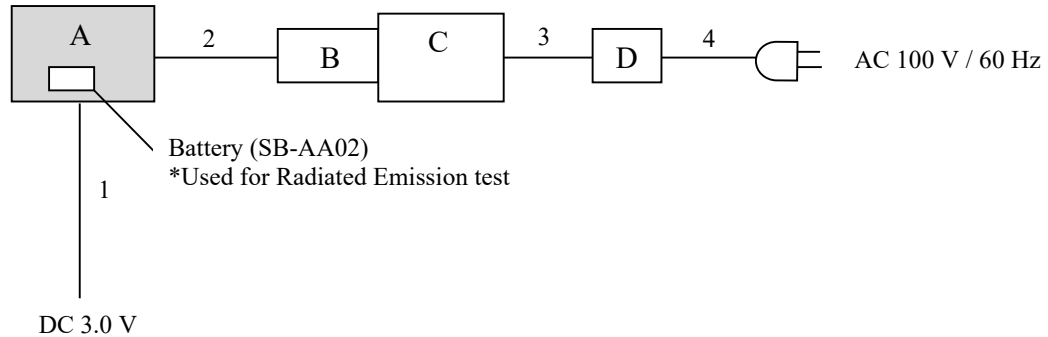

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Wireless vibration sensor node	LBAC0ZZ1LZ	No.1	Murata Manufacturing Co., Ltd.	EUT
B	Jig Board	-	-	Murata Manufacturing Co., Ltd.	-
C	Laptop PC	CF-N8HWCDPS	OCKSA09265	Panasonic	-
D	AC Adapter	CR-AA6372B	6372BM610X10953E	Panasonic	-

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	DC Cable	2.40	Unshielded	Unshielded	*AT only *1)
2	Signal Cable	0.45	Unshielded	Unshielded	-
3	DC Cable	1.10	Unshielded	Unshielded	-
4	AC Cable	0.90	Unshielded	Unshielded	-

*AT: Antenna Terminal conducted test

*1) The use of this cable does not influence the RF characteristic.

SECTION 5: Radiated Spurious Emission

Test Procedure

It was measured based on "11.0 Emissions in non-restricted frequency bands" of "KDB 558074 D01 DTS Meas Guidance v04".

[For below 1 GHz]

EUT was placed on a urethane platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane.

The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Test Antennas are used as below;

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn

In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9(IC) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (IC).

Frequency	Below 1 GHz	Above 1 GHz		20 dBc
Instrument used	Test Receiver	Spectrum Analyzer		Spectrum Analyzer
Detector	QP	Peak / Peak with Duty factor	AV *1)	PK
IF Bandwidth	BW 120 kHz	RBW: 1 MHz VBW: 3 MHz	Average Power Method: RBW: 1 MHz VBW: 3 MHz Detector: Power Averaging (RMS) Trace: 100 traces If duty cycle was less than 98%, a duty factor was added to the results.	RBW: 100 kHz VBW: 300kHz

*1) Average Power Measurement was performed based on 6. 0 & 12.2.5 of "KDB 558074 D01 DTS Meas Guidance v04".

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Figure 1: Test Setup


Below 1 GHz

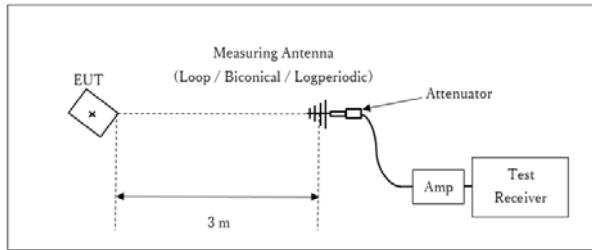

x : Center of turn table

Test Distance: 3 m

1 GHz - 10 GHz

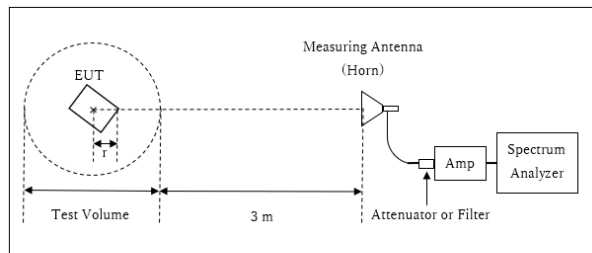

r : Radius of an outer periphery of EUT

x : Center of turn table

Distance Factor: $20 \times \log (3.75 \text{ m} / 3.0 \text{ m}) = 1.94 \text{ dB}$

* Test Distance: $(3 + \text{Test Volume} / 2) - r = 3.75 \text{ m}$

Test Volume : 1.5 m

(Test Volume has been calibrated based on CISPR 16-1-4.)

$r = 0.0 \text{ m}$

* The test was performed with $r = 0.0 \text{ m}$ since EUT is small and it was the rather conservative condition.

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement range : 30 MHz - 10 GHz

Test data : APPENDIX

Test result : Pass

SECTION 6: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument used
6dB Bandwidth	1 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99% Occupied Bandwidth *1)	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Peak Output Power	-	-	-	Auto	Peak/ Average *2)	-	Power Meter (Sensor: 50 MHz BW)
Peak Power Density	1.5 times the 6dB Bandwidth	3 kHz	10 kHz	Auto	Peak	Max Hold	Spectrum Analyzer *3)
Conducted Spurious Emission *4)	9kHz to 150kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150kHz to 30MHz	9.1 kHz	27 kHz				
*1) Peak hold was applied as Worst-case measurement. *2) Reference data *3) Section 10.2 Method PKPSD (peak PSD) of "KDB 558074 D01 DTS Meas Guidance v04". *4) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents. Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart. (9 kHz - 150 kHz: RBW = 200 Hz, 150 kHz - 30 MHz: RBW = 9.1 kHz)							

The test results and limit are rounded off to two decimals place, so some differences might be observed.

Test data	: APPENDIX
Test result	: Pass

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124


APPENDIX 1: Test data

6 dB Bandwidth and 99 % Occupied Bandwidth

Test place Ise EMC Lab. No.2 Measurement Room
Report No. 12176728H
Date February 16, 2018
Temperature / Humidity 20 deg. C / 31 % RH
Engineer Takafumi Noguchi
Mode Tx

Frequency [MHz]	99 % Occupied Bandwidth [kHz]	6 dB Bandwidth [kHz]	Limit for 6 dB Bandwidth [kHz]
902.500	477.7930	546.378	> 500.000
915.000	476.9981	548.517	> 500.000
927.500	483.3096	547.317	> 500.000

6 dB Bandwidth

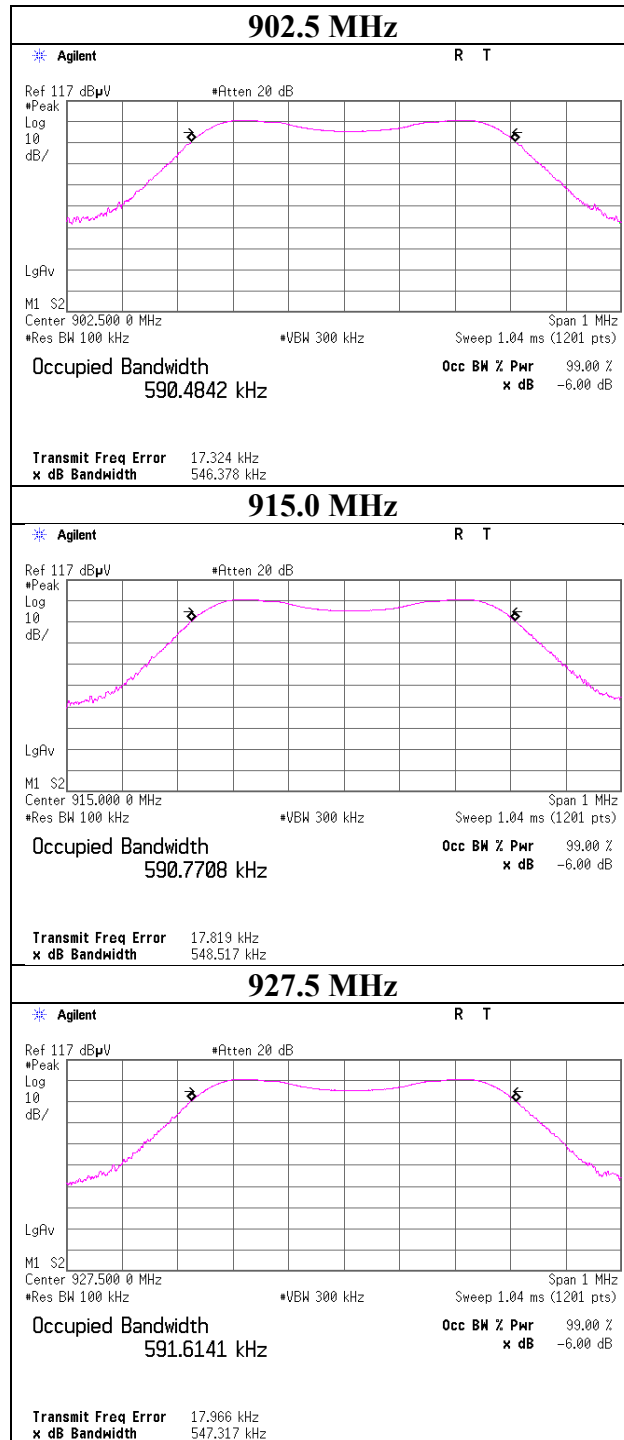

UL Japan, Inc.


Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

99 %Occupied Bandwidth

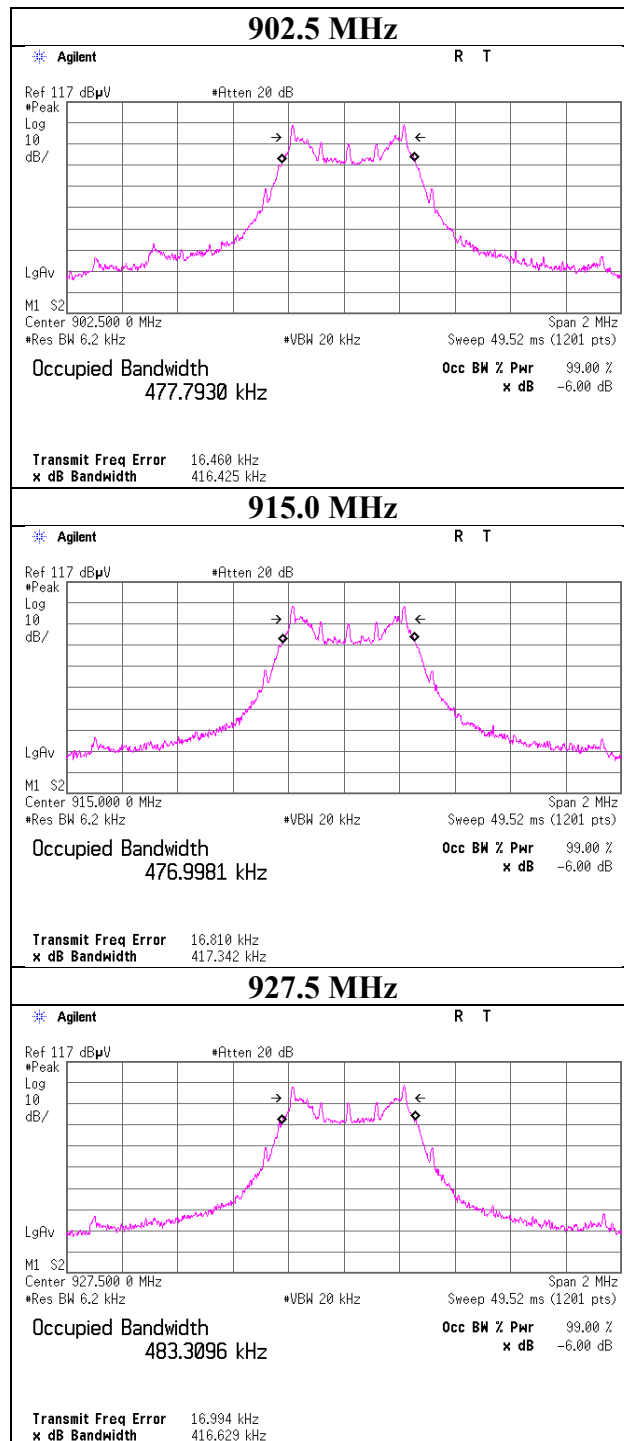

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Maximum Peak Output Power

Test place Ise EMC Lab. No.2 Measurement Room
Report No. 12176728H
Date February 16, 2018
Temperature / Humidity 20 deg. C / 31 % RH
Engineer Takafumi Noguchi
Mode Tx

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result		Limit		Margin [dB]
				[dBm]	[mW]	[dBm]	[mW]	
902.5	0.51	1.04	9.91	11.46	14.00	30.00	1000	18.54
915.0	0.48	1.05	9.91	11.44	13.93	30.00	1000	18.56
927.5	0.44	1.06	9.91	11.41	13.84	30.00	1000	18.59

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

Average Output Power
(Reference data for RF Exposure / SAR testing)

Test place	Ise EMC Lab. No.2 Measurement Room
Report No.	12176728H
Date	February 16, 2018
Temperature / Humidity	20 deg. C / 31 % RH
Engineer	Takafumi Noguchi
Mode	Tx

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)	
				[dBm]	[mW]
902.5	-9.83	1.04	9.91	1.12	1.29
915.0	-9.86	1.05	9.91	1.10	1.29
927.5	-9.90	1.06	9.91	1.07	1.28


Sample Calculation:

Result (Time average) = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

*The equipment and cables were not used for factor 0 dB of the data sheets.

Burst rate confirmation

Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No.	12176728H
Date	February 15, 2018
Temperature / Humidity	22 deg. C / 35 % RH
Engineer	Takafumi Noguchi
Mode	Tx

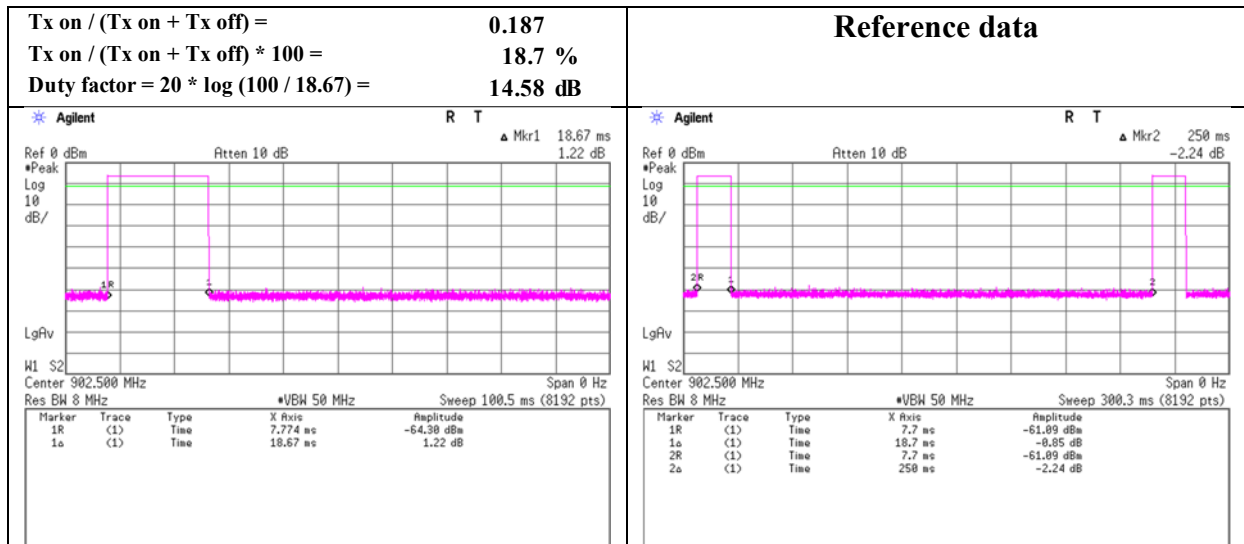

* Since the burst rate is not different between the channels, the data has been obtained on the representative channel.

Radiated Spurious Emission

Report No. 12176728H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.2
Date February 15, 2018 February 16, 2018
Temperature / Humidity 22 deg. C / 35 % RH 20 deg. C / 31 % RH
Engineer Takafumi Noguchi Takafumi Noguchi
(Below 1 GHz) (Above 1 GHz)
Mode Tx 902.5 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	96.017	QP	36.7	9.5	7.4	30.3	-	23.3	43.5	20.2	
Hori	104.136	QP	38.5	10.7	7.5	30.2	-	26.5	43.5	17.0	
Hori	120.010	QP	35.1	12.7	7.6	30.1	-	25.3	43.5	18.2	
Hori	192.009	QP	30.2	16.3	8.1	29.7	-	24.9	43.5	18.6	
Hori	278.953	QP	38.3	12.8	8.7	29.2	-	30.6	46.0	15.4	
Hori	325.761	QP	36.1	14.0	9.1	29.3	-	29.9	46.0	16.1	
Hori	1805.000	PK	56.1	26.8	5.0	34.7	-	53.2	73.9	20.7	
Hori	2707.500	PK	55.2	27.4	5.3	34.4	-	53.5	73.9	20.4	
Hori	3610.000	PK	45.3	28.7	5.7	33.8	-	45.9	73.9	28.0	
Hori	4512.500	PK	49.2	30.6	6.1	33.6	-	52.3	73.9	21.6	
Hori	5415.000	PK	41.4	31.7	6.6	33.4	-	46.3	73.9	27.6	Floor noise
Hori	6317.500	PK	41.7	33.7	7.0	33.6	-	48.8	73.9	25.1	Floor noise
Hori	7220.000	PK	42.2	35.6	7.2	33.6	-	51.4	73.9	22.5	Floor noise
Hori	8122.500	PK	42.4	36.5	7.5	33.7	-	52.7	73.9	21.2	Floor noise
Hori	9025.000	PK	43.0	37.0	7.7	33.8	-	53.9	73.9	20.0	Floor noise
Hori	5415.000	AV	34.0	31.7	6.6	33.4	-	38.9	53.9	15.0	Floor noise
Hori	6317.500	AV	34.5	33.7	7.0	33.6	-	41.6	53.9	12.3	Floor noise
Hori	7220.000	AV	34.7	35.6	7.2	33.6	-	43.9	53.9	10.0	Floor noise
Hori	8122.500	AV	34.7	36.5	7.5	33.7	-	45.0	53.9	8.9	Floor noise
Hori	9025.000	AV	35.3	37.0	7.7	33.8	-	46.2	53.9	7.7	Floor noise
Vert	50.497	QP	37.2	10.8	7.0	30.4	-	24.6	40.0	15.4	
Vert	72.001	QP	40.8	6.2	7.2	30.4	-	23.8	40.0	16.2	
Vert	96.017	QP	39.7	9.5	7.4	30.3	-	26.3	43.5	17.2	
Vert	120.004	QP	38.7	12.7	7.6	30.1	-	28.9	43.5	14.6	
Vert	192.010	QP	31.1	16.3	8.1	29.7	-	25.8	43.5	17.7	
Vert	278.953	QP	30.8	12.8	8.7	29.2	-	23.1	46.0	22.9	
Vert	1805.000	PK	54.1	26.8	5.0	34.7	-	51.2	73.9	22.7	
Vert	2707.500	PK	50.8	27.4	5.3	34.4	-	49.1	73.9	24.8	
Vert	3610.000	PK	45.3	28.7	5.7	33.8	-	45.9	73.9	28.0	
Vert	4512.500	PK	45.1	30.6	6.1	33.6	-	48.2	73.9	25.7	
Vert	5415.000	PK	42.2	31.7	6.6	33.4	-	47.1	73.9	26.8	Floor noise
Vert	6317.500	PK	41.7	33.7	7.0	33.6	-	48.8	73.9	25.1	Floor noise
Vert	7220.000	PK	42.2	35.6	7.2	33.6	-	51.4	73.9	22.5	Floor noise
Vert	8122.500	PK	42.4	36.5	7.5	33.7	-	52.7	73.9	21.2	Floor noise
Vert	9025.000	PK	43.0	37.0	7.7	33.8	-	53.9	73.9	20.0	Floor noise
Vert	5415.000	AV	34.0	31.7	6.6	33.4	-	38.9	53.9	15.0	Floor noise
Vert	6317.500	AV	34.5	33.7	7.0	33.6	-	41.6	53.9	12.3	Floor noise
Vert	7220.000	AV	34.7	35.6	7.2	33.6	-	43.9	53.9	10.0	Floor noise
Vert	8122.500	AV	34.7	36.5	7.5	33.7	-	45.0	53.9	8.9	Floor noise
Vert	9025.000	AV	35.3	37.0	7.7	33.8	-	46.2	53.9	7.7	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.75 m / 3.0 m) = 1.94 dB

20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	902.500	PK	101.2	21.9	11.2	28.1	106.2	-	-	Carrier
Hori	902.000	PK	78.9	21.9	11.2	28.1	83.9	86.2	2.3	
Vert	902.500	PK	98.8	21.9	11.2	28.1	103.8	-	-	Carrier
Vert	902.000	PK	76.6	21.9	11.2	28.1	81.6	83.8	2.2	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

PK with Duty Factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	1805.000	PK	56.1	26.8	5.0	34.7	-14.6	38.6	53.9	15.3	*1)
Hori	2707.500	PK	55.2	27.4	5.3	34.4	-14.6	38.9	53.9	15.0	*1)
Hori	3610.000	PK	45.3	28.7	5.7	33.8	-14.6	31.3	53.9	22.6	*1)
Hori	4512.500	PK	49.2	30.6	6.1	33.6	-14.6	37.7	53.9	16.2	*1)
Vert	1805.000	PK	54.1	26.8	5.0	34.7	-14.6	36.6	53.9	17.3	*1)
Vert	2707.500	PK	50.8	27.4	5.3	34.4	-14.6	34.5	53.9	19.4	*1)
Vert	3610.000	PK	45.3	28.7	5.7	33.8	-14.6	31.3	53.9	22.6	*1)
Vert	4512.500	PK	45.1	30.6	6.1	33.6	-14.6	33.6	53.9	20.3	*1)



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz))

- Gain(Amplifier) + Duty factor (Refer to duty factor data sheet)

*1) Noise synchronized with duty of carrier frequency.

Radiated Spurious Emission (Reference Plot for band-edge)

Report No.	12176728H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	February 15, 2018
Temperature / Humidity	22 deg. C / 35 % RH
Engineer	Takafumi Noguchi
	(Below 1 GHz)
Mode	Tx 902.5 MHz

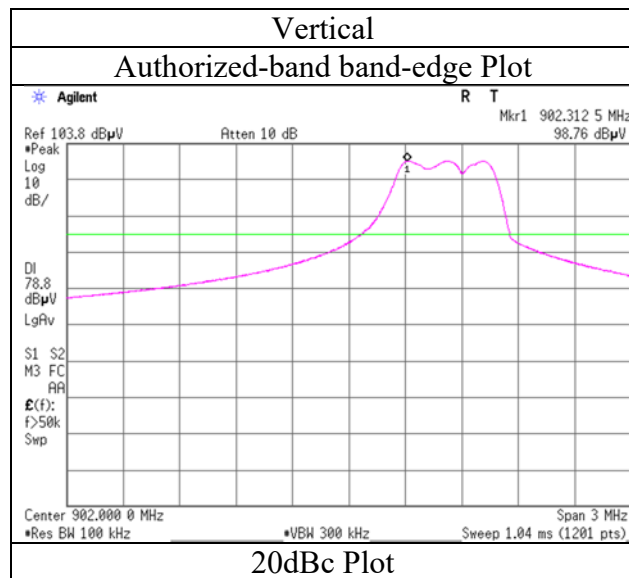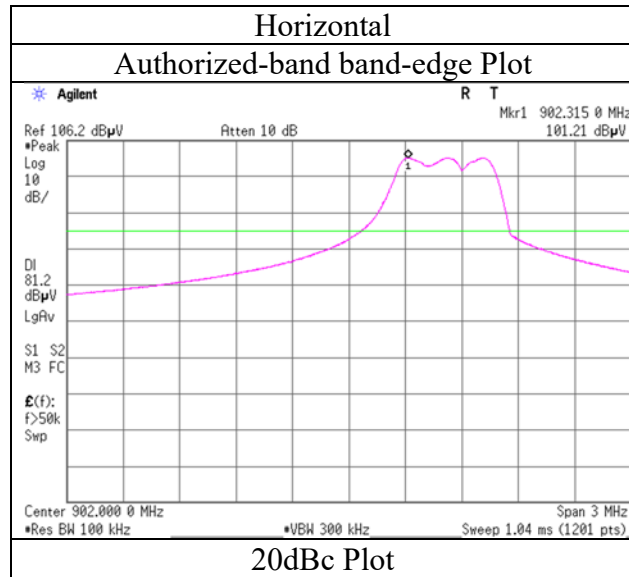

* Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No. 12176728H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.2
Date February 15, 2018 February 16, 2018
Temperature / Humidity 22 deg. C / 35 % RH 20 deg. C / 31 % RH
Engineer Takafumi Noguchi Takafumi Noguchi
(Below 1 GHz) (Above 1 GHz)
Mode Tx 915.0 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	96.017	QP	36.8	9.5	7.4	30.3	-	23.4	43.5	20.1	
Hori	104.516	QP	38.2	10.8	7.5	30.2	-	26.3	43.5	17.2	
Hori	120.031	QP	34.7	12.7	7.6	30.1	-	24.9	43.5	18.6	
Hori	192.009	QP	29.4	16.3	8.1	29.7	-	24.1	43.5	19.4	
Hori	279.793	QP	40.0	12.8	8.7	29.2	-	32.3	46.0	13.7	
Hori	325.460	QP	35.7	14.0	9.1	29.3	-	29.5	46.0	16.5	
Hori	1830.000	PK	52.9	26.8	5.1	34.7	-	50.1	73.9	23.8	
Hori	2745.000	PK	58.9	27.5	5.3	34.4	-	57.3	73.9	16.6	
Hori	3660.000	PK	46.3	28.8	5.7	33.8	-	47.0	73.9	26.9	
Hori	4575.000	PK	47.3	30.8	6.1	33.6	-	50.6	73.9	23.3	
Hori	5490.000	PK	42.2	31.7	6.6	33.4	-	47.1	73.9	26.8	Floor noise
Hori	6405.000	PK	41.4	34.0	7.0	33.6	-	48.8	73.9	25.1	Floor noise
Hori	7320.000	PK	41.6	35.8	7.3	33.6	-	51.1	73.9	22.8	Floor noise
Hori	8235.000	PK	42.4	36.4	7.4	33.7	-	52.5	73.9	21.4	Floor noise
Hori	9150.000	PK	42.9	37.3	7.8	33.8	-	54.2	73.9	19.7	Floor noise
Hori	5490.000	AV	33.6	31.7	6.6	33.4	-	38.5	53.9	15.4	Floor noise
Hori	6405.000	AV	34.2	34.0	7.0	33.6	-	41.6	53.9	12.3	Floor noise
Hori	7320.000	AV	34.7	35.8	7.3	33.6	-	44.2	53.9	9.7	Floor noise
Hori	8235.000	AV	34.6	36.4	7.4	33.7	-	44.7	53.9	9.2	Floor noise
Hori	9150.000	AV	35.4	37.3	7.8	33.8	-	46.7	53.9	7.2	Floor noise
Vert	50.497	QP	36.0	10.8	7.0	30.4	-	23.4	40.0	16.6	
Vert	72.006	QP	40.5	6.2	7.2	30.4	-	23.5	40.0	16.5	
Vert	96.018	QP	39.6	9.5	7.4	30.3	-	26.2	43.5	17.3	
Vert	120.016	QP	38.3	12.7	7.6	30.1	-	28.5	43.5	15.0	
Vert	192.010	QP	30.9	16.3	8.1	29.7	-	25.6	43.5	17.9	
Vert	298.063	QP	34.9	13.4	8.8	29.2	-	27.9	46.0	18.1	
Vert	1830.000	PK	51.1	26.8	5.1	34.7	-	48.3	73.9	25.6	
Vert	2745.000	PK	57.2	27.5	5.3	34.4	-	55.6	73.9	18.3	
Vert	3660.000	PK	45.7	28.8	5.7	33.8	-	46.4	73.9	27.5	
Vert	4575.000	PK	46.4	30.8	6.1	33.6	-	49.7	73.9	24.2	
Vert	5490.000	PK	42.2	31.7	6.6	33.4	-	47.1	73.9	26.8	Floor noise
Vert	6405.000	PK	41.4	34.0	7.0	33.6	-	48.8	73.9	25.1	Floor noise
Vert	7320.000	PK	41.6	35.8	7.3	33.6	-	51.1	73.9	22.8	Floor noise
Vert	8235.000	PK	42.4	36.4	7.4	33.7	-	52.5	73.9	21.4	Floor noise
Vert	9150.000	PK	42.9	37.3	7.8	33.8	-	54.2	73.9	19.7	Floor noise
Vert	5490.000	AV	33.6	31.7	6.6	33.4	-	38.5	53.9	15.4	Floor noise
Vert	6405.000	AV	34.2	34.0	7.0	33.6	-	41.6	53.9	12.3	Floor noise
Vert	7320.000	AV	34.7	35.8	7.3	33.6	-	44.2	53.9	9.7	Floor noise
Vert	8235.000	AV	34.6	36.4	7.4	33.7	-	44.7	53.9	9.2	Floor noise
Vert	9150.000	AV	35.4	37.3	7.8	33.8	-	46.7	53.9	7.2	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.75 m / 3.0 m) = 1.94 dB

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

PK with Duty Factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit dBuV/m	Margin [dB]	Remark
Hori	1830.000	PK	52.9	26.8	5.1	34.7	-14.6	35.5	53.9	18.4	*1)
Hori	2745.000	PK	58.9	27.5	5.3	34.4	-14.6	42.7	53.9	11.2	*1)
Hori	3660.000	PK	46.3	28.8	5.7	33.8	-14.6	32.4	53.9	21.5	*1)
Hori	4575.000	PK	47.3	30.8	6.1	33.6	-14.6	36.0	53.9	17.9	*1)
Vert	1830.000	PK	51.1	26.8	5.1	34.7	-14.6	33.7	53.9	20.2	*1)
Vert	2745.000	PK	57.2	27.5	5.3	34.4	-14.6	41.0	53.9	12.9	*1)
Vert	3660.000	PK	45.7	28.8	5.7	33.8	-14.6	31.8	53.9	22.1	*1)
Vert	4575.000	PK	46.4	30.8	6.1	33.6	-14.6	35.1	53.9	18.8	*1)

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz))

- Gain(Amplifier) + Duty factor (Refer to duty factor data sheet)

*1) Noise synchronized with duty of carrier frequency.

Radiated Spurious Emission

Report No. 12176728H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.2
Date February 15, 2018 February 16, 2018
Temperature / Humidity 22 deg. C / 35 % RH 20 deg. C / 31 % RH
Engineer Takafumi Noguchi Takafumi Noguchi
(Below 1 GHz) (Above 1 GHz)
Mode Tx 927.5 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	96.034	QP	36.7	9.5	7.4	30.3	-	23.3	43.5	20.2	
Hori	103.497	QP	38.6	10.7	7.5	30.2	-	26.6	43.5	16.9	
Hori	120.004	QP	34.6	12.7	7.6	30.1	-	24.8	43.5	18.7	
Hori	192.026	QP	30.5	16.3	8.1	29.7	-	25.2	43.5	18.3	
Hori	281.313	QP	39.0	12.8	8.7	29.2	-	31.3	46.0	14.7	
Hori	324.281	QP	36.0	14.0	9.0	29.3	-	29.7	46.0	16.3	
Hori	1855.000	PK	53.1	26.9	5.1	34.7	-	50.4	73.9	23.5	
Hori	2782.500	PK	60.4	27.5	5.2	34.4	-	58.7	73.9	15.2	
Hori	3710.000	PK	47.5	28.9	5.7	33.7	-	48.4	73.9	25.5	
Hori	4637.500	PK	44.9	30.9	6.1	33.7	-	48.2	73.9	25.7	
Hori	5565.000	PK	41.5	31.8	6.7	33.4	-	46.6	73.9	27.3	Floor noise
Hori	6492.500	PK	41.6	34.3	7.0	33.6	-	49.3	73.9	24.6	Floor noise
Hori	7420.000	PK	41.7	35.9	7.3	33.6	-	51.3	73.9	22.6	Floor noise
Hori	8347.500	PK	43.4	36.3	7.5	33.7	-	53.5	73.9	20.4	Floor noise
Hori	9275.000	PK	43.3	37.6	7.8	33.8	-	54.9	73.9	19.0	Floor noise
Hori	5565.000	AV	33.5	31.8	6.7	33.4	-	38.6	53.9	15.3	Floor noise
Hori	6492.500	AV	34.1	34.3	7.0	33.6	-	41.8	53.9	12.1	Floor noise
Hori	7420.000	AV	34.7	35.9	7.3	33.6	-	44.3	53.9	9.6	Floor noise
Hori	8347.500	AV	35.3	36.3	7.5	33.7	-	45.4	53.9	8.5	Floor noise
Hori	9275.000	AV	35.7	37.6	7.8	33.8	-	47.3	53.9	6.6	Floor noise
Vert	50.498	QP	36.3	10.8	7.0	30.4	-	23.7	40.0	16.3	
Vert	72.010	QP	40.1	6.2	7.2	30.4	-	23.1	40.0	16.9	
Vert	96.015	QP	39.6	9.5	7.4	30.3	-	26.2	43.5	17.3	
Vert	120.009	QP	38.1	12.7	7.6	30.1	-	28.3	43.5	15.2	
Vert	192.016	QP	31.2	16.3	8.1	29.7	-	25.9	43.5	17.6	
Vert	277.673	QP	30.3	12.7	8.7	29.2	-	22.5	46.0	23.5	
Vert	1855.000	PK	49.3	26.9	5.1	34.7	-	46.6	73.9	27.3	
Vert	2782.500	PK	59.4	27.5	5.2	34.4	-	57.7	73.9	16.2	
Vert	3710.000	PK	46.9	28.9	5.7	33.7	-	47.8	73.9	26.1	
Vert	4637.500	PK	44.2	30.9	6.1	33.7	-	47.5	73.9	26.4	
Vert	5565.000	PK	41.5	31.8	6.7	33.4	-	46.6	73.9	27.3	Floor noise
Vert	6492.500	PK	41.6	34.3	7.0	33.6	-	49.3	73.9	24.6	Floor noise
Vert	7420.000	PK	41.7	35.9	7.3	33.6	-	51.3	73.9	22.6	Floor noise
Vert	8347.500	PK	43.4	36.3	7.5	33.7	-	53.5	73.9	20.4	Floor noise
Vert	9275.000	PK	43.3	37.6	7.8	33.8	-	54.9	73.9	19.0	Floor noise
Vert	5565.000	AV	33.5	31.8	6.7	33.4	-	38.6	53.9	15.3	Floor noise
Vert	6492.500	AV	34.1	34.3	7.0	33.6	-	41.8	53.9	12.1	Floor noise
Vert	7420.000	AV	34.7	35.9	7.3	33.6	-	44.3	53.9	9.6	Floor noise
Vert	8347.500	AV	35.3	36.3	7.5	33.7	-	45.4	53.9	8.5	Floor noise
Vert	9275.000	AV	35.7	37.6	7.8	33.8	-	47.3	53.9	6.6	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.75\text{ m} / 3.0\text{ m}) = 1.94\text{ dB}$

20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	927.500	PK	97.9	22.0	11.3	27.9	103.3	-	-	Carrier
Hori	928.000	PK	72.0	22.0	11.3	27.9	77.4	83.3	5.9	
Vert	927.500	PK	93.2	22.0	11.3	27.9	98.6	-	-	Carrier
Vert	928.000	PK	67.0	22.0	11.3	27.9	72.4	78.6	6.2	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

PK with Duty Factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	1855.000	PK	53.1	26.9	5.1	34.7	-14.6	35.8	53.9	18.1	*1)
Hori	2782.500	PK	60.4	27.5	5.2	34.4	-14.6	44.1	53.9	9.8	*1)
Hori	3710.000	PK	47.5	28.9	5.7	33.7	-14.6	33.8	53.9	20.1	*1)
Hori	4637.500	PK	44.9	30.9	6.1	33.7	-14.6	33.6	53.9	20.3	*1)
Vert	1855.000	PK	49.3	26.9	5.1	34.7	-14.6	32.0	53.9	21.9	*1)
Vert	2782.500	PK	59.4	27.5	5.2	34.4	-14.6	43.1	53.9	10.8	*1)
Vert	3710.000	PK	46.9	28.9	5.7	33.7	-14.6	33.2	53.9	20.7	*1)
Vert	4637.500	PK	44.2	30.9	6.1	33.7	-14.6	32.9	53.9	21.0	*1)



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz))

- Gain(Amplifier) + Duty factor (Refer to duty factor data sheet)

*1) Noise synchronized with duty of carrier frequency.

Radiated Spurious Emission (Reference Plot for band-edge)

Report No.	12176728H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	February 15, 2018
Temperature / Humidity	22 deg. C / 35 % RH
Engineer	Takafumi Noguchi
	(Below 1 GHz)
Mode	Tx 927.5 MHz

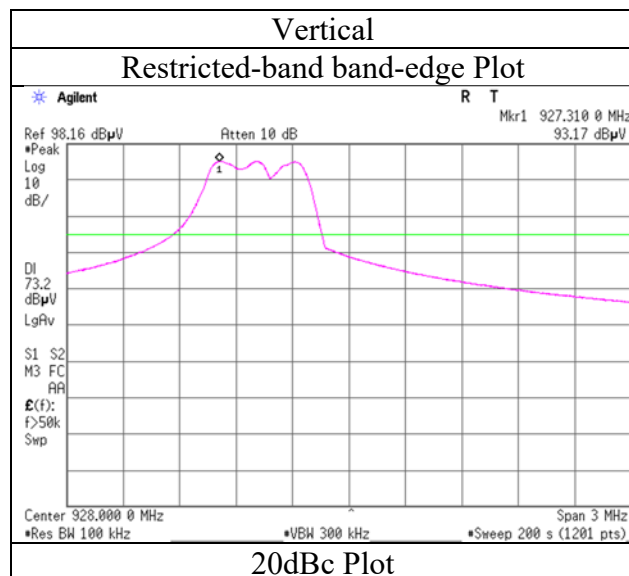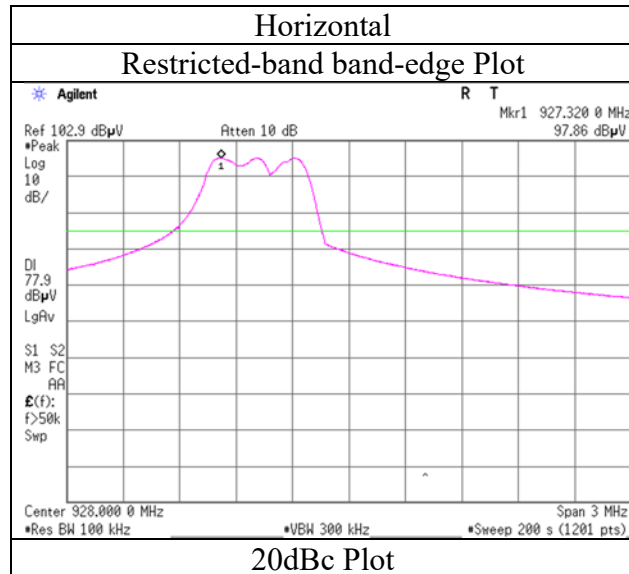

* Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission (Plot data, Worst case)


Report No.	12176728H	
Test place	Ise EMC Lab.	
Semi Anechoic Chamber	No.2	No.2
Date	February 15, 2018	February 16, 2018
Temperature / Humidity	22 deg. C / 35 % RH	20 deg. C / 31 % RH
Engineer	Takafumi Noguchi (Below 1 GHz)	Takafumi Noguchi (Above 1 GHz)
Mode	Tx 902.5 MHz	

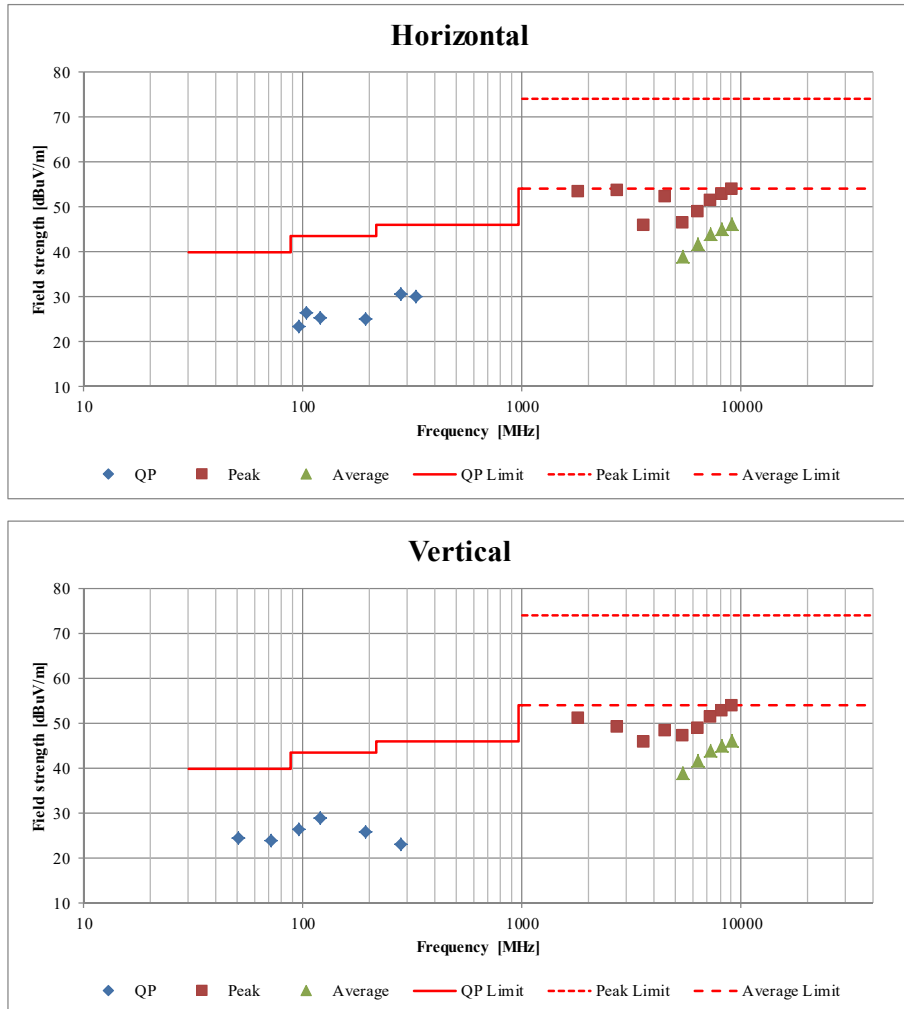

*These plots data contains sufficient number to show the trend of characteristic features for EUT.

Conducted Spurious Emission

Test place	Ise EMC Lab. No.2 Measurement Room
Report No.	12176728H
Date	February 16, 2018
Temperature / Humidity	20 deg. C / 31 % RH
Engineer	Takafumi Noguchi
Mode	Tx 902.5 MHz

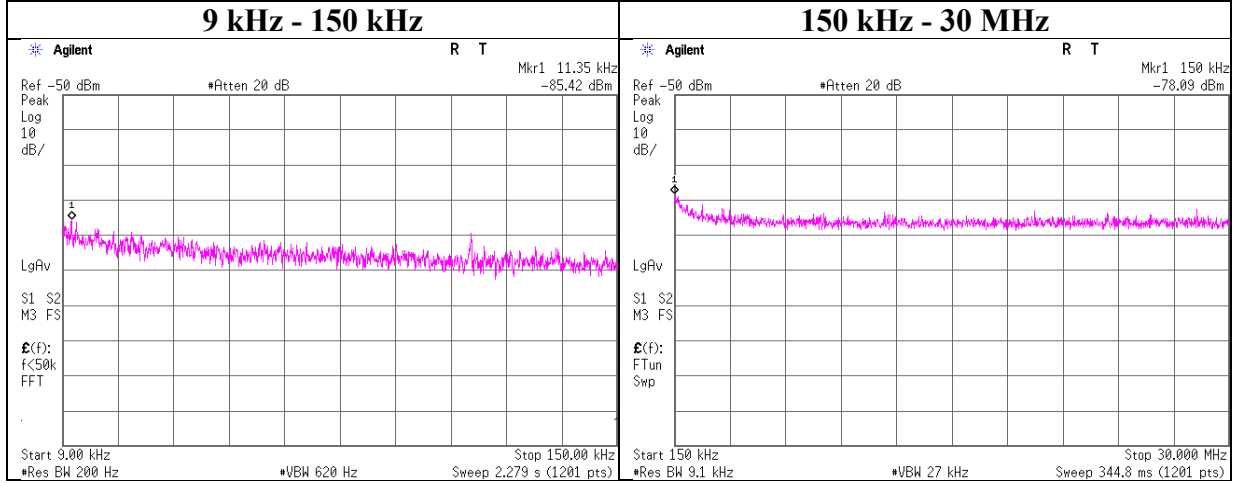

Frequency	Reading	Cable Loss	Attenuator Loss	Antenna Gain*	N (Number of Output)	EIRP	Distance	Ground bounce	E (field strength)	Limit	Margin	Remark
[kHz]	[dBm]	[dB]	[dB]	[dBi]		[dBm]	[m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
11.35	-85.4	0.26	9.8	2.0	1	-73.3	300	6.0	-12.1	46.5	58.6	
150.00	-78.1	0.47	9.9	2.0	1	-65.8	300	6.0	-4.5	24.0	28.5	

$E [dBuV/m] = EIRP [dBm] - 20 \log (Distance [m]) + Ground\ bounce [dB] + 104.8 [dBuV/m]$

$EIRP [dBm] = Reading [dBm] + Cable\ loss [dB] + Attenuator\ Loss [dB] + Antenna\ gain [dBi] + 10 * \log (N)$

N: Number of output

*2.0 dBi was applied to the test result based on KDB 558074 since antenna gain was less than 2.0 dBi.

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Test place	Ise EMC Lab. No.2 Measurement Room
Report No.	12176728H
Date	February 16, 2018
Temperature / Humidity	20 deg. C / 31 % RH
Engineer	Takafumi Noguchi
Mode	Tx 915.0 MHz

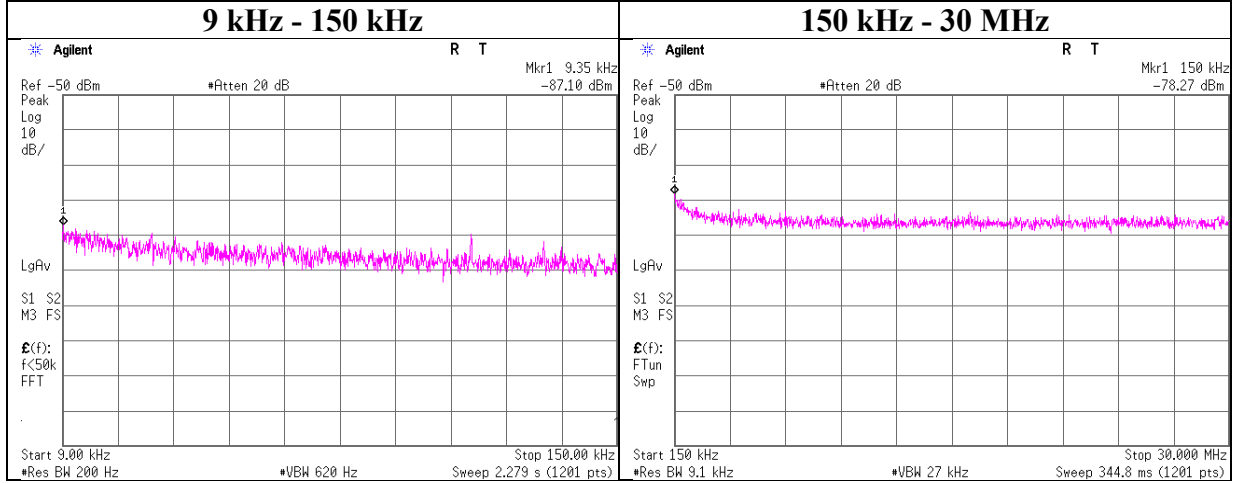

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain* [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
9.35	-87.1	0.26	9.8	2.0	1	-75.0	300	6.0	-13.7	48.1	61.8	
150.00	-78.3	0.47	9.9	2.0	1	-65.9	300	6.0	-4.7	24.0	28.7	

$E [dBuV/m] = EIRP [dBm] - 20 \log (Distance [m]) + Ground\ bounce [dB] + 104.8 [dBuV/m]$

$EIRP[dBm] = Reading [dBm] + Cable\ loss [dB] + Attenuator\ Loss [dB] + Antenna\ gain [dBi] + 10 * \log (N)$

N: Number of output

*2.0 dBi was applied to the test result based on KDB 558074 since antenna gain was less than 2.0 dBi.

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Test place	Ise EMC Lab. No.2 Measurement Room
Report No.	12176728H
Date	February 16, 2018
Temperature / Humidity	20 deg. C / 31 % RH
Engineer	Takafumi Noguchi
Mode	Tx 927.5 MHz

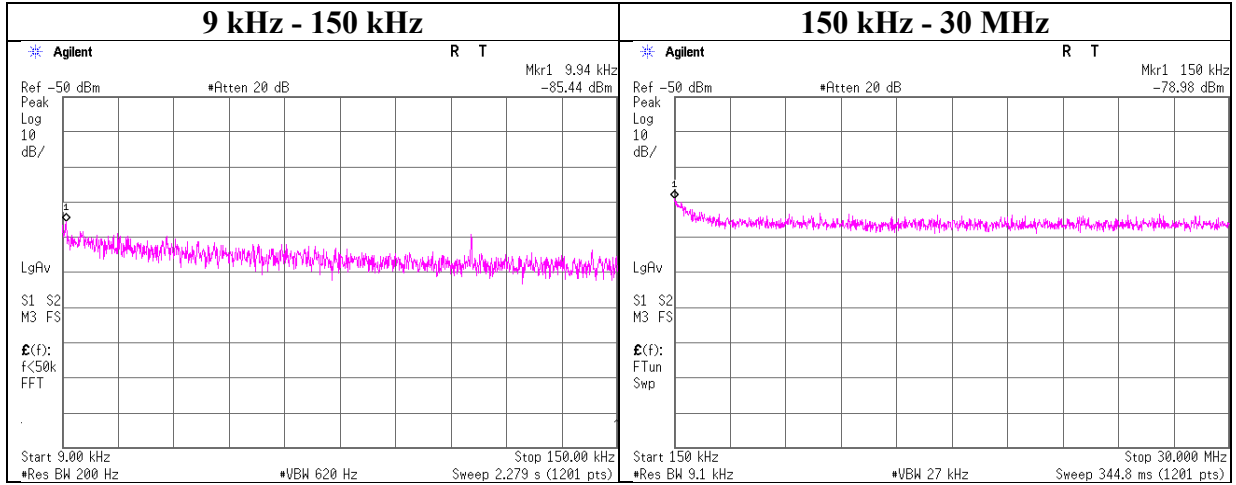

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain* [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
9.94	-85.4	0.26	9.8	2.0	1	-73.3	300	6.0	-12.1	47.6	59.7	
150.00	-79.0	0.47	9.9	2.0	1	-66.7	300	6.0	-5.4	24.0	29.4	

$E [dBuV/m] = EIRP [dBm] - 20 \log (Distance [m]) + Ground\ bounce [dB] + 104.8 [dBuV/m]$

$EIRP [dBm] = Reading [dBm] + Cable\ loss [dB] + Attenuator\ Loss [dB] + Antenna\ gain [dBi] + 10 * \log (N)$

N: Number of output

*2.0 dBi was applied to the test result based on KDB 558074 since antenna gain was less than 2.0 dBi.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Power Density

Test place	Ise EMC Lab. No.2 Measurement Room
Report No.	12176728H
Date	February 16, 2018
Temperature / Humidity	20 deg. C / 31 % RH
Engineer	Takafumi Noguchi
Mode	Tx


Freq.	Reading	Cable Loss	Atten. Loss	Result	Limit	Margin
[MHz]	[dBm]	[dB]	[dB]	[dBm]	[dBm]	[dB]
902.50	-3.59	1.04	9.91	7.36	8.00	0.64
915.00	-3.91	1.05	9.91	7.05	8.00	0.95
927.50	-3.07	1.06	9.91	7.90	8.00	0.10

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

*The equipment and cables were not used for factor 0 dB of the data sheets.

Power Density

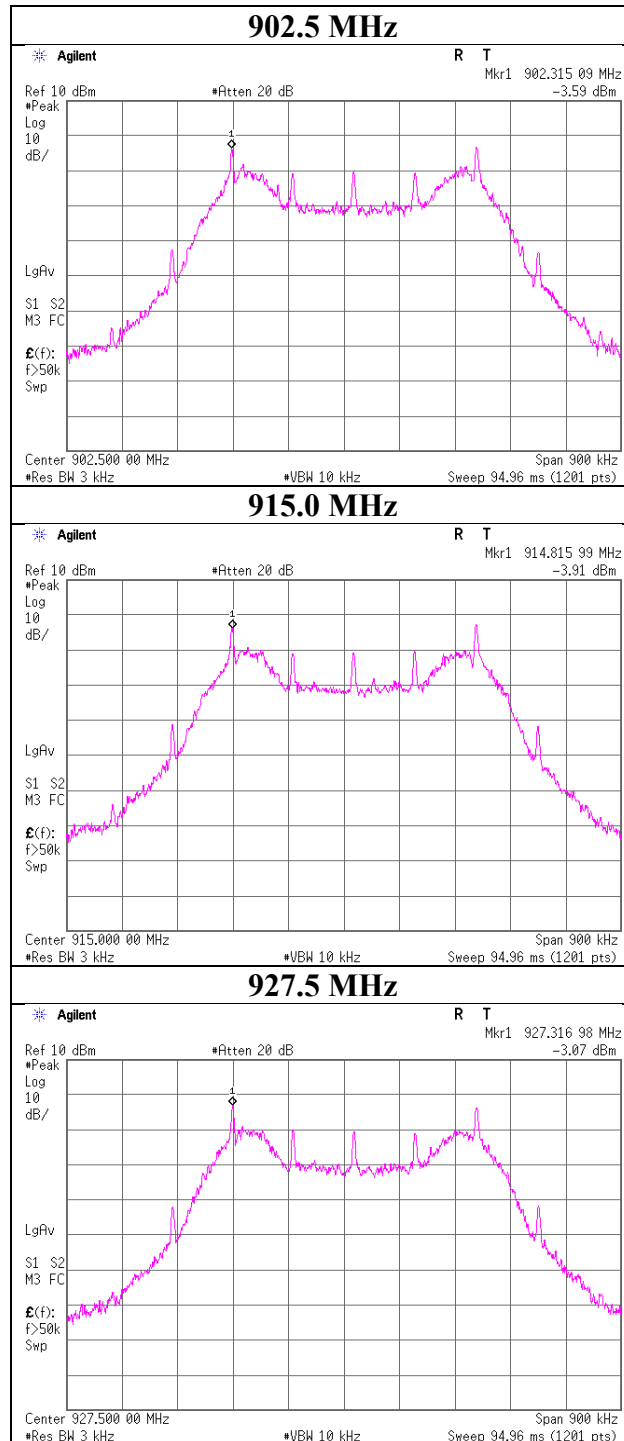

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

APPENDIX 2: Test instruments

Test Instruments

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MAEC-02	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-06902	RE	2017/08/31 * 12
MOS-22	Thermo-Hygrometer	Custom	CTH-201	0003	RE/AT	2017/12/21 * 12
MJM-14	Measure	KOMELON	KMC-36	-	RE/AT	-
COTS-MEMI	EMI measurement program	TSJ	TEPTO-DV	-	RE	-
MSA-03	Spectrum Analyzer	Agilent	E4448A	MY44020357	RE/AT	2017/11/07 * 12
MTR-03	Test Receiver	Rohde & Schwarz	ESCI	100300	RE	2017/08/21 * 12
MBA-08	Biconical Antenna	Schwarzbeck	VHA9103B	08031	RE	2017/09/13 * 12
MLA-21	Logperiodic Antenna(200-1000MHz)	Schwarzbeck	VUSLP9111B	911B-190	RE	2017/12/10 * 12
MCC-12	Coaxial Cable	Fujikura/Agilent	-	-	RE	2017/02/24 * 12
MAT-07	Attenuator(6dB)	Weinschel Corp	2	BK7970	RE	2017/11/14 * 12
MPA-09	Pre Amplifier	Agilent	8447D	2944A10845	RE	2017/09/27 * 12
MMM-01	Digital Tester	Fluke	FLUKE 26-3	78030611	RE/AT	2017/08/07 * 12
MHA-06	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	254	RE	2017/02/24 * 12
MCC-216	Microwave Cable	Junkosha	MWX221	1604S253(1 m) / 1608S087(5 m)	RE	2017/08/04 * 12
MPA-10	Pre Amplifier	Agilent	8449B	3008A02142	RE	2018/01/23 * 12
MHF-27	High Pass Filter(1.1-10GHz)	TOKYO KEIKI	TF219CD1	1001	RE	2018/01/18 * 12
MPM-13	Power Meter	Anritsu	ML2495A	0824014	AT	2017/11/16 * 12
MPSE-18	Power sensor	Anritsu	MA2411B	0738174	AT	2017/11/16 * 12
MCC-64	Coaxial Cable	UL Japan	-	-	AT	2017/03/24 * 12
MAT-10	Attenuator(10dB)	Weinschel Corp	2	BL1173	AT	2017/11/14 * 12

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

Test item: RE: Radiated Emission test
AT: Antenna Terminal Conducted

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124