

# **FCC Test Report**

FCC ID : VQK-F04G

**Equipment**: Mobile Phone

Model No. : F-04G

Brand Name : FUJITSU

Applicant : FUJITSU LIMITED

Address : 1-1, Kamikodanaka 4-chome, Nakahara-ku,

Kawasaki 211-8588, Japan

Standard : 47 CFR FCC Part 15.225

Received Date : Dec. 17, 2014
Tested Date : Feb. 24, 2015

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:

Gary Chang / Manager

Ilac-MRA

Testing Laboratory

Report No.: FR4D1701NF Report Version: Rev. 01 Page: 1 of 23



## **Table of Contents**

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	
1.3	Test Setup Chart	6
1.4	The Equipment List	7
1.5	Test Standards	8
1.6	Measurement Uncertainty	8
2	TEST CONFIGURATION	g
2.1	Testing Condition	g
2.2	The Worst Test Modes and Channel Details	g
3	TRANSMITTER TEST RESULTS	10
3.1	20dB and Occupied Bandwidth	10
3.2	Field Strength of Fundamental Emissions and Spectrum Mask	
3.3	Unwanted Emissions into Restricted Frequency Bands	15
3.4	Frequency Stability	21
4	TEST LABORATORY INFORMATION	23



## **Release Record**

Report No.	Version	Description	Issued Date
FR4D1701NF	Rev. 01	Initial issue	Apr. 01, 2015

Report No.: FR4D1701NF Page: 3 of 23



## **Summary of Test Results**

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	Note	N/A
15.225(a)~(c)	Field strength of fundamental emissions and spectrum mask	[dBuV/m at 3m]: 13.56 MHz 52.15 (Margin -71.85dB)	Pass
15.225(d)	Field strength of any emissions appearing outside of the 13.110-14.010 MHz band	Meet the requirement of limit	Pass
15.225(e)	Frequency tolerance	Meet the requirement of limit	Pass
15.215 (c)	20dB bandwidth	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Note: The EUT consumes DC power from battery, so the test is not required.

Report No.: FR4D1701NF Page: 4 of 23



## 1 General Description

## 1.1 Information

#### 1.1.1 Product Details

Product Name	Mobile Phone
Brand Name	FUJITSU
Model Name	F-04G
IMEI Code	357241060021606
H/W Version	v2.1.0
S/W Version	R21.5e

## 1.1.2 Specification of the Equipment under Test (EUT)

RF General Information						
Frequency Range (MHz) Modulation Ch. Frequency (MHz) Channel Number						
13.553 – 13.567	NFC-ASK	13.56	1			

#### 1.1.3 Antenna Details

Ant. No.	Туре	Gain (dBi)	Connector	Remark
1	Loop antenna			

## 1.1.4 EUT Operational Condition

Supply Voltage	AC adapter: (normal output rating) 5.0V (quick charge output rating Battery: 3.75Vdc		
Operational Voltage			
Operational Climatic	☐ Tnom (20°C)		☐ Tmin (-30°C)

#### 1.1.5 Accessories

No.	Equipment	Description
1	Cradle	Brand Name: Fujitsu Limited Model Name: F50 Input rating: (quick charge) 9.0Vdc, 1.5A Output rating: (quick charge) 9.0Vdc, 1.5A
2	Battery (Unremovable)	Brand Name: NTT Docomo Model Name: CA54310-0061 Power Rating: 3.75Vdc, 3120mAh, 12Wh

Report No.: FR4D1701NF Page: 5 of 23




## 1.1.6 Test Tool and Power Setting

Test tool	NFC Rw Test			
<b>Modulation Mode</b>	NFC RFID			
Setting	Default	Default		

## 1.2 Local Support Equipment List

	Support Equipment List							
No.	No. Equipment Brand Model S/N FCC ID Signal cable / Length (r							
1	NFC Tag	Easy Card Corp.	Easy Card					

## 1.3 Test Setup Chart

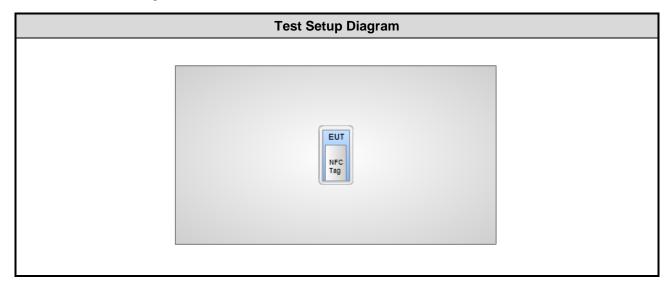

Report No.: FR4D1701NF Page: 6 of 23



## 1.4 The Equipment List

Test Item	RF Conducted								
Test Site	(TH01-WS)	TH01-WS)							
Instrument	Manufacturer	Manufacturer Model No. Serial No. Calibration Date Calibration Until							
Spectrum Analyzer	R&S	FSV40	101063	Feb. 03, 2015	Feb. 02, 2016				
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Dec. 03, 2014	Dec. 02, 2015				
Measurement Software     Sporton     Sporton_1     1.3.30     NA     NA									
Note: Calibration Inte	rval of instruments liste	d above is one year.							

Test Item	Radiated Emission						
Test Site	966 chamber1 / (03CH01-WS)						
Instrument	Manufacturer	Model No.	Calibration Until				
Spectrum Analyzer	R&S	FSV40	101498	Dec. 09, 2014	Dec. 08, 2015		
Receiver	R&S	ESR3	101658	Nov. 10, 2014	Nov. 09, 2015		
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Sep. 05, 2014	Sep. 04, 2015		
Loop Antenna	R&S	HFH2-Z2	11900	Nov. 10, 2014	Nov. 09, 2015		
Preamplifier	Burgeon	BPA-530	SN:100219	Sep. 09, 2014	Sep. 08, 2015		
Preamplifier	Agilent	83017A	MY39501308	Oct. 09, 2014	Oct. 08, 2015		
Preamplifier	EMC	EMC184045B	980192	Aug. 26, 2014	Aug. 25, 2015		
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 15, 2014	Dec. 14, 2015		
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 15, 2014	Dec. 14, 2015		
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 15, 2014	Dec. 14, 2015		
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Dec. 15, 2014	Dec. 14, 2015		
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Dec. 15, 2014	Dec. 14, 2015		
Measurement Software	AUDIX	e3	6.120210g	NA	NA		
Note: Calibration Inte	rval of instruments lister	d above is one year.			_		

Report No.: FR4D1701NF Page: 7 of 23



## 1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.225

ANSI C63.10-2013

## 1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty					
Parameters	Uncertainty				
Bandwidth	±34.134 Hz				
Radiated emission ≤ 1GHz	±3.72 dB				
Radiated emission > 1GHz	±5.65 dB				

Report No.: FR4D1701NF Page: 8 of 23



## 2 Test Configuration

## 2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
Radiated Emissions	03CH01-WS	22°C / 67%	Haru Yang
RF Conducted	TH01-WS	20°C / 63%	Anderson Hung

FCC site registration No.: 657002IC site registration No.: 10807A-1

### 2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)
Field strength of fundamental emissions and spectrum mask	NFC	13.56
Field strength of any emissions appearing outside of the 13.110-14.010 MHz band	NFC	13.56
Frequency tolerance	NFC	13.56
20dB bandwidth	NFC	13.56

#### NOTE:

Report No.: FR4D1701NF Page: 9 of 23

<sup>1.</sup> The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Y-plane** results were found as the worst case and were shown in this report.



## 3 Transmitter Test Results

## 3.1 20dB and Occupied Bandwidth


#### 3.1.1 Limit of 20dB Bandwidth

The upper and lower frequency of the 20dB bandwidth shall within 13.553~13.567 MHz

#### 3.1.2 Test Procedures

- 1. Set resolution bandwidth (RBW) = 1 kHz, Video bandwidth = 3 kHz.
- 2. Detector = Peak, Trace mode = max hold.
- 3. Sweep = auto couple, Allow the trace to stabilize.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20dB relative to the maximum level measured in the fundamental emission.

### 3.1.3 Test Setup

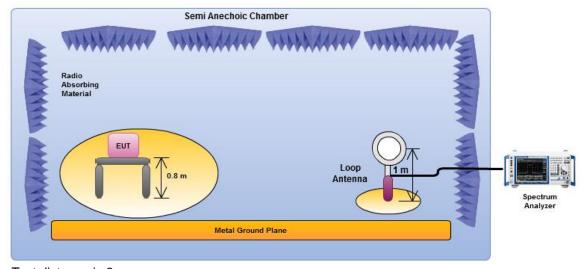


Note: Test distance is 3m

Report No.: FR4D1701NF Page: 10 of 23



## 3.1.4 Test Result of 20dB and Occupied Bandwidth

Modulation Mode	Freq. (MHz)	20dB Bandwidth (kHz)	F <sub>L</sub> at 20dB BW (MHz)	F <sub>H</sub> at 20dBBW (MHz)	99% Bandwidth (kHz)
NFC	NFC 13.56		13.557641	13.562923	7.235890014
Limit		N/A	13.553	13.567	N/A

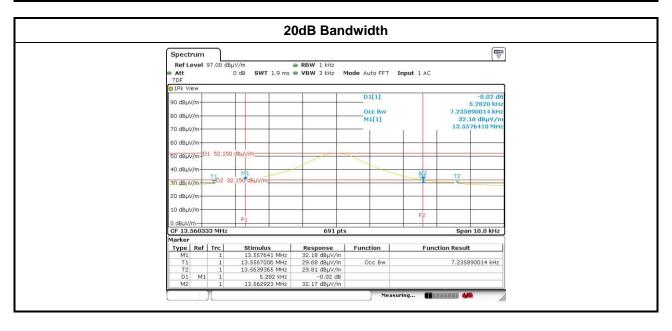

Report No.: FR4D1701NF Page: 11 of 23



## 3.2 Field Strength of Fundamental Emissions and Spectrum Mask

#### 3.2.1 Field Strength of Fundamental Emissions and Spectrum Mask Limit

Field Strength of Fundamental Emissions							
Emissions (uV/m)@30m (dBuV/m)@30m (dBuV/m)@10m (dBuV/m)@3m (dBuV/m)@1m							
Fundamental         15848         84.0         103.1         124.0         143.1							
Quasi peak measurement of the fundamental.							

Spectrum Mask							
Freq. of Emission (MHz)	(uV/m)@30m	(dBuV/m)@30m	(dBuV/m)@10m	(dBuV/m)@3m	(dBuV/m)@1m		
1.705~13.110	30	29.5	48.6	69.5	88.6		
13.110~13.410	106	40.5	59.6	80.5	99.6		
13.410~13.553	334	50.5	69.6	90.5	109.6		
13.553~13.567	15848	84.0	103.1	124.0	143.1		
13.567~13.710	334	50.5	69.6	90.5	109.6		
13.710~14.010	106	40.5	59.6	80.5	99.6		
14.010~30.000	30	29.5	48.6	69.5	88.6		


#### 3.2.2 Test Procedures

- 1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at a height of 0.8 m test table above the ground plane.
- 2. Measurement is made with the antenna positioned in both the open and close planes of polarization. . Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, and the antenna rotated to repeat the measurements for both the open and close antenna polarizations.

Report No.: FR4D1701NF Page: 12 of 23



## 3.2.3 Test Setup

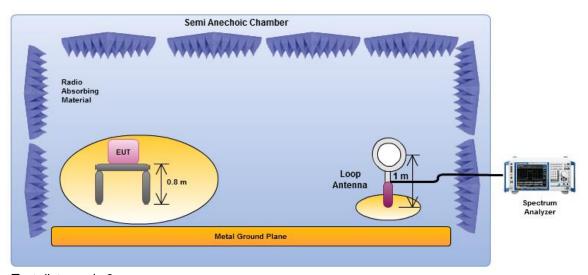


Note: Test distance is 3m

Report No.: FR4D1701NF Page: 13 of 23



## 3.2.4 Test Result of Field Strength of Fundamental Emissions and Spectrum Mask

Field Strength of Fundamental Emissions Result							
Modulation Frequency Fundamental Mode (MHz) Fundamental (dBuV/m)@3m Polarization Margin (dB) Limit (dBuV/m)@3							
NFC	13.56	52.15	Open	-71.85	124.0		

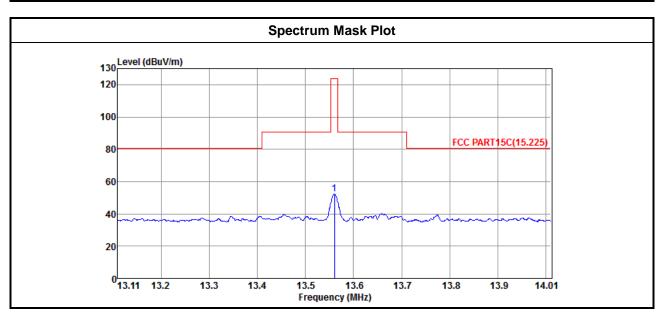

Report No.: FR4D1701NF Page: 14 of 23



### 3.3 Unwanted Emissions into Restricted Frequency Bands

#### 3.3.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit							
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)				
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300				
0.490~1.705	24000/F(kHz)	33.8 - 23	30				
1.705~30.0	30	29	30				
30~88	100	40	3				
88~216	150	43.5	3				
216~960	200	46	3				
Above 960	500	54	3				

#### Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

#### 3.3.2 Test Procedures

- 4. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at a height of 0.8 m test table above the ground plane.
- 5. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 6. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


#### Note:

1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.

Report No.: FR4D1701NF Page: 15 of 23




## 3.3.3 Test Setup

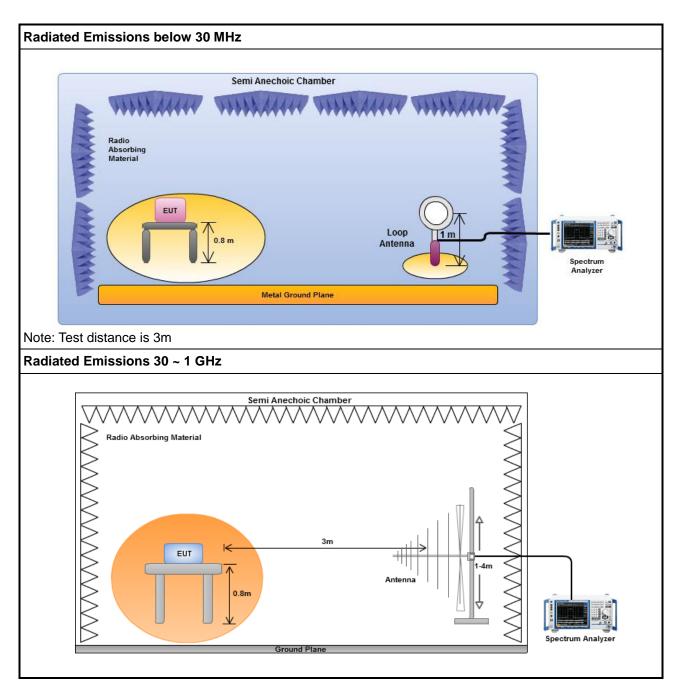

Report No.: FR4D1701NF Page: 16 of 23




## 3.3.4 Transmitter Radiated Unwanted Emissions (Below 30GHz)

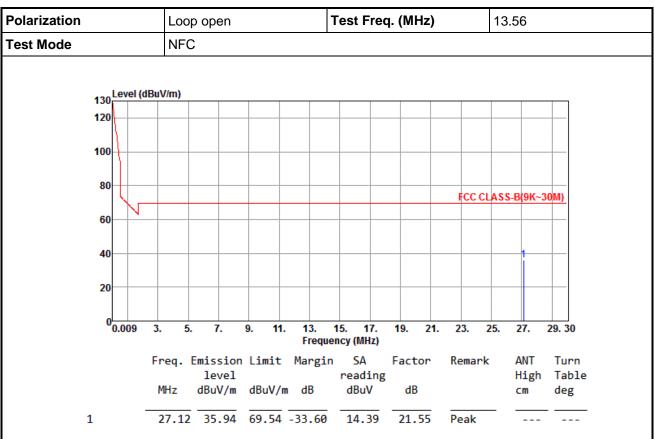

Note 1: Level (dBuV/m) = Read Level (dBuV/m) + Antenna Factor (dB) + Cable Loss (dB) - Preamp Factor (dB). 2: Over Limit (dBuV/m) = Limit Line (dBuV/m) - Level (dBuV/m).

Report No.: FR4D1701NF Page: 17 of 23



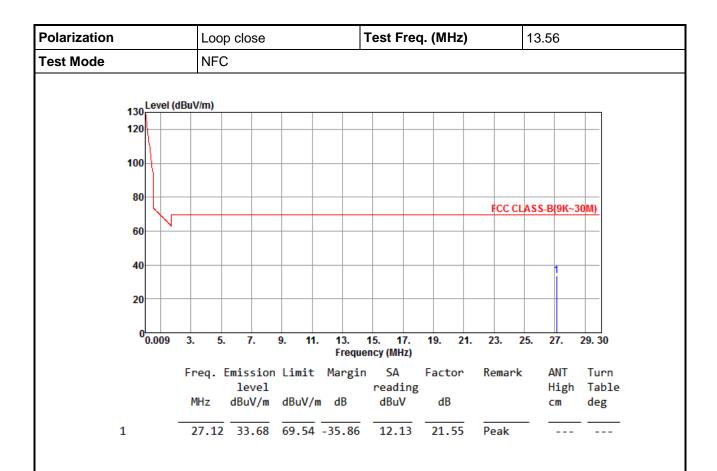


Note 1: Level (dBuV/m) = Read Level (dBuV/m) + Antenna Factor (dB) + Cable Loss (dB) - Preamp Factor (dB). 2: Over Limit (dBuV/m) = Limit Line (dBuV/m) - Level (dBuV/m).

Report No.: FR4D1701NF Page: 18 of 23



### 3.3.5 Transmitter Radiated Unwanted Emissions (Above 30MHz)

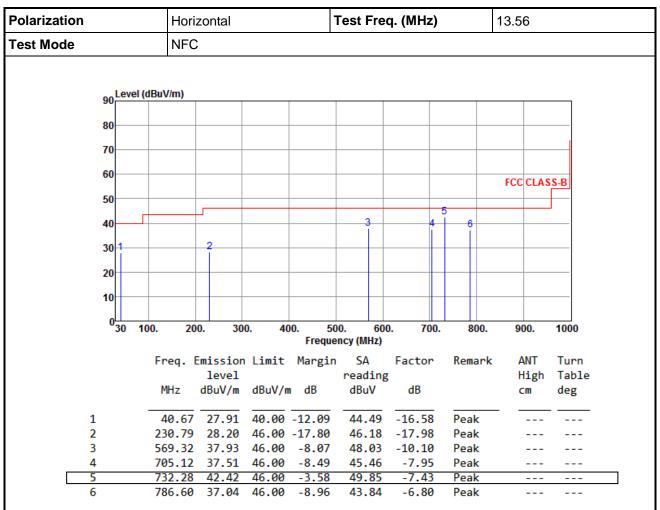

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Report No.: FR4D1701NF Page: 19 of 23

Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Polarization	Vertical	Test Freq. (MHz)	13.56
Test Mode	NFC		

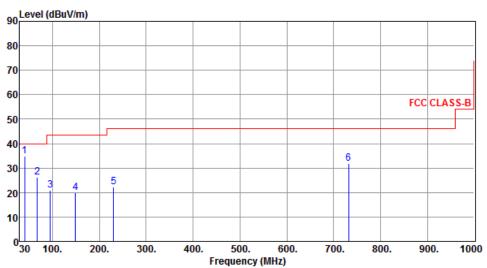

	Freq.	Emission level	Limit	Margin	SA reading		Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	40.67	35.00	40.00	-5.00	51.58	-16.58	Peak		
2	67.83	26.16	40.00	-13.84	44.88	-18.72	Peak		
3	94.99	20.80	43.50	-22.70	43.03	-22.23	Peak		
4	149.31	19.87	43.50	-23.63	36.52	-16.65	Peak		
5	230.79	22.14	46.00	-23.86	40.12	-17.98	Peak		
6	732.28	31.84	46.00	-14.16	39.27	-7.43	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Report No.: FR4D1701NF Page: 20 of 23



## 3.4 Frequency Stability


## 3.4.1 Frequency Stability Limit

Carrier frequency stability shall be maintained to ±0.01% (±100 ppm).

#### 3.4.2 Test Procedures

	Test Method						
	Refer as ANSI C63.10, clause 6.8 for frequency stability tests						
	□ Frequency stability with respect to ambient temperature						
	□ Frequency stability when varying supply voltage						
	For conducted measurement.						
$\boxtimes$	For radiated measurement. The equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted power level.						

## 3.4.3 Test Setup

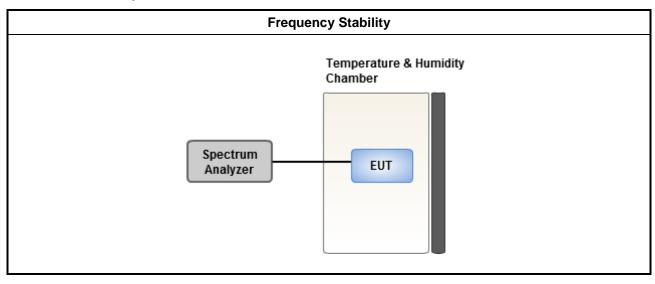

Report No.: FR4D1701NF Page: 21 of 23



## 3.4.4 Test Result of Frequency Stability

	Frequency Stability Result							
Condition	Ch. Freq.	Frequency Stability (ppm)						
	(MHz)	0 Min	2 Min	5Min	10Min			
T <sub>20°C</sub> Vmax	13.56	23.60	20.65	23.60	24.34			
T <sub>20°C</sub> Vmin	13.56	24.34	26.55	24.34	24.34			
T <sub>50°C</sub> Vnom	13.56	22.12	22.86	20.65	24.34			
T <sub>40°C</sub> Vnom	13.56	22.12	23.60	22.12	25.07			
T <sub>30°C</sub> Vnom	13.56	23.60	22.12	19.17	21.39			
T <sub>20°C</sub> Vnom	13.56	23.45	22.12	22.86	25.81			
T <sub>10°C</sub> Vnom	13.56	21.39	21.39	28.76	24.34			
$T_{0^{\circ}C}Vnom$	13.56	27.29	20.65	22.12	22.12			
T <sub>-10°C</sub> Vnom	13.56	22.86	20.65	24.34	27.29			
T <sub>-20°C</sub> Vnom	13.56	19.91	26.55	25.07	24.34			
T <sub>-30°C</sub> Vnom	13.56	24.34	25.81	28.76	25.81			
Limit (p	opm)		1	00				

Note 1: Measure at 85 % [Vmin] and 115 % [Vmax] of the nominal voltage [Vnom]. The nominal voltage refer test report clause 1.1.4 for EUT operational condition.

Report No.: FR4D1701NF Page: 22 of 23

Note 2: Measure maximum deviation frequency at operating frequency at startup and two, five, and ten min.



## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <a href="http://www.icertifi.com.tw">http://www.icertifi.com.tw</a>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan,

R.O.C.

Kwei Shan

Tel: 886-3-271-8666 No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C. Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Email: ICC\_Service@icertifi.com.tw

<u>==END</u>==

Report No.: FR4D1701NF Page: 23 of 23