

TEST REPORT

Report No.: SRTC2014-H024-E0068

Product Name: GSM/GPRS/EDGE/UMTS

Digital Mobile Phone with Bluetooth and WiFi

Product Model: Philips S308

Applicant: Shenzhen Sang Fei Consumer Communications Co.,Ltd.

Manufacturer: Shenzhen Sang Fei Consumer Communications Co.,Ltd.

Specification: FCC Part 15, Subpart C (October 1, 2013 edition)

FCC ID: VQRCTS308

The State Radio_monitoring_center Testing Center (SRTC)

No.80 Beilishi Road Xicheng District Beijing, China

Tel: 86-10-68009202 Fax: 86-10-68009205

CONTENTS

1. General information	3
1.1 Notes of the test report	3
1.2 Information about the testing laboratory.....	3
1.3 Applicant's details	3
1.4 Manufacturer's details.....	3
1.5 Application details	4
1.6 Reference specification.....	4
1.7 Information of EUT.....	4
1.7.1 General information.....	4
1.7.2 EUT details	5
1.7.3 Auxiliary equipment details.....	5
2. Test information	6
2.1 Summary of the test results.....	6
2.2 Test result.....	7
2.2.1 Occupied Bandwidth	7
2.2.2 Channel Separation	13
2.2.3 Peak Power Output	15
2.2.4 Dwell Time	21
2.2.5 Number of Hopping Frequencies	29
2.2.6 Conducted out of band emission measurement	31
2.2.7 Spurious Radiated Emissions.....	35
2.2.8 AC Power line Conducted Emission	50
2.3. Measurement Uncertainty	53
2.4. List of test equipment.....	54
Appendix	55

1. General information

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing Center (SRTC).

The test results relate only to individual items of the samples which have been tested.

1.2 Information about the testing laboratory

Company: The State Radio_monitoring_center Testing Center (SRTC)
Address: No.80 Beilishi Road, Xicheng District, Beijing China
City: Beijing
Country or Region: China
Contacted person: Wang Junfeng
Tel: +86 10 68009181 +86 10 68009202
Fax: +86 10 68009195 +86 10 68009205
Email: wangjf@srrc.org.cn / wangjunfeng@srtc.org.cn

1.3 Applicant's details

Company: Shenzhen Sang Fei Consumer Communications Co.,Ltd.
Address: 11 Science & Technology Rd., Shenzhen Hi-tech Industrial Park, Nanshan District, Shenzhen
City: Shenzhen
Country or Region: P.R.China
Grantee Code: VQRCT
Contacted person: Helen.Lin
Tel: 86-755-33308888
Fax: 86-755-26614979
Email: Helen.Lin@sangfei.com

1.4 Manufacturer's details

Company: Shenzhen Sang Fei Consumer Communications Co.,Ltd.
Address: 11 Science & Technology Rd., Shenzhen Hi-tech Industrial Park, Nanshan District, Shenzhen
City: Shenzhen
Country or Region: P.R.China
Contacted person: Helen.Lin
Tel: 86-755-33308888
Fax: 86-755-26614979
Email: Helen.Lin@sangfei.com

1.5 Application details

Date of reception of test sample: 26th August 2014

Date of test: 27th August 2014 to 12nd September 2014

1.6 Reference specification

FCC Part 15, Subpart C (October 1, 2013 edition)

1.7 Information of EUT

1.7.1 General information

Name of EUT	GSM/GPRS/EDGE/UMTS Digital Mobile Phone with Bluetooth and WiFi
FCC ID	VQRCTS308
Frequency Range	2.4GHz~2.4835GHz
Number of Channel	79
Modulation Type	GFSK, $\pi/4$ DQPSK, 8DPSK
Duplex Mode	TDD
Channel Spacing	1MHz
Data Rate	1Mbps, 2 Mbps, 3 Mbps
Antenna Type	Fixed Internal
Power Supply	Battery or Charger
Rated Power Supply Voltage	3.7V
HW Version	TMB1a
SW Version	S308_M6572M_1432_V01A_AM_FCC

1.7.2 EUT details

Product Name	Product Model	IMEI
GSM/GPRS/EDGE/UMTS Digital Mobile Phone with Bluetooth and WiFi	Philips S308	862391023896236

1.7.3 Auxiliary equipment details




Equipment	Charger
Manufacturer	ShenZhen AoHai Technology Co., Ltd
Model Number	A31-500650
Input Voltage	100V-240V a.c.
Output Voltage	5.0V d.c.
Frequency	50/60Hz

Equipment	Battery
Manufacturer	Shenzhen cyclelong power-tech Co., ltd
Model Number	ABI400BWML
Capacity	1400 mAh
Rated Voltage	3.7V d.c.

2. Test information

2.1 Summary of the test results

No.	Test case	FCC reference	Verdict
1	Occupied Bandwidth	15.247(a)(1)	Pass
2	Channel Separation	15.247(a)(1)	Pass
3	Peak Power Output	15.247(b)(1)	Pass
4	Dwell Time	15.247(a)(1)(iii)	Pass
5	Number of Hopping Frequencies	15.247(a)(1)(iii)	Pass
6	Conducted out of band emission measurement	15.247(d)	Pass
7	Spurious Radiated Emissions	15.247(d)/15.35(b)/15.209	Pass
8	AC Power line Conducted Emission	15.207	Pass

This Test Report Is Issued by: Director of the test lab 	Checked by: Deputy director of the test lab 
Tested by: Mr. Jiang Shuo Test engineer 	Issued date: 2014.09.16

2.2 Test result

2.2.1 Occupied Bandwidth

2.2.1.1 Ambient condition

Temperature	Relative humidity	Pressure
22°C	40%	101.1kPa

2.2.1.2 Test Description

The bandwidth at 20dB down from the highest in-band spectral density is measured with a spectrum analyzer and Bluetooth test set via a power splitter with a known loss which connected to the transmitter antenna terminal of the EUT while the EUT is operating at maximum power and at the appropriate frequencies. All modes of operation were investigated and the worst case configuration results are reported in this section.

2.2.1.3 Test limit


FCC Part15.247 (a)(1)

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shell be a minimum limit for the hopping channel separation.

2.2.1.4 Test settings

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 30dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.

2.2.1.5 Test Setup

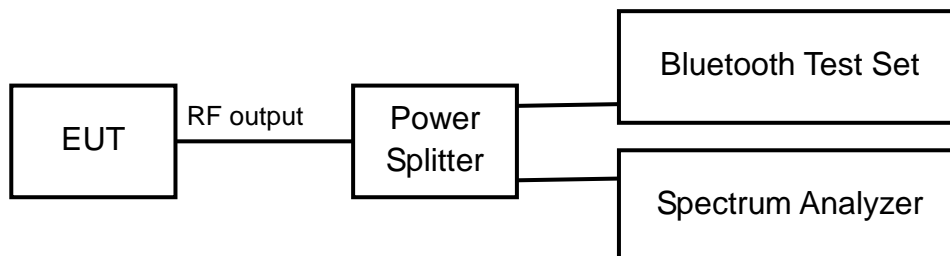

2.2.1.6 Test result

Modulation type: GFSK


Carrier frequency (MHz)	Channel No.	20 dB bandwidth(kHz)
2402	0	819.1
2441	39	819.1
2480	78	816.2

Modulation type: $\pi/4$ DQPSK

Carrier frequency (MHz)	Channel No.	20 dB bandwidth(kHz)
2402	0	1.224
2441	39	1.230
2480	78	1.230

Modulation type: 8DPSK


Carrier frequency (MHz)	Channel No.	20 dB bandwidth(kHz)
2402	0	1.262
2441	39	1.262
2480	78	1.262

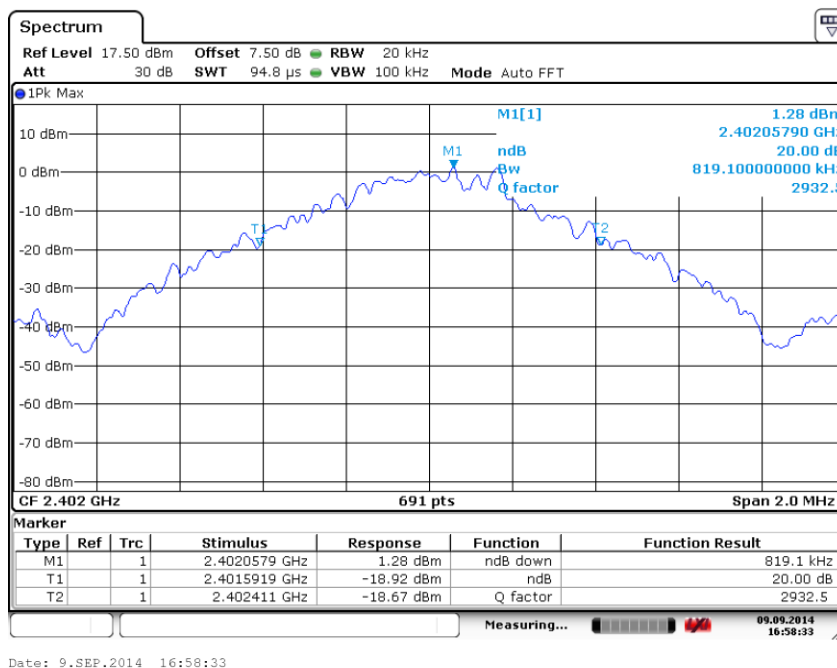

Carrier frequency (MHz): 2402

Channel No.:0


Modulation type: GFSK

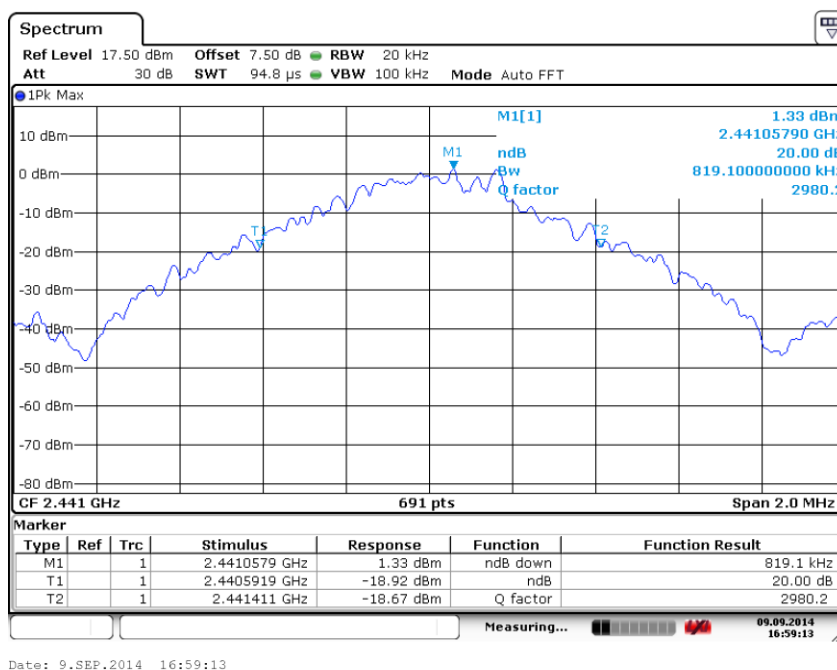

Carrier frequency (MHz): 2441

Channel No.:39


Modulation type: GFSK

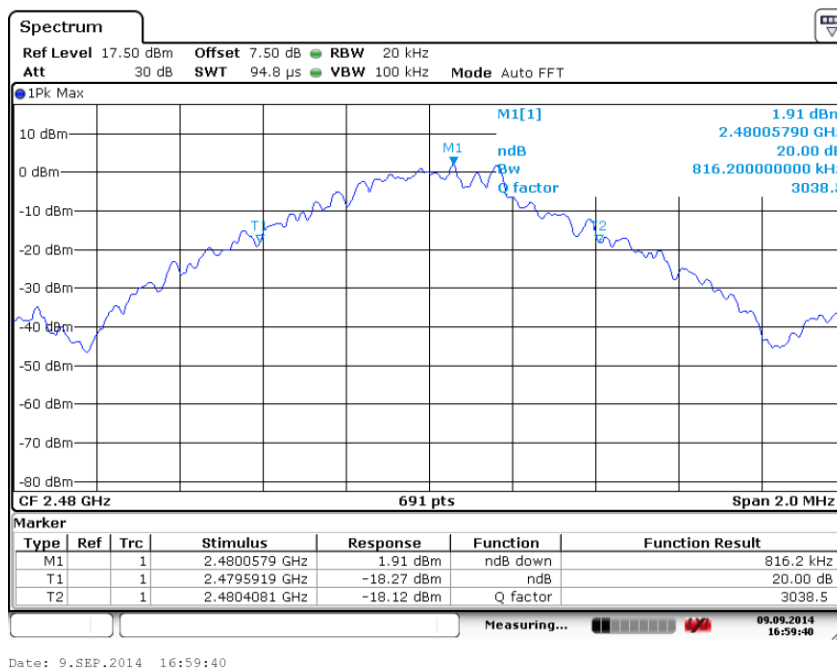

Carrier frequency (MHz): 2480

Channel No.:78


Modulation type: GFSK

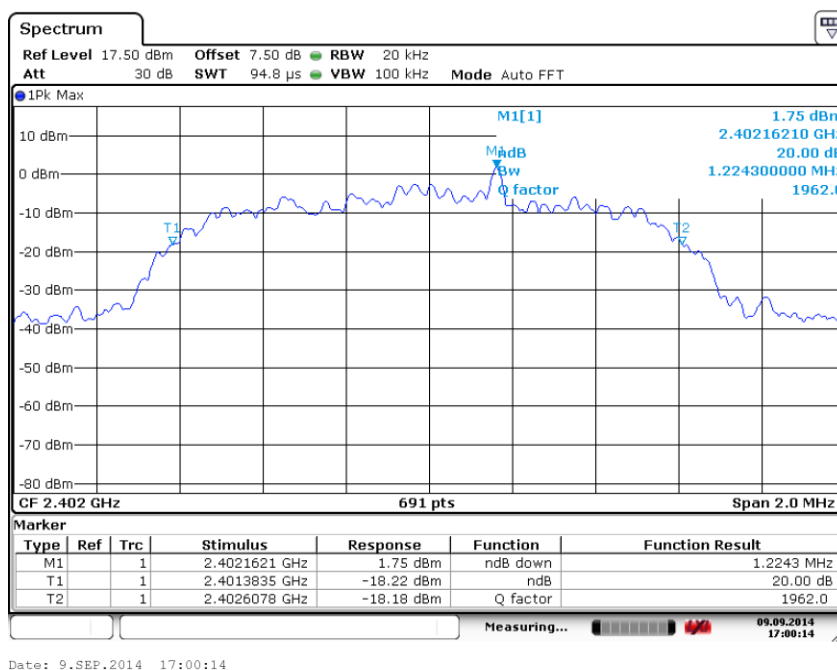


Carrier frequency (MHz): 2402

Channel No.:0


Modulation type: $\pi/4$ DQPSK

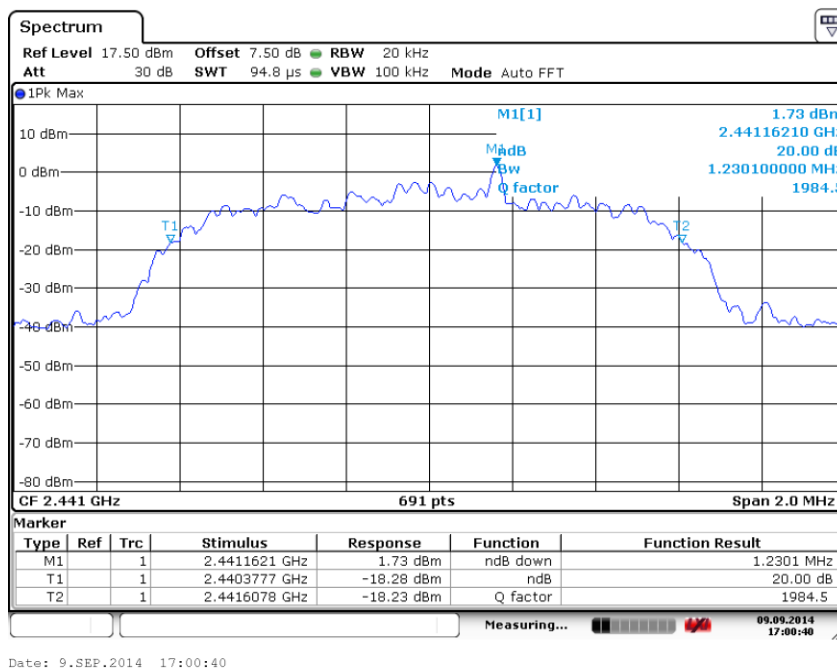

Carrier frequency (MHz): 2441
Channel No.:39
Modulation type: $\pi/4$ DQPSK

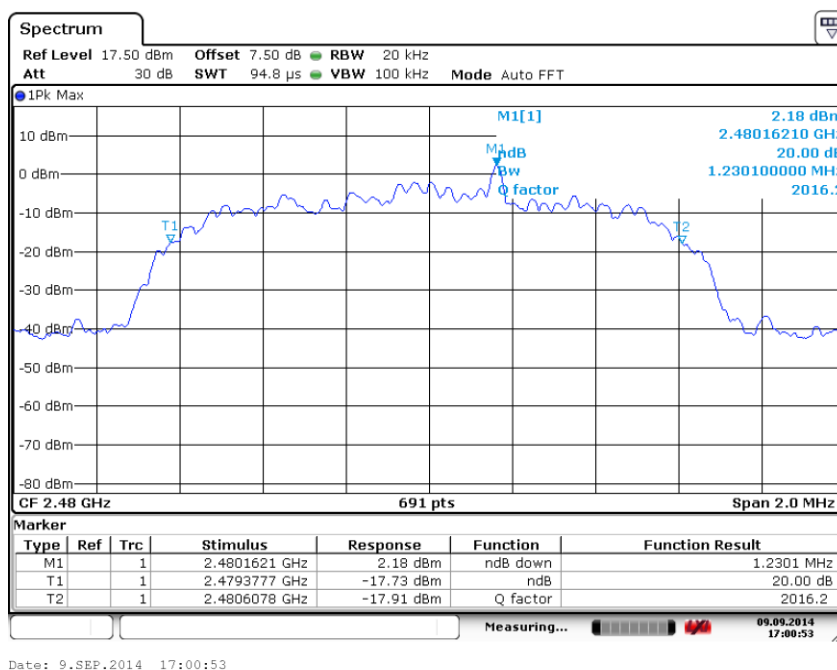


Carrier frequency (MHz): 2480
Channel No.:78
Modulation type: $\pi/4$ DQPSK

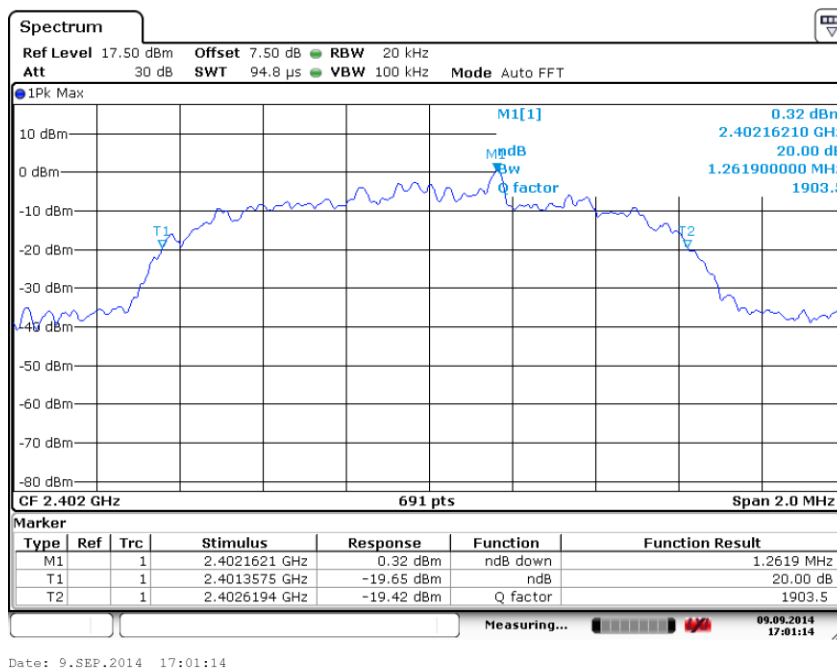

Carrier frequency (MHz): 2402

Channel No.:0


Modulation type: 8DPSK

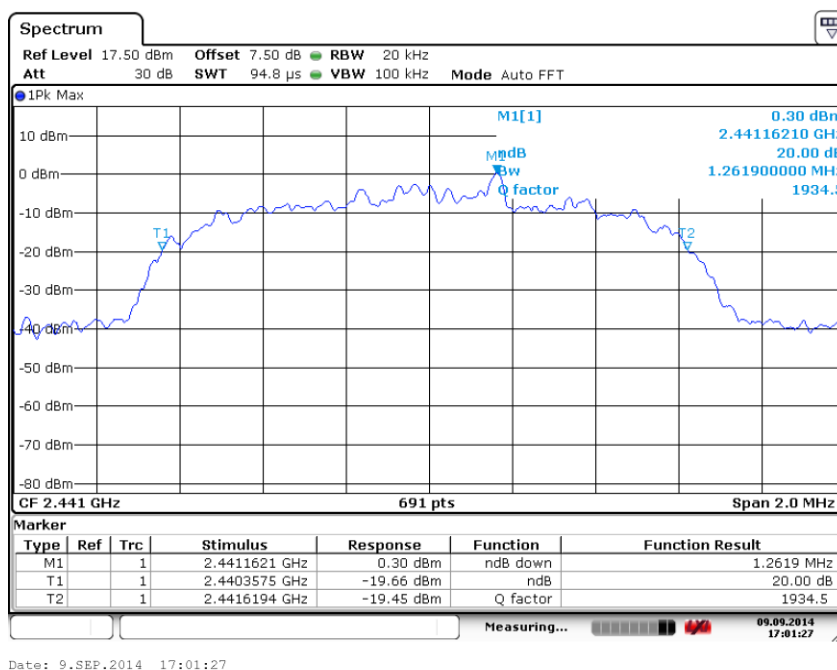

Carrier frequency (MHz): 2441

Channel No.:39

Modulation type: 8DPSK

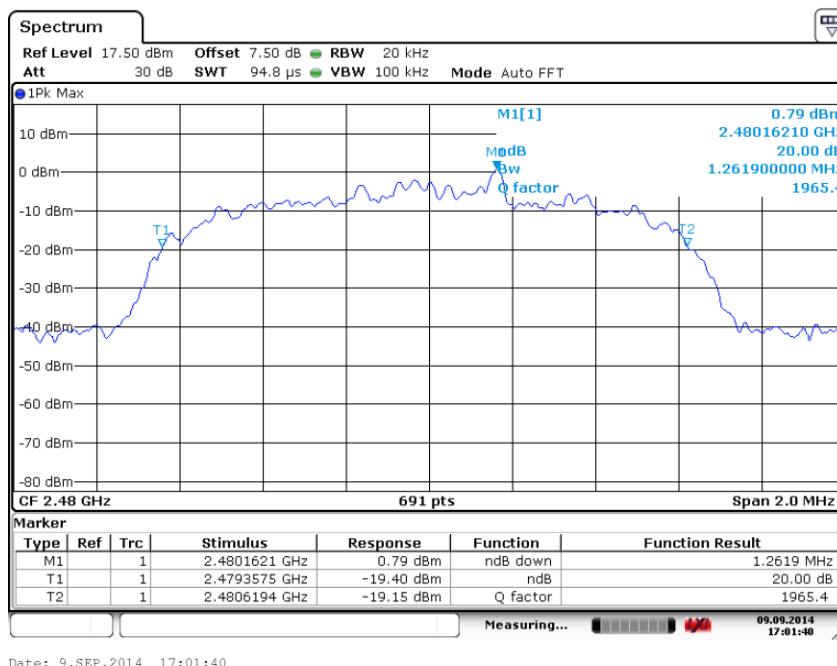

Carrier frequency (MHz): 2480

Channel No.:78

Modulation type: 8DPSK

2.2.2 Channel Separation

2.2.2.1 Ambient condition

Temperature	Relative humidity	Pressure
22°C	40%	101.1kPa

2.2.2.2 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the channel separation measurements. The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss.

2.2.2.3 Test limit


FCC Part15.247 (a)(1)

Measurement is made with EUT operating in hopping mode. **The minimum permissible channel separation for this system is 2/3 the value of the 20dB BW.**

2.2.2.4 Test Settings


- Detector: Peak-Max hold
- Span: 3 MHz
- Centre Frequency: 2441 MHz
- Resolution Bandwidth (RBW): 30 kHz
- Video Bandwidth (VBW): 1 MHz
- Sweep Time: Coupled

2.2.2.5 Test Setup

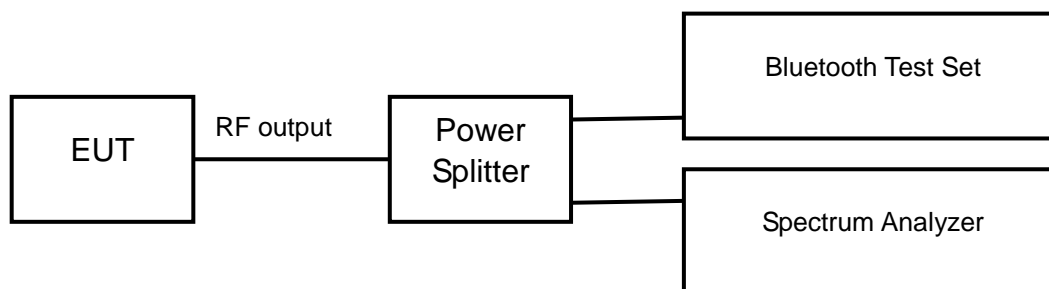

2.2.2.6 Test result

Op-mode	Channel separation MHz
Hopping mode	1

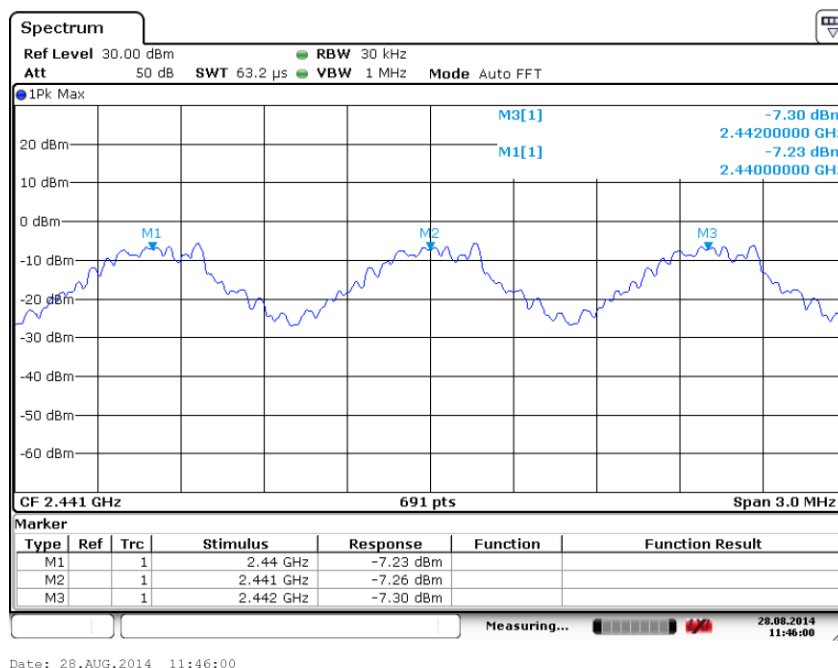

Op-mode: Hopping mode

2.2.3 Peak Power Output

2.2.3.1 Ambient condition

Temperature	Relative humidity	Pressure
22°C	40%	101.1kPa

2.2.3.2 Test Description

Measurement is made while the EUT is operating in non-hopping transmission mode. The powers shown below were measured using a spectrum analyzer with a Bluetooth signaling test set used only to maintain a Bluetooth link with the EUT.

2.2.3.3 Test limit

FCC Part15.247(b)(1):

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.


Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW) →

Modulation type	GFSK	$\pi/4$ DQPSK	8DPSK
Maximum Output Power	30dBm	30dBm	30dBm

2.2.3.4 Test Settings

Hopping Mode	Modulation type	RBW	VBW	Span	Sweep time
Hopping OFF	GFSK	2MHz	3MHz	8MHz	1ms
Hopping OFF	$\pi/4$ DQPSK	2MHz	3MHz	8MHz	1ms
Hopping OFF	8DPSK	2MHz	3MHz	8MHz	1ms

2.2.3.5 Test Setup

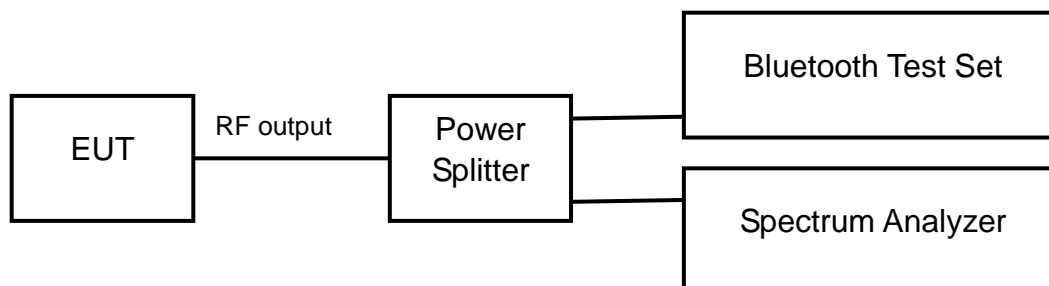


2.2.3.6 Test result


Modulation type	Average Power Output (mW)		
	2402MHz (Ch0)	2441MHz (Ch39)	2480MHz (Ch78)
GFSK	4.02	3.45	3.91
$\pi/4$ DQPSK	3.89	3.56	3.66
8DPSK	4.11	4.13	4.21

Average power data is provided to determine the need for Bluetooth SAR testing according to KDB 447498 D01 v05r01.


Modulation type	Peak Power Output (dBm)		
	2402MHz (Ch0)	2441MHz (Ch39)	2480MHz (Ch78)
GFSK	4.21	3.83	4.03
$\pi/4$ DQPSK	4.09	3.82	3.98
8DPSK	4.69	4.44	4.60

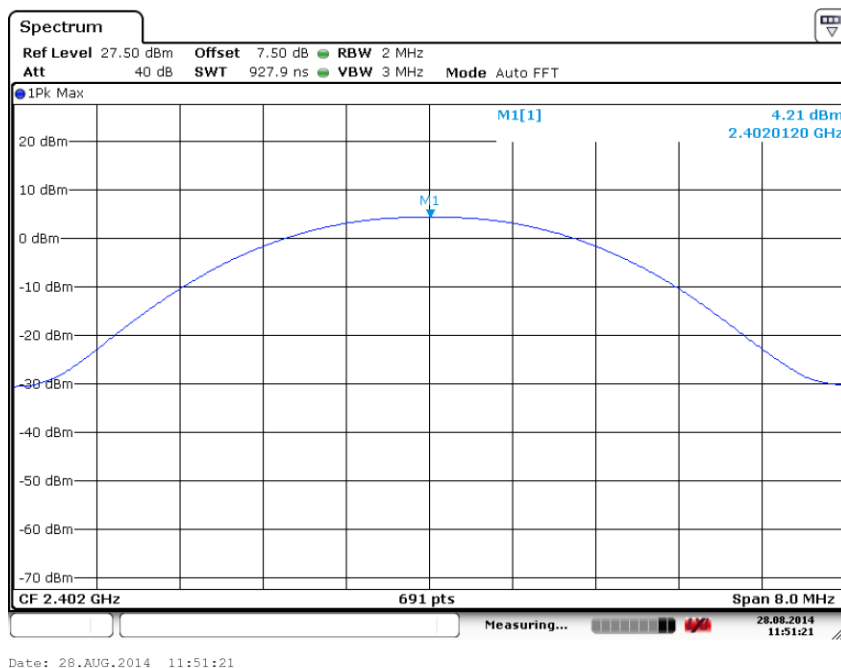


Carrier frequency (MHz): 2402
Channel No.:0
Modulation type: GFSK

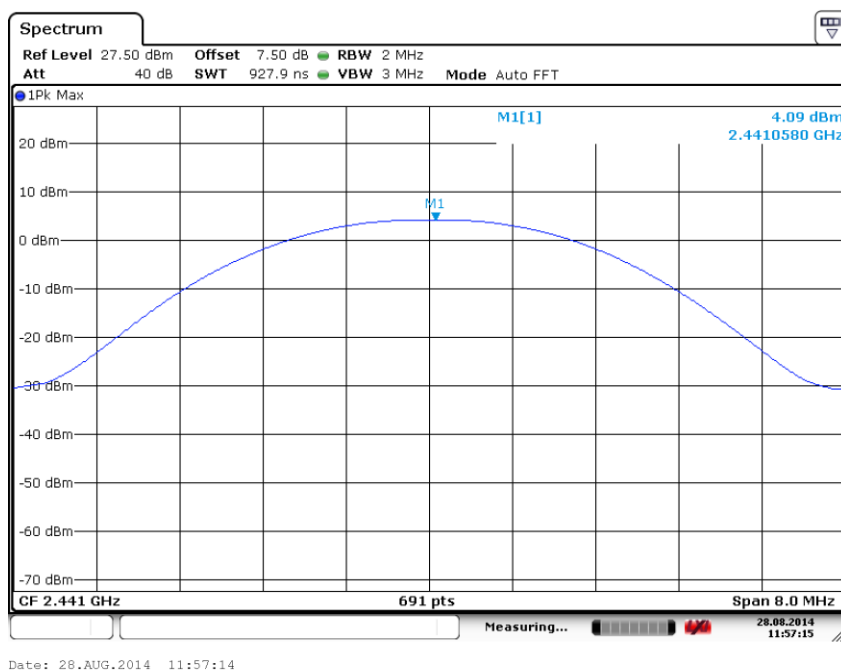


Carrier frequency (MHz): 2441
Channel No.:39
Modulation type: GFSK

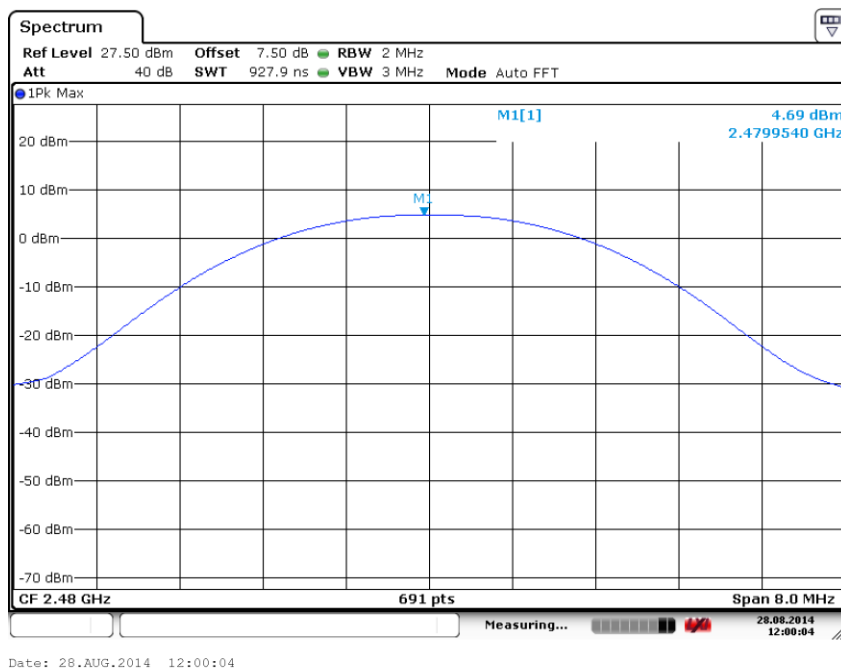


Carrier frequency (MHz): 2480
Channel No.:78
Modulation type: GFSK

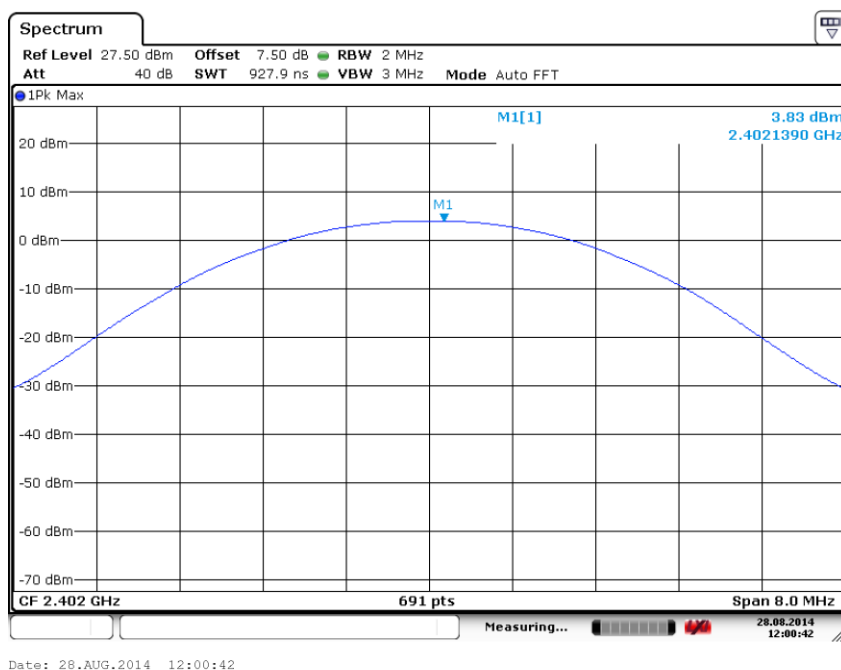


Carrier frequency (MHz): 2402
Channel No.:0
Modulation type: $\pi/4$ DQPSK

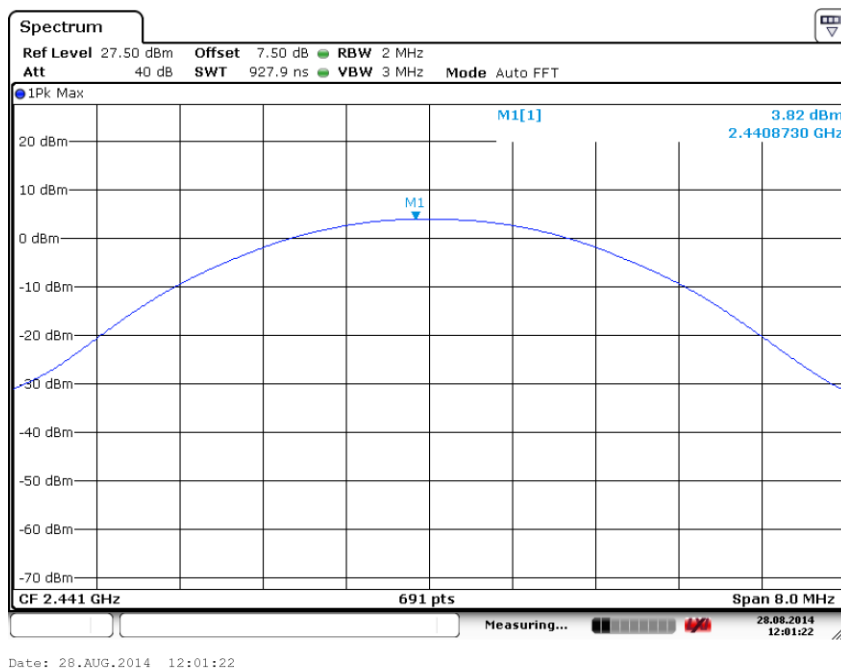


Carrier frequency (MHz): 2441
Channel No.:39
Modulation type: $\pi/4$ DQPSK

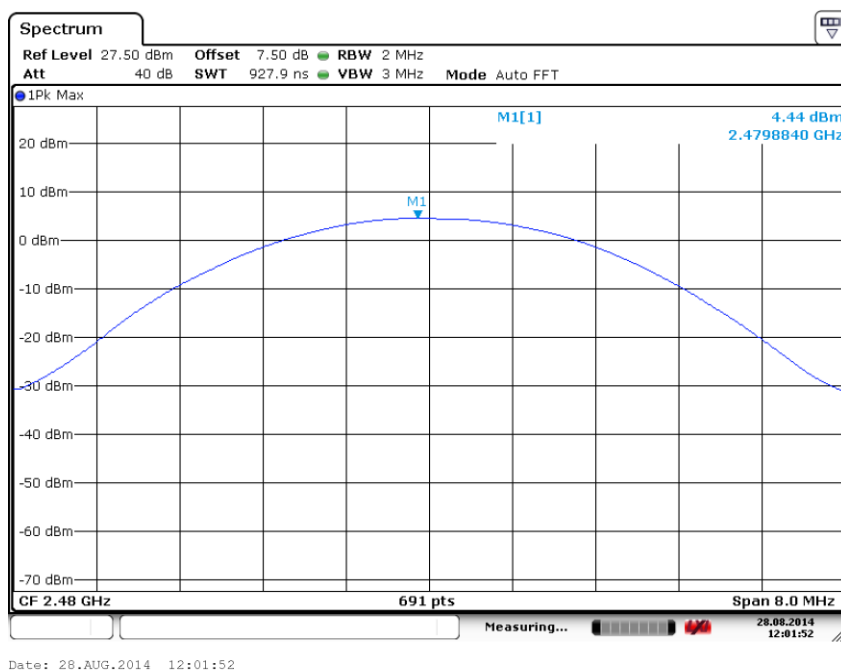


Carrier frequency (MHz): 2480
Channel No.:78
Modulation type: $\pi/4$ DQPSK

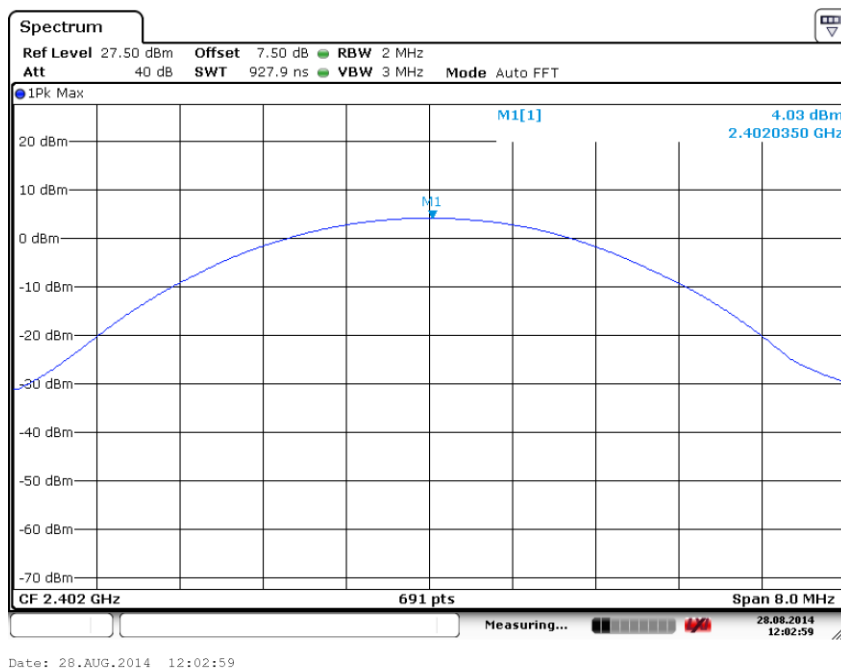

Carrier frequency (MHz): 2402
Channel No.:0
Modulation type: 8DPSK

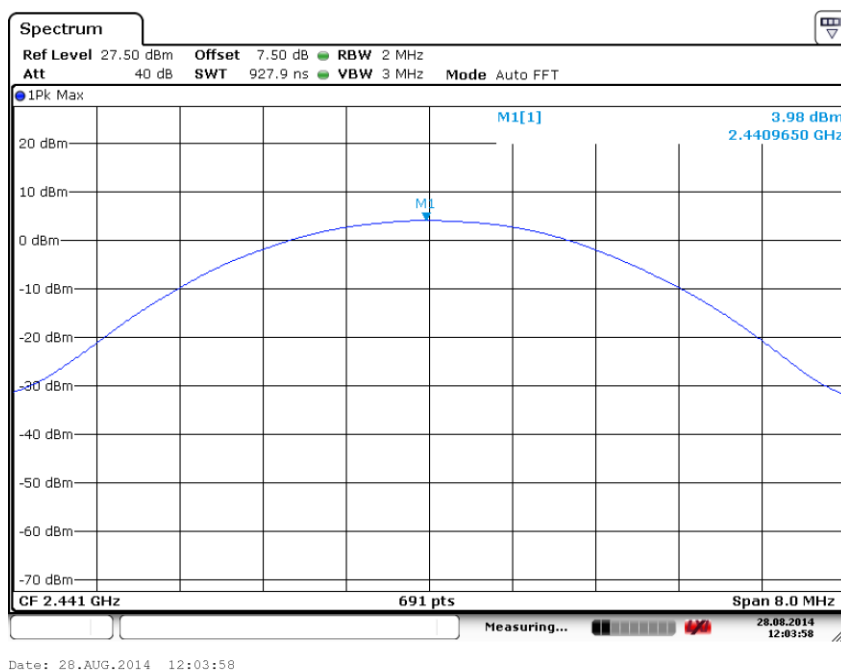

Carrier frequency (MHz): 2441
Channel No.:39
Modulation type: 8DPSK

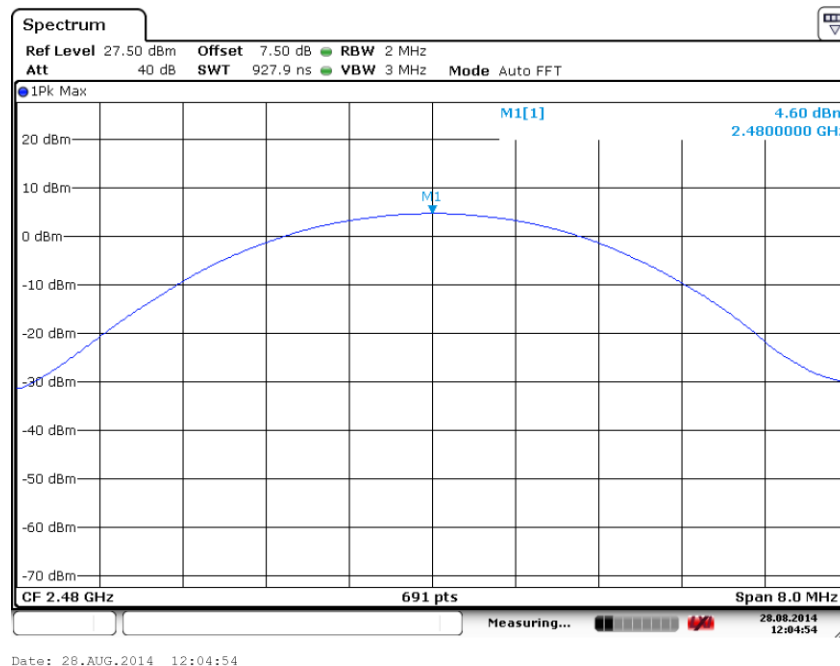

Carrier frequency (MHz): 2480

Channel No.:78

Modulation type: 8DPSK

2.2.4 Dwell Time

2.2.4.1 Ambient condition

Temperature	Relative humidity	Pressure
22°C	40%	101.1kPa

2.2.4.2 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the dwell time measurements.

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss.

The time slot length is measured of three different packet types which are available in the Bluetooth technology. Those are DH1, DH3 and DH5 packets. The dwell time is calculated by:

Dwell time = time slot length * hop rate * 31.6/ number of hopping channels

with:

- hop rate= $1600/2 * 1/s$ for DH1 packets =800
- hop rate= $1600/4 * 1/s$ for DH3 packets =400
- hop rate= $1600/6 * 1/s$ for DH5 packets =266.67
- number of hopping channels=79
- $31.6 s = 0.4$ seconds multiplied by the number of hopping channels= $0.4s * 79$

2.2.4.3 Test limit


FCC Part15.247(a)(1)(iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

2.2.4.4 Test Test Settings

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- Repeat above procedures until all different time-slot modes have been completed.


2.2.4.5 Test Setup

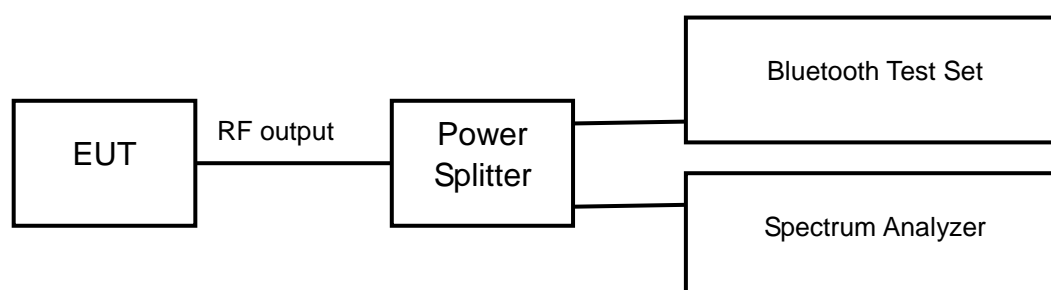

2.2.4.6 Test result

Modulation type: GFSK


Packet type	Time slot length ms	Dwell time	Dwell time ms
DH1	0.3696	time slot length *31.6 *1600/2 /79	118.27
DH3	1.6304	time slot length * 31.6 *1600/4 /79	260.86
DH5	2.8841	time slot length * 31.6 *1600/6 /79	307.64

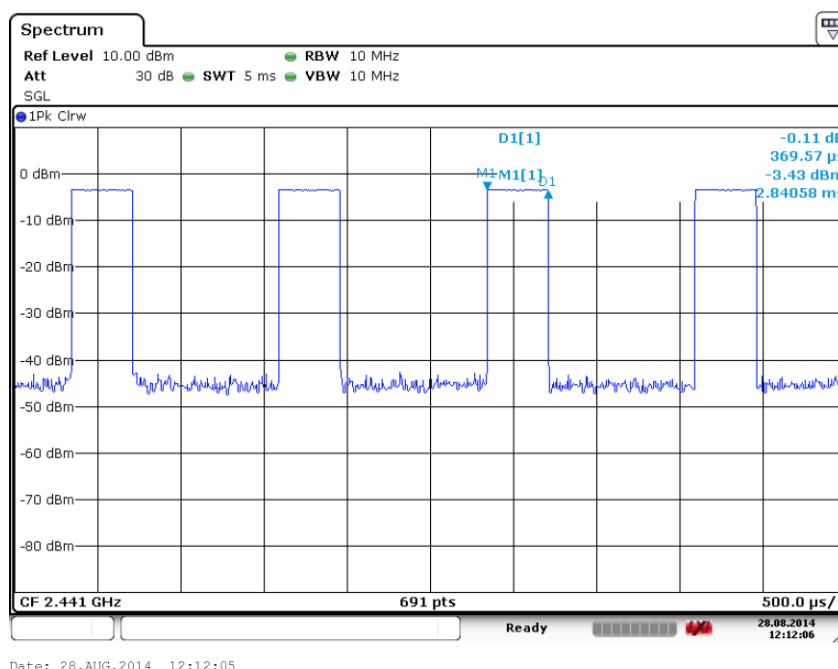


Carrier frequency (MHz): 2441

Packet type: DH1

Modulation type: GFSK

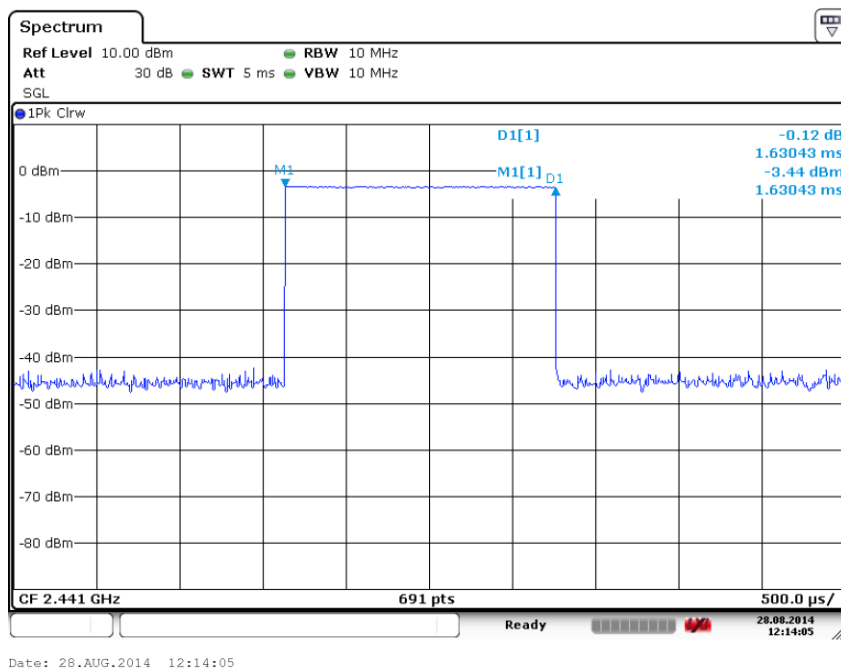


Carrier frequency (MHz): 2441
Packet type: DH3
Modulation type: GFSK

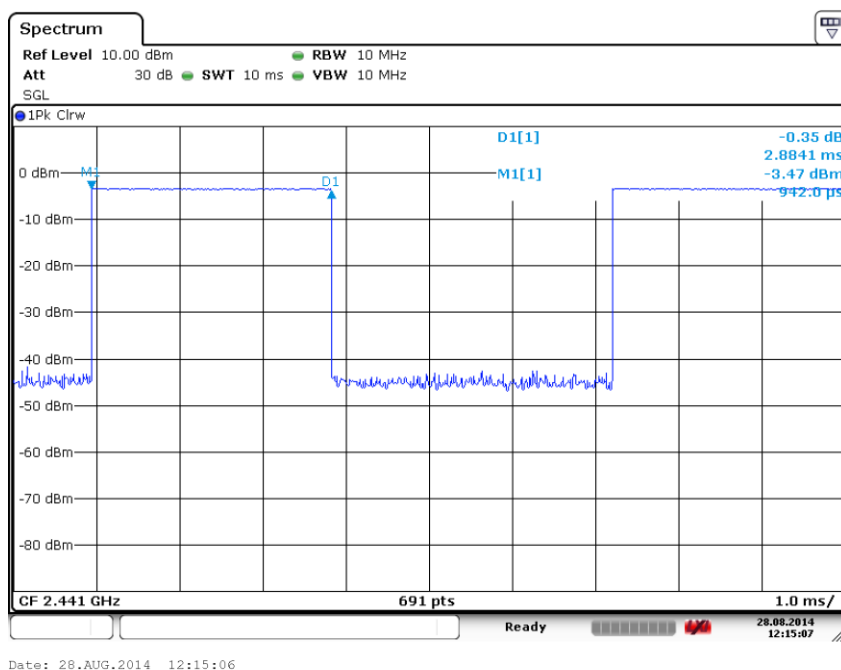

Carrier frequency (MHz): 2441
Packet type: DH5
Modulation type: GFSK

Modulation type: $\pi/4$ DQPSK

Packet type	Time slot length ms	Dwell time	Dwell time ms
DH1	0.3764	time slot length *31.6 *1600/2 /79	120.58
DH3	1.6286	time slot length * 31.6 *1600/4 /79	260.86
DH5	2.8764	time slot length * 31.6 *1600/6 /79	307.64

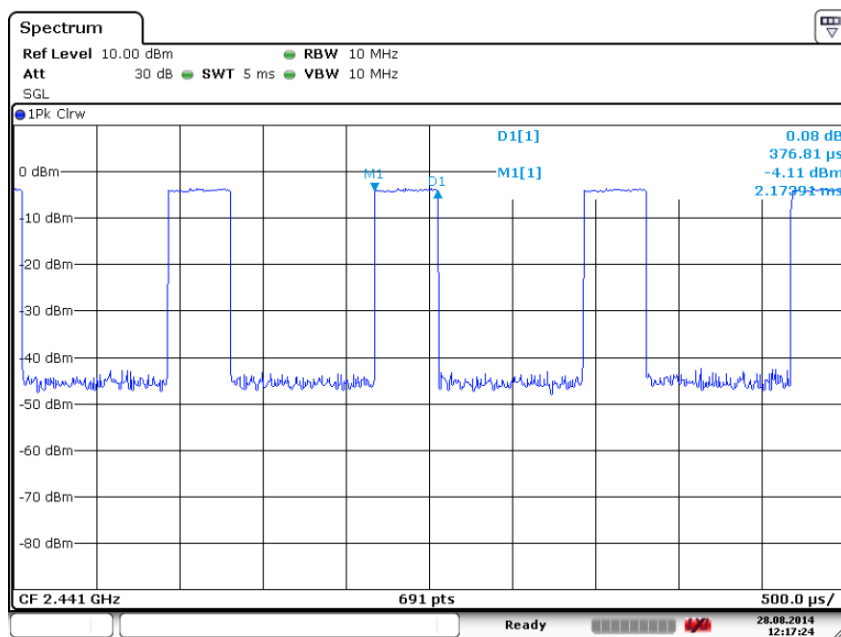


Date: 28.AUG.2014 12:17:24


Carrier frequency (MHz): 2441

Packet type: DH1

Modulation type: $\pi/4$ DQPSK

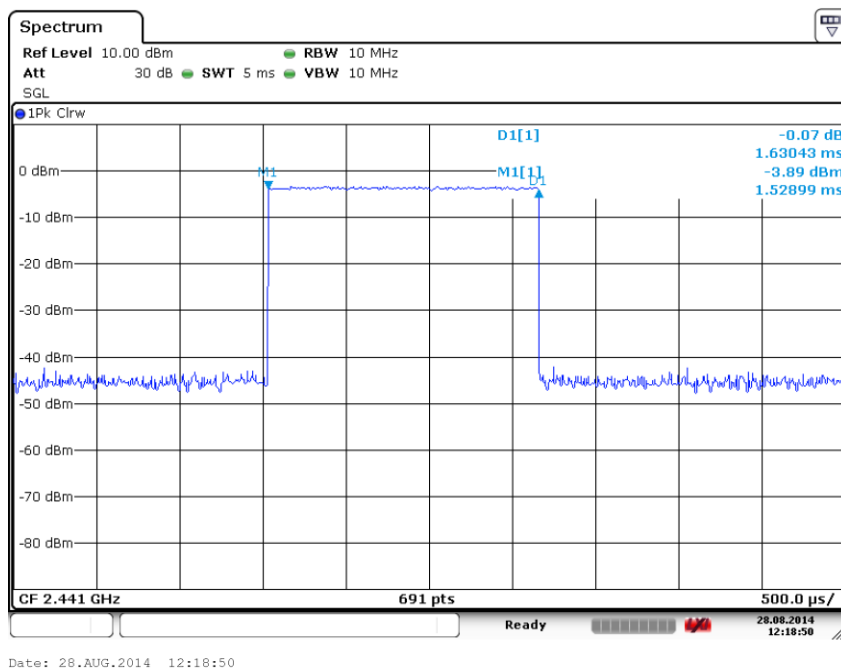


Carrier frequency (MHz): 2441
Packet type: DH3
Modulation type: $\pi/4$ DQPSK

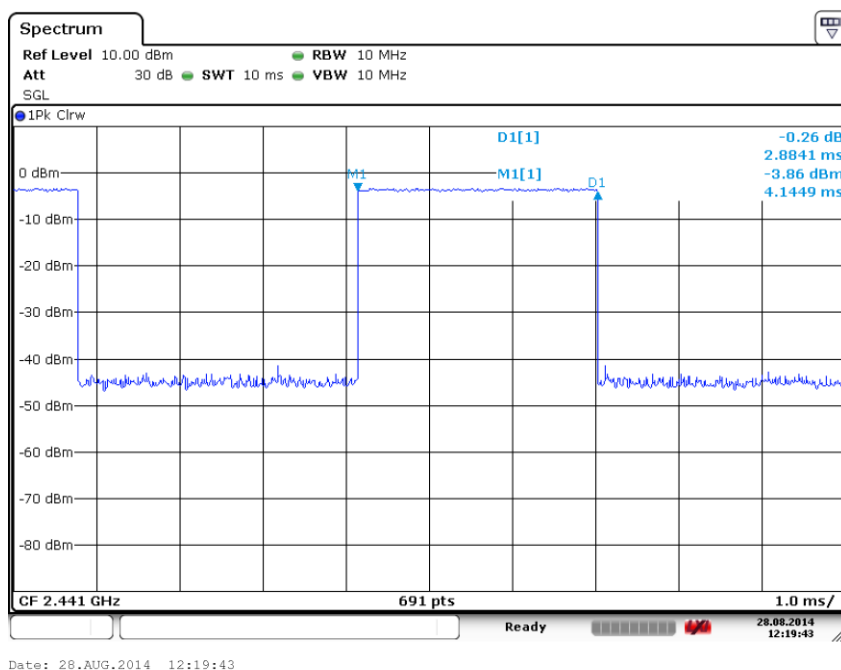

Carrier frequency (MHz): 2441
Packet type: DH5
Modulation type: $\pi/4$ DQPSK

Modulation type: 8DPSK


Packet type	Time slot length ms	Dwell time	Dwell time ms
DH1	0.3675	time slot length *31.6 *1600/2 /79	120.58
DH3	1.6429	time slot length * 31.6 *1600/4 /79	260.86
DH5	2.8864	time slot length * 31.6 *1600/6 /79	307.64

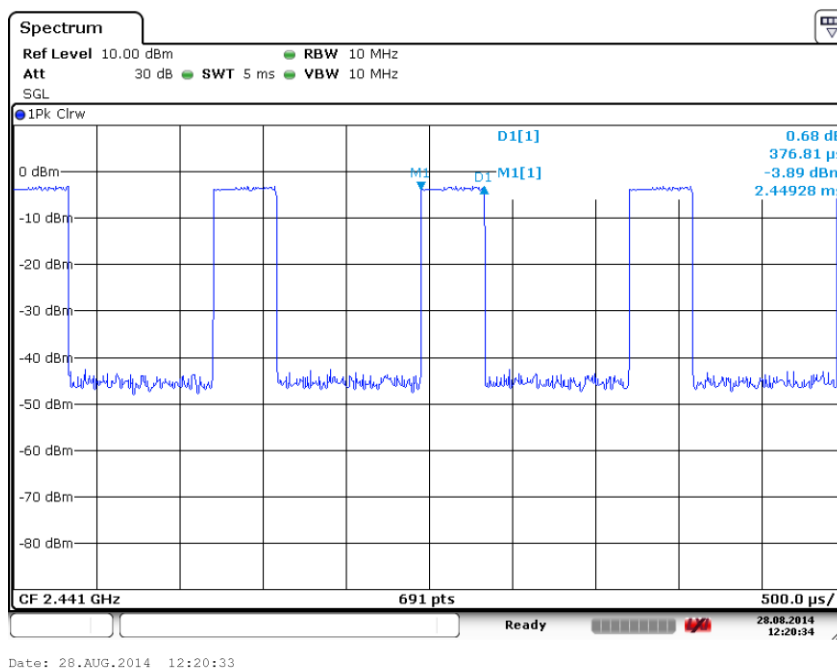


Carrier frequency (MHz): 2441

Packet type:DH1

Modulation type: 8DPSK

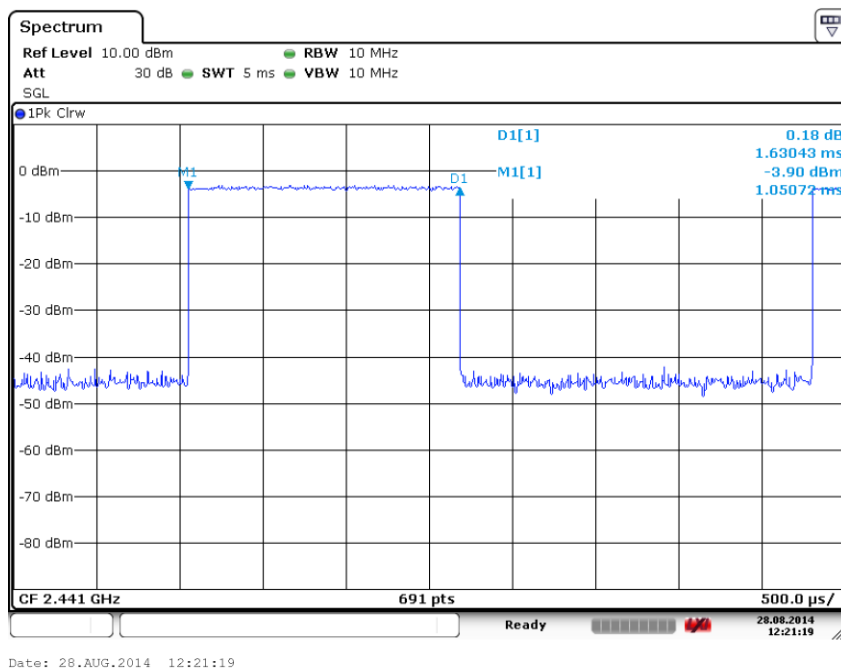

Carrier frequency (MHz): 2441
Packet type:DH3
Modulation type: 8DPSK

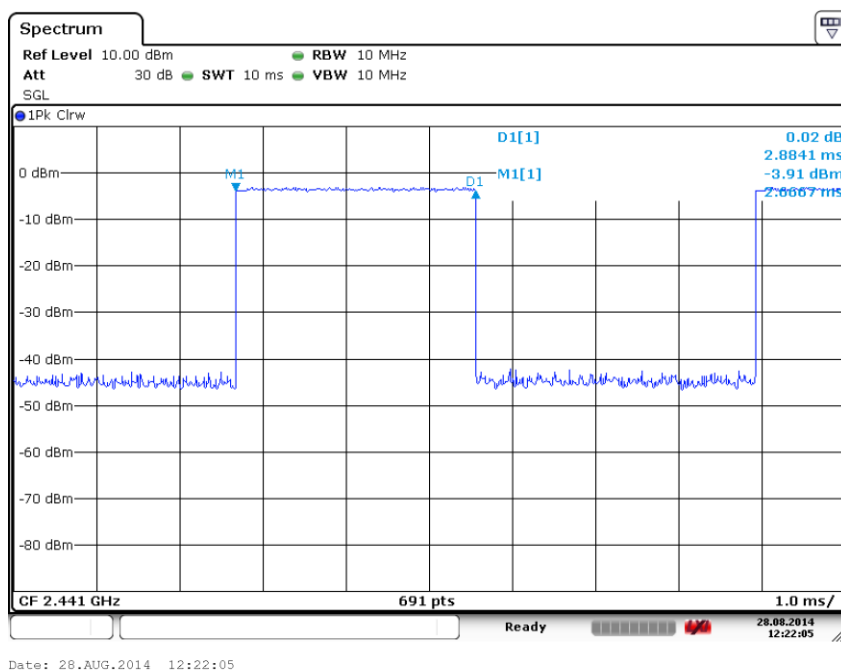

Carrier frequency (MHz): 2441
Packet type:DH5
Modulation type: 8DPSK

2.2.5 Number of Hopping Frequencies

2.2.5.1 Ambient condition

Temperature	Relative humidity	Pressure
22°C	40%	101.1kPa

2.2.5.2 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the number of hopping frequencies measurement. The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss.

2.2.5.3 Test limit


FCC Part15.247(a)(1)(iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

2.2.5.4 Test Settings


- a) Detector: Peak-Maxhold
- b) Start frequency: 2400 MHz
- c) Stop frequency: 2483.5 MHz
- d) Resolution Bandwidth (RBW): 30 kHz
- e) Video Bandwidth (VBW): 1 MHz
- f) Sweep Time: Coupled

2.2.5.5 Test Setup

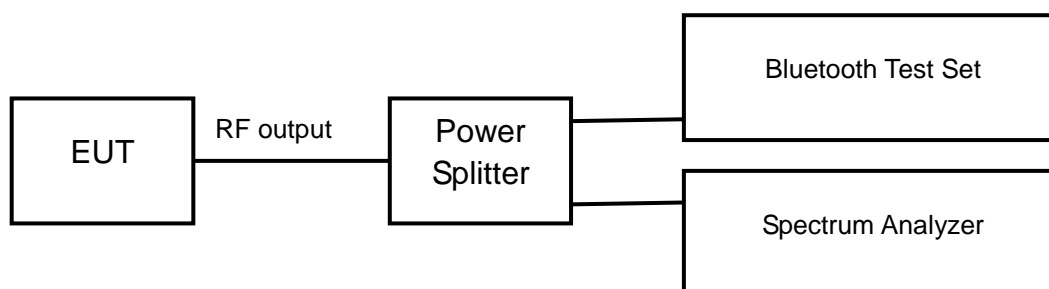

2.2.5.6 Test result

Op-mode	Result
Hopping mode	79

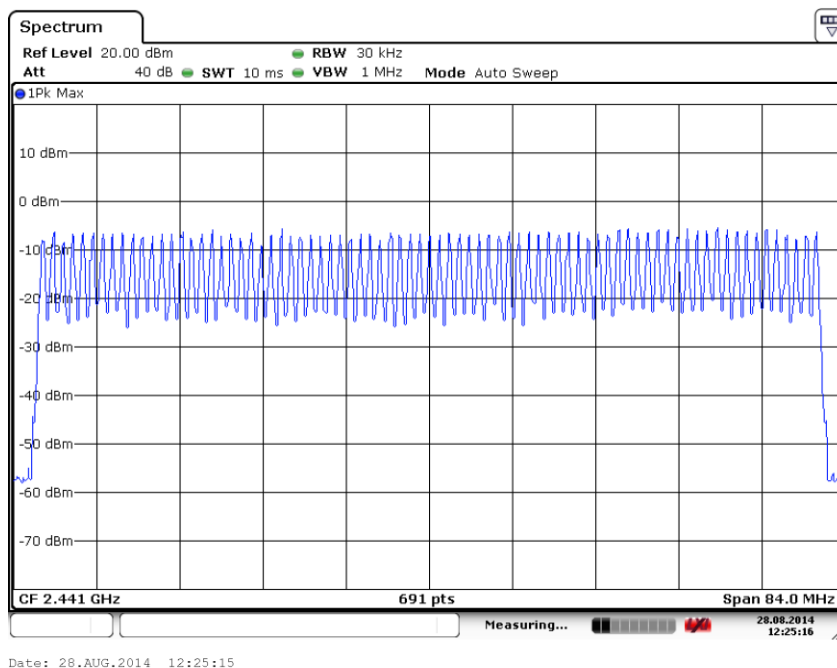

Op-mode: Hopping mode

2.2.6 Conducted out of band emission measurement

2.2.6.1 Ambient condition

Temperature	Relative humidity	Pressure
22°C	40%	101.1kPa

2.2.6.2 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the spurious emissions measurements. The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss.

2.2.6.3 Test limit


FCC Part15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

2.2.6.4 Test Settings

- Set RBW = 100 kHz.
- Set VBW = 300 kHz.
- Set span to encompass the spectrum to be examined
- Detector = peak.
- Trace Mode = max hold.
- Sweep = auto couple. Detector: Peak-Maxhold
- Frequency range: 30 ~25000 MHz

2.2.6.5 Test Setup


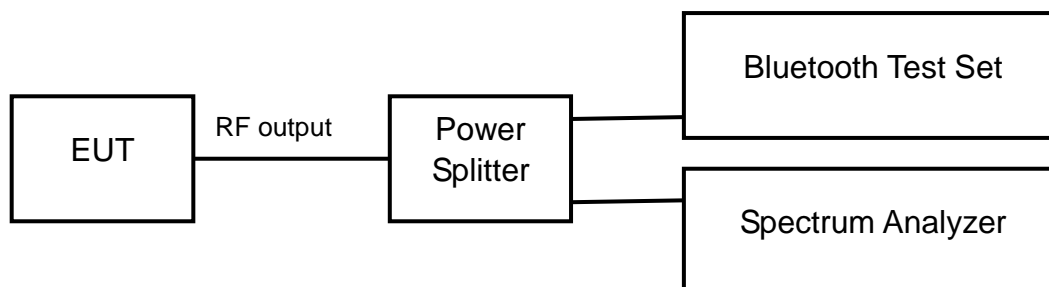


2.2.6.6 Test result



The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

GFSK


CH0 (Hopping off)

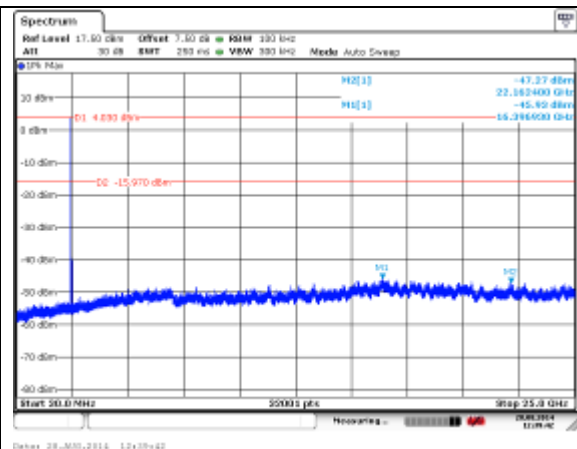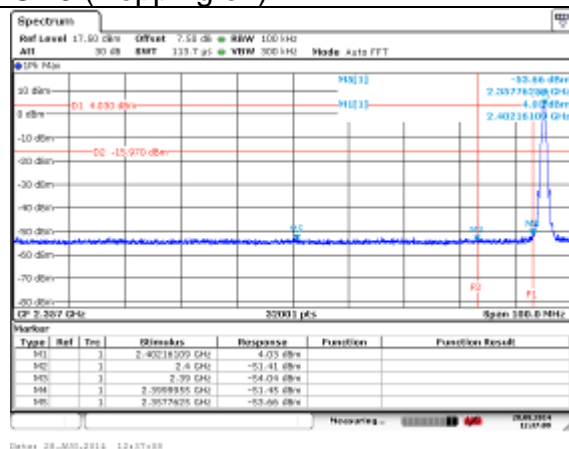


CH78 (Hopping off)

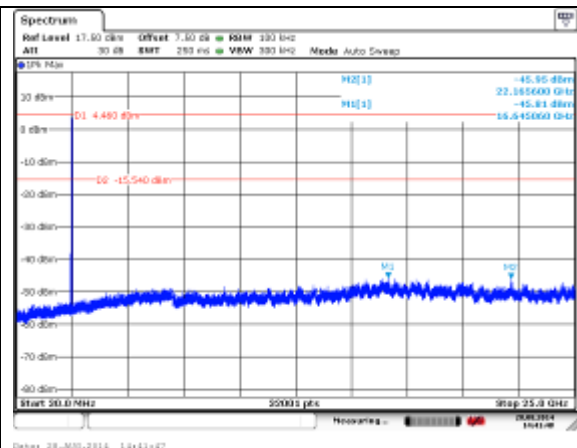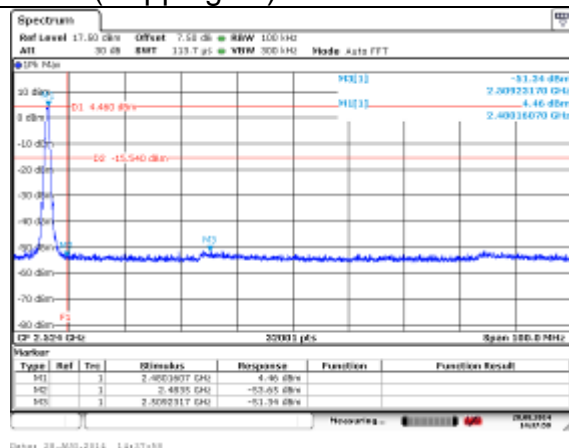

CH0 (Hopping on)


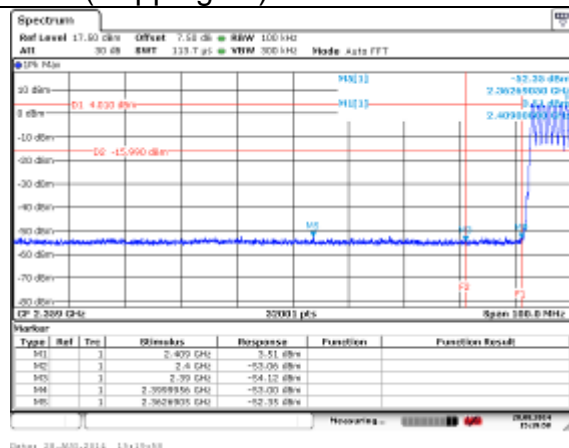


CH78 (Hopping on)


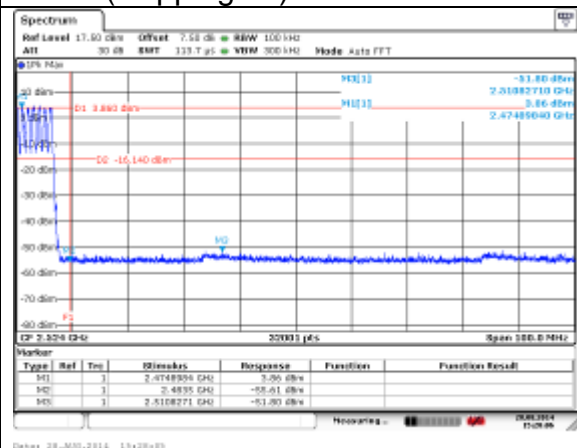


$\pi/4$ DQPSK


CH0 (Hopping off)

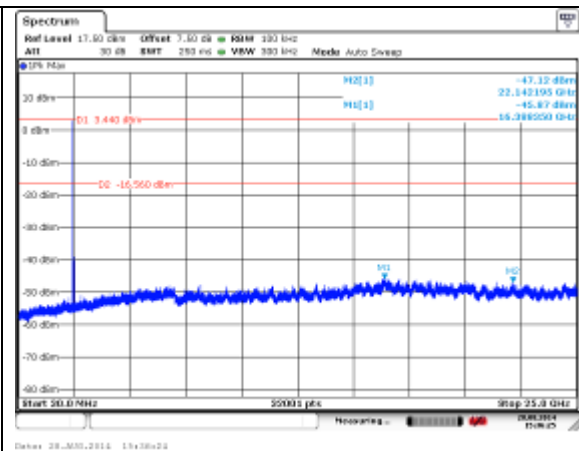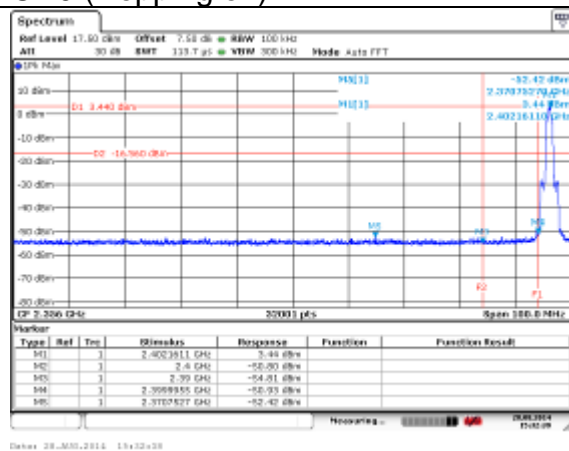


CH78(Hopping off)

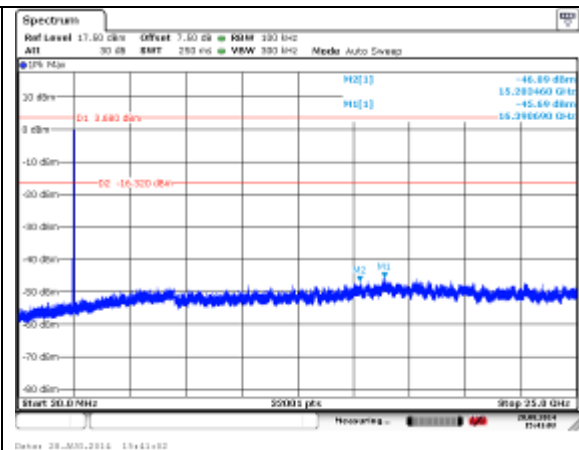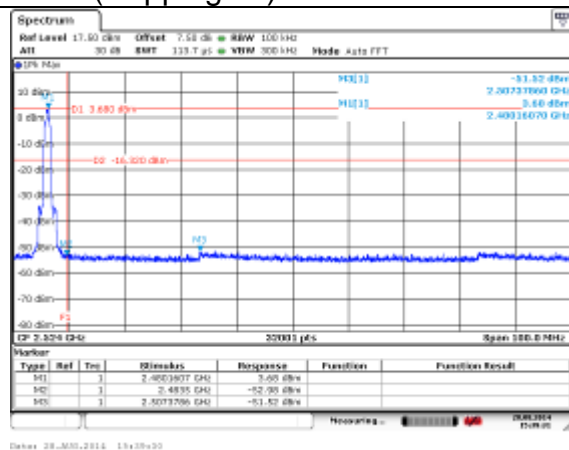

CH0 (Hopping on)


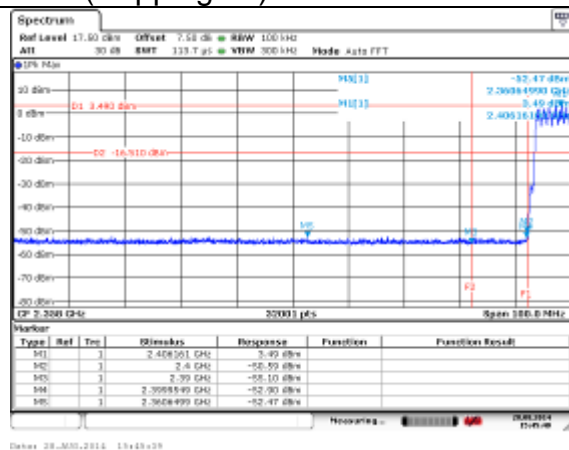


CH78 (Hopping on)


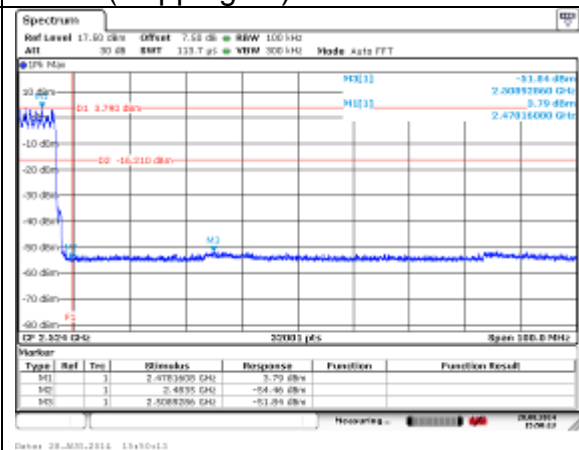


8DPSK


CH0 (Hopping off)

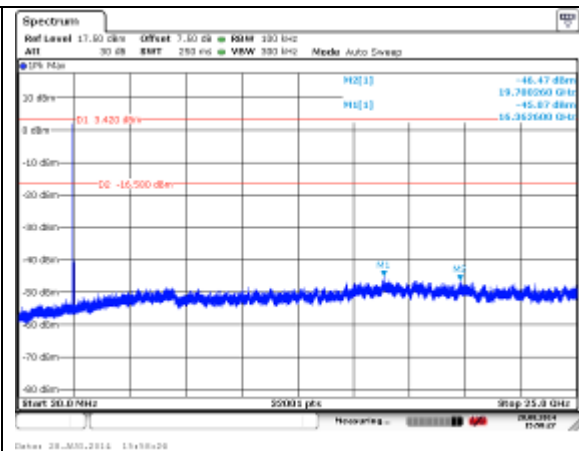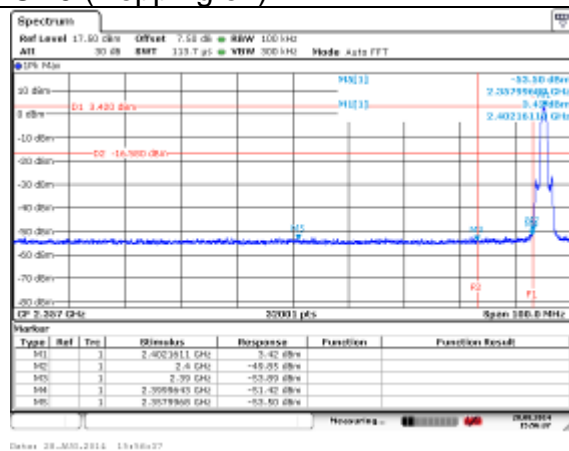

CH78(Hopping off)

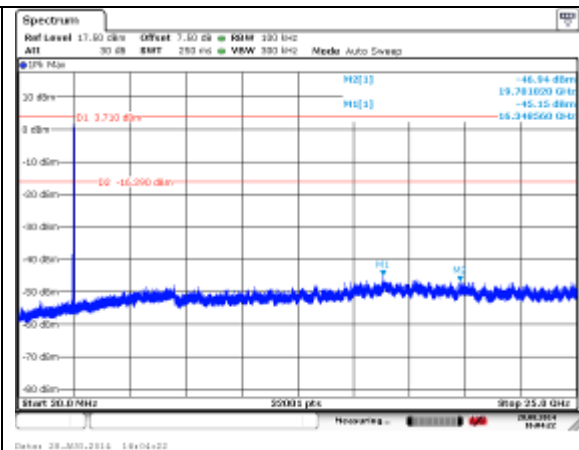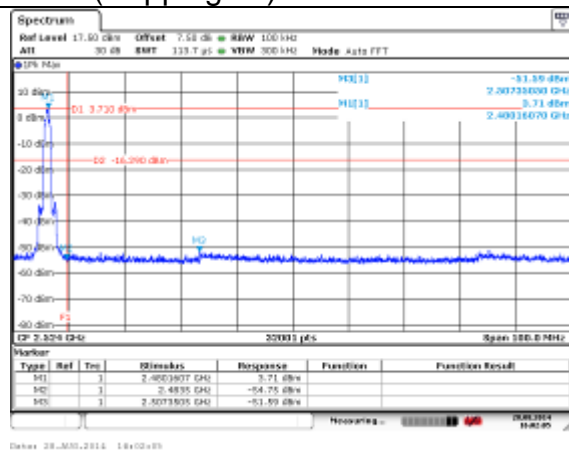

CH0 (Hopping on)

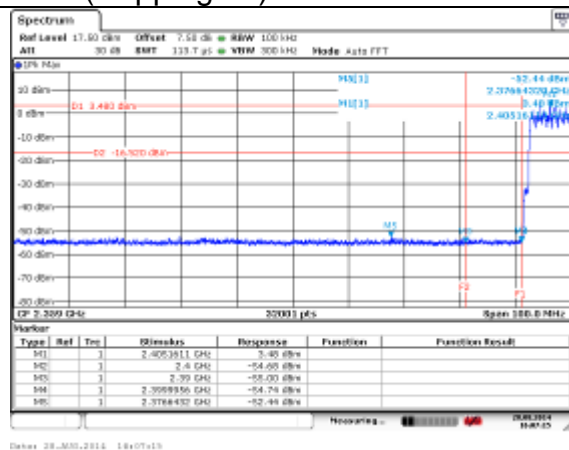

CH78 (Hopping on)



2.2.7 Spurious Radiated Emissions

2.2.7.1 Ambient condition

Temperature	Relative humidity	Pressure
24.3°C	36.2%	100.2kPa

2.2.7.2 Test Description

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

2.2.7.3 Test limit

FCC Part15.247(d):

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)). ***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in below Table per Section 15.209.***

Frequency [MHz]	Field strength [μV/m]	Measured Distance [meters]
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Radiated Limits

FCC Part15.35(b):

there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit

Used conversion factor: Limit (dBμV/m) = 20 log (Limit (μV/m)/1μV/m)

Frequency of Emission(MHz)	Limits	
	Detector	Unit (dBμV/m)
30~88	Quasi-peak	40.0
88~216	Quasi-peak	43.5
216~960	Quasi-peak	46.0
960~1000	Quasi-peak	54.0
1000~5th harmonic of the highest frequency or 40GHz, whichever is lower	Average	54.0
	Peak	74.0

Conversion Radiated limits

2.2.7.3 Test Settings


The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna.

The radiated emissions measurements were made in a typical installation configuration. During the test, the antenna height and EUT azimuth were varied in order to identify the maximum level of emission from the EUT. The height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

2.2.7.4 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below

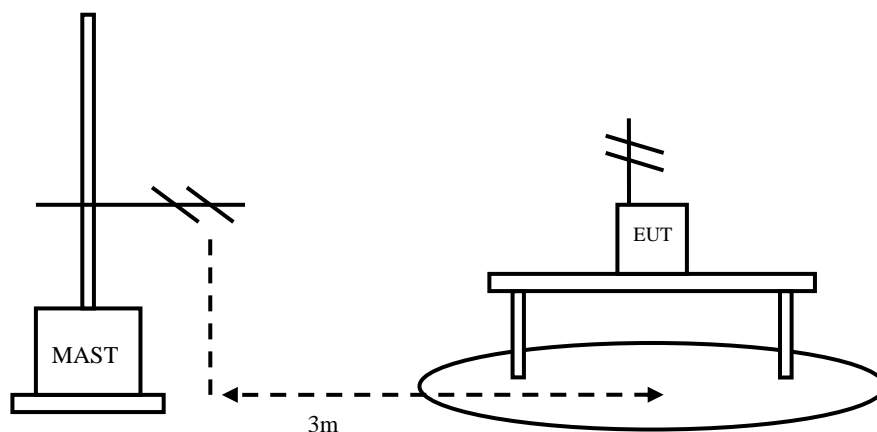

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration. Then start the test software ES-K1. Sweep the whole frequency band through the range from 30MHz to 1GHz or above, using receive log period antenna HL562 or Ridge horn antenna HF906. During the test, the antenna height and EUT azimuth were varied in order to identify the maximum level of emission from the EUT. The height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees. The measurements shall be repeated with orthogonal polarization of the test antenna. The results shall be showed the worst case of the three orthogonal axes.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

2.2.7.4 Test result

The worst case attitude: The mobile lay down.

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	91.63	57.63	N/A	N/A	8.90	25.10
2	2390	48.09	14.09	-25.91	74.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	94.44	60.44	N/A	N/A	8.90	25.10
2	2390	48.17	14.17	-25.83	74.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	84.90	50.9	N/A	N/A	8.90	25.10
2	2390	35.57	1.57	-18.43	54.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	85.19	51.19	N/A	N/A	8.90	25.10
2	2390	35.74	1.74	-18.26	54.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: GFSK

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	91.08	57.08	N/A	N/A	8.90	25.10
2	2483.5	52.40	18.4	-21.6	74.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: GFSK

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	88.49	54.49	N/A	N/A	8.90	25.10
2	2483.5	53.61	19.61	-20.39	74.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: GFSK

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	86.82	52.82	N/A	N/A	8.90	25.10
2	2483.5	40.75	6.75	-13.25	54.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: GFSK

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	84.98	50.98	N/A	N/A	8.90	25.10
2	2483.5	42.18	8.18	-11.82	54.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: $\pi/4$ DQPSK

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	91.13	57.13	N/A	N/A	8.90	25.10
2	2390	47.74	13.74	-26.26	74.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: $\pi/4$ DQPSK

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	93.81	59.81	N/A	N/A	8.90	25.10
2	2390	48.2	14.2	-25.8	74.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: $\pi/4$ DQPSK

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	84.11	50.11	N/A	N/A	8.90	25.10
2	2390	35.57	1.57	-18.43	54.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: $\pi/4$ DQPSK

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	84.19	50.19	N/A	N/A	8.90	25.10
2	2390	35.74	1.74	-18.26	54.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: $\pi/4$ DQPSK

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	91.37	57.37	N/A	N/A	8.90	25.10
2	2483.5	49.34	15.34	-24.66	74.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: $\pi/4$ DQPSK

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	89.69	55.69	N/A	N/A	8.90	25.10
2	2483.5	49.27	15.27	-24.73	74.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: $\pi/4$ DQPSK

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	89.11	55.11	N/A	N/A	8.90	25.10
2	2483.5	38.90	4.9	-15.1	54.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: $\pi/4$ DQPSK

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	86.17	52.17	N/A	N/A	8.90	25.10
2	2483.5	38.39	4.39	-15.61	54.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: 8DPSK

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	91.15	57.15	N/A	N/A	8.90	25.10
2	2390	48.34	14.34	-25.66	74.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: 8DPSK

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	93.82	59.82	N/A	N/A	8.90	25.10
2	2390	48.45	14.45	-25.55	74.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: 8DPSK

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	83.35	49.35	N/A	N/A	8.90	25.10
2	2390	35.57	1.57	-18.43	54.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: 8DPSK

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	82.95	48.95	N/A	N/A	8.90	25.10
2	2390	35.75	1.75	-18.25	54.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: 8DPSK

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	91.44	57.44	N/A	N/A	8.90	25.10
2	2483.5	49.46	15.46	-24.54	74.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: 8DPSK

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	89.66	55.66	N/A	N/A	8.90	25.10
2	2483.5	49.34	15.34	-24.66	74.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: 8DPSK

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	88.45	54.45	N/A	N/A	8.90	25.10
2	2483.5	37.85	3.85	-16.15	54.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: 8DPSK

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	86.69	52.69	N/A	N/A	8.90	25.10
2	2483.5	38.52	4.52	-15.48	54.00	8.90	25.10

Sample Calculations

Determining Spurious Emissions Levels

A “reference path loss” is established and the A_{Rpl} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{mea}} + A_{Rpl}$$

Channel No.:39

Frequency (MHz)	Result (dBuV/m)	A_{Rpl} (dB)	P_{mea} (dBuV/m)	Polarity	Limit (dBuV/m)
40.100200	33.90	15.9	18	Vertical	40.0
53.847695	14.80	7.6	7.2	Vertical	40.0
103.206413	9.50	9.3	0.2	Vertical	43.5
494.388778	16.80	18.2	-1.4	Horizontal	46.0
540.080160	17.60	18.8	-1.2	Horizontal	46.0
957.915832	25.20	25.4	-0.2	Horizontal	46.0

For $\pi/4$ DQPSK

Channel No.:39

Frequency (MHz)	Result (dBuV/m)	A_{Rpl} (dB)	P_{mea} (dBuV/m)	Polarity	Limit (dBuV/m)
39.959920	33.70	16.0	17.7	Vertical	40.0
54.268537	14.50	7.4	7.1	Vertical	40.0
102.404810	9.10	9.3	-0.2	Vertical	43.5
487.975952	16.70	18.1	-1.4	Vertical	46.0
548.096192	17.80	19.1	-1.3	Horizontal	46.0
905.811623	24.60	25.0	-0.4	Horizontal	46.0


For 8DPSK

Channel No.:39

Frequency (MHz)	Result (dBuV/m)	A _{Rpl} (dB)	P _{mea} (dBuV/m)	Polarity	Limit (dBuV/m)
40.100200	34.00	15.9	18.1	Vertical	40.0
54.128257	14.10	7.5	6.6	Vertical	40.0
98.597194	8.60	9.1	-0.5	Vertical	43.5
485.571142	16.60	18.1	-1.5	Vertical	46.0
541.082164	17.60	18.8	-1.2	Vertical	46.0
922.845691	25.10	25.5	-0.4	Vertical	46.0

Carrier frequency (MHz): 2441


Channel No.:39

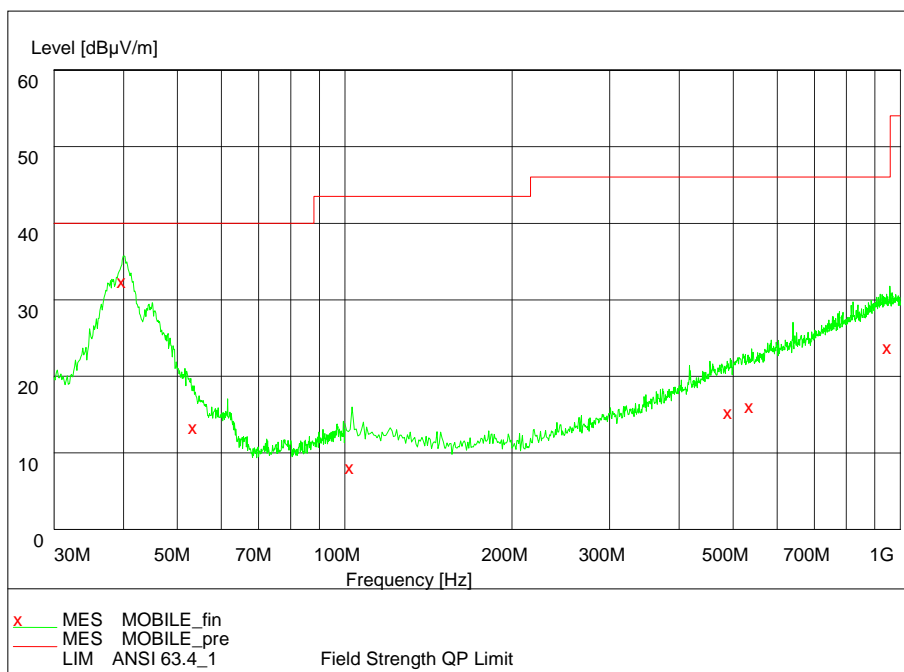


Frequency Range: 30MHz-1000MHz

Detector: QP mode


Modulation type: GFSK

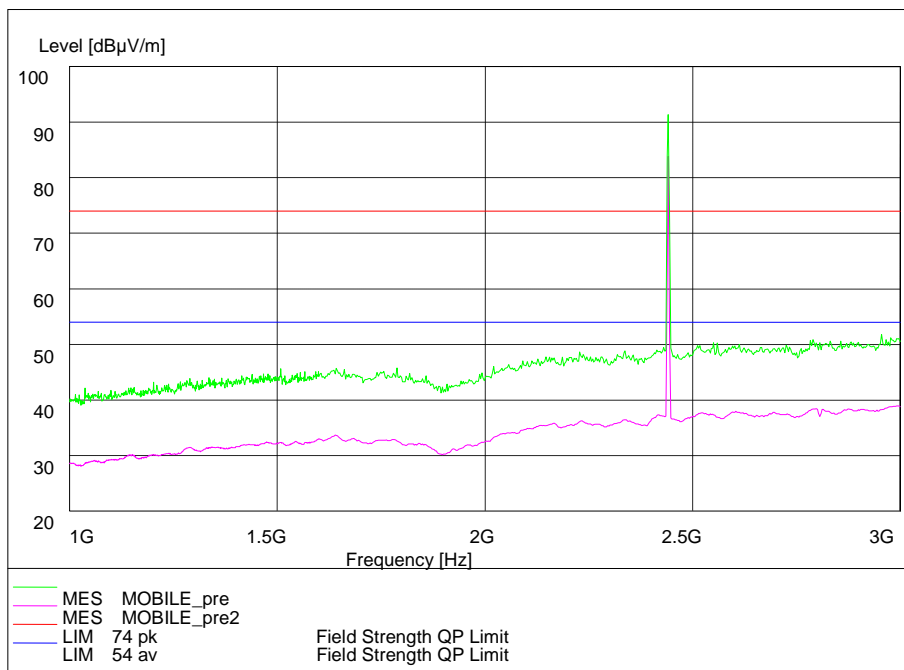


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: GFSK

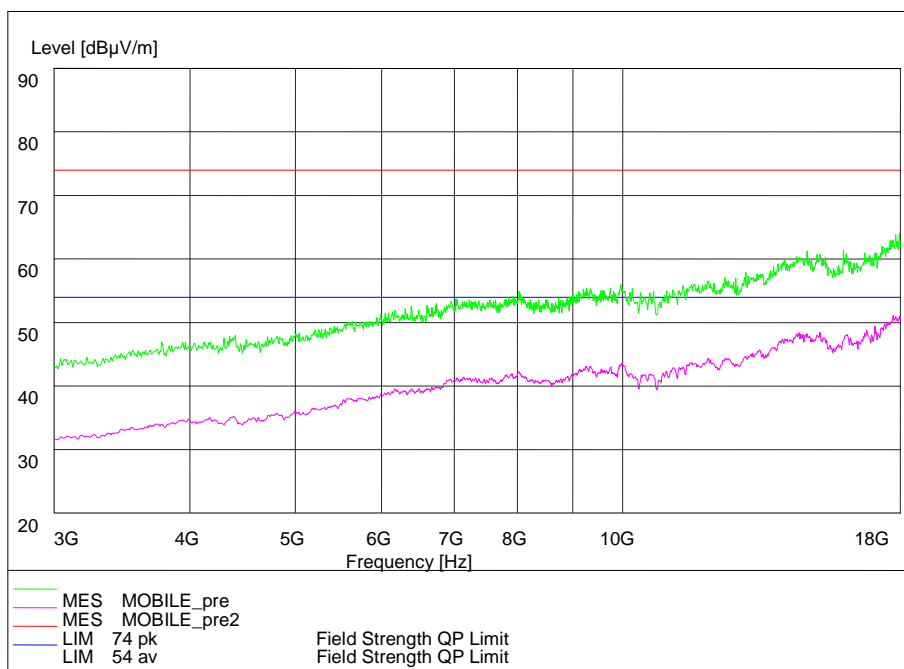


Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: GFSK

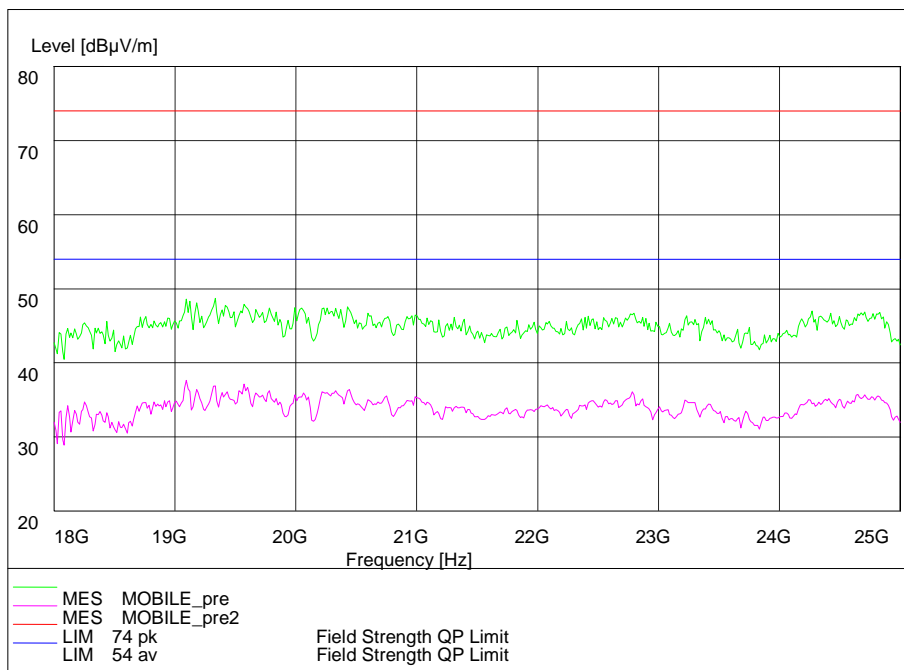


Frequency Range: 18GHz-25GHz
Detector: Av mode and PK mode
Modulation type: GFSK

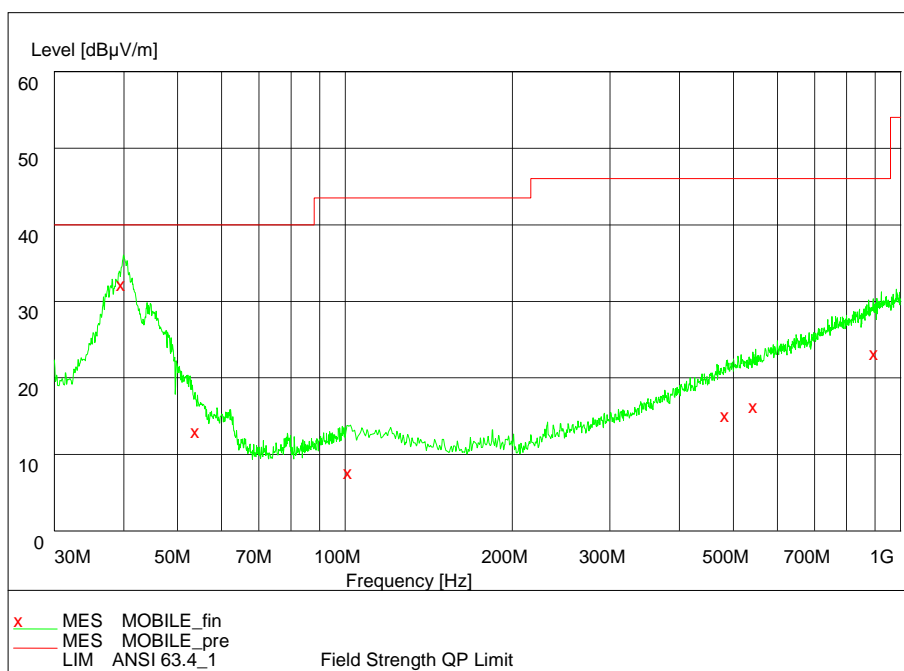


Frequency Range: 30MHz-1000 MHz
Detector: QP mode
Modulation type: $\pi/4$ DQPSK

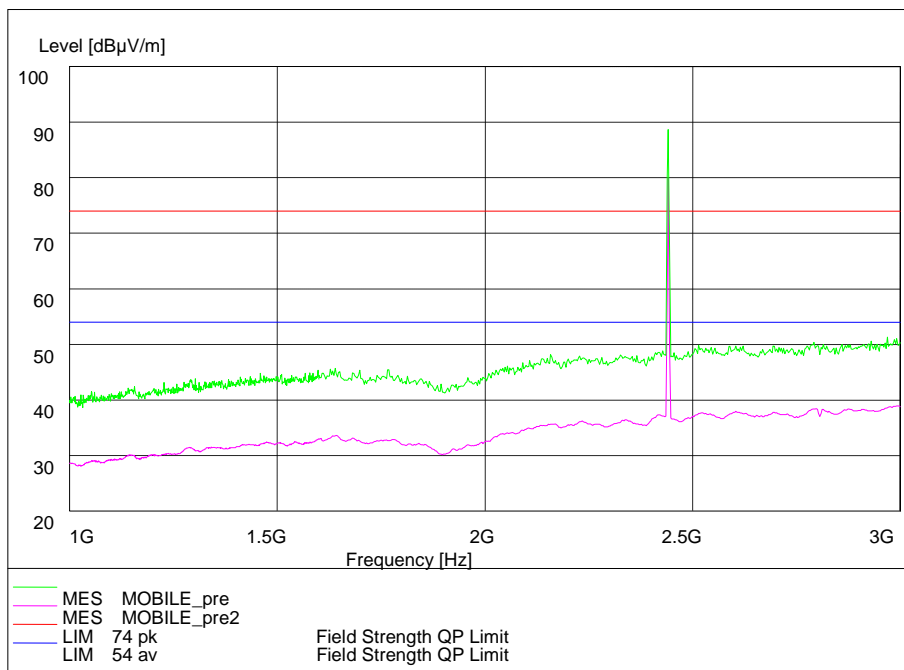

Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK

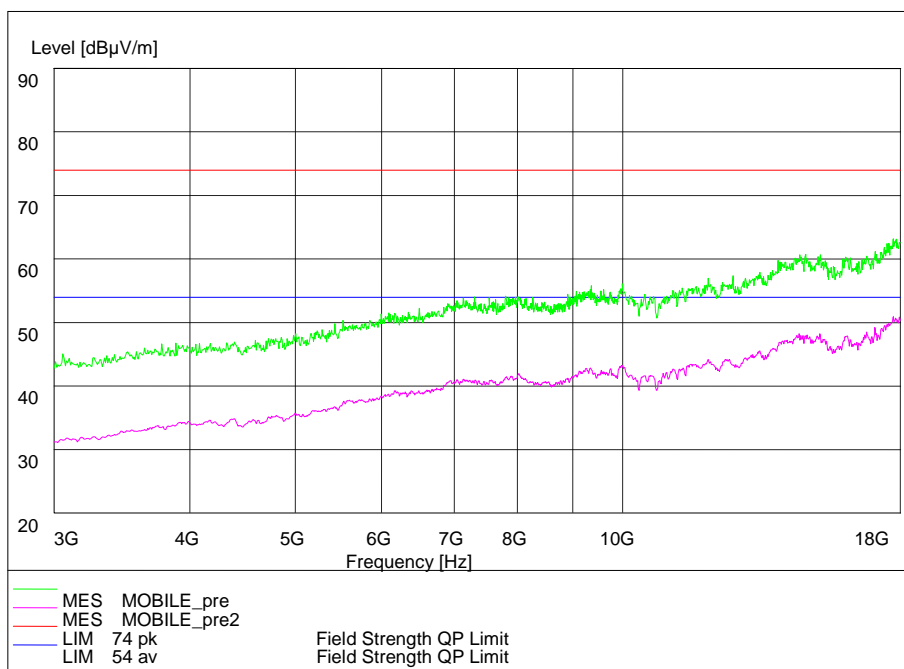


Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK

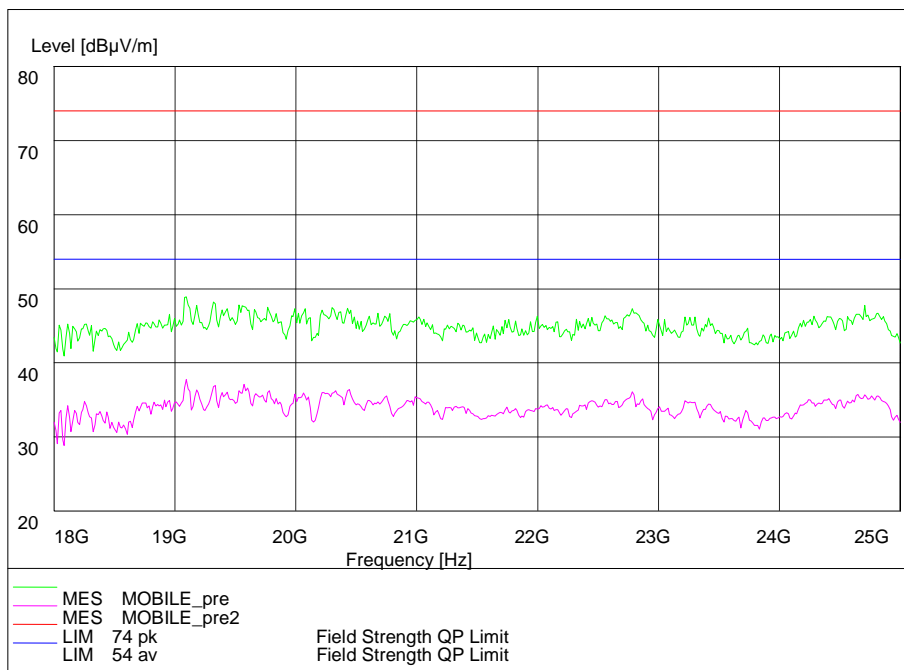

Frequency Range: 18GHz-25GHz

Detector: Av mode and PK mode


Modulation type: $\pi/4$ DQPSK

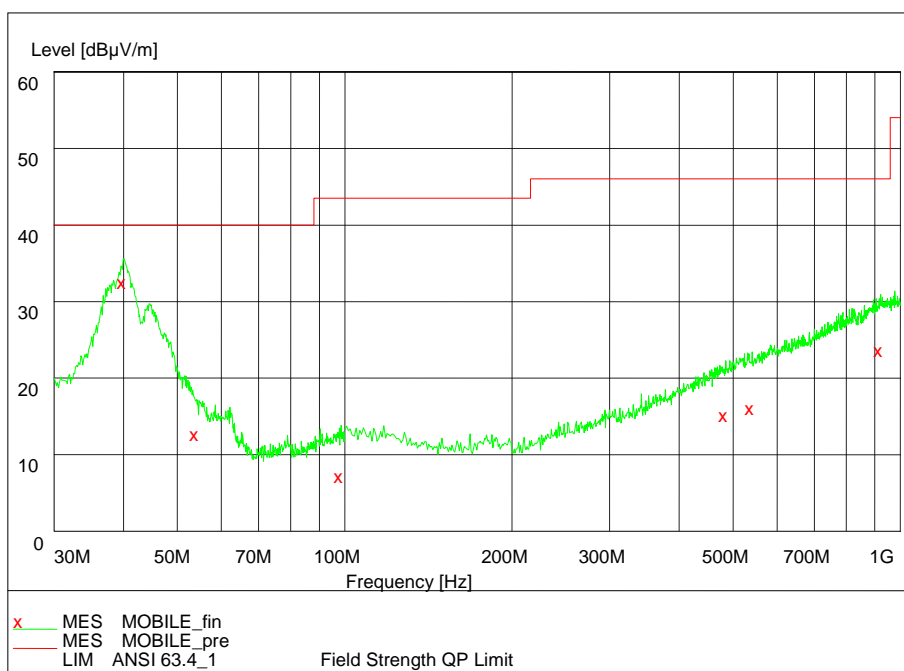


Frequency Range: 30MHz-1000 MHz

Detector: QP mode


Modulation type: 8DPSK

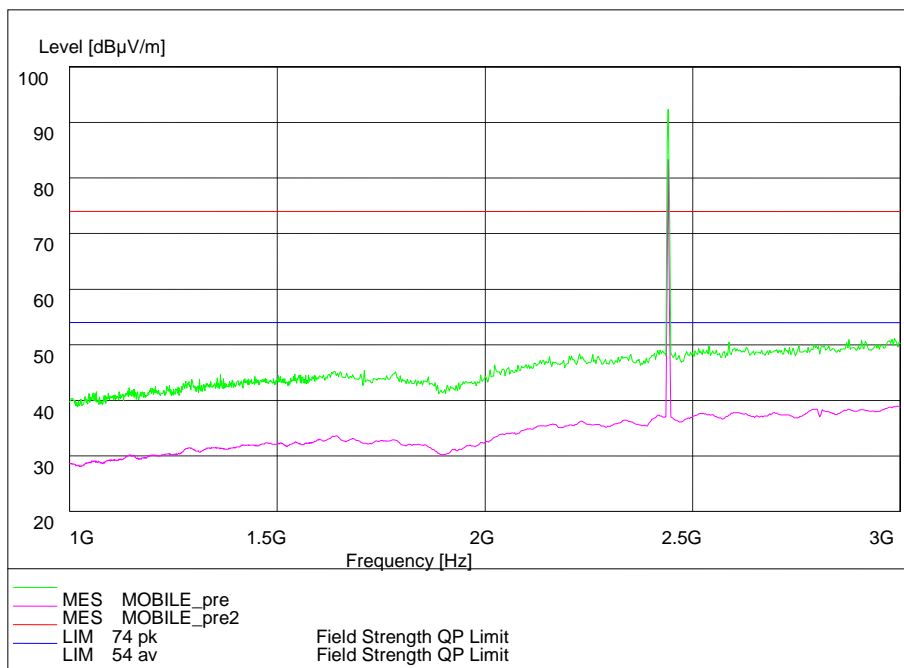

Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

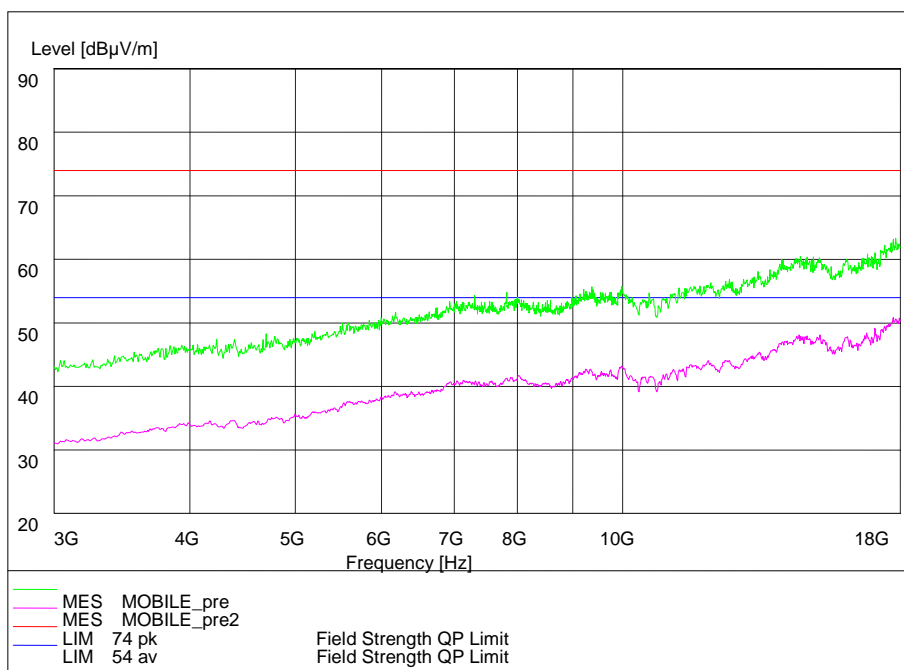

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

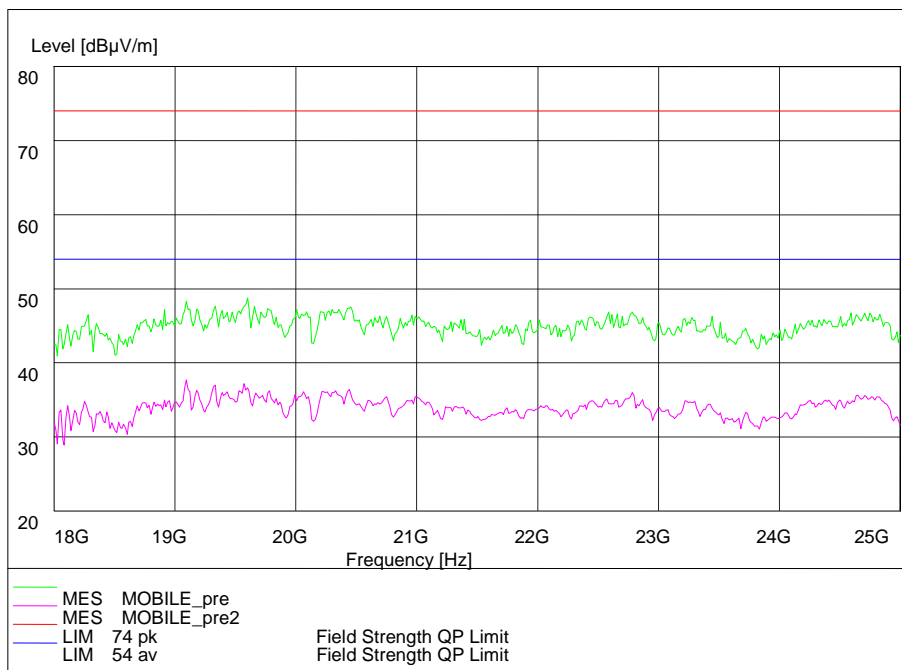

Frequency Range: 18GHz-25GHz

Detector: Av mode and PK mode

Modulation type: 8DPSK

2.2.8 AC Power line Conducted Emission

2.2.8.1 Ambient condition

Temperature	Relative humidity	Pressure
20°C	35%	101.4kPa

2.2.8.2 Test limit

FCC Part15.207


Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

The measurement is made according to ANSI C63.4-2009

2.2.8.3 Test result

Noise Level of the Measuring Instrument

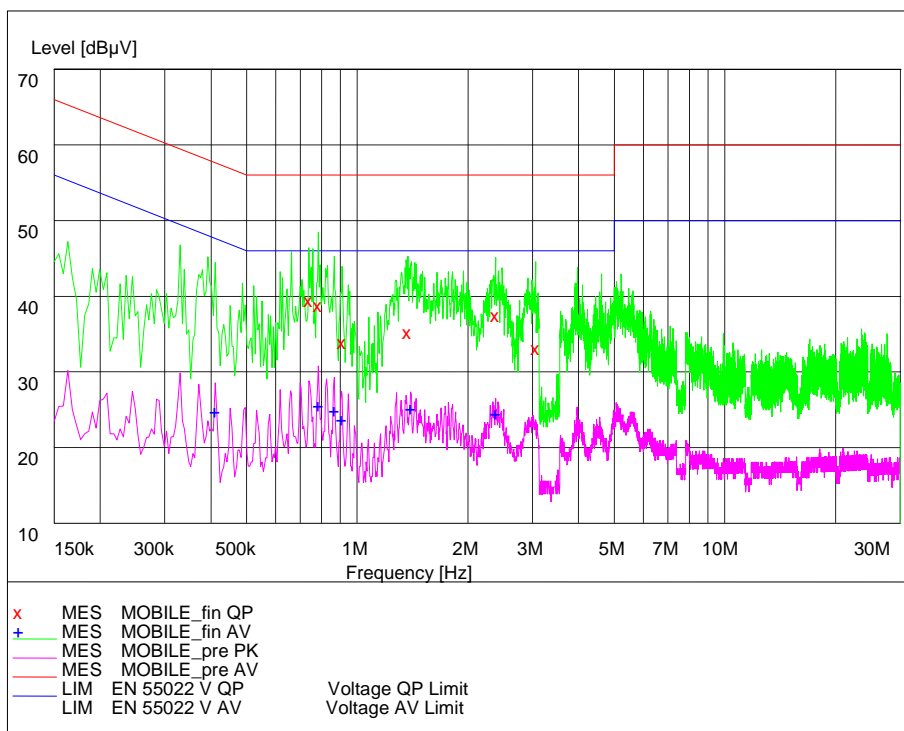

L Line


MEASUREMENT RESULT: "MOBILE_fin AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBμV	dB	dBμV	dB		
0.411000	26.30	20.1	48	21.4	---	---
0.784500	27.10	20.1	46	18.9	---	---
0.865500	26.40	20.2	46	19.6	---	---
0.906000	25.20	20.2	46	20.8	---	---
1.396500	26.70	20.2	46	19.3	---	---
2.377500	26.00	20.2	46	20.0	---	---

MEASUREMENT RESULT: "MOBILE_fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBμV	dB	dBμV	dB		
0.739500	41.00	20.1	56	15.0	---	---
0.784500	40.30	20.1	56	15.7	---	---
0.910500	35.40	20.2	56	20.6	---	---
1.374000	36.70	20.2	56	19.3	---	---
2.377500	38.90	20.2	56	17.1	---	---

3.057000 34.60 20.3 56 21.4 --- ---

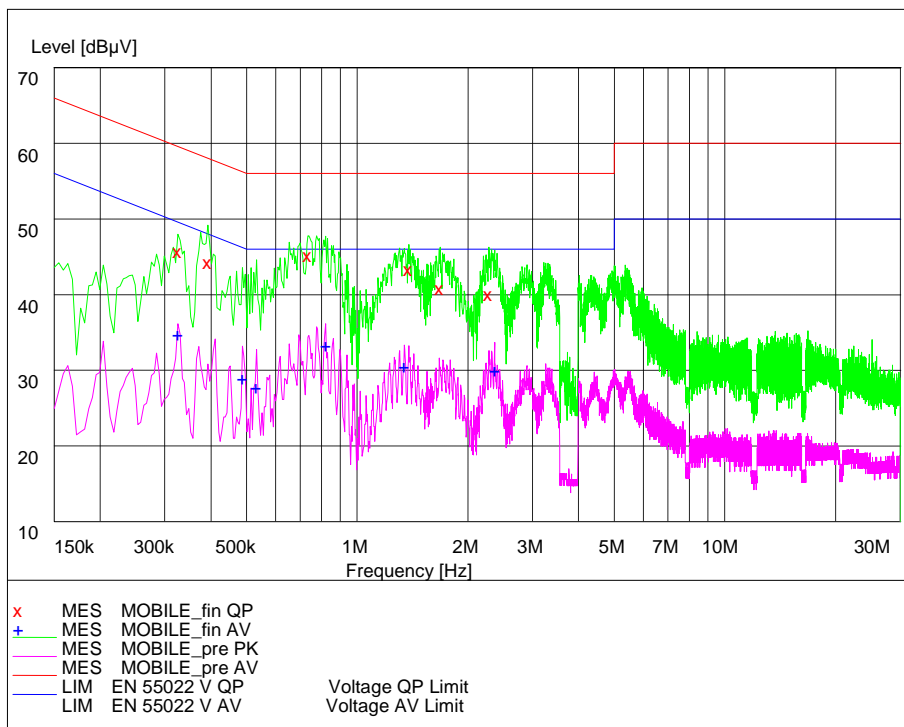

N Line

MEASUREMENT RESULT: "MOBILE_fin AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBμV	dB	dBμV	dB		
0.325500	36.30	20.1	50	13.3	---	---
0.487500	30.40	20.2	46	15.8	---	---
0.532500	29.20	20.1	46	16.8	---	---
0.820500	34.70	20.1	46	11.3	---	---
1.342500	32.10	20.2	46	13.9	---	---
2.364000	31.50	20.3	46	14.5	---	---

MEASUREMENT RESULT: "MOBILE_fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBμV	dB	dBμV	dB		
0.325500	47.20	20.1	60	12.3	---	---
0.393000	45.70	20.1	58	12.3	---	---
0.735000	46.60	20.1	56	9.4	---	---
1.383000	44.80	20.2	56	11.2	---	---
1.680000	42.30	20.2	56	13.7	---	---
2.278500	41.60	20.3	56	14.4	---	---

2.3. Measurement Uncertainty

Items	Uncertainty	
Occupied Bandwidth	3kHz	
Peak power output	0.67dB	
Band edge compliance	1.20dB	
Spurious emissions	30MHz~1GHz	2.83dB
	1GHz~12.75GHz	2.50dB
	12.75GHz~25GHz	2.75dB

2.4. List of test equipment

No.	Name/ Model	Manufacturer	S/N	Cal Due date
1.	Spectrum Analyzer FSV	ROHDE&SCHWARZ	101065	2015.8
2.	Signal Generator MG3700A	Anritsu	6200677084	2015.8
3.	Bluetooth Test Set MT8852B	Anritsu	1142010	2015.2
4.	Cable 104EA	SUCOFLEX	9272/4EA	2015.8
5.	Cable 104EA	SUCOFLEX	9266/4EA	2015.8
6.	Power Splitter 11850C	Agilent	026057	2015.8
7.	12.65m×8.03m×7.50m Fully-Anechoic Chamber	FRANKONIA	-----	-----
8.	23.18m×16.88m×9.60m Semi-Anechoic Chamber	FRANKONIA	---	-----
9.	Turn table Diameter:1m	HD	-----	-----
10.	Turn table Diameter:5m	HD	-----	-----
11.	Antenna master FAC(MA4.0)	MATURO	-----	-----
12.	Antenna master SAC(MA4.0)	MATURO	-----	-----
13.	9.080m×5.255m×3.525m Shielding room	FRANKONIA	-----	-----
14.	HF 906 Double-Ridged Waveguide Horn Antenna	R&S	100030	2015.8
15.	HF 906 Double-Ridged Waveguide Horn Antenna	R&S	100029	2015.8
16.	HL562 Ultra log antenna	R&S	100016	2015.8
17.	3160-09 Receive antenna	SCHWARZ-BECK	002058-002	2015.8
18.	ESI 40 EMI test receiver	R&S	100015	2015.8
19.	Radio tester	CMU 200	114667	2015.8
20.	ESCS30 EMI test receiver	R&S	100029	2015.8
21.	HL562 Receive antenna	R&S	100167	2015.8
22.	ESH3-Z5 LISN	R&S	100020	2015.8

Appendix

Appendix1 Test Setup