

**System Check\_Body\_2450MHz\_130419****DUT: D2450V2-SN:736**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL\_2450\_130419 Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.973$  mho/m;  $\epsilon_r = 52.342$ ;  $\rho$

$= 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C; Liquid Temperature : 21.2 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3270; ConvF(4.17, 4.17, 4.17); Calibrated: 2012/9/28;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: ELI 4.0\_Front; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

**Configuration/Pin=250mW/Area Scan (61x61x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (interpolated) = 19.2 mW/g



**Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.954 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 28.626 mW/g

**SAR(1 g) = 13.6 mW/g; SAR(10 g) = 6.37 mW/g**

Maximum value of SAR (measured) = 17.8 mW/g

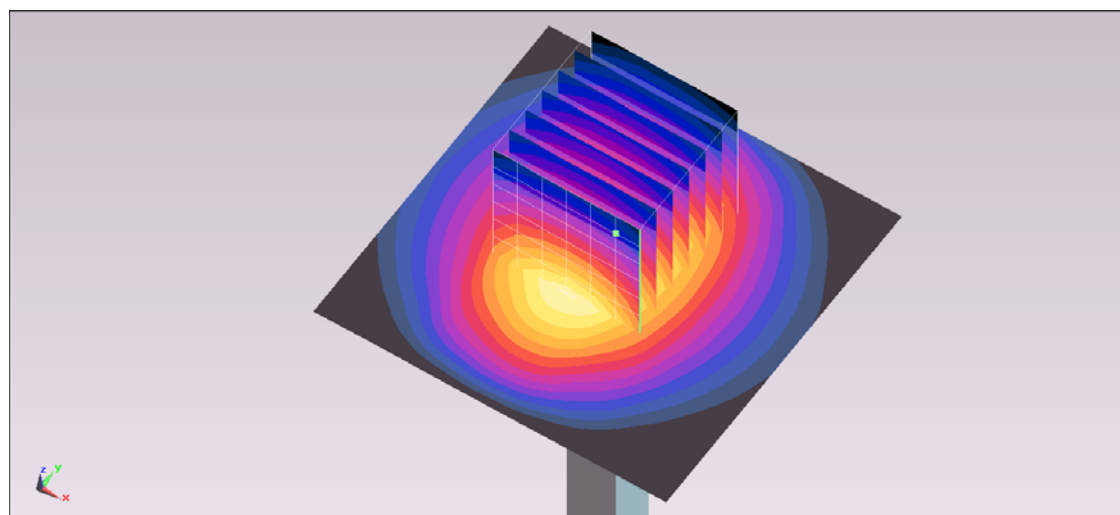

0 dB = 17.8 mW/g = 25.01 dB mW/g

**System Check\_Body\_2450MHz\_130423****DUT: D2450V2-SN:736**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL\_2450\_130423 Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2.02$  mho/m;  $\epsilon_r = 53.886$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.6 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3792; ConvF(7.1, 7.1, 7.1); Calibrated: 2012/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2012/6/12
- Phantom: ELI 4.0\_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

**Configuration/Pin=250mW/Area Scan (61x61x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (interpolated) = 22.5 mW/g


**Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.930 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 29.248 mW/g

**SAR(1 g) = 13.3 mW/g; SAR(10 g) = 6.15 mW/g**

Maximum value of SAR (measured) = 20.5 mW/g

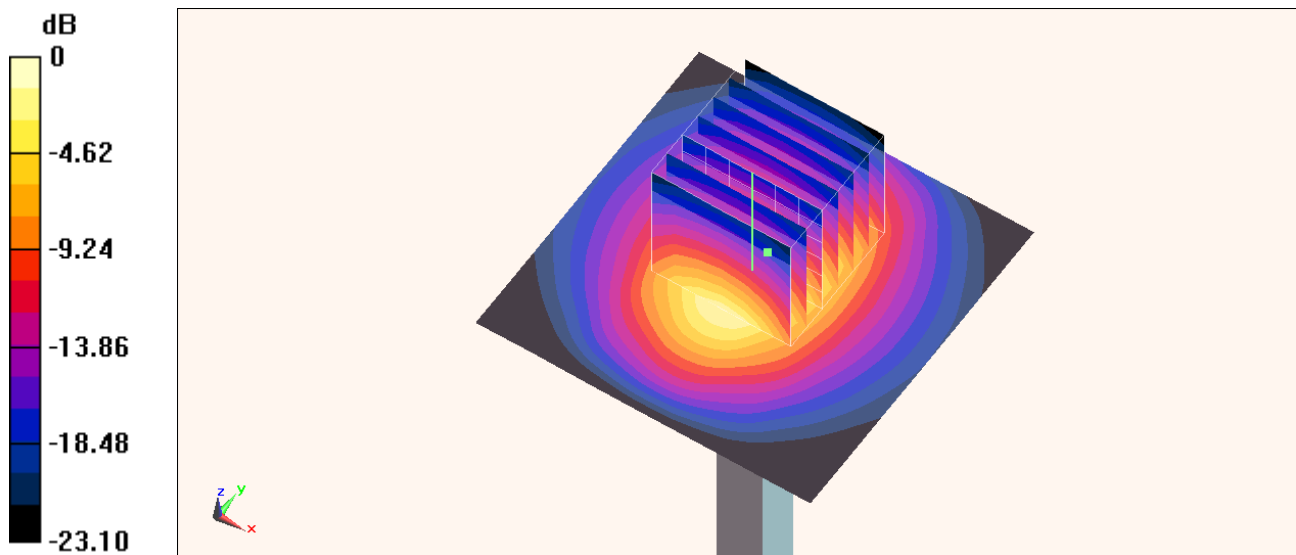

0 dB = 20.5 mW/g = 26.24 dB mW/g