VRVTRONSART2O Horisontal bottom

VRVTRONSART20 Horisontal top

VRVTRONSART20 horisontal

SART

Search and Rescue 9GHz Radar Transponder

JOTRON

Operating Instructions
Use only in emergency

1. **Activate SART** by pulling red tab. ➔ O➔ ✦
   Ensure switch is pushed to **ON** position.
2. **Indicator light** will now flash slowly. ☀ . ☀ . ☀
3. Secure SART at least **1m above water**
   in open area.
   If in Life Raft: Hang SART under canopy support,
   or use optional handheld 1m telescopic pole.
4. When **triggered** by radar signal, SART will beep
   and indicator light will flash fast.

Compass Safe Distance 1,5m

ON

OFF

TEST

Indicator
Light

VRVTRONSART20
vertical 2

Tron SART 20
Search and Rescue 9GHz Radar Transponder

Test Instructions
Compass safe distance 1.5m

1. Push switch to TEST position.
2. Observe Indicator light flashing.
3. Return switch to OFF position.
4. See Users Manual for testing against ships own radar.

FCC ID: RA9TronSART20
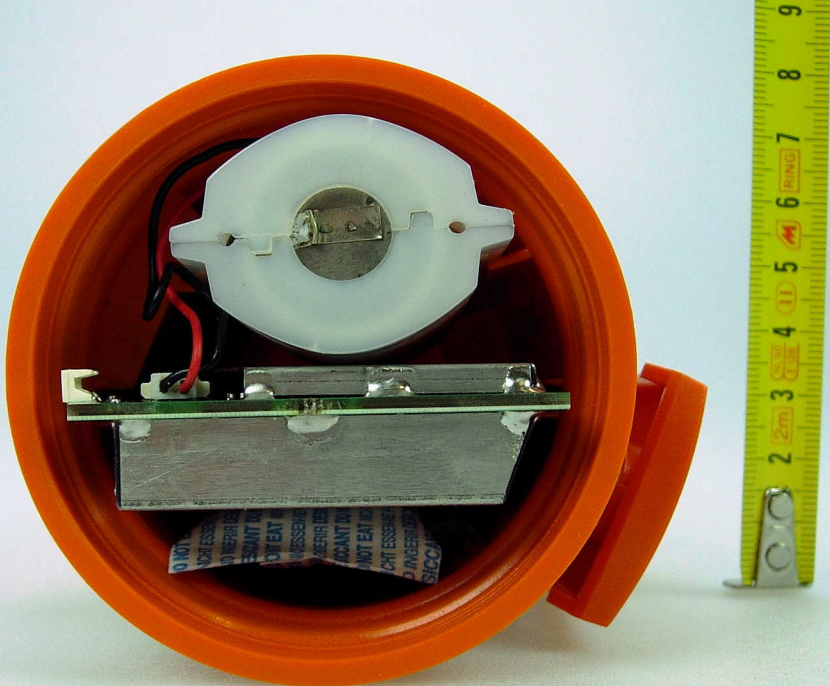
Canada: 2131 B309

Serial no:

Vessel:

JOTRON

Jotron AS
P.O. Box 54
NO-3280 Tjodalyng
Norway
Tel +47 33 13 97 00
www.jotron.com

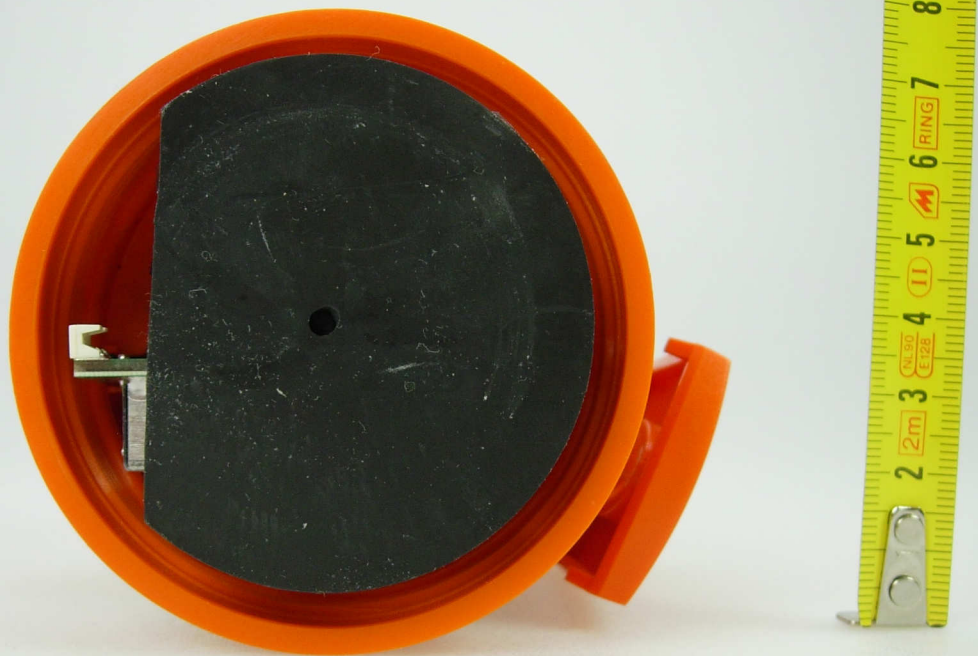**Battery Expiry Date**
Battery Type: R-6305

VRVTRONSART20 vertical 3

VRVTRONSART20 vertical

**Seen from underside with bottom lid
and rubber gasket removed**

Seen from underside with bottom lid removed