



Prüfbericht - Nr.:		16010824 001		Seite 1 von 30	
<i>Test Report No.:</i>				<i>Page 1 of 30</i>	
Auftraggeber:		Blueway Electronic Co., Ltd			
<i>Client:</i>		No.16 Zone, Zhongkai High & Tech Industry Development Zone			
		Huizhou, Guangdong 516008			
		P.R. China			
Gegenstand der Prüfung: Bluetooth Wireless Headset					
<i>Test item:</i>					
Bezeichnung:		LH-063	FCC ID:		VSL LH-063
<i>Identification:</i>			<i>FCC ID</i>		
Wareneingangs-Nr.:		173032568	Eingangsdatum:		18.09.2007
<i>Receipt No.:</i>			<i>Date of receipt:</i>		
Prüfart:		TÜV Rheinland (Guangdong) Ltd. EMC		Listed test laboratory	
<i>Testing location:</i>		Laboratory		according to FCC rules	
		Guangzhou Auto Market, Yuan Gang Section of		section 2.948 for	
		Guangshan Road, Guangzhou 510650,		measuring devices.	
		P. R. China			
Prüfgrundlage:		ANSI C63.4: 2003			
<i>Test specification:</i>		FCC Part 15: 20, Sep. 2007, Subpart C section 15.209 and 15.247			
Prüfresultat:		Der Prüfgegenstand entspricht oben genannter Prüfgrundlage(n).			
<i>Test Result:</i>		<i>The test item passed the test specification(s).</i>			
Prüflaboratorium:		TÜV Rheinland (Guangdong) Ltd.			
<i>Testing Laboratory:</i>					
geprüft/ tested by:		kontrolliert/ reviewed by:			
16. Nov. 2008		Ricky Liu		18. Nov. 2008	
		Project Manager		Liangdong Xie	
					
Datum	Name/Stellung	Unterschrift	Datum	Name/Stellung	Unterschrift
<i>Date</i>	<i>Name/Position</i>	<i>Signature</i>	<i>Date</i>	<i>Name/Position</i>	<i>Signature</i>
Sonstiges/ Other Aspects:					
<div style="display: flex; justify-content: space-between;"> <div> Abkürzungen: P(ass) = entspricht Prüfgrundlage F(ail) = entspricht nicht Prüfgrundlage N/A = nicht anwendbar N/T = nicht getestet </div> <div> Abbreviations: P(ass) = passed F(ail) = failed N/A = not applicable N/T = not tested </div> </div>					
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.</i>					

Prüfbericht - Nr.:
Test Report No.:

16010824 001

Seite 2 von 30
Page 2 of 30

Test Summary

FCC and IC test specification		Test items	Result
Paragraph	Released Date		
Part 15 Per Section 15.209(a)	20. Sep, 2007	Transmitter Radiated Spurious Emission	Pass
Part 15 Per Section 15.203	20. Sep, 2007	Antenna Requirement	Pass
Part 15 Per Section 15.247(b)(1)	20. Sep, 2007	Maximum Peak Conducted Output Power	Pass
Part 15 Per Section 15.247(a)(1)	20. Sep, 2007	20dB Bandwidth	Pass
Part 15 Per Section 15.247(a)(1)	20. Sep, 2007	Hopping Channel Carrier Frequency Separation	Pass
Part 15 Per Section 15.247(a)(1)(iii)	20. Sep, 2007	Number of Hopping Frequency Used	Pass
Part 15 Per Section 15.247(a)(1)(iii)	20. Sep, 2007	Time of Occupancy (Dwell Time)	Pass
Part 15 Per Section 15.247(d)	20. Sep, 2007	Out-Of-Band Emission measurement	Pass
TCB Exclusions List	17, July, 2002	Exemption from Routine Evaluation Limits – SAR Evaluation	Pass

Prüfbericht - Nr.:
Test Report No.:

16010824 001

Seite 3 von 30
Page 3 of 30

Contents

1	GENERAL REMARKS.....	5
1.1	COMPLEMENTARY MATERIALS.....	5
2	TEST SITES.....	5
2.1	TEST FACILITIES.....	5
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
2.3	TRACEABILITY.....	6
2.4	CALIBRATION.....	7
2.5	MEASUREMENT UNCERTAINTY.....	7
2.6	LOCATION OF ORIGINAL DATA.....	7
2.7	STATUS OF FACILITY USED FOR TESTING.....	7
3	GENERAL PRODUCT INFORMATION.....	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	8
3.2	RATINGS AND SYSTEM DETAILS.....	8
3.3	INDEPENDENT OPERATION MODES.....	9
3.4	SUBMITTED DOCUMENTS.....	9
4	TEST SET-UP AND OPERATION MODE.....	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	10
4.2	TEST OPERATION AND TEST SOFTWARE.....	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	10
4.5	TEST SET-UP.....	11
5	TEST RESULTS EMISSION.....	13
5.1	TRANSMITTER RADIATED SPURIOUS EMISSION.....	13
5.2	ANTENNA REQUIREMENT.....	16
5.3	MAXIMUM PEAK CONDUCTED OUTPUT POWER.....	17
5.4	20dB BANDWIDTH.....	18
5.5	HOPPING CHANNEL CARRIER FREQUENCY SEPARATION.....	19
5.6	NUMBER OF HOPPING FREQUENCY USED.....	21
5.7	TIME OF OCCUPANCY (DWELL TIME).....	22
5.8	OUT-OF-BAND EMISSION.....	24
5.9	EXEMPTION FROM ROUTINE EVALUATION LIMITS – RF EXPOSURE EVALUATION.....	26

6	PHOTOGRAPHS OF THE TEST SET-UP	27
7	LIST OF TABLES.....	30
8	LIST OF PHOTOGRAPHS.....	30

Prüfbericht - Nr.:
Test Report No.:

16010824 001

Seite 5 von 30
Page 5 of 30

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix 1: Test result

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Guangdong) Ltd. EMC Laboratory

Guangzhou Auto Market, Yuan Gang Section of Guangshan Road
Guangzhou 510650

P. R. China

Prüfbericht - Nr.:
Test Report No.:

16010824 001

Seite 6 von 30
Page 6 of 30

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Type	Manufacturer	S/N	Calibrated until	Calibrated Interval
EMI Test Receiver	ESCI-3	Rohde & Schwarz	100216	26.Nov.2008	1 year
Spectrum Analyzer	FSP30	Rohde & Schwarz	100286	27.Aug.2009	1 year
Trilog-Broadband Antenna	VULB9168	SCHWARZBECK MESS-ELEKTRONIK	210	08.May.2009	2 year
Double-Ridged Waveguide Horn Antenna	HF906	Rohde & Schwarz	100385	18.Jul.2009	2 year
Double-Ridged Waveguide Horn Antenna	HF906	Rohde & Schwarz	100407	08.May.2009	2 year
Pre-amplifier	AFS42- 00101800- 25-S-42	MITEQ	1101599	31.Jul.2009	2 year
Band Reject Filter	BRM50702	Micro-Tronics	023	14.Mar.2010	2 year
Standard Gain Horn Antenna	3160-09	EMCO	21642	N/A	N/A
Standard Gain Horn Antenna	3160-09	EMCO	21645	N/A	N/A
Pre-amplifier	AFS33- 18002650- 30-8P-44	MITEQ	1108282	31.Jul.2009	2 year
3m Anechoic Chamber	N/A	Albatross Project GmbH	N/A	16.Apr.2009	3 year
EMI Test Receiver	ESCS30	Rohde & Schwarz	100316	27.Mar.2009	1 year
Two-Line V-Network	ESH3-Z5	Rohde & Schwarz	100308	27.Mar.2009	1 year
Pulse Limiter	ESH3-Z2	Rohde & Schwarz	100701	27.Mar.2009	1 year

2.3 Traceability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations.

Prüfbericht - Nr.:

16010824 001

Seite 7 von 30

Test Report No.:

Page 7 of 30

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

Uncertainty for conducted emissions measurements is $\pm 2.51\text{dB}$.

Uncertainty for radiated emissions measurements is $\pm 4.9\text{dB}$ (30MHz-1GHz), $\pm 4.84\text{dB}$ (>1GHz).

The reported expanded uncertainty is based on a standard uncertainty multiply by a coverage factor $k=2$, providing a level of confidence of approximately 95%.

2.6 Location of original data

The original copies of test data taken during actual testing were attached at Appendix 1 of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Guangdong) file for certification follow-up purposes.

2.7 Status of facility used for testing

TÜV Rheinland (Guangdong) Ltd. EMC Laboratory; Guangzhou Auto Market, Yuan Gang Section of Guangshan Road, Guangzhou 510650, P. R. China is listed on the US Federal Communications Commission list of facilities approved to perform measurements, the register no. 833845

Prüfbericht - Nr.:
Test Report No.:

16010824 001

Seite 8 von 30
Page 8 of 30

3 General Product Information

The EUT is a Bluetooth Mono Headset powered by integral rechargeable battery.

3.1 Product Function and Intended Use

Refer to user manual for more information.

3.2 Ratings and System Details

Frequency range	:	2402.0MHz – 2480MHz (unlicensed ISM band)
Number of employed channels	:	79 channels
Total Number of channels	:	79 channels
Modulation Type	:	Frequency Hopping Spread Spectrum
Mode of RF Operation (Simplex/ Duplex)	:	Duplex
Type of antenna	:	Integral antenna
Power supply	:	DC 5V via mini-USB for charging.
Ports	:	Mini USB port for charging
Protection Class	:	III

Refer to the Technical Documentation for further information

Prüfbericht - Nr.:
Test Report No.:

16010824 001

Seite 9 von 30
Page 9 of 30

3.3 Independent Operation Modes

Off/On

Charge (No Bluetooth operation in charge mode)

The basic operation modes for the Bluetooth Operating: Transmitting and receiving

For further information refer to User Manual

3.4 Submitted Documents

Operation Description

Block Diagram

Schematics

FCC and IC label and its location

User Manual

Internal Photos

External Photos

Application form

4 Test Set-up and Operation Mode

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Refer to test set-up in chapter 5.

4.3 Special Accessories and Auxiliary Equipment

The product has been tested together with the following auxiliary equipment.

1. Laptop PC:

Manufacturer: IBM
Model Number: R40e
Serial Number: 99-CYY55

2. Test software:

Manufacturer: CSR
Model Number: Bluetest (of Bluesuit)
Version: 1.22

4.4 Countermeasures to achieve EMC Compliance

The test sample, which has been tested, contained the noise suppression parts as described in the technical document. No additional measures were employed to achieve compliance.

4.5 Test set-up

Diagram 1 of Configuration for Testing Radiated Emission below 1 GHz


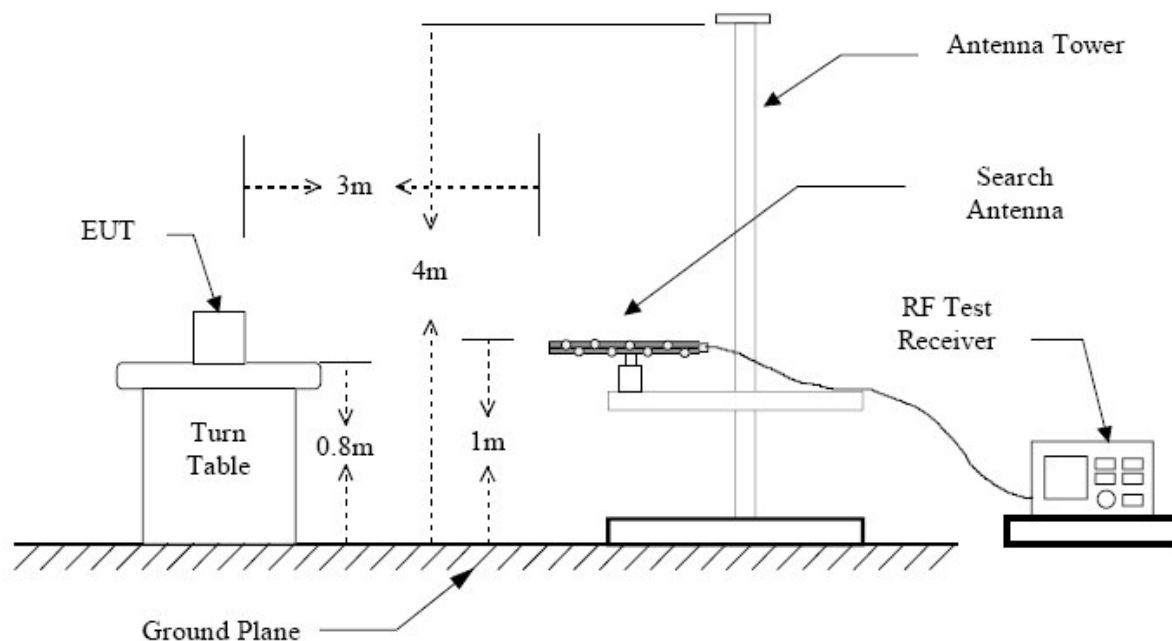


Diagram 2 of Configuration for Testing Radiated Emission above 1 GHz

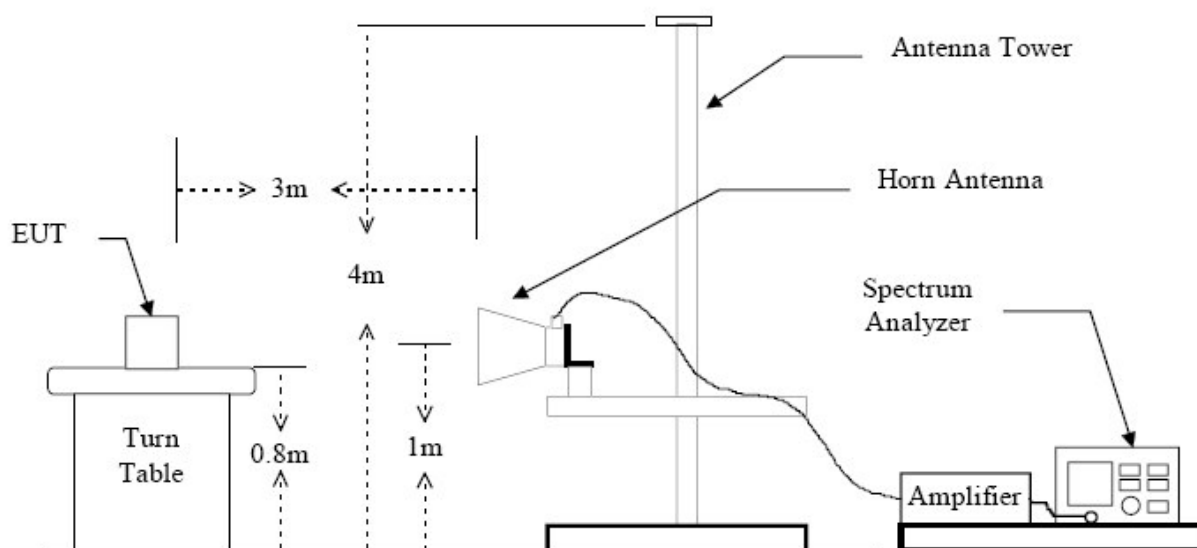


Prüfbericht - Nr.:
Test Report No.:

16010824 001

Seite 12 von 30
Page 12 of 30

Diagram 3 of Configuration for Testing other test items

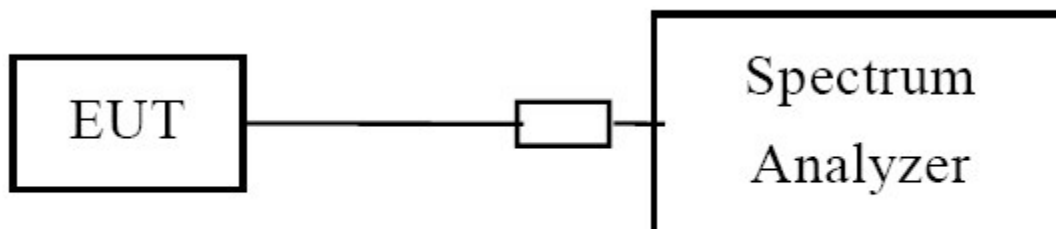

Prüfbericht - Nr.:
Test Report No.:

16010824 001

Seite 13 von 30
Page 13 of 30

5 Test Results EMISSION

5.1 Transmitter Radiated Spurious Emission

RESULT:

Pass

Date of testing	:	09.12.2007
Test specification	:	FCC Part 15 Per Section 15.209(a)
Limits	:	FCC Part 15 Per Section 15.209(a)
Test procedure	:	Procedure specified in ANSI C63.4
Deviations from Standard Test procedures	:	None
Kind of test site	:	3m Semi-anechoic chamber
Operation mode	:	RF transmitting
Power supply	:	DC 3.7V by battery
Temperature	:	22°C
Humidity	:	55%

Test procedure:

1. The EUT was placed on the top of a rotatable table 0.8 meters above the ground with 3-orthogonal direction and be kept close enough to the receiving antenna. The table was rotated 360 degrees to determine the suspected emission frequency and the position of the worst radiation case with both horizontal and vertical antenna polarization.
2. The EUT was then set 3 meters away from the receiving antenna, which was mounted on a variable-height antenna tower.
3. For each suspected emission frequency recorded in step 1, the EUT was arranged to its worst case that the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to read the maximum emission.

Prüfbericht - Nr.:

16010824 001

Seite 14 von 30

Test Report No.:

Page 14 of 30

Table 2: Radiated Emission (Transmitting at channel low)

Frequency	QP	AV	PK	Polarity	Limit		
					QP	AV	PK
[MHz]	[dBμV/m]			(H/V)	[dBμV/m]		
275.650	39.2	N/A	N/A	V	46.0	N/A	N/A
299.550	33.4	N/A	N/A	V	46.0	N/A	N/A
347.550	34.5	N/A	N/A	V	46.0	N/A	N/A
443.450	35.2	N/A	N/A	V	46.0	N/A	N/A
515.350	35.3	N/A	N/A	V	46.0	N/A	N/A
2736.200	N/A	45.2	49.9	V	N/A	54	74
4803.750	N/A	46.0	50.2	V	N/A	54	74
17970.250	N/A	44.7	55.6	V	N/A	54	74
*)---							

Table 3: Radiated Emission (Transmitting at channel mid)

Frequency	QP	AV	PK	Polarity	Limit		
					QP	AV	PK
[MHz]	[dBμV/m]			(H/V)	[dBμV/m]		
275.650	39.2	N/A	N/A	V	46.0	N/A	N/A
443.450	38.1	N/A	N/A	V	46.0	N/A	N/A
491.350	37.9	N/A	N/A	V	46.0	N/A	N/A
515.350	40.9	N/A	N/A	V	46.0	N/A	N/A
1195.500	N/A	34.4	43.7	V	N/A	54	74
4882.375	N/A	49.1	52.5	V	N/A	54	74
17908.625	N/A	44.4	55.8	V	N/A	54	74
*)---							

Prüfbericht - Nr.:
Test Report No.:

16010824 001

Seite 15 von 30
Page 15 of 30

Table 4: Radiated Emission (Transmitting at channel high)

Frequency	QP	AV	PK	Polarity	Limit		
					QP	AV	PK
[MHz]	[dBμV/m]			(H/V)	[dBμV/m]		
275.650	33.3	N/A	N/A	V	46.0	N/A	N/A
398.850	33.1	N/A	N/A	V	46.0	N/A	N/A
443.450	34.6	N/A	N/A	V	46.0	N/A	N/A
467.450	35.6	N/A	N/A	V	46.0	N/A	N/A
491.350	35.1	N/A	N/A	V	46.0	N/A	N/A
4958.875	N/A	48.1	54.3	V	N/A	54	74
17857.625	N/A	44.5	56.8	V	N/A	54	74
*)---							

*) Measurement is made from 30 MHz to 26 GHz. Disturbances other than those mentioned above are small or not detectable.

Prüfbericht - Nr.:
Test Report No.:

16010824 001

Seite 16 von 30
Page 16 of 30

5.2 Antenna requirement

RESULT:

Pass

Date of testing : ---

Test specification : FCC Part 15 Per Section 15.203
FCC Part 15 Per Section 15.247(b)

For intentional device, according to 15.203, and intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to 15.247(b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by amount in dB than the directional gain of the antenna exceeds of 6dBi.

As the antenna is permanently mounted on RF Board, there is no consideration of replacement.

And the max gain of the antenna is 2.66dBi.

Prüfbericht - Nr.:

16010824 001

Seite 17 von 30

Test Report No.:

Page 17 of 30

5.3 Maximum Peak Conducted Output Power

RESULT:

Pass

Date of testing : 17.12.2007
Test specification : FCC Part 15 Per Section 15.247(b)(1)
Limits : FCC Part 15 Per Section 15.247(b)(1)

For frequency hopping systems operating in the band 2400-2483.5 MHz employing at least 75 hopping channels, the maximum peak conducted output power shall not exceed 1 W; for all other frequency hopping systems in the band, the maximum peak conducted output power shall not exceed 0.125 W.

Deviations from Standard Test procedures

: None
Test procedure : Procedure specified in ANSI C63.4
Kind of test site : Shielded room
Operation mode : Continuously transmitting on the measured channel.
Power supply : DC 3.7V by battery
Temperature : 22°C
Humidity : 50%

Test procedure:

1. Connect the antenna port of the EUT to the spectrum analyzer by a low lost cable.
2. Set the EUT to proper test mode with relative test software and hardware.
3. Spectrum analyzer setting: Centered Frequency= measured channel, RBW=1MHz, VBW≥RBW.
4. Mark the peak power output frequency and record the max reading.
5. Repeat step 2 to 4 until all the channels measured are finished.

Table 5: Peak Conducted Power

Channel	Frequency(MHz)	Power Reading (dBm)	Cable Loss (dB)	Output Power		Limit *
				(dBm)	(mW)	
Low	2401.880	-1.46	0.8	-0.66	0.86	1000
Mid	2441.000	-0.32	0.8	0.48	1.12	1000
High	2480.000	-0.49	0.8	0.31	1.07	1000

*Note: Refer to the test result of “Number of Hopping Channel Used” for the non-overlap channel number.

Prüfbericht - Nr.:

16010824 001

Seite 18 von 30

Test Report No.:

Page 18 of 30

5.4 20dB Bandwidth

RESULT:

Pass

Date of testing : 17.12.2007
Test specification : FCC Part 15 Per Section 15.247(a)(1)
Limits : FCC Part 15 Per Section 15.247(b)(1)

Frequency hopping systems operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

Deviations from Standard Test

procedures : None
Test procedure : Procedure specified in ANSI C63.4
Operation mode : Continuously transmitting on the measured channel.
Kind of test site : Shielded room
Power supply : DC 3.7V by battery
Temperature : 22°C
Humidity : 55%

Test procedure:

1. Connect the antenna port of the EUT to the spectrum analyzer by a low lost cable.
2. Set the EUT to proper test mode with relative test software and hardware.
3. Spectrum analyzer setting: Centered Frequency= measured channel, RBW=10kHz, VBW=30kHz.
4. Mark the peak power frequency point and the -20dB upper and lower frequency points.
5. Read the frequency delta value between the -20dB upper and lower frequency points.
6. Repeat step 2 to 5 until all the channels required are finished.

Table 6: 20dB Bandwidth

Channel	Frequency (GHz)	Test Result (kHz)
Low	2402.000	800
Mid	2441.000	876
High	2480.000	868

Please refer to Appendix 1 for measurement data.

Prüfbericht - Nr.:

16010824 001

Seite 19 von 30

Test Report No.:

Page 19 of 30

5.5 Hopping Channel Carrier Frequency Separation

RESULT:

Pass

Date of testing	:	17.12.2007
Test specification	:	FCC Part 15 Per Section 15.247(a)(1)
Limits	:	FCC Part 15 Per Section 15.247(a)(1)

Frequency hopping systems operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

Deviations from Standard Test procedures

procedures	:	None
Test procedure	:	Procedure specified in ANSI C63.4
Kind of test site	:	Shielded room
Operation mode	:	Transmitting with hopping at the full channel set
Power supply	:	DC 3.7V by battery
Temperature	:	22°C
Humidity	:	55%

Test procedure:

1. Connect the antenna port of the EUT to the spectrum analyzer by a low loss cable.
2. Set the EUT to proper test mode with relative test software and hardware.
3. Spectrum analyzer setting: Centered Frequency = measured channel, RBW = 100 kHz, VBW = 100 kHz, Frequency Span = wide enough to cover the adjacent channel.
4. Mark the peak power frequency point of the measured channel and its adjacent channel(s)
5. Read the frequency delta value between the measured channel and its adjacent channel(s)
6. Repeat step 3 to 5 until all the channels measured are finished.

Prüfbericht - Nr.:

16010824 001

Seite 20 von 30

Test Report No.:

Page 20 of 30

Table 7: Hopping Channel Carrier Frequency Separation

Channel	Adjacent Hopping channel separation (kHz)	Limit
Low	1008	At least 25kHz or tow-thirds of the 20dB bandwidth of the hopping channel, whichever is greater. Note: refer to table 6 for the value of 20dB bandwidth
Mid	1008	
High	1008	

Please refer to Appendix 1 for measurement data.

Prüfbericht - Nr.:

16010824 001

Seite 21 von 30

Test Report No.:

Page 21 of 30

5.6 Number of Hopping Frequency Used

RESULT:

Pass

Date of testing : 17.12.2007
Test specification : FCC Part 15 Per Section 15.247(a)(1)(iii)
Limits : FCC Part 15 Per Section 15.247(a)(1)(iii)

Frequency hopping system in the 2400-2483.5 MHz band shall use at least 15 non-overlapping channels

Deviations from Standard Test procedures

: None
Test procedure : Procedure specified in ANSI C63.4
Kind of test site : Shielded room
Operation mode : Transmitting with hopping at the full channel set
Power supply : DC 3.7V by battery
Temperature : 22°C
Humidity : 55%

Test procedure:

1. Connect the antenna port of the EUT to the spectrum analyzer by a low lost cable.
2. Set the EUT to proper test mode with relative test software and hardware.
3. Spectrum analyzer setting: RBW = 300 kHz, VBW ≥ RBW, Frequency Span = wide enough to cover the channels to be plotted.
4. Set the spectrum analyzer to Max-hold mode and plot the result(s) with record of all hopping channel.

Table 8: Number of hopping frequency

Number of hopping frequency (full set):	79
Number of actual employed hopping frequency:	79
Limit:	At least 15 non-overlapping channels

Please refer to Appendix 1 for measurement data.

Prüfbericht - Nr.:

16010824 001

Seite 22 von 30

Test Report No.:

Page 22 of 30

5.7 Time of Occupancy (Dwell Time)

RESULT:

Pass

Date of testing	:	19.12.2007
Test specification	:	FCC Part 15 Per Section 15.247(a)(1)(iii)
Limits	:	FCC Part 15 Per Section 15.247(a)(1)(iii)

For frequency hopping system operating in the 2400-2483.5MHz band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Deviations from Standard Test procedures

Deviations from Standard Test procedures	:	None
Test Procedure	:	Procedure specified in ANSI C63.4
Kind of test site	:	Shielded room
Operation mode	:	Transmitting with hopping at the full channel set
Power supply	:	DC 3.7V by battery
Temperature	:	22°C
Humidity	:	55%

Test procedure:

1. Connect the antenna port of the EUT to the spectrum analyzer by a low loss cable.
2. Set the EUT to proper test mode with relative test software and hardware.
3. Spectrum analyzer setting: Centered Frequency = measured channel, RBW = 1MHz, VBW ≥ RBW, Frequency Span = 0 Hz.
4. Set sweep time properly to capture the entire dwell time per hopping channel.
5. Set detector type to Peak and trace mode to Max Hold and make the measurement.
6. Repeat step 3-5 until all channels measured were complete.

Prüfbericht - Nr.:
Test Report No.:

16010824 001

Seite 23 von 30
Page 23 of 30

Table 9: Dwell Time

channel	Frequency (GHz)	Dwell time of one signal Burst (ms)	Total Dwell Time (ms)	Limit (ms)
Low	2402.000	3.13	$(3.13 \times \mathbf{106.81}) = 334.315$	400
Mid	2441.000	2.94	$(2.94 \times \mathbf{106.81}) = 314.021$	400
High	2480.000	2.92	$(2.92 \times \mathbf{106.81}) = 311.885$	400

Note:

Period of the EUT= 0.4 (seconds) x 79 (channels) = 31.6 seconds

For Bluetooth system, there are 1600 timeslots in one second. Supposed the EUT work in DH5 mode operates on a 5-slot transmission and 1-slot receiving basis which may result a maximum dwell time. Thus there are $1600 / (5+1) = 266.7$ transmission per second. In one period for each particular channel there are $(266.7/79) \times 31.6 = 106.81$ times of transmission.

Dwell Time in one period(ms) = Dwell time of one transmission(ms) multiplexes **106.81**

Please refer to Appendix 1 for measurement data.

Prüfbericht - Nr.:
Test Report No.:

16010824 001

Seite 24 von 30
Page 24 of 30

5.8 Out-of-Band Emission

RESULT:

Pass

Date of testing : 19.12.2007
Test specification : FCC Part 15 Per Section 15.247(d)
Limits : FCC Part 15 Per Section 15.247(d)

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

In addition:

FCC Part 15 - radiated emission which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a).

Deviations from Standard Test
procedures

: None
Test Procedure : Procedure specified in ANSI C63.4
Kind of test site : Shielded room
Operation mode : Transmitting at the highest and lowest channel (band edge)
Power supply : DC 3.7V by battery
Temperature : 22°C
Humidity : 55%

Test procedure:

1. Connect the antenna port of the EUT to the spectrum analyzer by a low lost cable.
2. Set the EUT to proper test mode with relative test software and hardware.
3. Spectrum analyzer setting: RBW = 100 kHz, VBW≥RBW.
4. Set proper frequency span respectively for out-of-band emission measurement of the band edge and the whole range (up to 10 times of the carrier frequency.)
5. Set the trace mode to Max Hold and mark the peak reading of any spurious emission recorded.

Prüfbericht - Nr.:

16010824 001

Seite 25 von 30

Test Report No.:

Page 25 of 30

Table 10: Band Edges Emission

Emission	Attenuation (dB)	Limit (dB)
Lower Band Edge	All emission in this 100kHz bandwidth are attenuated more than 20dB from the carrier	$\Delta \geq 20$
Upper Band Edge	All emission in this 100kHz bandwidth are attenuated more than 20dB from the carrier	$\Delta \geq 20$

Table 11: Out-Of-Band Emission measurement (conducted)

Emission (Max reading among Channel low, mid and high)	Attenuation	Limit (dB)
30MHz to 25GHz	All emission in this 100kHz bandwidth are attenuated more than 20dB from the carrier	$\Delta \geq 20$

Table 12: Band Edges Emission in the Restricted Bands 2483.5-2500MHz and 2310-2390MHz

Restricted band	Frequency [MHz]	dBc [dB]	PK [dB μ V/m]	Polarity (H/V)	PK limit [dB μ V/m]	AV limit [dB μ V/m]
Low band	2376.200	46.43	51.97		74	54
High band	*---				74	54

Remark:

1. The test result of peak carrier field strength of lowest channel and highest channel is recorded: 98.4dBuV/m (low) and 99.37dBuV/m (high).

2. The dBc value between the carrier maximum power and band edge emission power of the frequency listed in the table is calculated from the test record showed in Appendix 1.

3. Peak value of the band edge emission listed in the table is calculated by the below formula:

PK value of band edge emission = Peak carrier field strength – dBc value described in item2

* **Note:** Disturbances other than those mentioned above are small or not detectable. Please refer to the Appendix 1 for the noise floor of the band edge emission.

Prüfbericht - Nr.:

16010824 001

Seite 26 von 30

Test Report No.:

Page 26 of 30

5.9 Exemption from Routine Evaluation Limits – RF Exposure Evaluation

RESULT:

Pass

Date of testing : ---

Test specification : TCB Exclusions List

Limits : TCB Exclusions List:

Output power for portable transmitters is the higher of the conducted or radiated (EIRP) source-based time-averaged output. f_{GHz} is mid-band frequency in GHz, and d is the distance to a person's body.

Exposure category	<u>low threshold</u>	<u>high threshold</u>
general population	$(60/f_{\text{GHz}}) \text{ mW}, d < 2.5 \text{ cm}$ $(120/f_{\text{GHz}}) \text{ mW}, d \geq 2.5 \text{ cm}$	$(900/f_{\text{GHz}}) \text{ mW}, d < 20 \text{ cm}$
occupational	$(375/f_{\text{GHz}}) \text{ mW}, d < 2.5 \text{ cm}$ $(900/f_{\text{GHz}}) \text{ mW}, d \geq 2.5 \text{ cm}$	$(2250/f_{\text{GHz}}) \text{ mW}, d < 20 \text{ cm}$

The EUT is a wireless headphone for General Public Use, which separation between it and the user is less than 2.5 cm. Mid-band of the EUT is 2.441 GHz.

Table 13: source-based time-averaged e.i.r.p

Channel	Frequency	Peak Conducted Output Power	Antenna Gain	Peak e.i.r.p	Duty cycle*	source-based time-averaged e.i.r.p **		limit
	(MHz)	(dBm)	(dBi)	(dBm)	--	(dBm)	(mW)	(mW)
Low	2402.000	-0.66	2.66	2.00	83.5%	1.92	1.56	24.6
Mid	2441.000	0.48	2.66	3.14	78.4%	3.03	2.01	24.6
High	2480.000	0.31	2.66	2.97	77.9%	2.86	1.93	24.6

* Duty Cycle = Dwell Time per hop/ Total time per hop (refer to the Table 9 for the Dwell time per hope, and Total time per hop is 1/266.7 sec)

** source-based time-averaged e.i.r.p (dBm) = Peak e.i.r.p(dBm) +10*Log(Duty Cycle)

Prüfbericht - Nr.:
Test Report No.:

16010824 001

Seite 27 von 30
Page 27 of 30

6 Photographs of the Test Set-Up

Photograph 1: Set-up for Radiation Measurement below 1GHz




Prüfbericht - Nr.:
Test Report No.:

16010824 001

Seite 28 von 30
Page 28 of 30

Photograph 2: Set-up for Radiation Measurement above 1-18GHz

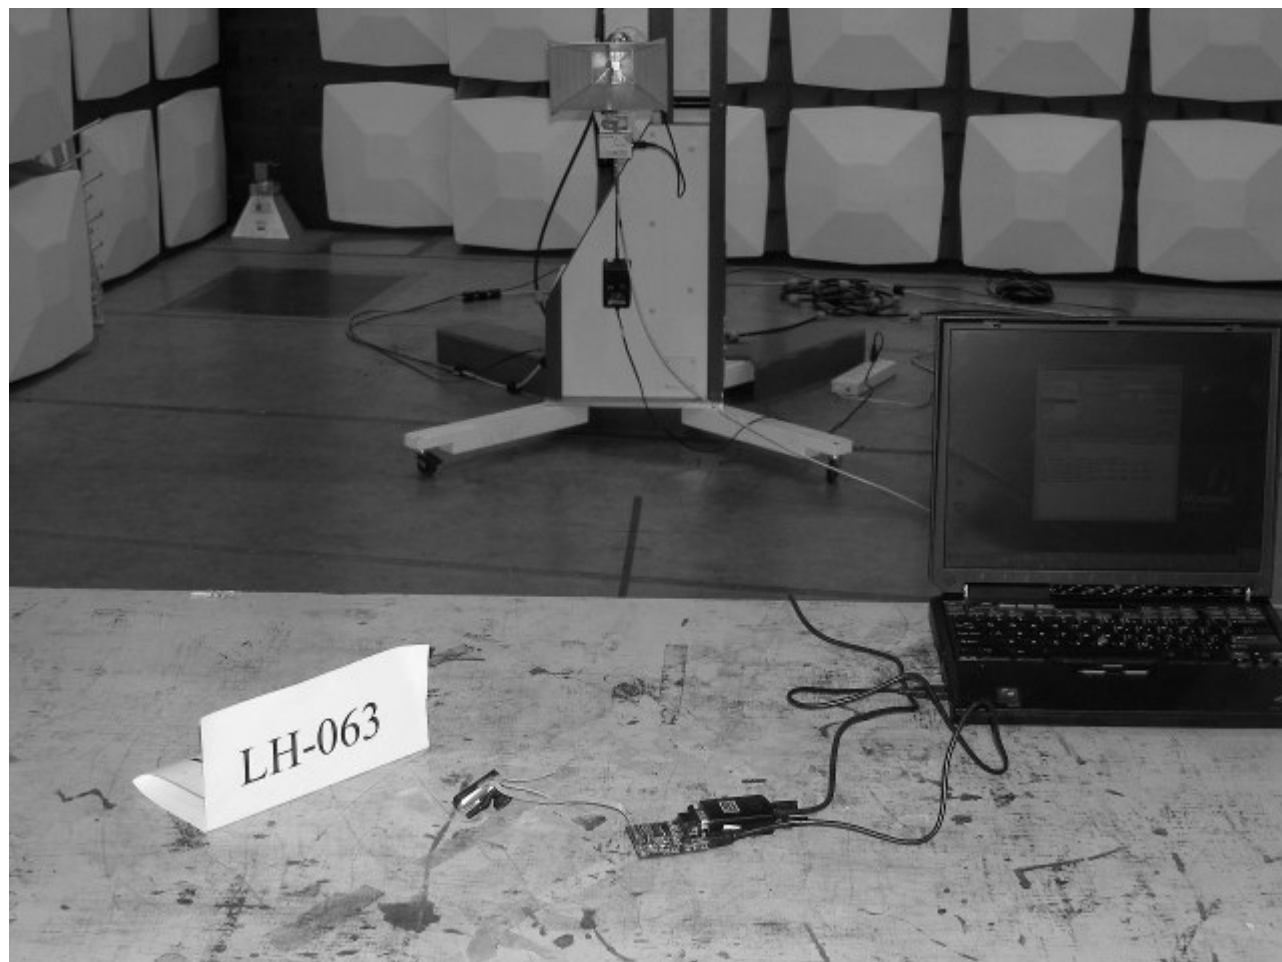


Prüfbericht - Nr.:
Test Report No.:

16010824 001

Seite 29 von 30
Page 29 of 30

Photograph 3: Set-up for Radiation Measurement 18-25GHz

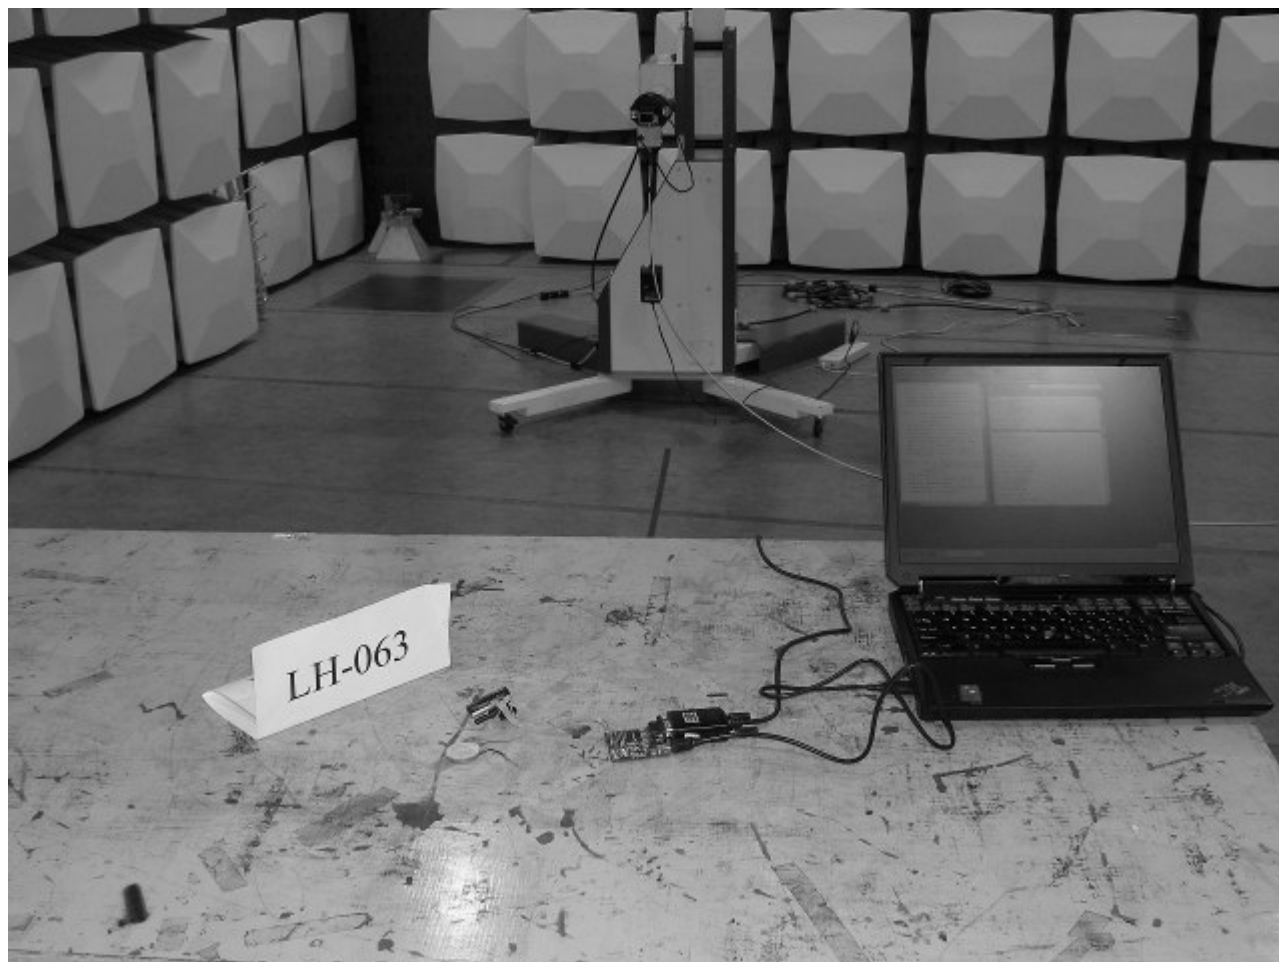

7 List of Tables

Table 1: List of Test and Measurement Equipment	6
Table 2: Radiated Emission (Transmitting at channel low)	14
Table 3: Radiated Emission (Transmitting at channel mid)	14
Table 4: Radiated Emission (Transmitting at channel high)	15
Table 5: Peak Conducted Power	17
Table 6: 20dB Bandwidth.....	18
Table 7: Hopping Channel Carrier Frequency Separation	20
Table 8: Number of hopping frequency	21
Table 9: Dwell Time	23
Table 10: Band Edges Emission	25
Table 11: Out-Of-Band Emission measurement (conducted)	25
Table 12: Band Edges Emission in the Restricted Bands 2483.5-2500MHz and 2310-2390MHz.....	25
Table 13: source-based time-averaged e.i.r.p	26

8 List of Photographs


Photograph 1: Set-up for Radiation Measurement below 1GHz.....	27
Photograph 2: Set-up for Radiation Measurement above 1-18GHz.....	28
Photograph 3: Set-up for Radiation Measurement 18-25GHz	29

Prüfbericht - Nr.: 16010824 001

Test Report no.:

Seite 1 von 13

Page 1 of 13

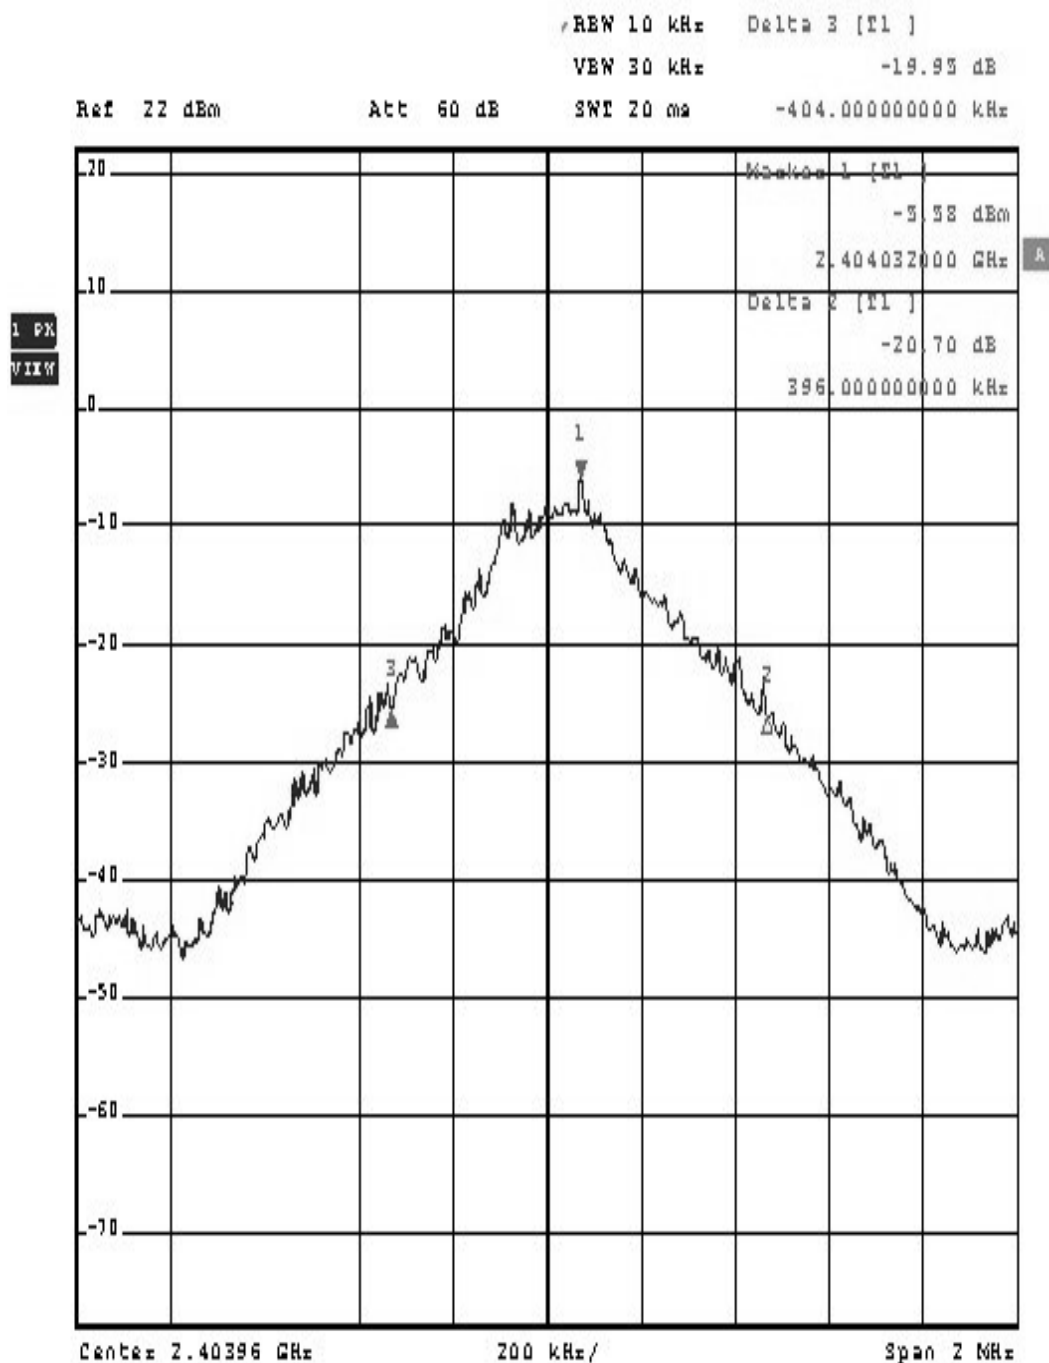


Prüfbericht - Nr.: 16010824 001

Test Report no.:

Seite 2 von 13

Page 2 of 13

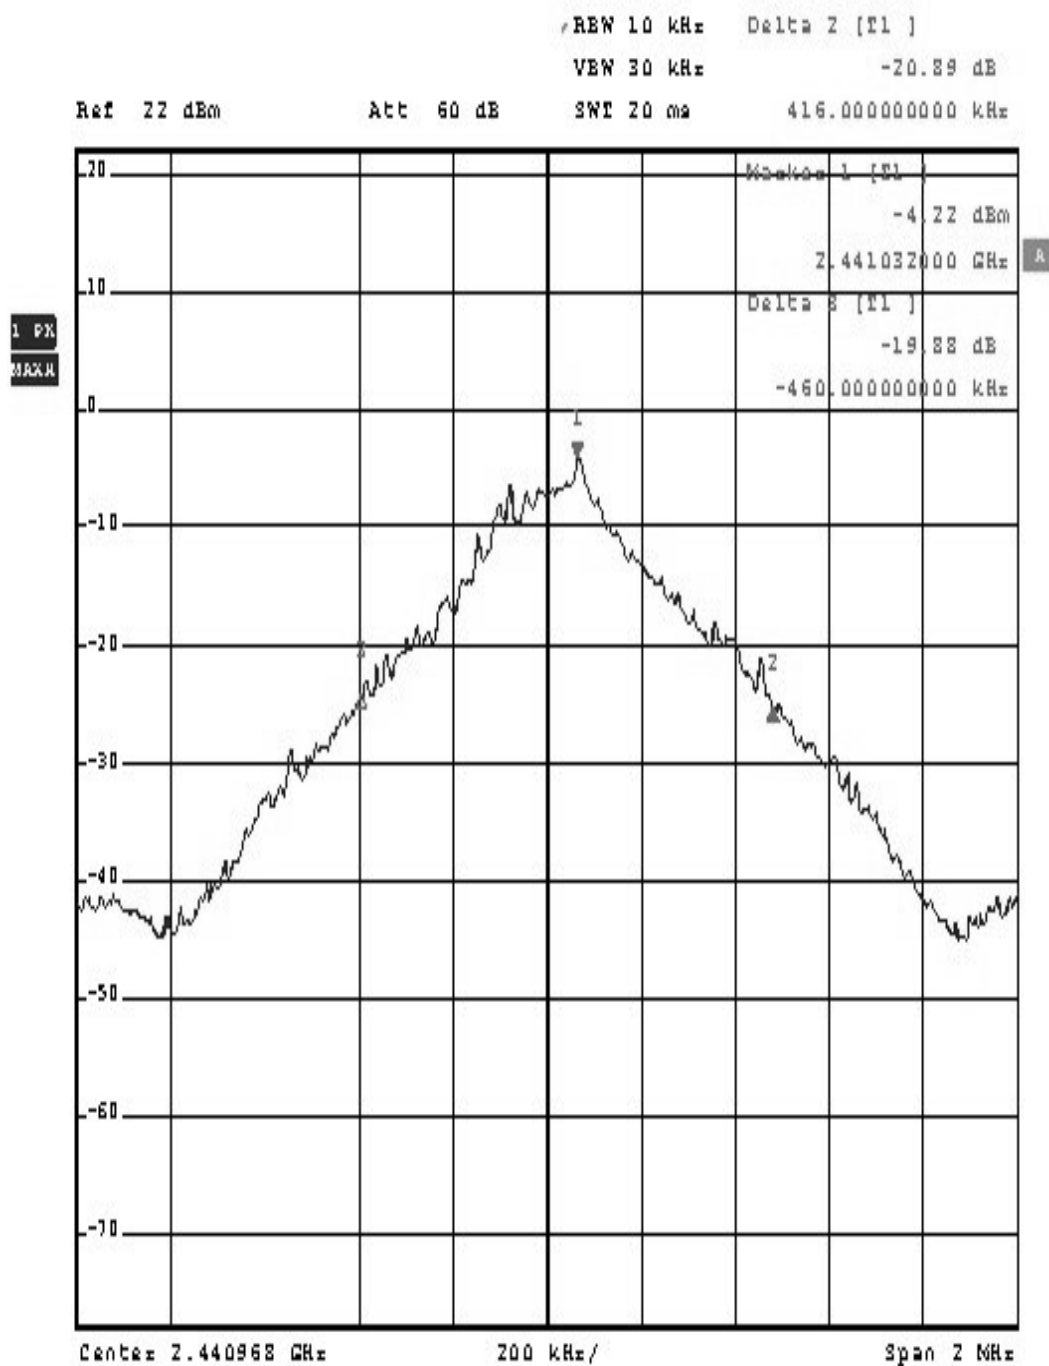


Prüfbericht - Nr.: 16010824 001

Test Report no.:

Seite 3 von 13

Page 3 of 13

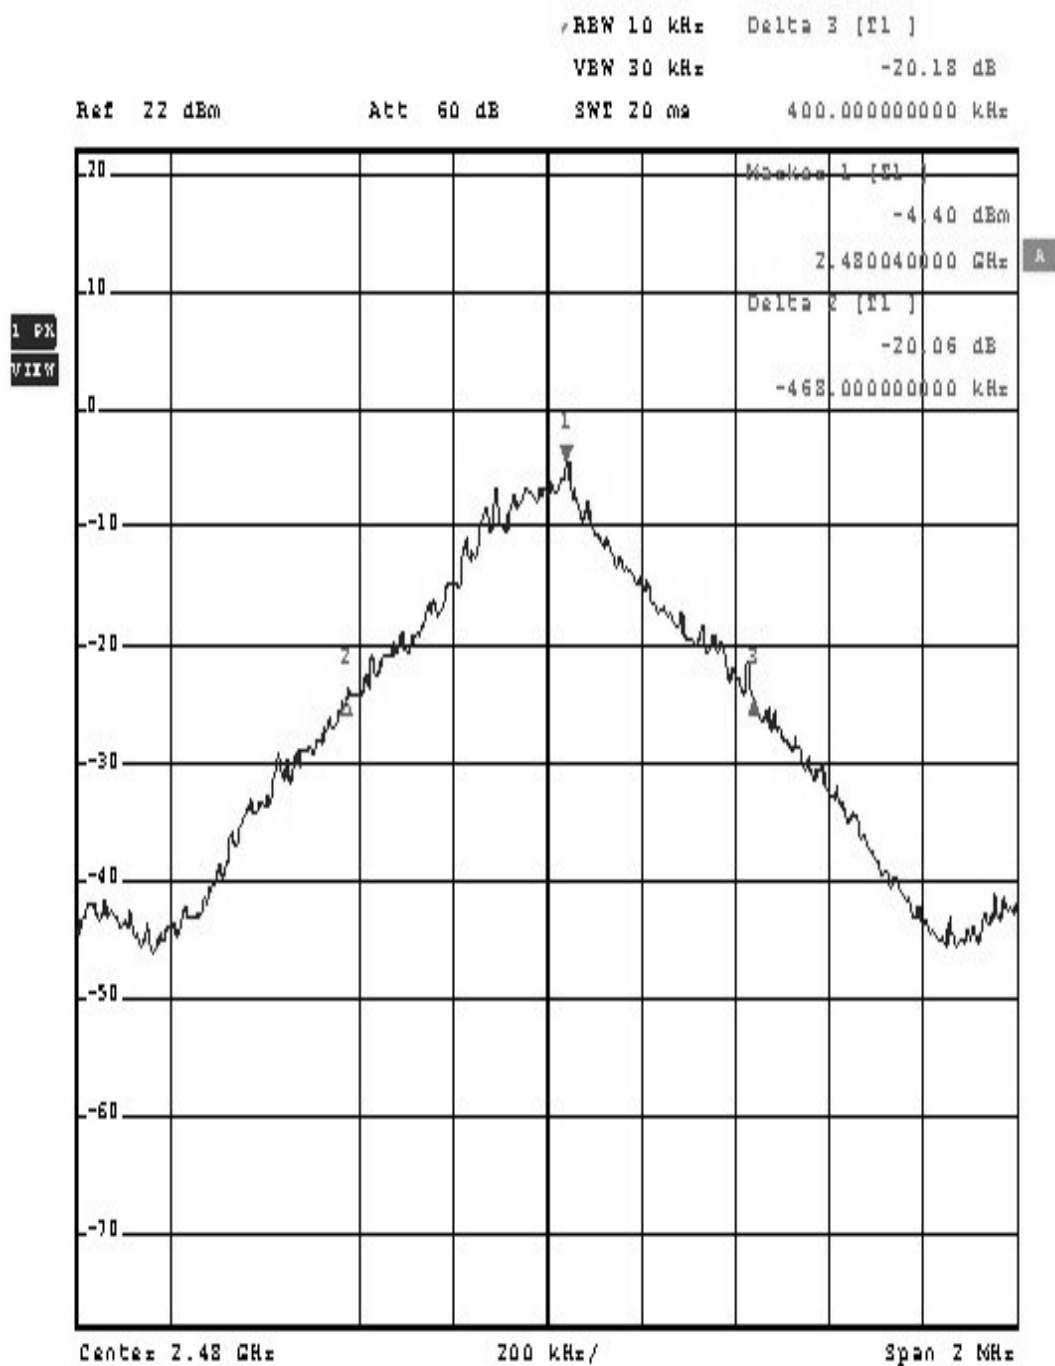


Prüfbericht - Nr.: 16010824 001

Test Report no.:

Seite 4 von 13

Page 4 of 13

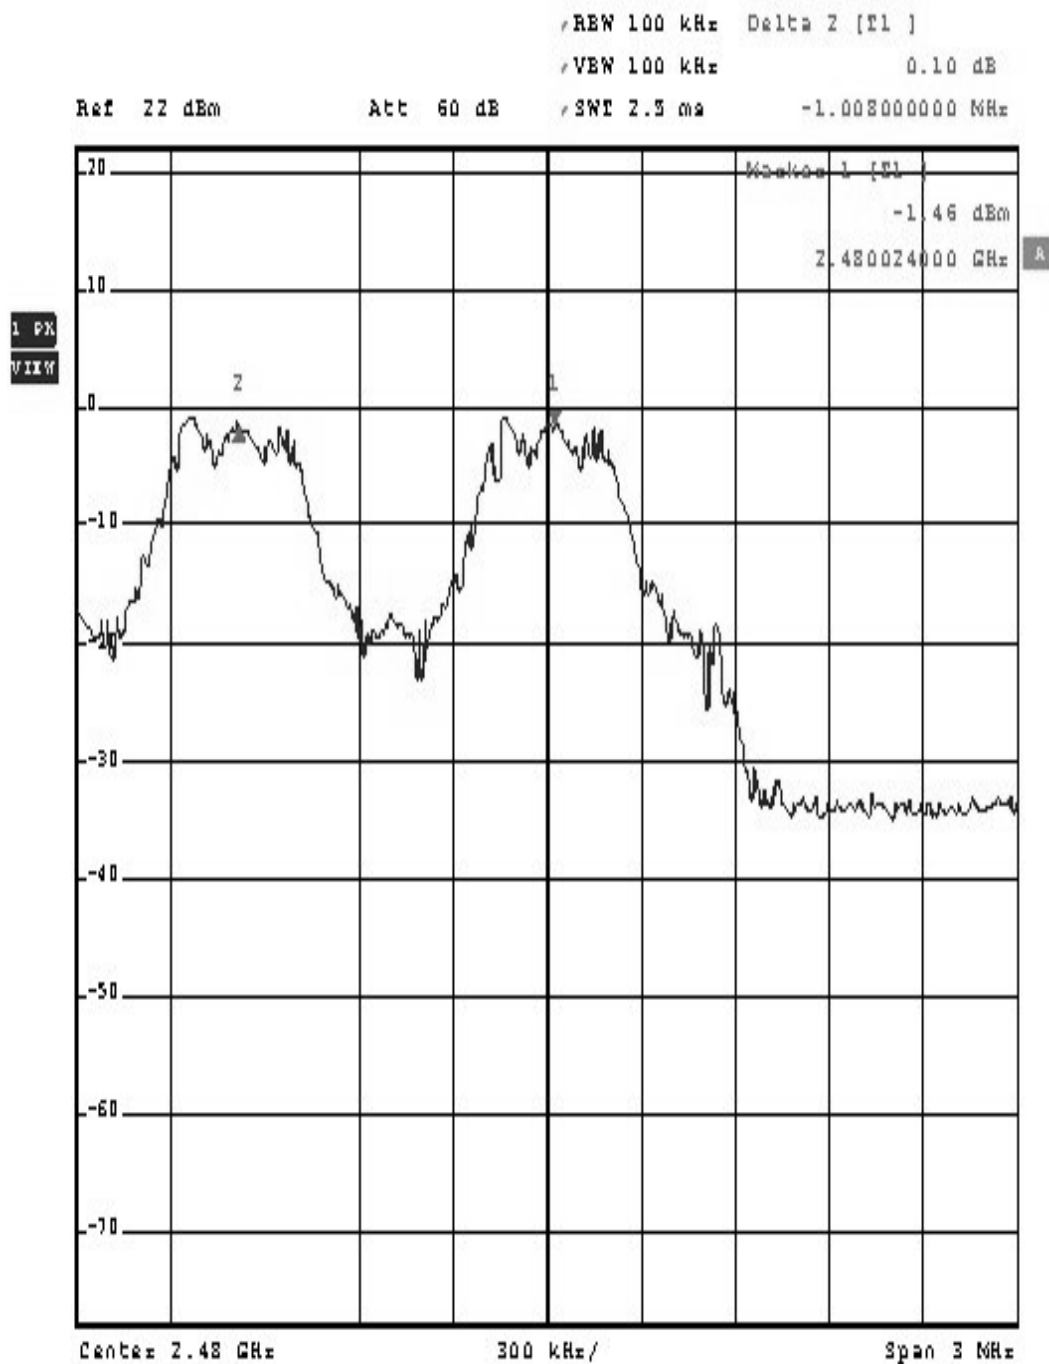


Prüfbericht - Nr.: 16010824 001

Test Report no.:

Seite 5 von 13

Page 5 of 13

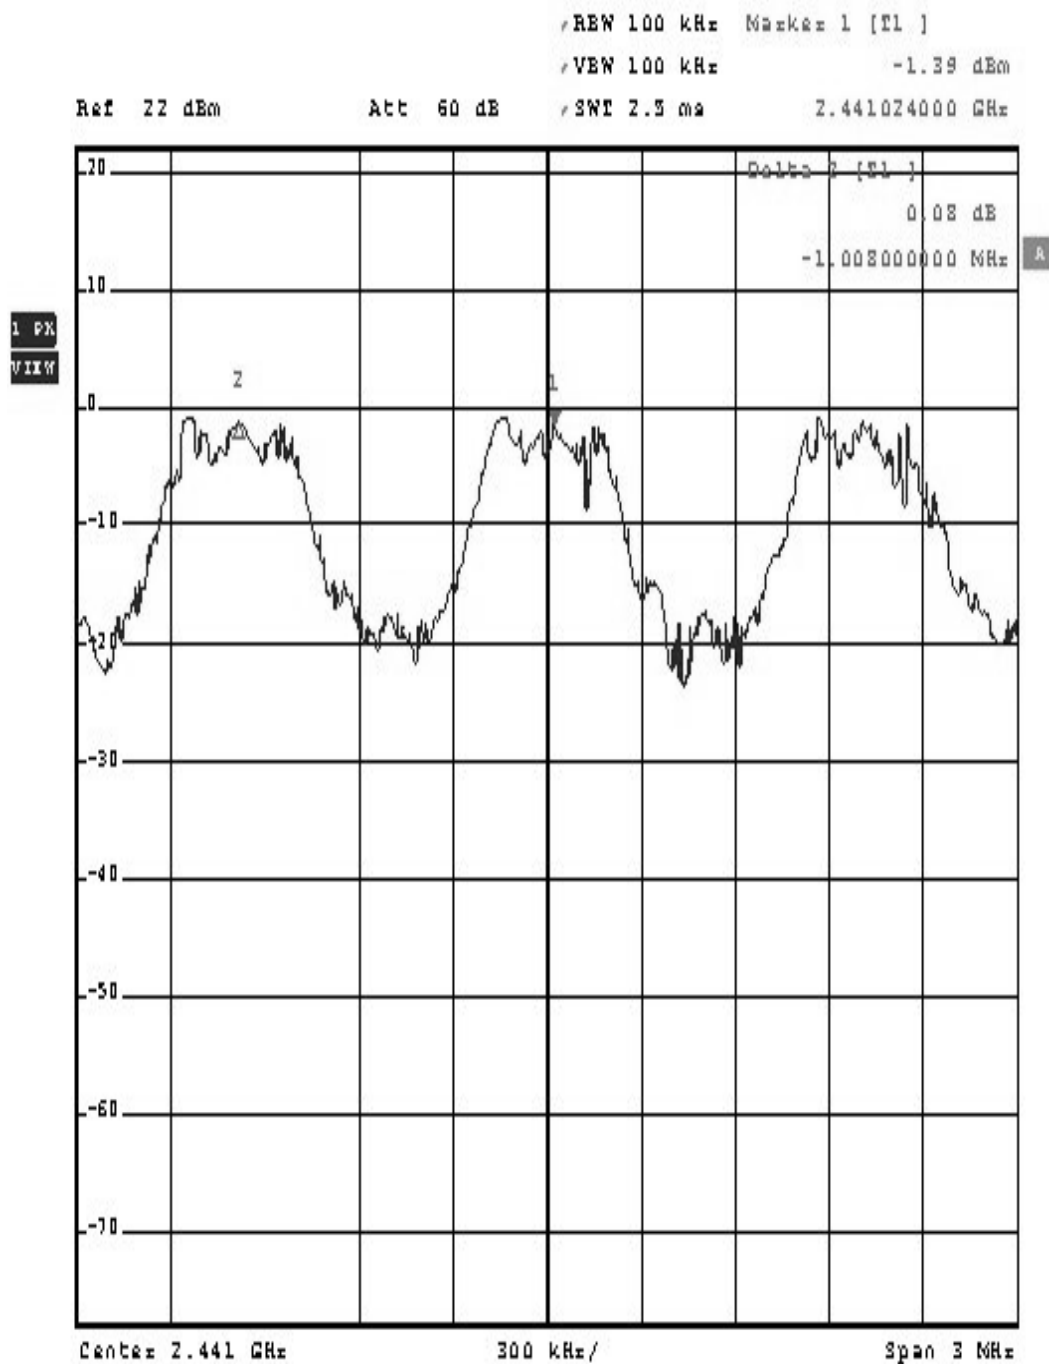


Prüfbericht - Nr.: 16010824 001

Test Report no.:

Seite 6 von 13

Page 6 of 13

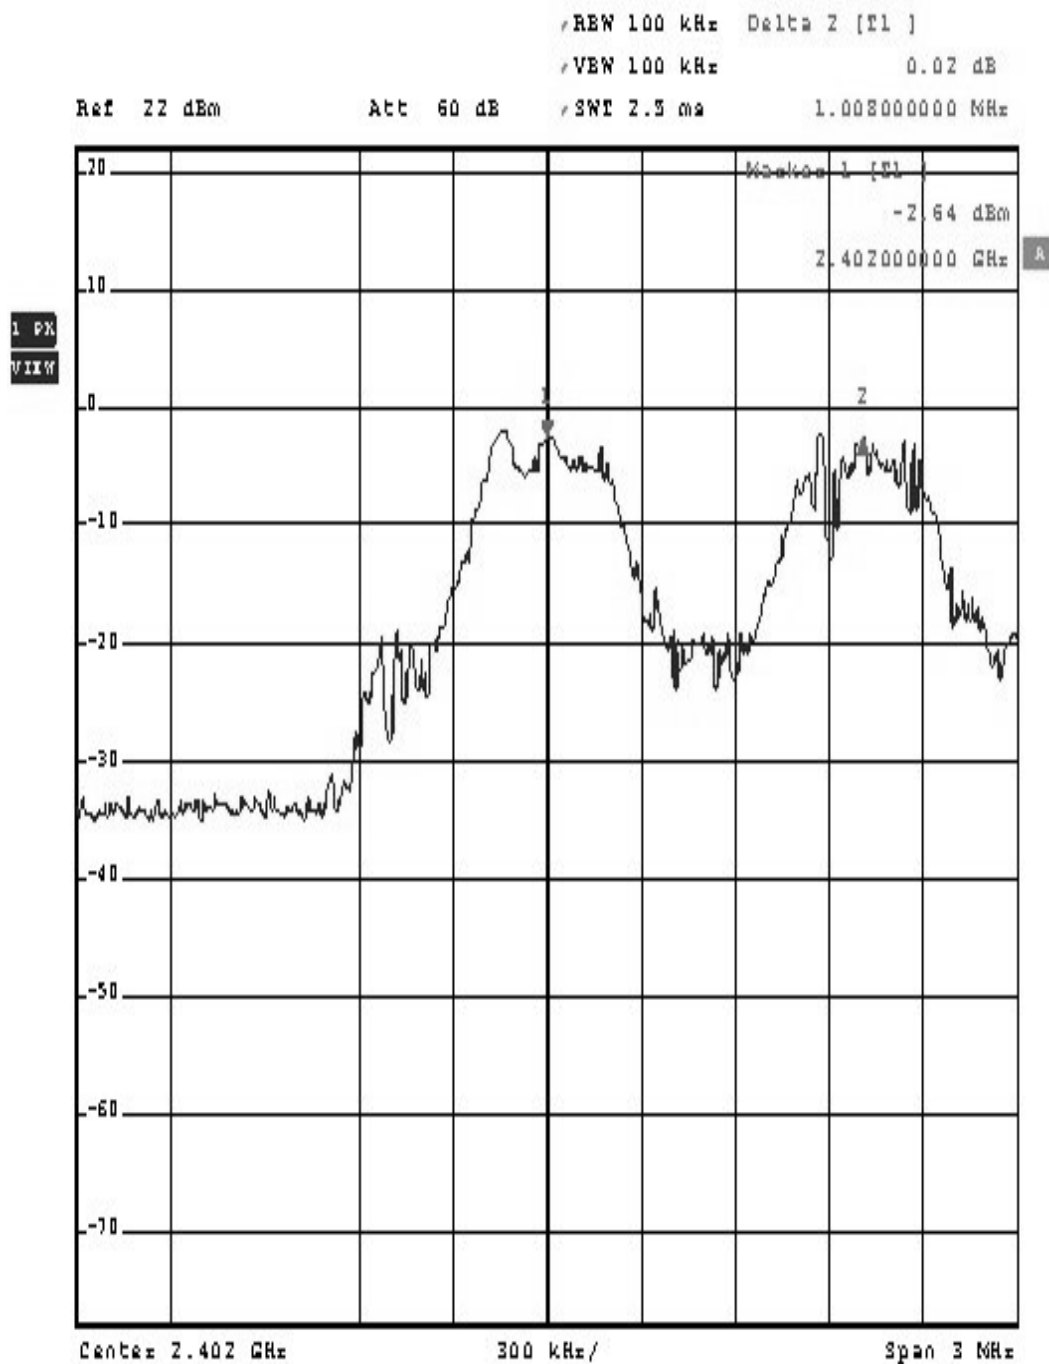


Prüfbericht - Nr.: 16010824 001

Test Report no.:

Seite 7 von 13


Page 7 of 13

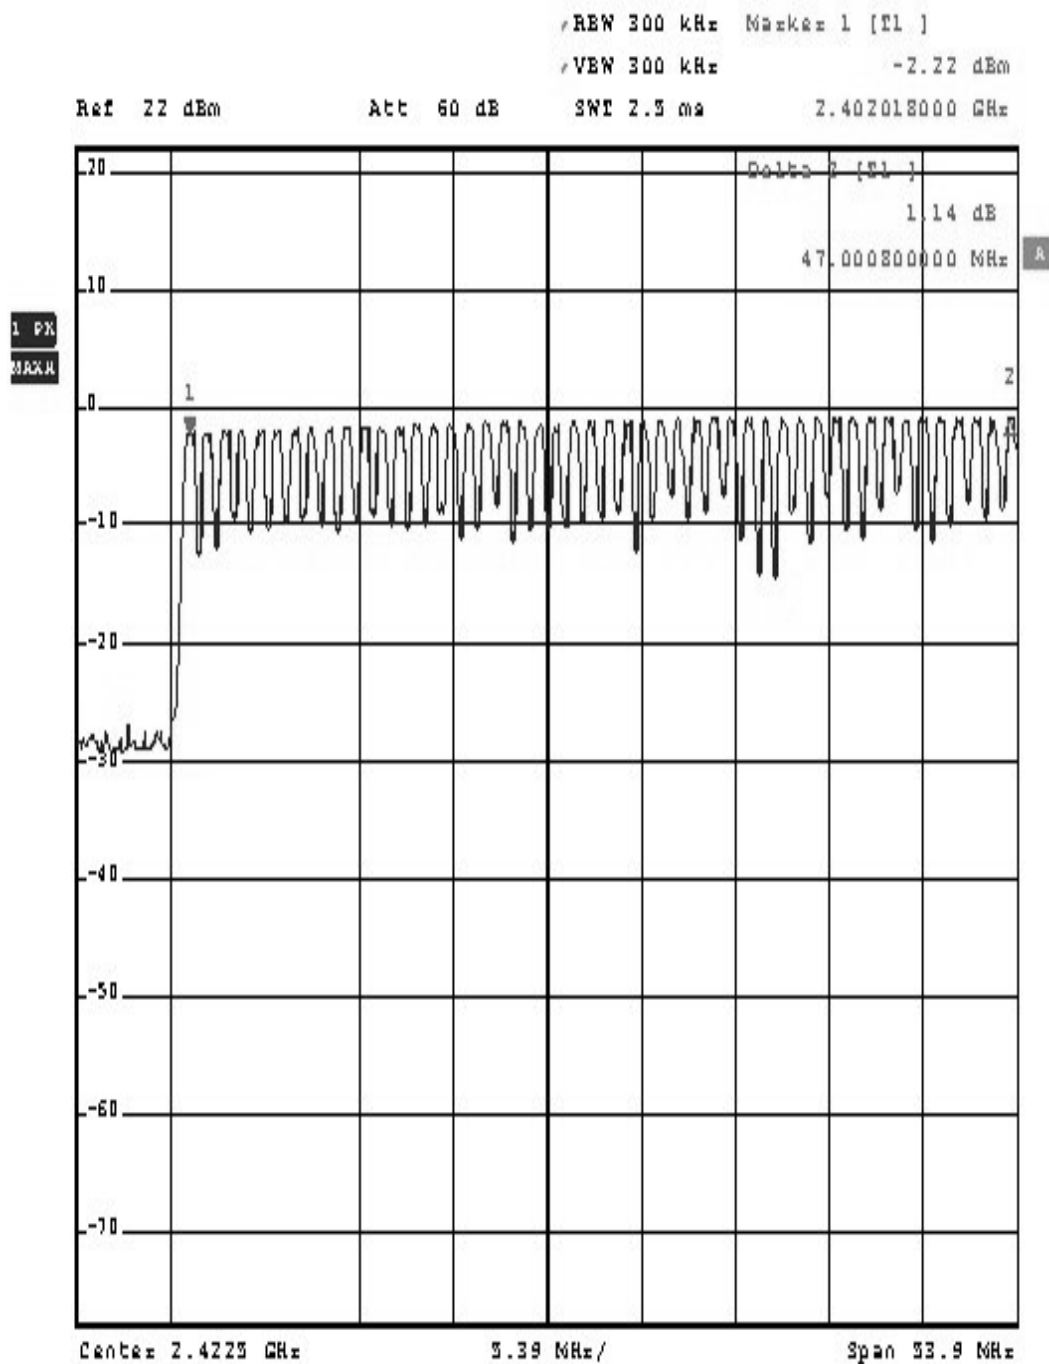

Prüfbericht - Nr.: 16010824 001

Test Report no.:

Seite 8 von 13
Page 8 of 13

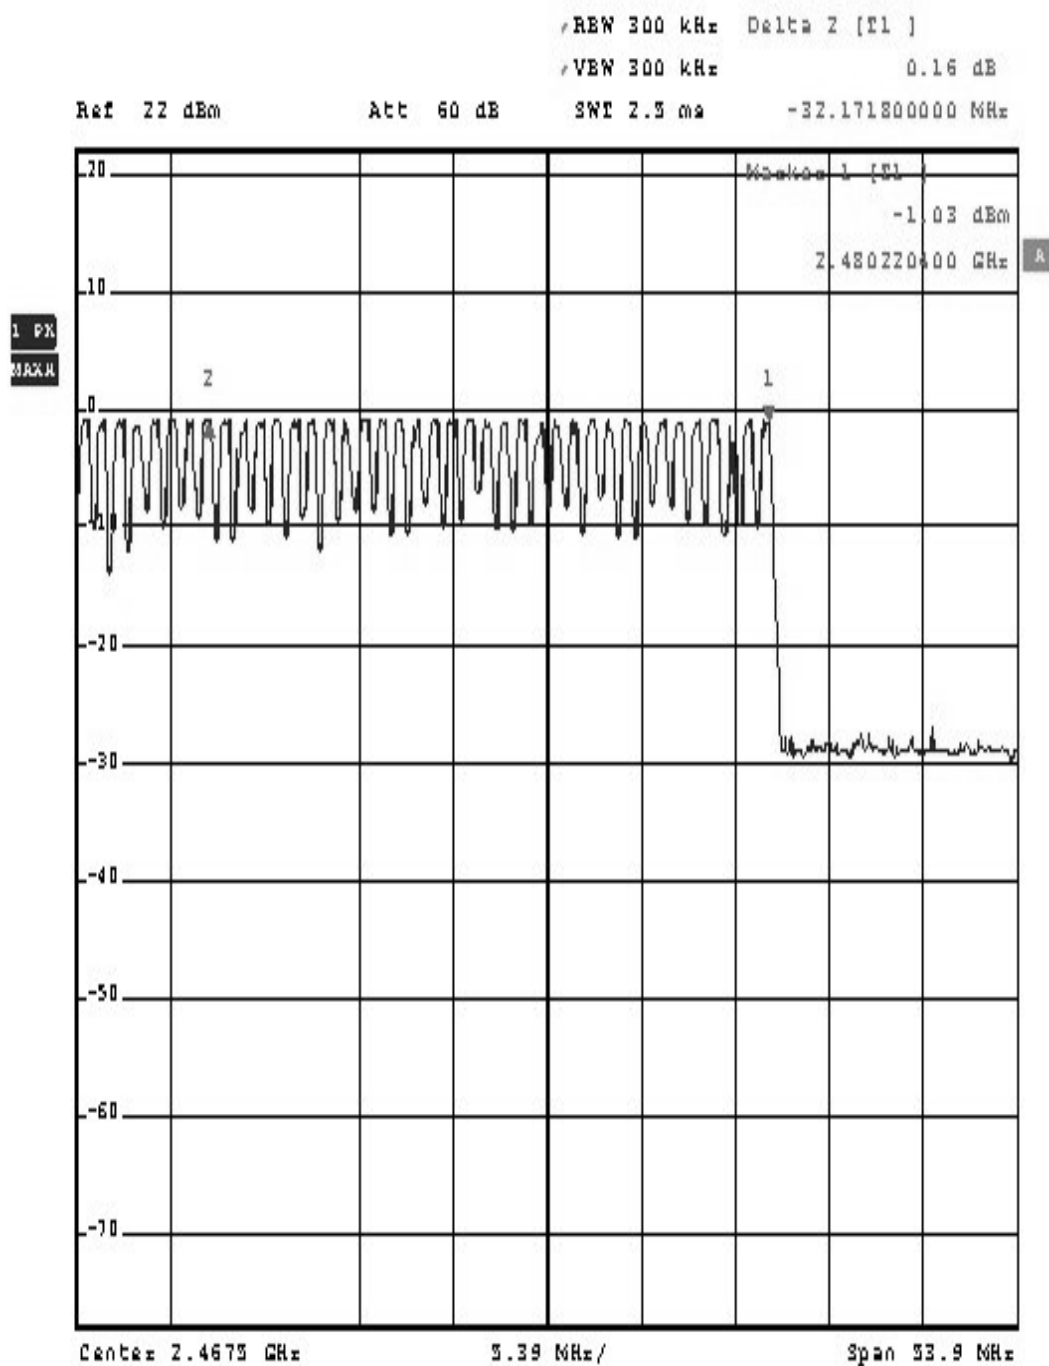


Prüfbericht - Nr.: 16010824 001

Test Report no.:

Seite 9 von 13

Page 9 of 13

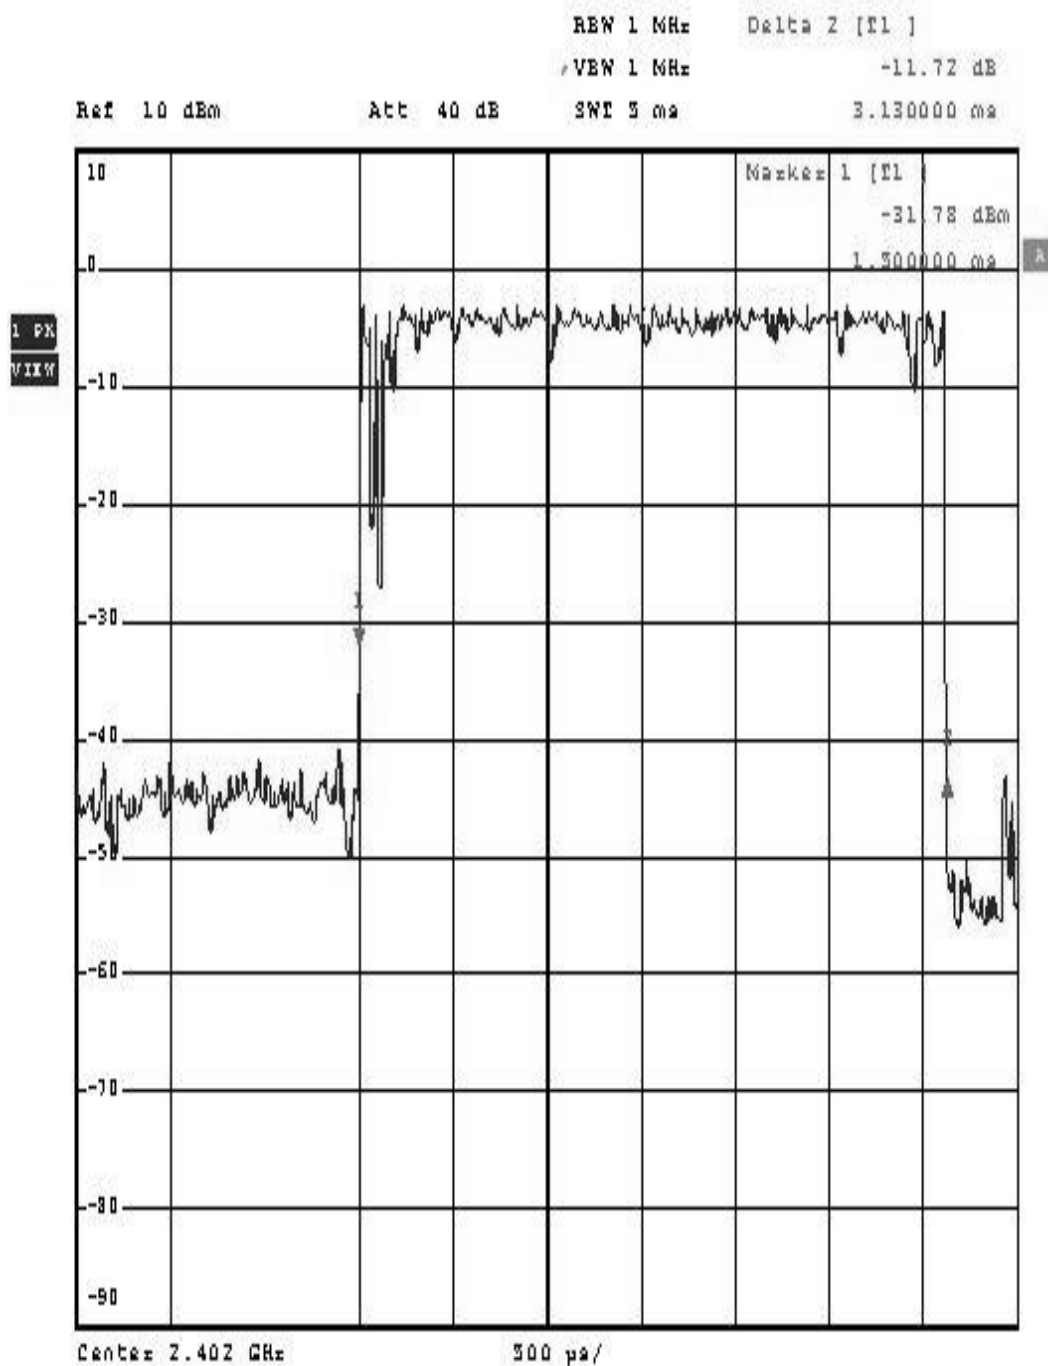


Prüfbericht - Nr.: 16010824 001

Test Report no.:

Seite 10 von 13

Page 10 of 13

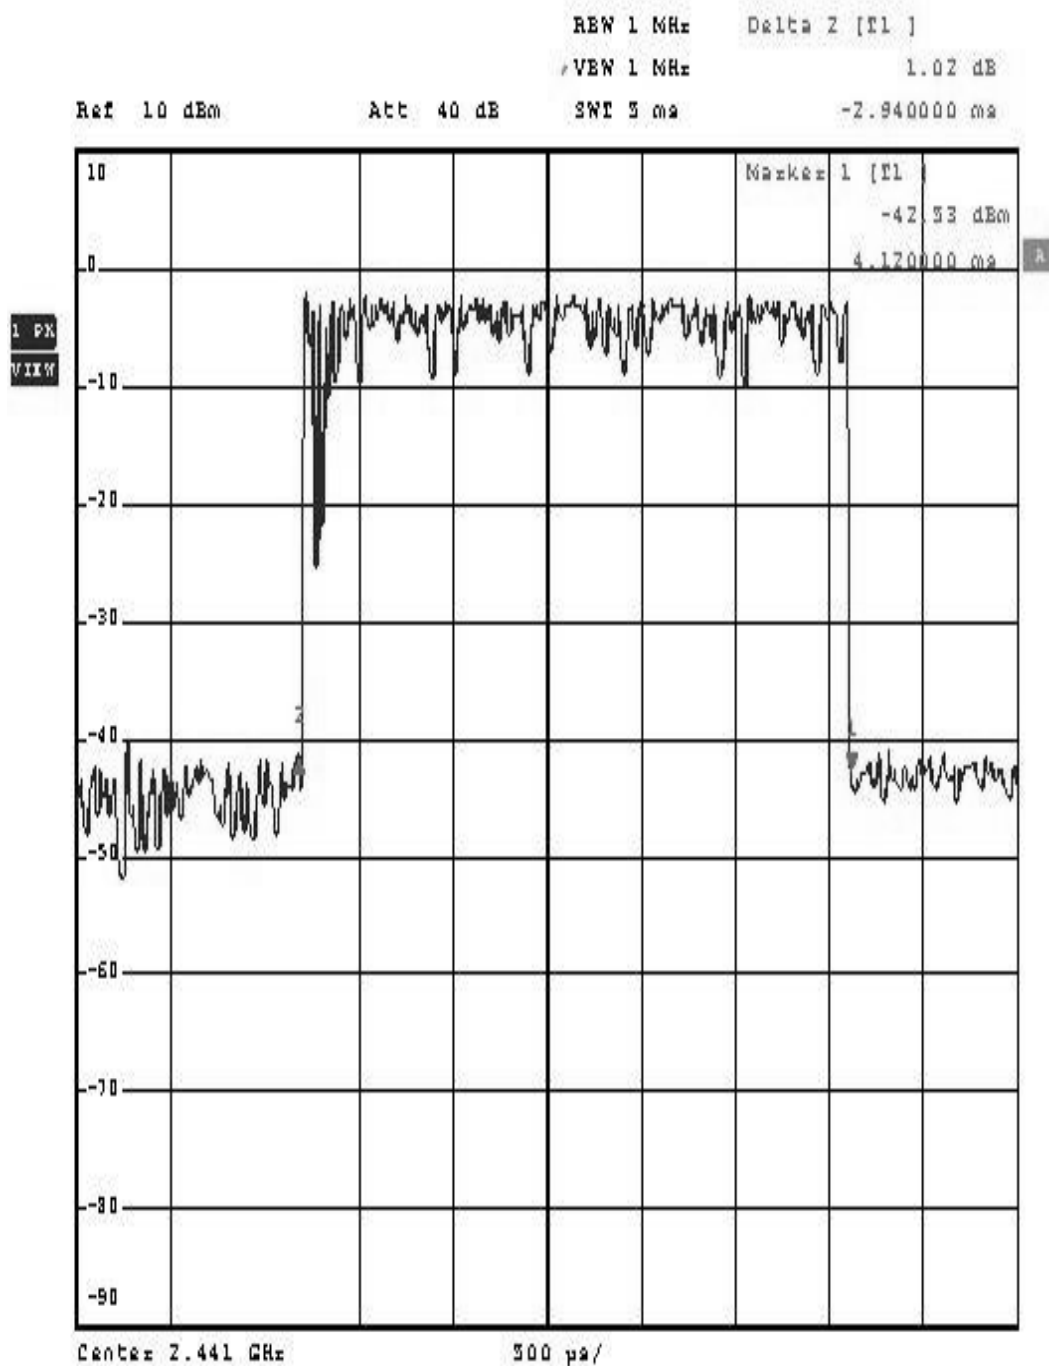


Prüfbericht - Nr.: 16010824 001

Test Report no.:

Seite 11 von 13

Page 11 of 13

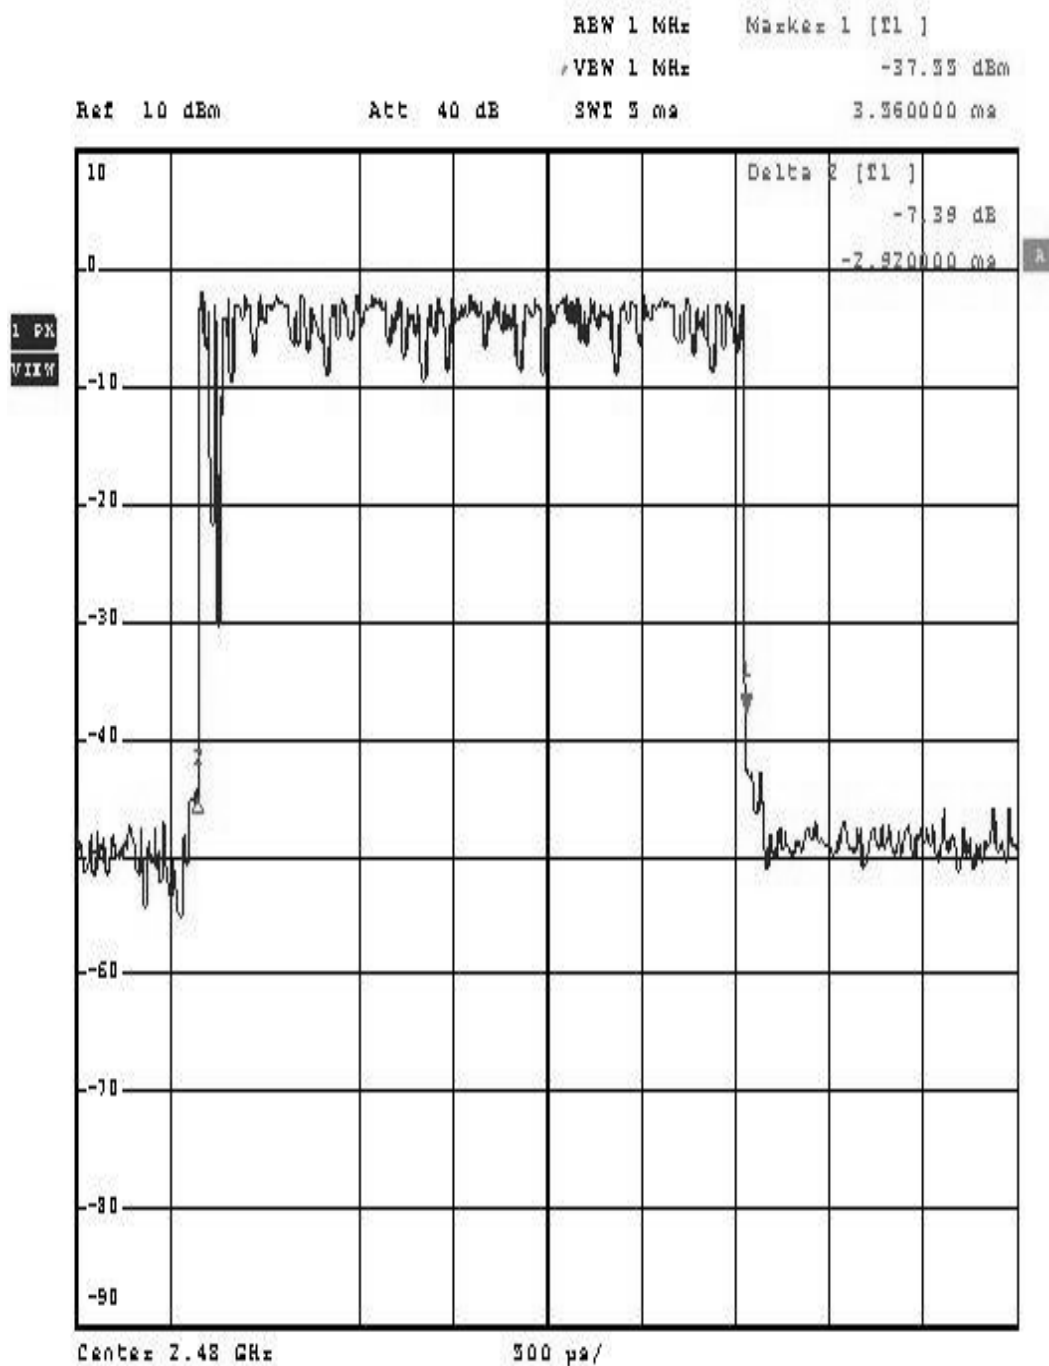


Prüfbericht - Nr.: 16010824 001

Test Report no.:

Seite 12 von 13

Page 12 of 13

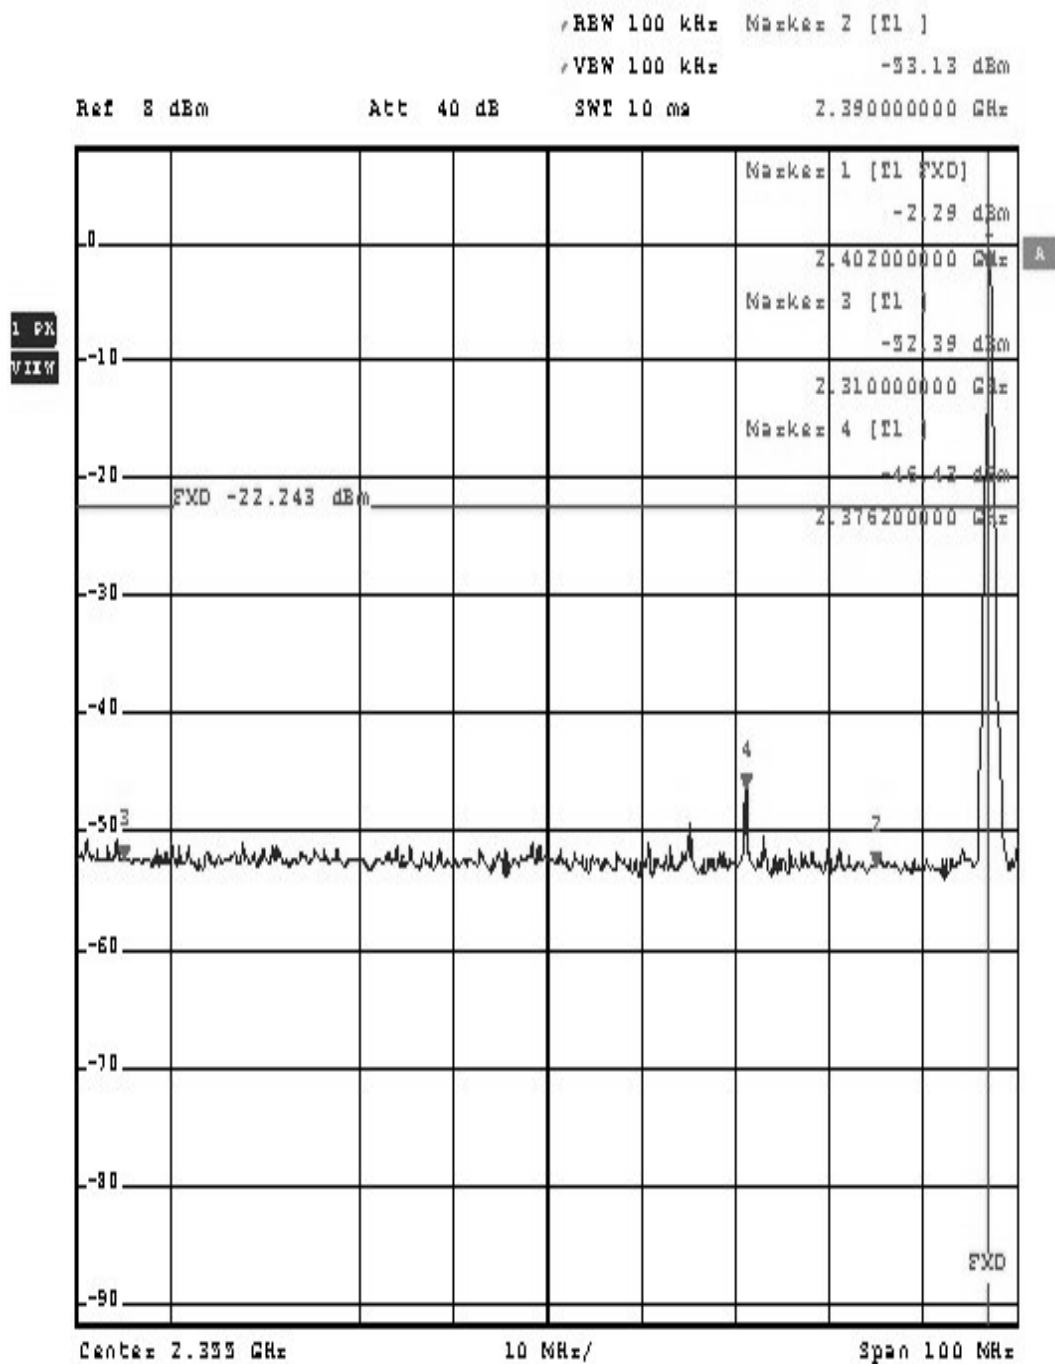

Prüfbericht - Nr.: 16010824 001
Test Report no.:

Seite 13 von 13
Page 13 of 13

