

RT01T Label

Dimension: 45x33(H)mm

FCC ID:VSM16950235000001

FCC STATEMENT

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

1UHG7 Label

Dimension: 45x62(H)mm

FCC ID:VSM16950235000001

FCC STATEMENT

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

DECLARACION DE LA FCC

Este dispositivo cumple con la Sección 15 de las Normas de la FCC. Su funcionamiento está sujeto a las siguientes dos condiciones:(1) Este dispositivo no debe causar interferencia y (2) Este dispositivo debe aceptar toda interferencia recibida, incluida aquella que puede causar un funcionamiento no deseado.

型號: RT01T/GR
 客人型號: 1UH7
 底板: TX01/RT01T/RT01TSU
 包裝: 連同RT01R/GR發射機
 放在同一個白盒
 卡通箱貼紙: 有

註:

- 1.此型號使用RT01T面殼及LT06底殼(原料ABS757 加1字於頂針面)
- 2.內付一張雙面A4英文/西班牙文說明書,放在白盒內

DATE	REV	DESCRIPTION	NAME	APRVD
071025	1	符合2002/95/EC指令		

Limit of RoHS (RoHS的限量指標)

鎘Cadmium (Cd)	<0.01%
鉛Lead (Pb)	<0.1%
汞Mercury (Hg)	<0.1%
六價鉻Hexavalent chromium (Cr ⁶⁺)	<0.1%
多溴聯苯Polybrominated biphenyls (PBB)	<0.1%
多溴二苯醚Polybrominated biphenyl ethers (PBDE)	<0.1%

RT01T/GR面殼移印
 SNO.:RT01T.29GGR3.1.070616.11.CDR


LOGO PRINTED COLOR(標誌顏色移印):WHITE ON BLACK(黑底白字)

® BLACK ON WHITE(白底黑字)

Rubber key

MODEL: RT10T/PG(TRANSMITTER)

面殼移印和橡膠按鍵絲印
 OTHERWISE COLOR: RAL7016(Dark Grey)深灰色

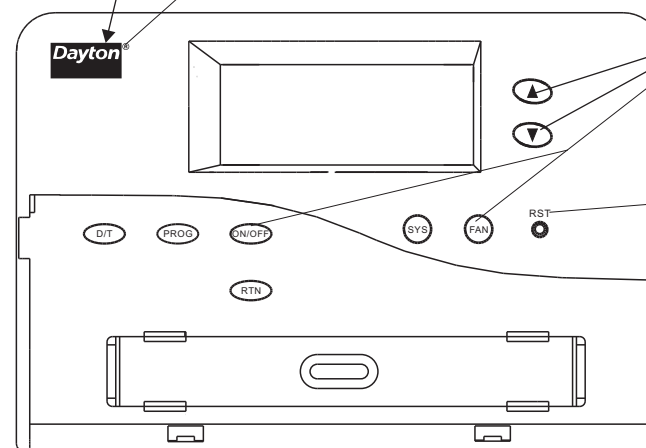

貼在面蓋裡面

MODEL:RT01T/GR 面蓋指示貼紙
 DWN.:RT01T.1EGR1.071002.11.CDR

FCC ID:V5M1695023500001

FCC STATEMENT
 This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

DECLARACION DE LA FCC
 Este dispositivo cumple con la Sección 15 de las Normas de la FCC. Su funcionamiento está sujeto a las siguientes dos condiciones: (1) Este dispositivo no debe causar interferencia y (2) Este dispositivo debe aceptar toda interferencia recibida, incluida aquella que pueda causar un funcionamiento no deseado.

Label Location

貼在此處

貼在此處

MODEL: LT08~接線柱貼紙
 SIZE: 19 x 8(H)mm
 PART NUMBER: EZ1LT08~1

貼在發射機的底殼此位置

白底黑色

白底黑色

071015C

生產日期貼紙

4(H) X 14(W)

每部成品機都要貼一張
 此生產日期貼紙在底殼

MODEL: RT01T/GR 包裝盒/條碼貼紙
 SIZE: 68 x 90(H)mm
 COLOR: BLACK ON PMS 466U(PMS466U底黑字)
 DWN.:RT01T.1EGR6.1.071002.11.CDR

Dayton® (1) 1UH7

RF Wireless Thermostat
 Range of temperature: 41 ~ 95°F
 Operating Voltage: 24Vac 50/60Hz
 Contact type: SPST
 32T104°F

Made in China
 Manufactured for Dayton Electric Mfg. Co., Niles Illinois 60714 U.S.A.

Termostato Inalámbrico RF
 Gama de Temp.: 41 ~ 95°F
 Voltaje de funcionamiento: 24Vca 50/60Hz
 Tipo de contacto: SPST
 32T104°F

Hecho en China
 Fabricado para Dayton Electric Mfg. Co., Niles Illinois 60714 EE.UU.



1 1UH7

Dayton® (25) 1UH7

RF Wireless Thermostat
 Range of temperature: 41 ~ 95°F
 Operating Voltage: 24Vac 50/60Hz
 Contact type: SPST
 32T104°F

Made in China
 Manufactured for Dayton Electric Mfg. Co., Niles Illinois 60714 U.S.A.

Termostato Inalámbrico RF
 Gama de Temp.: 41 ~ 95°F
 Voltaje de funcionamiento: 24Vca 50/60Hz
 Tipo de contacto: SPST
 32T104°F


Hecho en China
 Fabricado para Dayton Electric Mfg. Co., Niles Illinois 60714 EE.UU.



25 1UH7



Warning: Reset after sliding Delay/No Delay switch
 Advertencia: Reinicie luego de deslizar el interruptor Delay/No Delay (Retardo/Sin Retardo)



Warning: Reset after sliding Delay/No Delay switch
 Advertencia: Reinicie luego de deslizar el interruptor Delay/No Delay (Retardo/Sin Retardo)

1UH7 Operating Instruction:
 (refer to user manual for detail)
 Instrucciones de Operación para el Modelo 1UH7:
 (consulte el manual del usuario para obtener información detallada)

SYS/SIS:OFF/IA PAGADO → HEAT/CALOR → COOL/FRIO → AUTO
 FAN:VENTILADOR: AUTO → ON/ENCENDIDO
 ON/OFF:ENC./APG.: PERMANENT OVERRIDE/ANULACION PERMANENTE → PROG ON/PROG ENC.

白底黑色

型號: RT01T/GR(24VAC)

卡通箱貼紙貼於卡通的側嘜右上角,每次同一位置,只需每個卡通箱貼1張

尺寸: 76 X 89mm(H)

要求顏色: BLACK ON PMS 466U(PMS466U底黑字)

DWN.:RT01T.1EGR8.1.071002.11.CDR

File: GGR~.WORK1.071025.11.CDR
 CORELDRAW File

Edition: ANNY NG
 2007-10-25 Page 2/2

WORLD EXCEL RT01T/GR
 CUSTOMER 1UH7
 WORKINST 生產資料

Drawing no: RT01T.GR.WORK1.071025.11.CDR

REV 1

C

WEXCEL

World Excel Company Limited